



**ANALOG
DEVICES**

8-Chan JFET Analog Multiplexers (Overvoltage & Power Supply Loss Protected)

MUX-08

FEATURES

- JFET Switches Rather Than CMOS
- Low "ON" Resistance 220Ω Typ
- Highly Resistant to Static Discharge Damage
- No SCR Latch-Up Problems
- Digital Inputs Compatible With TTL and CMOS
- 125°C Temperature Tested Dice Available
- MUX-08 Pin Compatible With DG508, HI-508A, IH5108, IH6108, LF11508/12508/13508, AD7506
- MUX-24 is Obsolete

ORDERING INFORMATION[†]

25°C ON RESISTANCE	PACKAGE			OPERATING TEMPERATURE RANGE
	CERDIP 16-PIN	PLASTIC 16-PIN	LCC 20-CONTACT	
220Ω	MUX08AQ*	—	—	MIL
	MUX08EQ	—	—	IND
	—	MUX08EP	—	COM
300Ω	MUX08BQ*	—	MUX08BRC/883	MIL
	MUX08FQ	—	—	IND
	—	MUX08FP	—	XIND
	—	MUX08FS ^{††}	—	XIND

* For devices processed in total compliance to MIL-STD-883, add /883 after part number. Consult factory for 883 data sheet.

† Burn-in is available on commercial and industrial temperature range parts in CerDIP, plastic DIP, and TO-can packages.

†† For availability and burn-in information on SO and PLCC packages, contact your local sales office.

GENERAL DESCRIPTION

The MUX-08 is a monolithic eight-channel analog multiplexer which connects a single output to one of the eight analog inputs depending upon the state of a 3-bit binary address.


The MUX-24 is a monolithic four-channel differential analog multiplexer configured in a double pole, four-position (plus OFF) electronic switch array. A two-bit binary input address connects a pair of independent analog inputs from each four-channel input section to the corresponding pair of independent analog outputs.

All switches in the MUX-08/MUX-24 are turned OFF by applying logic "0" to the ENABLE pin, thereby providing a package select function.

Fabricated with Precision Monolithics' high performance Bipolar-JFET technology, these devices offer low, constant "ON" resistance, low leakage currents and fast settling time with low crosstalk to satisfy a wide variety of applications. These multiplexers do not suffer from latch-up or static charge blow-out problems associated with similar CMOS parts. The digital inputs are designed to operate from both TTL and CMOS levels while always providing a definite break-before-make action without the need for external pull-up resistors over the full operating temperature range.

The MUX-24 is no longer available.

PIN CONNECTIONS

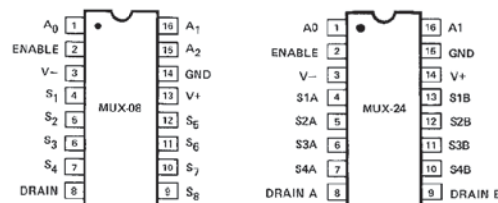


16-PIN CERDIP (Q-Suffix)

16-PIN PLASTIC DIP (P-Suffix)


16-PIN SO (S-Suffix)

20-CONTACT LCC
(RC-Suffix)




FUNCTIONAL DIAGRAMS

MUX-08

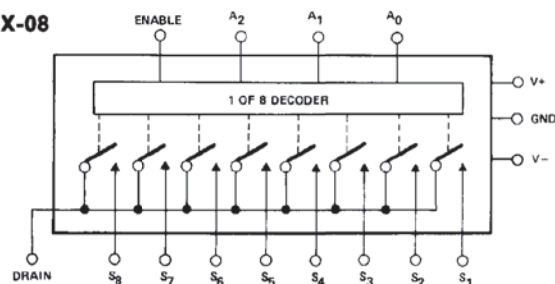

MUX-24

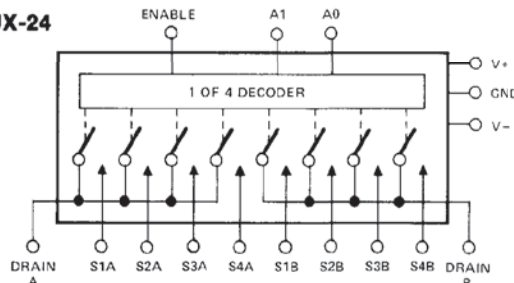

REV. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 617/329-4700 Fax: 617/326-8703 Twx: 710/394-6577
Telex: 924491 Cable: ANALOG NORWOODMASS

MUX08* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

COMPARABLE PARTS

View a parametric search of comparable parts.

DOCUMENTATION

Application Notes

- AN-1024: How to Calculate the Settling Time and Sampling Rate of a Multiplexer
- AN-32: Single Supply Operation of JFET Multiplexers

Data Sheet

- MUX08: Military Data Sheet
- MUX08: 8-Chan Analog Multiplexers (Overvoltage & Power Supply Loss Protected) Data Sheet

DESIGN RESOURCES

- MUX08 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

DISCUSSIONS

View all MUX08 EngineerZone Discussions.

SAMPLE AND BUY

Visit the product page to see pricing options.

TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

DOCUMENT FEEDBACK

Submit feedback for this data sheet.

MUX-08

ABSOLUTE MAXIMUM RATINGS (Note 1)

Operating Temperature Range

MUX-08/24-AQ, BQ, BRC	–55°C to +125°C
MUX-02/24-EQ, FQ	–25°C to +85°C
MUX-08/24-EP	0°C to +70°C
MUX-08/24-FP, FS	–40°C to +85°C

Junction Temperature (T_J) –65°C to +150°C

Storage Temperature Range –65°C to +150°C

P-Suffix –65°C to +125°C

Lead Temperature (Soldering, 60 sec) 300°C

Maximum Junction Temperature 150°C

V+ Supply to V– Supply 36V

Logic Input Voltage (–4V or V–) to V+ Supply

Analog Input Voltage V– Supply –20V to V+ Supply +20V

Maximum Current Through Any Pin 25mA

PACKAGE TYPE	θ_{JA} (Note 2)	θ_{JC}	UNITS
16-Pin Hermetic DIP (Q)	100	16	°C/W
16-Pin Plastic DIP (P)	82	39	°C/W
20-Contact LCC (RC)	98	38	°C/W
16-Pin SO (S)	111	35	°C/W

NOTES:

1. Absolute maximum ratings apply to both DICE and packaged parts, unless otherwise noted.
2. θ_{JA} is specified for worst case mounting conditions, i.e., θ_{JA} is specified for device in socket for CerDIP, P-DIP, and LCC packages; θ_{JA} is specified for device soldered to printed circuit board for SO package.

ELECTRICAL CHARACTERISTICS at V+ = +15V, V– = –15V and T_A = 25°C, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	MUX-08A/E MUX-24A/E			MUX-08B/F MUX-24B/F			UNITS	
			MIN	TYP	MAX	MIN	TYP	MAX		
“ON” Resistance	R _{ON}	V _S ≤ 10V, I _S ≤ 200μA	—	220	300	—	300	400	Ω	
ΔR _{ON} With Applied Voltage	ΔR _{ON}	−10V ≤ V _S ≤ 10V, I _S = 200μA	—	1	5	—	3	7	%	
R _{ON} Match Between Switches	R _{ON} Match	V _S = 0V, I _S = 200μA	—	7	15	—	9	20	%	
Analog Voltage Range	V _A	(Note 6)	+10 −10	+10.4 −15	—	+10 −10	+10.4 −15	—	V	
Source Current (Switch “OFF”)	I _{S (OFF)}	V _S = 10V, V _D = −10V (Note 1)	—	0.01	1.0	—	0.01	2.0	nA	
Drain Current (Switch “OFF”)	I _{D (OFF)}	V _S = 10V, V _D = −10V (Note 1)	MUX-08 MUX-24	— —	0.1 0.05	1.0 1.0	— —	0.1 0.05	2.0 2.0	nA
Leakage Current (Switch “ON”)	I _{D (ON)} + I _{S (ON)}	V _D = 10V (Note 1)	MUX-08 MUX-24	— —	0.1 0.05	1.0 1.0	— —	0.1 0.05	2.0 2.0	nA
Digital Input Current	I _{IN}	V _{IN} = 0.4V to 15V	—	1	10	—	1	10	μA	
Digital “0” Enable Current	I _{INL (EN)}	V _{EN} = 0.4V	—	4	10	—	4	10	μA	
Digital Input Capacitance	C _{DIG}		—	3	—	—	3	—	pF	
Switching Time (t _{TRAN})	t _{PHL} t _{PLH}	(Notes 2, 5) Figure 1 (Test Circuit)	— —	1.5 1.0	2.1 1.3	— —	1.5 1.0	2.1 1.3	μs	
Output Settling Time	t _S	10V Step to 0.10% 10V Step to 0.05% 10V Step to 0.02%	— — —	2.2 2.7 3.4	— — —	— — —	2.2 2.7 3.4	— — —	μs	
Break-Before-Make Delay	t _{OPEN}	Figure 3 (Test Circuit)	—	0.8	—	—	1.0	—	μs	
Enable Delay “ON”	t _{ON (EN)}	(Note 5) Figure 2 (Test Circuit)	—	1	2	—	1	2	μs	
Enable Delay “OFF”	t _{OFF (EN)}	(Note 5) Figure 2 (Test Circuit)	MUX-08 MUX-24	— —	0.1 0.2	0.4 0.5	— —	0.2 0.3	0.4 0.6	μs
“OFF” Isolation	ISO _{OFF}	(Note 4) Figure 5 (Test Circuit)	MUX-08 MUX-24	— —	60 66	— —	— 66	— —	dB	
Crosstalk	CT	(Note 3) Figure 4 (Test Circuit)	MUX-08 MUX-24	— —	70 76	— —	— 76	— —	dB	
Source Capacitance	C _{S (OFF)}	Switch “OFF”, V _S = 0V, V _D = 0V	MUX-08 MUX-24	— —	2.5 2	— —	— 2	— —	pF	
Drain Capacitance	C _{D (OFF)}	Switch “OFF”, V _S = 0V, V _D = 0V	MUX-08 MUX-24	— —	7 4	— —	— 4	— —	pF	
Input to Output Capacitance	C _{DS (OFF)}	(Note 4)	MUX-08 MUX-24	— —	0.3 0.15	— —	— 0.15	— —	pF	
Positive Supply Current (All Digital Inputs Logic “0” or “1”)	I ₊	V ₊ = 15V V ₊ = 5V	— —	10 8	12 —	— —	6 5	12 —	mA	
Negative Supply Current (All Digital Inputs Logic “0” or “1”)	I _−	V ₊ = −15V V ₊ = −5V	— —	3.0 2.5	3.8 —	— —	2.0 1.8	3.8 —	mA	

ELECTRICAL CHARACTERISTICS at $V_+ = 15V$, $V_- = -15V$ and $-55^\circ C \leq T_A \leq 125^\circ C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	MUX-08A/ MUX-24A			MUX-08B/ MUX-24B			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
“ON” Resistance	R _{ON}	V _S ≤ 10V, I _S ≤ 200μA	—	—	400	—	—	500	Ω
ΔR _{ON} With Applied Voltage	ΔR _{ON}	−10V ≤ V _S ≤ 10V, I _S = 200μA	—	1.5	—	—	4.5	—	%
R _{ON} Match Between Switches	R _{ON} Match	V _S = 0V, I _S = 200μA	—	10	—	—	15	—	%
Analog Voltage Range	V _A	(Note 6)	+10 −10	+10.4 −15	—	+10 −10	+10.4 −15	—	V
Source Current (Switch “OFF”)	I _{S (OFF)}	V _S = 10V, V _D = −10V (Notes 1, 7)	—	—	25	—	—	50	nA
Drain Current (Switch “OFF”)	I _{D (OFF)}	V _S = 10V, V _D = −10V (Notes 1, 7)	MUX-08 MUX-24	— —	100 50	— —	— —	500 500	nA
Leakage Current (Switch “ON”)	I _{D (ON)} + I _{S (ON)}	V _D = 10V (Notes 1, 7)	MUX-08 MUX-24	— —	100 50	— —	— —	500 500	nA
Digital “1” Input Voltage	V _{INH}	(Note 6)	2	—	—	2	—	—	V
Digital “0” Input Voltage	V _{INL}	(Note 6)	—	—	0.7	—	—	0.7	V
Digital Input Current	I _{IN}	V _{IN} = 0.4V to 15V	—	—	20	—	—	20	μA
Digital “0” Enable Current	I _{INL (EN)}	V _{EN} = 0.4V	—	—	20	—	—	20	μA
Positive Supply Current	I+	All Digital Inputs Logic “0” or “1”	—	—	15	—	—	15	mA
Negative Supply Current	I−	All Digital Inputs Logic “0” or “1”	—	—	5	—	—	5	mA

ELECTRICAL CHARACTERISTICS at $V_+ = 15V$, $V_- = -15V$ and $-25^\circ C \leq T_A \leq +85^\circ C$ for MUX-08EQ/FQ and MUX-24EQ/FQ; $0^\circ C \leq T_A \leq +70^\circ C$ for MUX-08EP and MUX-24EP; $-40^\circ C \leq T_A \leq +85^\circ C$ for MUX-08FP/FS and MUX-24FP/FS, unless otherwise noted.


PARAMETER	SYMBOL	CONDITIONS	MUX-08E/ MUX-24E			MUX-08F/ MUX-24F			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
"ON" Resistance	R _{ON}	V _S ≤ 10V, I _S ≤ 200μA	—	—	400	—	—	500	Ω
ΔR _{ON} With Applied Voltage	ΔR _{ON}	−10V ≤ V _S ≤ 10V, I _S = 200μA	—	1.5	—	—	4.5	—	%
R _{ON} Match Between Switches	R _{ON} Match	V _S = 0V, I _S = 200μA	—	10	—	—	15	—	%
Analog Voltage Range	V _A	(Note 6)	+10 −10	+10.4 −15	—	+10 −10	+10.4 −15	—	V
Source Current (Switch "OFF")	I _{S (OFF)}	V _S = 10V, V _D = −10V (Notes 1, 7)	—	—	10	—	—	10	nA
Drain Current (Switch "OFF")	I _{D (OFF)}	V _S = 10V, V _D = −10V (Notes 1, 7)	MUX-08			MUX-08			nA
			MUX-24			MUX-24			
Leakage Current (Switch "ON")	I _{D (ON)} + I _{S (ON)}	V _D = 10V (Notes 1, 7)	MUX-08			MUX-08			nA
			MUX-24			MUX-24			
Digital "1" Input Voltage	V _{INH}	(Note 6)	2	—	—	2	—	—	V
Digital "0" Input Voltage	V _{INL}	(Note 6)	—	—	0.8	—	—	0.8	V
Digital Input Current	I _{IN}	V _{IN} = 0.4V to 15V	—	—	20	—	—	20	μA
Digital "0" Enable Current	I _{INL (EN)}	V _{EN} = 0.4V	—	—	20	—	—	20	μA
Positive Supply Current	I ₊	All Digital Inputs Logic "0" or "1"	—	—	15	—	—	15	mA
Negative Supply Current	I _−	All Digital Inputs Logic "0" or "1"	—	—	5	—	—	5	mA

NOTES:

- Conditions applied to leakage tests insure worst case leakages. Exceeding 11V on the analog input may cause an "OFF" channel to turn "ON".
- $R_L = 10M\Omega$, $C_L = 10pF$.
- Crosstalk is measured by driving channel 8 with channel 4 "ON".
 $R_L = 1M\Omega$, $C_L = 10pF$, $V_S = 5V$ RMS, $f = 500kHz$.
- "OFF" isolation is measured by driving channel 8 with ALL channels "OFF".
 $R_L = 1k\Omega$, $C_L = 10pF$, $V_S = 5V$ RMS, $f = 500kHz$. C_{DS} is computed from the OFF isolation measurement.
- Sample tested.
- Guaranteed by leakage current and R_{ON} tests.
- Leakage tests are performed only on military temperature grades at $125^\circ C$.


MUX-08

DICE CHARACTERISTICS (125° C TESTED DICE AVAILABLE)



MUX-08

MUX-24



DIE SIZE 0.093 × 0.059 inch, 5487 sq. mils
(2.362 × 1.500 mm, 3543 sq. mm)

- | | |
|-------------------|---------|
| 1. A0 | 9. S8 |
| 2. ENABLE | 10. S7 |
| 3. V- (SUBSTRATE) | 11. S6 |
| 4. S1 | 12. S5 |
| 5. S2 | 13. V+ |
| 6. S3 | 14. GND |
| 7. S4 | 15. A2 |
| 8. DRAIN | 16. A1 |

- | | |
|-------------------|------------|
| 1. A0 | 9. DRAIN B |
| 2. ENABLE | 10. S4 B |
| 3. V- (SUBSTRATE) | 11. S3 B |
| 4. S1 A | 12. S2 B |
| 5. S2 A | 13. S1 B |
| 6. S3 A | 14. V+ |
| 7. S4 A | 15. GND |
| 8. DRAIN A | 16. A1 |

WAFER TEST LIMITS at V+ = 15V, V- = -15V, T_A = 25° C, unless otherwise noted. (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MUX-08/ MUX-24NT LIMIT	MUX-08/ MUX-24N LIMIT	MUX-08/ MUX-24G LIMIT	UNITS
"ON" Resistance	R _{ON}	V _S = 0V, I _S = 200μA T _A = 125° C	300 400	300 —	400 —	Ω MAX
Digital "1" Input Voltage	V _{INH}	(Note 2)	2	2	2	V MIN
Digital "0" Input Voltage	V _{INL}	(Note 2)	0.8	0.8	0.8	V MAX
Digital "0" Input Current	I _{INL}	V _{IN} = 0.4V T _A = 125° C	10 20	10 —	10 —	μA MAX
Digital "0" Enable Current	I _{INL(EN)}	V _{IN} = 0.4V T _A = 125° C	10 20	10 —	10 —	μA MAX
Positive Supply Current (All Digital Inputs Logic "0")	I+	T _A = 125° C	12 15	12 —	12 —	mA MAX
Negative Supply Current (All Digital Inputs Logic "0")	I-	T _A = 125° C	3.8 5	3.8 —	3.8 —	mA MAX
Analog Input Range	V _A	(Note 2)	± 10	± 10	± 10	V MIN

NOTE:

Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.

TYPICAL ELECTRICAL CHARACTERISTICS at V+ = 15V, V- = -15V and T_A = 25° C for MUX-08/24N & G, T_A = 125° C for MUX-08/24NT, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	MUX-08/ MUX-24NT TYPICAL	MUX-08/ MUX-24N TYPICAL	MUX-08/ MUX-24G TYPICAL	UNITS
Switching Time (t _{TRAN})	t _{PHL}	(Note 1)	1.7	1.3	2.1	μs
	t _{PLH}		1.1	0.9	1.3	
Output Settling Time	t _S	10V Step to 0.1% (Note 1)	2.1	1.5	1.9	μs
Break-Before-Make Delay	t _{OPEN}	(Note 1)	0.8	0.8	1.0	μs
Crosstalk	CT	(Note 1)	70	70	70	dB
ΔR _{ON} With Applied Voltage	ΔR _{ON}	-10V ≤ V _S ≤ 10V, I _S = 200μA	2	2	6	%
Leakage Current (Switch "ON")	I _{D(ON)}	V _D = 10V (Note 1)	20	0.5	0.5	nA
Analog Input Range	V _A		+ 10.4/-15	+ 10.4/-15	+ 10.4/-15	V

NOTES:

1. The data shown is extrapolated from measurements made on the packaged devices.

2. Guaranteed by leakage current and R_{ON} tests.

**MUX-08
LOGIC STATE**


A ₂	A ₁	A ₀	EN	"ON" CHANNEL
X	X	X	L	NONE
L	L	L	H	1
L	L	H	H	2
L	H	L	H	3
L	H	H	H	4
H	L	L	H	5
H	L	H	H	6
H	H	L	H	7
H	H	H	H	8

**MUX-24
LOGIC STATE**

A ₁	A ₀	EN	"ON" CHANNEL
X	X	L	NONE
L	L	H	1
L	H	H	2
H	L	H	3
H	H	H	4


TYPICAL PERFORMANCE CHARACTERISTICS (Applies to all grades, unless otherwise noted.)

**MUX-08
BREAK-BEFORE-MAKE
SWITCHING**




R_L = 1kΩ, C_L = 10pF, V₁ = 10V
VOLTAGE = 2V/DIV
TIME = 200ns/DIV

**MUX-08
LARGE-SIGNAL SWITCHING**




R_L = 1MΩ, C_L = 10pF, V₁ = -10V, V₈ = +10V
VOLTAGE = 5V/DIV
TIME = 1μs/DIV

**MUX-08
SMALL-SIGNAL SWITCHING**




R_L = 1MΩ, C_L = 10pF, V₁ = -500mV, V₈ = +500mV
VOLTAGE = 500mV/DIV
TIME = 1μs/DIV

**MUX-08
SMALL-SIGNAL SWITCHING
WITH FILTERING**




R_L = 1MΩ, C_L = 500pF, V₁ = 500mV, V₈ = +500mV
VOLTAGE = 500mV/DIV
TIME = 1μs/DIV

**MUX-08
SMALL-SIGNAL SWITCHING
WITH 2μs SAMPLE TIME**



R_L = 1MΩ, C_L = 10pF, V₁ = -500mV, V₈ = +500mV
VOLTAGE = 500mV/DIV
TIME = 500ns/DIV

**MUX-08
SMALL-SIGNAL SWITCHING
WITH FILTERING AND
2.5μs SAMPLE TIME**



R_L = 1MΩ, C_L = 500pF, V₁ = -500mV, V₈ = +500mV
VOLTAGE = 500mV/DIV
TIME = 500ns/DIV


NOTE:

Top waveforms: Digital Input 5V/DIV
Bottom waveforms: Multiplexer Output


MUX-08

TYPICAL PERFORMANCE CHARACTERISTICS (Applies to all grades, unless otherwise noted.)


MUX-08 CROSSTALK AND OFF ISOLATION PERFORMANCE OF CHANNEL 8

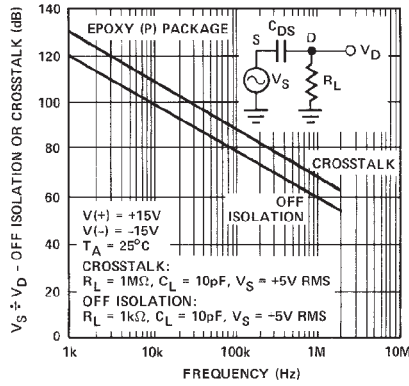


MUX-08 CROSSTALK AND OFF ISOLATION PERFORMANCE OF CHANNEL 8

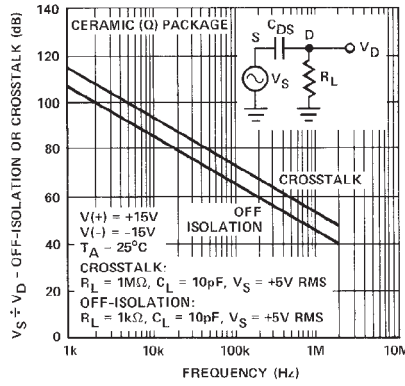


TRANSITION TIMES vs TEMPERATURE

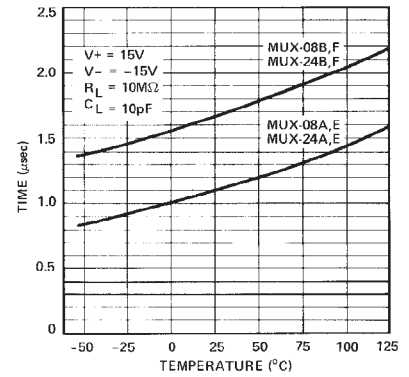


ENABLE DELAY TIMES vs TEMPERATURE

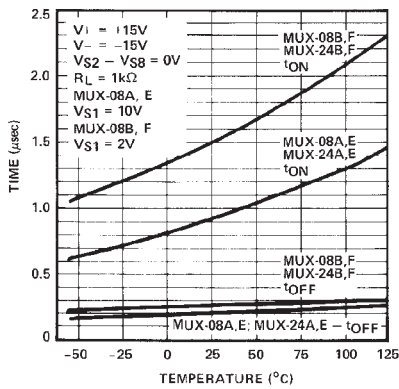


"ON" RESISTANCE (R_ON) vs ANALOG VOLTAGE (V_A)

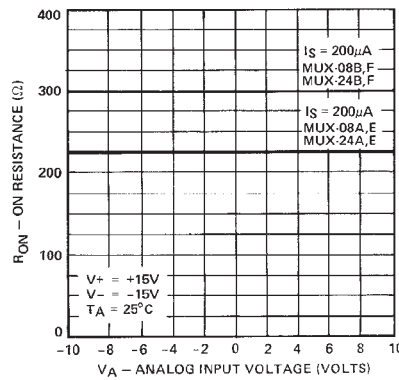


R_ON vs SWITCH VOLTAGE (V_SD)

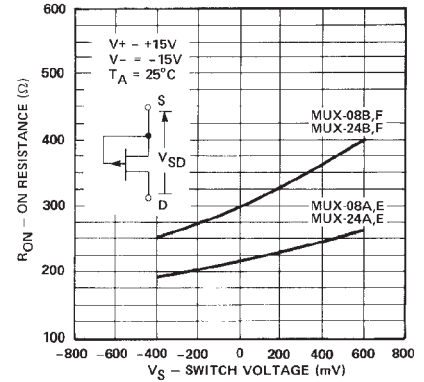


R_ON vs SWITCH CURRENT (I_S)

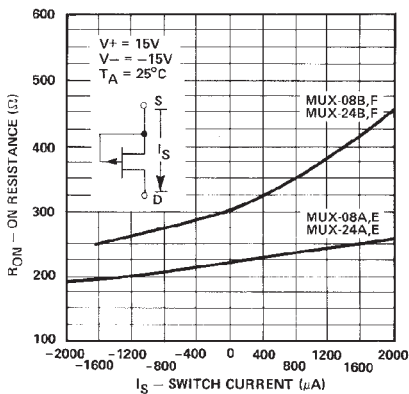

R_ON vs TEMPERATURE

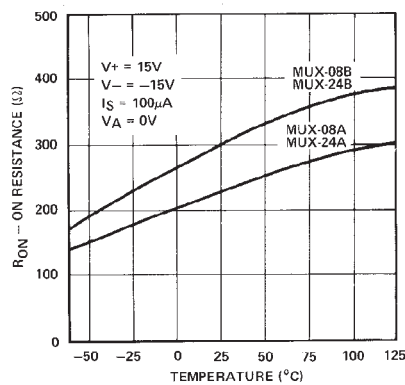


SWITCH LEAKAGE CURRENTS vs ANALOG INPUT VOLTAGE

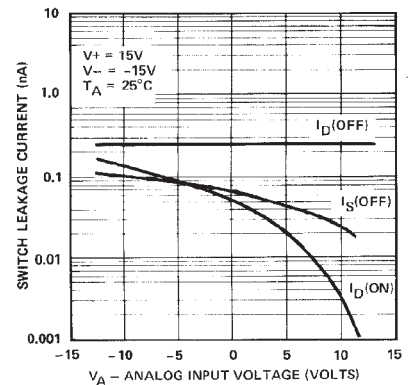


TYPICAL PERFORMANCE CHARACTERISTICS (Applies to all grades, unless otherwise noted.)


SWITCH LEAKAGE CURRENTS vs TEMPERATURE

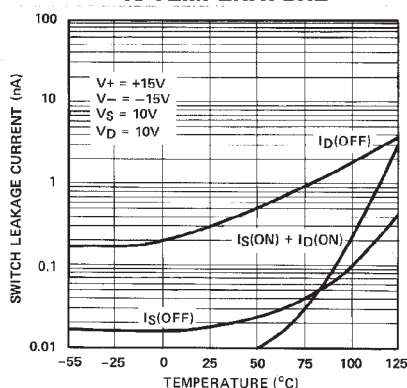


SUPPLY CURRENTS vs TEMPERATURE

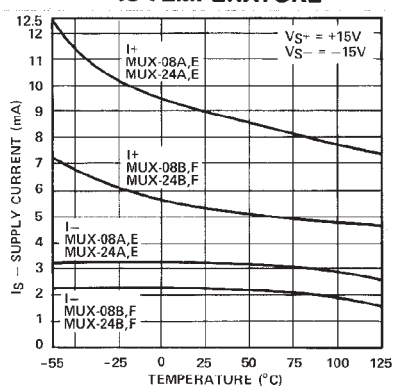

MUX-08 SWITCH CAPACITANCES vs ANALOG INPUT VOLTAGE

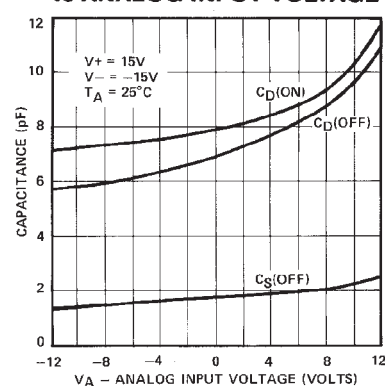


MUX-24 SMALL-SIGNAL SWITCHING




$R_L = 1M\Omega$, $C_L = 10pF$, $V_1 = -500mV$, $V_4 = +500mV$
VOLTAGE = 500mV/DIV, TIME = 1 μ s/DIV

MUX-24 SMALL-SIGNAL SWITCHING WITH FILTERING




$R_L = 1M\Omega$, $C_L = 500pF$, $V_1 = -500mV$, $V_4 = +500mV$
VOLTAGE = 500mV/DIV, TIME = 1 μ s/DIV

MUX-24 SMALL-SIGNAL SWITCHING WITH 2 μ s SAMPLE TIME




$R_L = 1M\Omega$, $C_L = 10pF$, $V_1 = -500mV$, $V_4 = +500mV$
VOLTAGE = 500mV/DIV, TIME = 500ns/DIV

MUX-24 SMALL-SIGNAL SWITCHING WITH FILTERING AND 2.5 μ s SAMPLE TIME




$R_L = 1M\Omega$, $C_L = 500pF$, $V_1 = -500mV$, $V_4 = +500mV$
VOLTAGE = 500mV/DIV, TIME = 500ns/DIV

MUX-24 BREAK-BEFORE-MAKE SWITCHING



$R_L = 1k\Omega$, $C_L = 10pF$, $V_1, 4 = 10V$
VOLTAGE = 2V/DIV, TIME = 200ns/DIV

MUX-24 LARGE-SIGNAL SWITCHING



$R_L = 1M\Omega$, $C_L = 10pF$, $V_1 = -10V$, $V_4 = +10V$
VOLTAGE = 5V/DIV, TIME = 1 μ s/DIV


NOTE:

Top waveforms: Digital Input 5V/DIV
Bottom waveforms: Multiplexer Output


MUX-08

TYPICAL PERFORMANCE CHARACTERISTICS (Applies to all grades, unless otherwise noted.)


DIGITAL INPUT CURRENTS vs TEMPERATURE

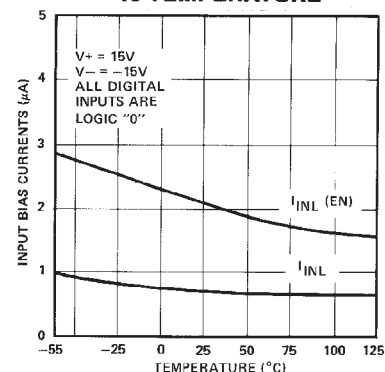

MUX-24 SWITCH CAPACITANCES vs ANALOG INPUT VOLTAGE

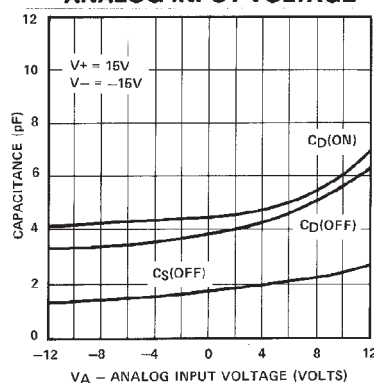

MUX-24 CROSSTALK AND OFF ISOLATION PERFORMANCE OF CHANNEL 3A

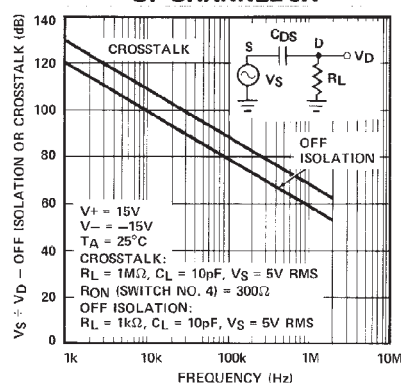

A.C. TEST CIRCUITS

TRANSITION TIME TEST CIRCUIT

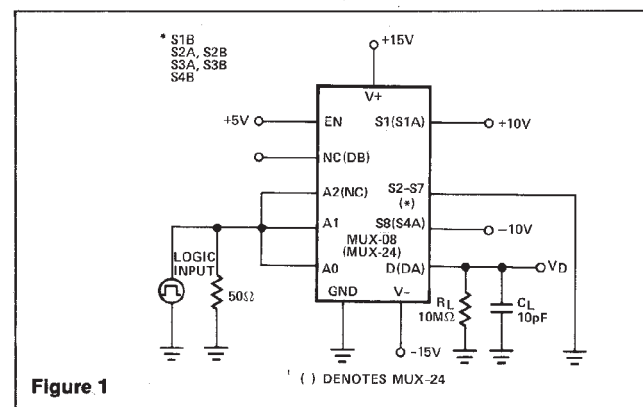


Figure 1

BREAK-BEFORE-MAKE TEST CIRCUIT

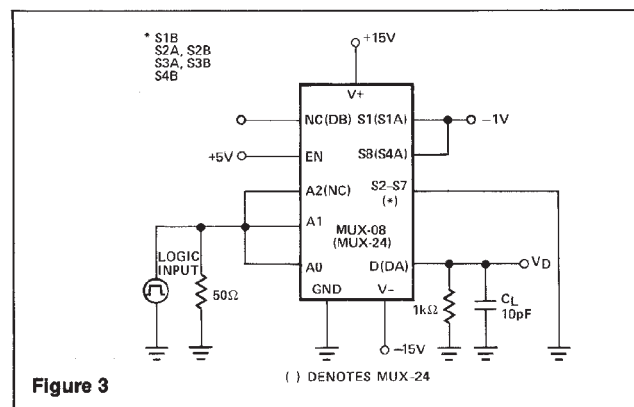


Figure 3

ENABLE DELAY TIME TEST CIRCUIT

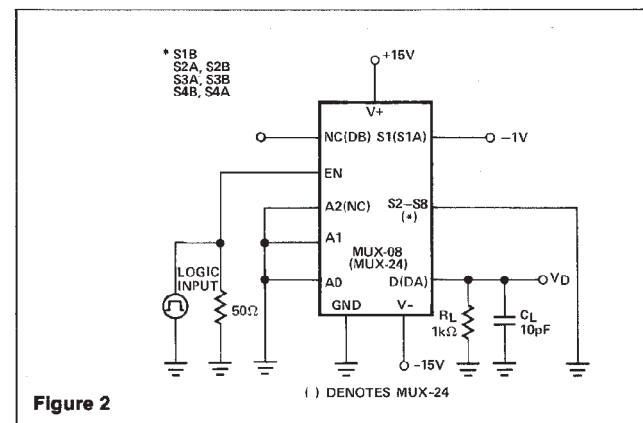


Figure 2

CROSSTALK MEASUREMENT CIRCUIT


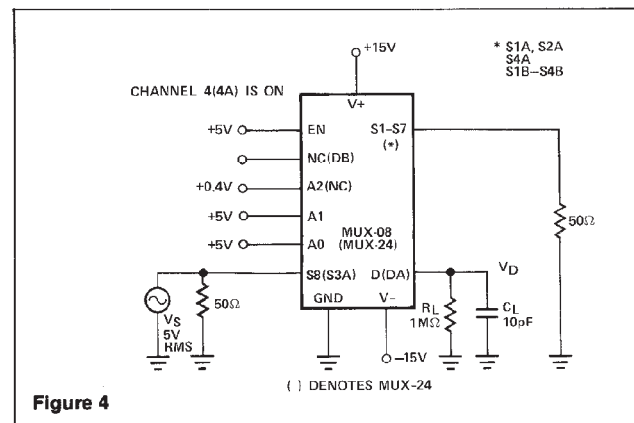


Figure 4

MUX-08

SIMPLIFIED MUX-08 SCHEMATIC

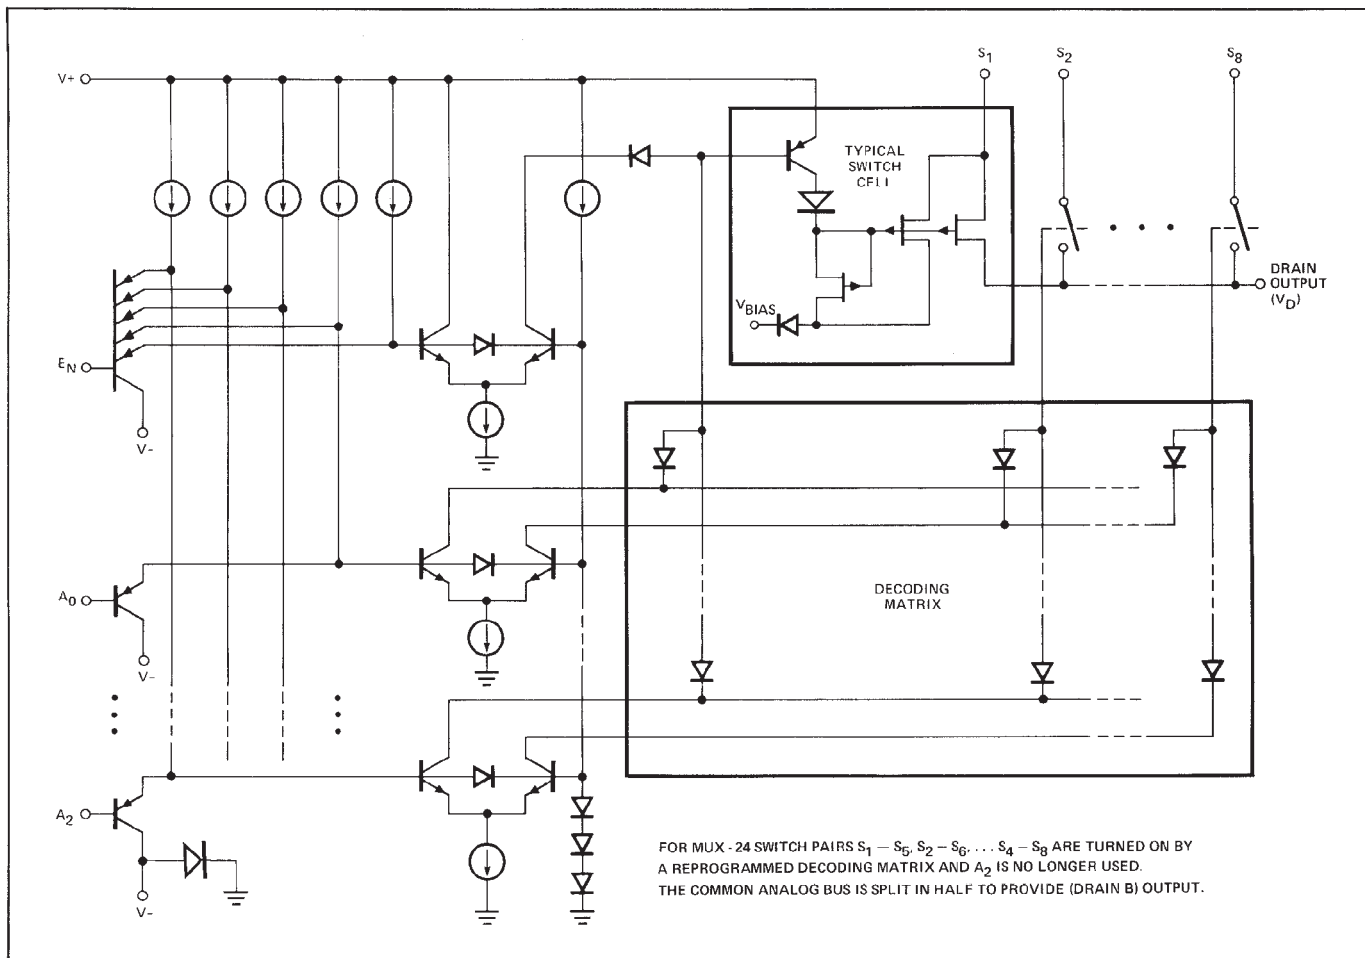


The simplified MUX-08/MUX-24 schematic shows that logic trip points are determined by two forward diode drops. An internal clamping diode between V_- and ground prevents excessive current flow between V_+ and ground in the event that V_- becomes open circuit. The decoding matrix is accomplished by a programmed diode array. The switch cell consists of P channel JFET's with appropriate blocking diodes which ruggedizes the circuit's overvoltage and supply loss characteristics.




DIFFERENTIAL MULTIPLEXERS

One characteristic unique to differential multiplexers (MUX-24) is the ability to reject common-mode signals from becoming differential error signals. Common-mode rejection is a parameter which defines the amount of rejection in terms of dB. The MUX-24 exhibits a 106dB at 60Hz and 101dB at 400Hz of CMRR using the test circuit of Figure 6.

CMRR TEST CIRCUIT

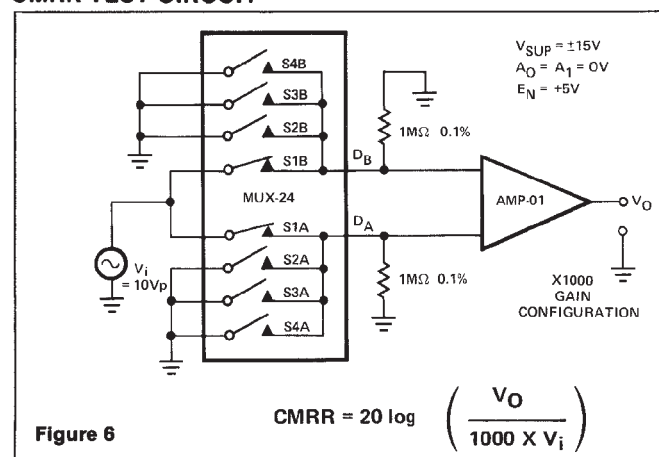

TYPICAL PERFORMANCE CHARACTERISTICS

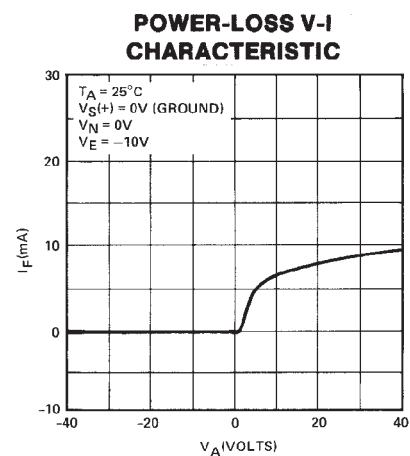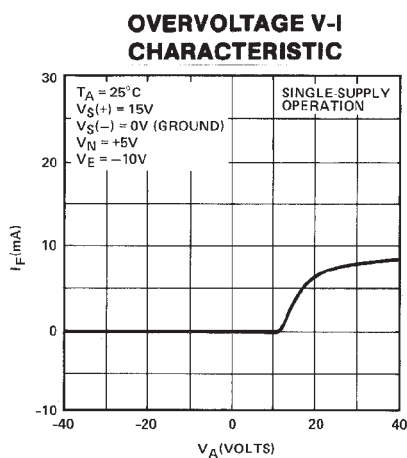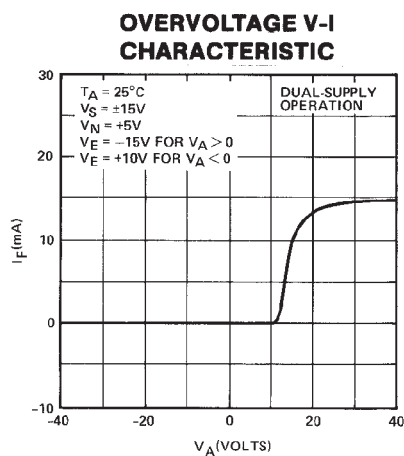

OVERVOLTAGE/POWER-LOSS MEASUREMENT TEST CIRCUIT

