

# SN54AS882A, SN74AS882A 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

- Directly Compatible With 'AS181B, 'AS1181, 'AS881B, and 'AS1881 ALUs
- Package Options Include Plastic Small Outline Packages, Both Plastic and Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Capable of Anticipating the Carry Across a Group of Eight 4-Bit Binary Adders
- Cascadable to Perform Look-Ahead Across n-Bit Adders
- Typical Carry Time,  $C_n$  to Any  $C_{n+i}$ , is Less Than 6 ns
- Dependable Texas Instruments Quality and Reliability

## description


The 'AS882A is a high-speed look-ahead carry generator capable of anticipating the carry across a group of eight 4-bit adders permitting the designer to implement look-ahead for a 32-bit ALU with a single package or, by cascading 'AS882As, full look-ahead is possible across n-bit adders.

The SN54AS882A is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74AS882A is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .


## 'AS882A LOGIC EQUATIONS

$$\begin{aligned}
 C_{n+8} &= G1 + P1G0 + P1P0C_n \\
 C_{n+16} &= G3 + P3G2 + P3P2G1 + P3P2P1G0 \\
 &\quad + P3P2P1P0C_n \\
 C_{n+24} &= G5 + P5G4 + P5P4G3 + P5P4P3G2 \\
 &\quad + P5P4P3P2G1 + P5P4P3P2P1G0 \\
 &\quad + P5P4P3P2P1P0C_n \\
 C_{n+32} &= G7 + P7G6 + P7P6G5 + P7P6P5G4 \\
 &\quad + P7P6P5P4G3 + P7P6P5P4P3G2 \\
 &\quad + P7P6P5P4P3P2G1 + P7P6P5P4P3P2P1G0 \\
 &\quad + P7P6P5P4P3P2P1P0C_n
 \end{aligned}$$

SN54AS882A ... JT PACKAGE  
SN74AS882A ... DW OR NT PACKAGE  
(TOP VIEW)

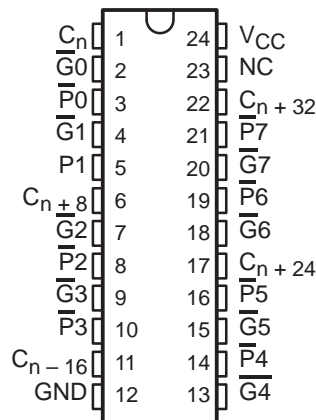

SN54AS882A ... FK PACKAGE  
SN74AS882A ... DW OR NT PACKAGE  
(TOP VIEW)

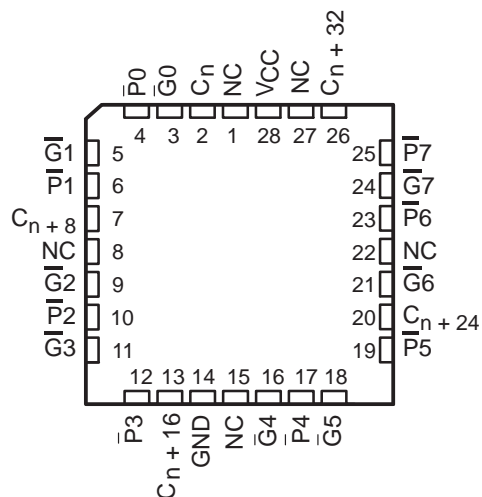


NC – No internal connection

# SN54AS882A, SN74AS882A

## 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

logic symbol†

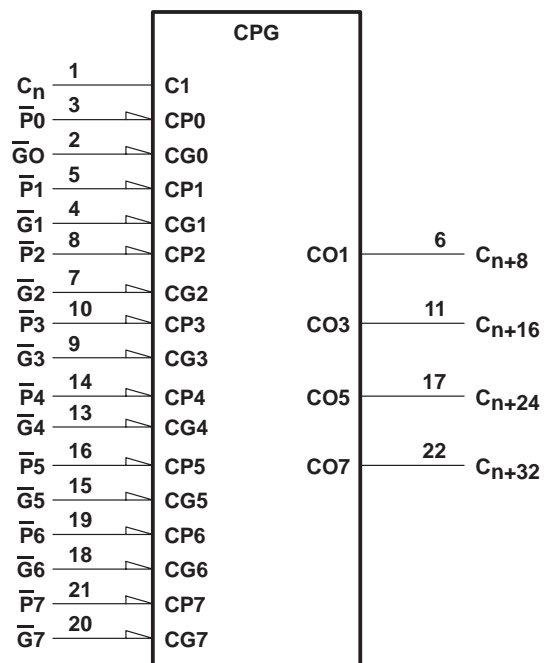

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.  
Pin numbers shown are for DW, JT, and NT packages.

# SN54AS882A, SN74AS882A

## 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

FUNCTION TABLE  
FOR  $C_n + 32$  OUTPUT

INPUTS																	OUTPUT
G7	G6	G5	G4	G3	G2	G1	G0	P7	P6	P5	P4	P3	P2	P1	P0	$C_n$	$C_n + 32$
L	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	H
X	L	X	X	X	X	X	X	L	X	X	X	X	X	X	X	X	H
X	X	L	X	X	X	X	X	L	L	X	X	X	X	X	X	X	H
X	X	X	L	X	X	X	X	L	L	L	X	X	X	X	X	X	H
X	X	X	X	L	X	X	X	L	L	L	L	X	X	X	X	X	H
X	X	X	X	X	L	X	X	L	L	L	L	L	X	X	X	X	H
X	X	X	X	X	X	L	X	L	L	L	L	L	L	X	X	X	H
X	X	X	X	X	X	X	L	L	L	L	L	L	L	L	X	X	H
X	X	X	X	X	X	X	X	L	L	L	L	L	L	L	L	H	H
All other combinations																	L

FUNCTION TABLE  
FOR  $C_n + 24$  OUTPUT

INPUTS													OUTPUT
G5	G4	G3	G2	G1	G0	P5	P4	P3	P2	P1	P0	$C_n$	$C_n + 24$
L	X	X	X	X	X	X	X	X	X	X	X	X	H
X	L	X	X	X	X	L	X	X	X	X	X	X	H
X	X	L	X	X	X	L	L	X	X	X	X	X	H
X	X	X	L	X	X	L	L	L	X	X	X	X	H
X	X	X	X	L	X	L	L	L	L	X	X	X	H
X	X	X	X	X	L	L	L	L	L	L	X	X	H
X	X	X	X	X	X	L	L	L	L	L	L	H	H
All other combinations													L

### Function Tables

FOR  $C_n + 16$  OUTPUT

INPUTS									OUTPUT
G3	G2	G1	G0	P3	P2	P1	P0	$C_n$	$C_n + 16$
L	X	X	X	X	X	X	X	X	H
X	L	X	X	L	X	X	X	X	H
X	X	L	X	L	L	X	X	X	H
X	X	X	L	L	L	L	X	X	H
X	X	X	X	L	L	L	L	H	H
All other combinations									L

FOR  $C_n + 8$  OUTPUT

INPUTS					OUTPUT
G1	G0	P1	P0	$C_n$	$C_n + 8$
L	X	X	X	X	H
X	L	L	X	X	H
X	X	L	L	H	H
All other combinations					L


Any inputs not shown in a given table are irrelevant with respect to that output.

# SN54AS882A, SN74AS882A

## 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

### logic diagram (positive logic)

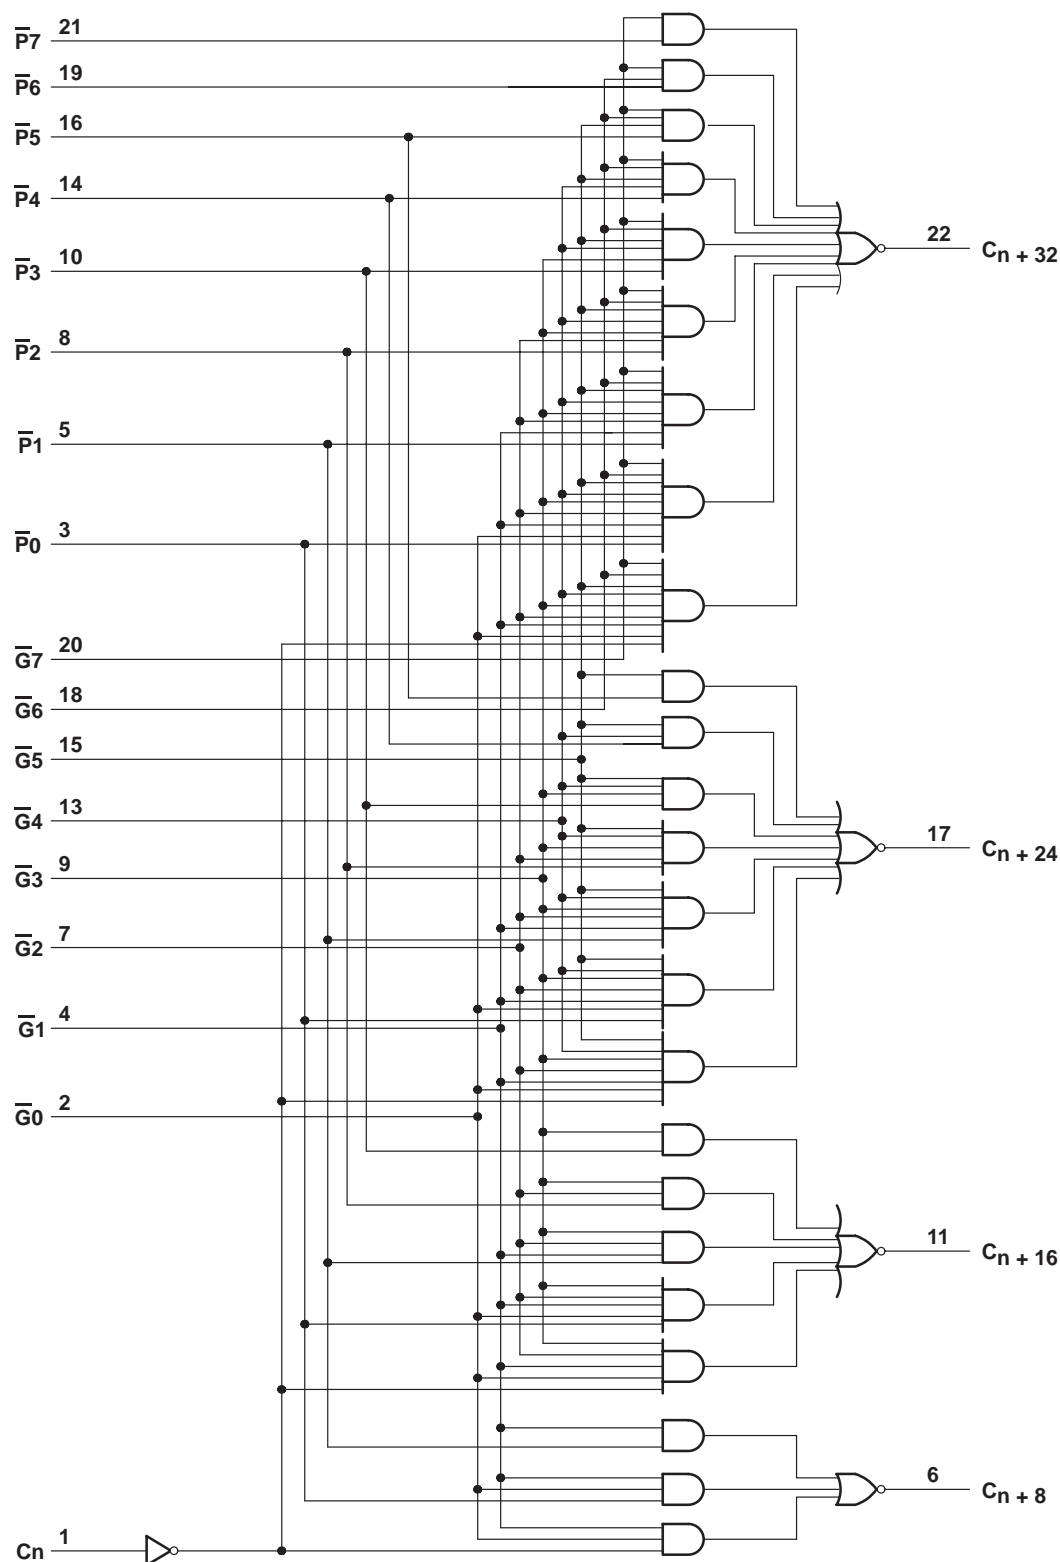

Pin numbers shown are for DW, JT, and NT packages.

## SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

Supply voltage, $V_{CC}$	7 V
Input voltage	7 V
Operating free-air temperature range:	
SN54AS882A	–55°C to 125°C
SN74AS882A	0°C to 70°C
Storage temperature range	–65°C to 150°C

		SN54AS882A			SN74AS882A			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub>	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V <sub>IH</sub>	High-level input voltage	2			2			V
V <sub>IL</sub>	Low-level input voltage			0.8			0.8	V
I <sub>OH</sub>	High-level output current			−2			−2	mA
I <sub>OL</sub>	Low-level output current			20			20	mA
T <sub>A</sub>	Operating free-air temperature	−55		125	0		70	°C

# SN54AS882A, SN74AS882A

## 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER		TEST CONDITIONS	SN54AS882A			SN74AS882A			UNIT
			MIN	TYP†	MAX	MIN	TYP†	MAX	
$V_{IK}$		$V_{CC} = 4.5 \text{ V}$ , $I_I = -18 \text{ mA}$			-1.2			-1.2	V
$V_{OH}$		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$ , $I_{OH} = -2 \text{ mA}$	$V_{CC}-2$			$V_{CC}-2$			V
$V_{OL}$		$V_{CC} = 4.5 \text{ V}$ , $I_{OL} = 20 \text{ mA}$		0.3	0.5		0.3	0.5	V
$I_I$	$C_n, \overline{P}0, \overline{P}1$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 7 \text{ V}$			0.4			0.4	mA
	$\overline{G}0, \overline{G}6$				0.8			0.8	
	$\overline{G}1, \overline{G}2, \overline{G}4$				1.2			1.2	
	$\overline{G}3, \overline{G}5$				1.5			1.5	
	$\overline{G}7$				0.9			0.9	
	$\overline{P}2, \overline{P}3$				0.3			0.3	
	$\overline{P}4, \overline{P}5$				0.2			0.2	
	$\overline{P}6, \overline{P}7$				0.1			0.1	
$I_{IH}$	$C_n, \overline{P}0, \overline{P}1$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 2.7 \text{ V}$			80			80	$\mu\text{A}$
	$\overline{G}0, \overline{G}6$				160			160	
	$\overline{G}1, \overline{G}2, \overline{G}4$				240			240	
	$\overline{G}3, \overline{G}5$				300			300	
	$\overline{G}7$				180			180	
	$\overline{P}2, \overline{P}3$				60			60	
	$\overline{P}4, \overline{P}5$				40			40	
	$\overline{P}6, \overline{P}7$				20			20	
$I_{IL}$	$C_n, \overline{P}0, \overline{P}1$	$V_{CC} = 5.5 \text{ V}$ , $V_I = 0.4 \text{ V}$			-2			-2	mA
	$\overline{G}0, \overline{G}6$				-4			-4	
	$\overline{G}1, \overline{G}2, \overline{G}4$				-6			-6	
	$\overline{G}3, \overline{G}5$				-7.5			-7.5	
	$\overline{G}7$				-4.5			-4.5	
	$\overline{P}2, \overline{P}3$				-1.5			-1.5	
	$\overline{P}4, \overline{P}5$				-1			-1	
	$\overline{P}6, \overline{P}7$				-0.5			-0.5	
$I_{O\ddagger}$		$V_{CC} = 5.5 \text{ V}$ , $V_O = 2.25 \text{ V}$	-30		-130	-30		-30	mA
$I_{CC}$		$V_{CC} = 5.5 \text{ V}$		44	70		44	70	mA

† All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .

# SN54AS882A, SN74AS882A 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

## switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 4.5 V to 5.5 V, C <sub>L</sub> = 50 pF, R <sub>L</sub> = 500 Ω, T <sub>A</sub> = MIN to MAX				UNIT
			SN54AS882A		SN74AS882A		
			MIN	MAX	MIN	MAX	
t <sub>PLH</sub>	C <sub>n</sub>	Any output	2	10	2	9	ns
t <sub>PHL</sub>			3	15	3	14	
t <sub>PLH</sub>	$\overline{\text{P}}$ or G	C <sub>n</sub> + 8	2	8	2	7	
t <sub>PHL</sub>			2	8	2	7	
t <sub>PLH</sub>	$\overline{\text{P}}$ or G	C <sub>n</sub> + 16	2	8	2	7	
t <sub>PHL</sub>			2	8	2	7	
t <sub>PLH</sub>	$\overline{\text{P}}$ or G	C <sub>n</sub> + 24	2	8	2	7	
t <sub>PHL</sub>			2	11	2	10	
t <sub>PLH</sub>	$\overline{\text{P}}$ or G	C <sub>n</sub> + 32	1.5	9	2	8	
t <sub>PHI</sub>			2	13	2	12	

NOTE 1: Load circuits and voltage waveforms are shown in Section 1.

# SN54AS882A, SN74AS882A 32-BIT LOOK-AHEAD CARRY GENERATORS

SDAS235 – D2661, DECEMBER 1982 – REVISED NOVEMBER 1985

## TYPICAL APPLICATION DATA

The application given in Figure 1 illustrates how the 'AS882A can implement look-ahead carry for a 32-bit ALU (in this case, the popular 'AS881A) with a single package. Typical carry times shown are derived using the standard Advanced Schottky load circuit.

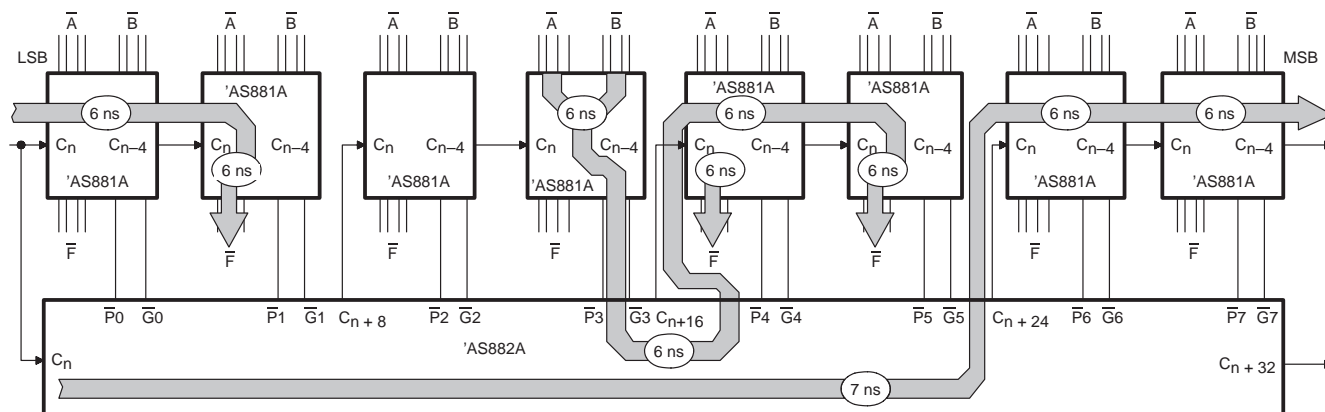


Figure 1

Likewise, Figure 2 illustrates the same 32-bit ALU using two 'AS882s. This shows the worst-case delay from LSB to MSB to be 19 ns as opposed to 25 ns in Figure 1.

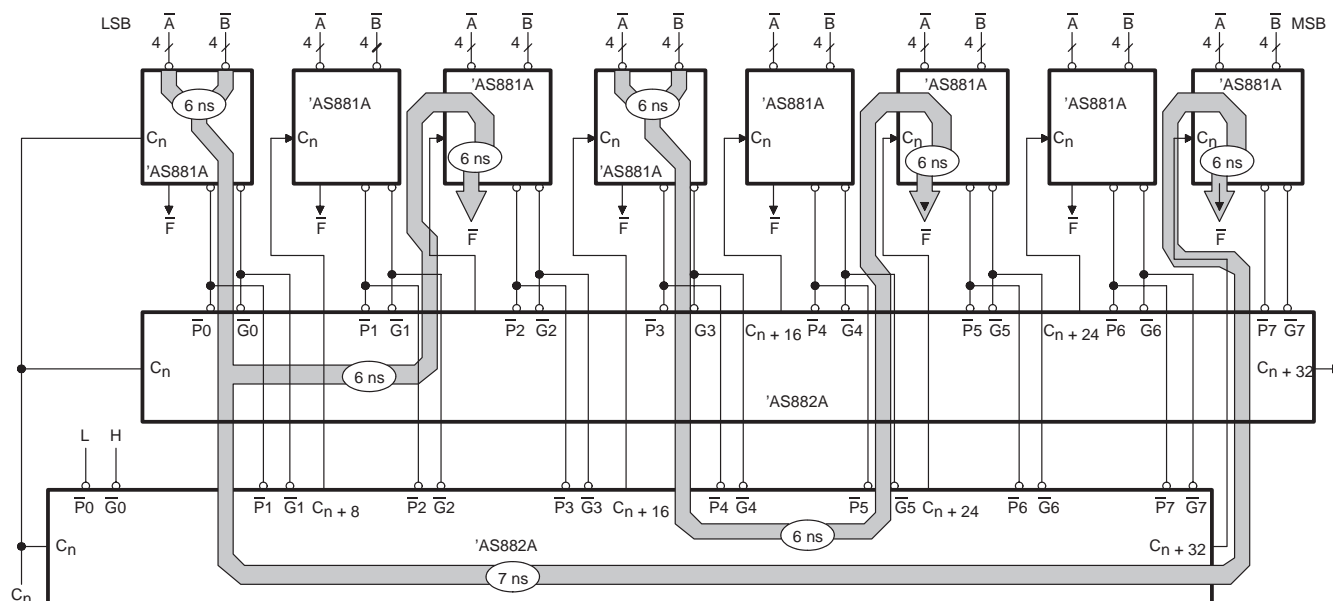


Figure 2



## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.