



## 24-BIT, 192-kHz SAMPLING, ADVANCED SEGMENT, AUDIO STEREO DIGITAL-TO-ANALOG CONVERTER

### FEATURES

- Supports Both DSD and PCM Formats
- 24-Bit Resolution
- Analog Performance:
  - Dynamic Range:
    - 132 dB (9 V RMS, Mono)
    - 129 dB (4.5 V RMS, Stereo)
    - 127 dB (2 V RMS, Stereo)
  - THD+N: 0.0004%
- Differential Current Output: 7.8 mA p-p
- 8× Oversampling Digital Filter:
  - Stop-Band Attenuation: –130 dB
  - Pass-Band Ripple:  $\pm 0.00001$  dB
- Sampling Frequency: 10 kHz to 200 kHz
- System Clock: 128, 192, 256, 384, 512, or 768 f<sub>S</sub> With Autodetect
- Accepts 16-, 20-, and 24-Bit Audio Data
- PCM Data Formats: Standard, I<sup>2</sup>S, and Left-Justified
- Optional Interface to External Digital Filter or DSP Available
- I<sup>2</sup>C-Compatible Serial Port
- User-Programmable Mode Controls:
  - Digital Attenuation: 0 dB to –120 dB, 0.5 dB/Step
  - Digital De-Emphasis
  - Digital Filter Rolloff: Sharp or Slow
  - Soft Mute

- Dual-Supply Operation:
  - 5-V Analog, 3.3-V Digital
- 5-V Tolerant Digital Inputs
- Small 28-Lead SSOP Package

### APPLICATIONS

- A/V Receivers
- SACD Player
- DVD Players
- HDTV Receivers
- Car Audio Systems
- Digital Multitrack Recorders
- Other Applications Requiring 24-Bit Audio

### DESCRIPTION

The DSD1794A is a monolithic CMOS integrated circuit that includes stereo digital-to-analog converters and support circuitry in a small 28-lead SSOP package. The data converters use TI's advanced-segment DAC architecture to achieve excellent dynamic performance and improved tolerance to clock jitter. The DSD1794A provides balanced current outputs, allowing the user to optimize analog performance externally. The DSD1794A accepts the PCM and DSD audio data formats, providing easy interfacing to audio DSP and decoder chips. The DSD1794A also interfaces with external digital filter devices (DF1704, DF1706, PMD200). Sampling rates up to 200 kHz are supported. A full set of user-programmable functions is accessible through an I<sup>2</sup>C-compatible serial port.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

## ORDERING INFORMATION

| PRODUCT    | PACKAGE      | PACKAGE CODE | OPERATION TEMPERATURE RANGE | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA |
|------------|--------------|--------------|-----------------------------|-----------------|-----------------|-----------------|
| DSD1794ADB | 28-lead SSOP | 28DB         | –25°C to 85°C               | DSD1794A        | DSD1794ADB      | Tube            |
|            |              |              |                             |                 | DSD1794ADBR     | Tape and reel   |

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted<sup>(1)</sup>

|                                                                                      |                                                                                                                      | DSD1794A                                    |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Supply voltage                                                                       | V <sub>CC1</sub> , V <sub>CC2L</sub> , V <sub>CC2R</sub>                                                             | –0.3 V to 6.5 V                             |
|                                                                                      | V <sub>DD</sub>                                                                                                      | –0.3 V to 4 V                               |
| Supply voltage differences: V <sub>CC1</sub> , V <sub>CC2L</sub> , V <sub>CC2R</sub> |                                                                                                                      | ±0.1 V                                      |
| Ground voltage differences: AGND1, AGND2, AGND3L, AGND3R, DGND                       |                                                                                                                      | ±0.1 V                                      |
| Digital input voltage                                                                | PLRCK, PDATA, PBCK, SCK, RST, SCL, SDA <sup>(2)</sup> , ADR0, ADR1, DSDL <sup>(2)</sup> , DSDR <sup>(2)</sup> , DBCK | –0.3 V to 6.5 V                             |
|                                                                                      | DSDL <sup>(3)</sup> , DSDR <sup>(3)</sup> , SDA <sup>(3)</sup>                                                       | –0.3 V to (V <sub>DD</sub> + 0.3 V) < 4 V   |
| Analog input voltage                                                                 |                                                                                                                      | –0.3 V to (V <sub>CC</sub> + 0.3 V) < 6.5 V |
| Input current (any pins except supplies)                                             |                                                                                                                      | ±10 mA                                      |
| Ambient temperature under bias                                                       |                                                                                                                      | –40°C to 125°C                              |
| Storage temperature                                                                  |                                                                                                                      | –55°C to 150°C                              |
| Junction temperature                                                                 |                                                                                                                      | 150°C                                       |
| Lead temperature (soldering)                                                         |                                                                                                                      | 260°C, 5 s                                  |
| Package temperature (IR reflow, peak)                                                |                                                                                                                      | 250°C                                       |

(1) Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) Input mode

(3) Output mode

## ELECTRICAL CHARACTERISTICS

all specifications at T<sub>A</sub> = 25°C, V<sub>CC1</sub> = V<sub>CC2L</sub> = V<sub>CC2R</sub> = 5 V, V<sub>DD</sub> = 3.3 V, f<sub>S</sub> = 44.1 kHz, system clock = 256 f<sub>S</sub>, and 24-bit data, unless otherwise noted

| PARAMETER                   |                    | TEST CONDITIONS | DSD1794ADB                                  |     |         | UNIT |
|-----------------------------|--------------------|-----------------|---------------------------------------------|-----|---------|------|
|                             |                    |                 | MIN                                         | TYP | MAX     |      |
| RESOLUTION                  |                    |                 | 24                                          |     |         | Bits |
| DATA FORMAT (PCM Mode)      |                    |                 |                                             |     |         |      |
| Audio data interface format |                    |                 | Standard, I <sup>2</sup> S, left justified  |     |         |      |
| Audio data bit length       |                    |                 | 16-, 20-, 24-bit selectable                 |     |         |      |
| Audio data format           |                    |                 | MSB first, 2s complement                    |     |         |      |
| f <sub>S</sub>              | Sampling frequency |                 | 10                                          |     | 200     | kHz  |
| System clock frequency      |                    |                 | 128, 192, 256, 384, 512, 768 f <sub>S</sub> |     |         |      |
| DATA FORMAT (DSD Mode)      |                    |                 |                                             |     |         |      |
| Audio data interface format |                    |                 | DSD (direct stream digital)                 |     |         |      |
| Audio data bit length       |                    |                 | 1 bit                                       |     |         |      |
| f <sub>S</sub>              | Sampling frequency |                 | 2.8224                                      |     |         | MHz  |
| System clock frequency      |                    |                 | 2.8224                                      |     | 11.2896 | MHz  |

## ELECTRICAL CHARACTERISTICS (Continued)

all specifications at  $T_A = 25^\circ\text{C}$ ,  $V_{CC1} = V_{CC2L} = V_{CC2R} = 5\text{ V}$ ,  $V_{DD} = 3.3\text{ V}$ ,  $f_S = 44.1\text{ kHz}$ , system clock =  $256 f_S$ , and 24-bit data, unless otherwise noted

| PARAMETER                                               |                     | TEST CONDITIONS                             | DSD1794ADB      |     |     | UNIT |
|---------------------------------------------------------|---------------------|---------------------------------------------|-----------------|-----|-----|------|
|                                                         |                     |                                             | MIN             | TYP | MAX |      |
| DIGITAL INPUT/OUTPUT                                    |                     |                                             |                 |     |     |      |
| Logic family                                            |                     |                                             | TTL compatible  |     |     |      |
| V <sub>IH</sub>                                         | Input logic level   |                                             | 2               |     |     | VDC  |
| V <sub>IL</sub>                                         |                     |                                             | 0.8             |     |     |      |
| I <sub>IH</sub>                                         | Input logic current | V <sub>IN</sub> = V <sub>DD</sub>           | 10              |     |     | μA   |
| I <sub>IL</sub>                                         |                     | V <sub>IN</sub> = 0 V                       | −10             |     |     |      |
| V <sub>OH</sub>                                         | Output logic level  | I <sub>OH</sub> = −2 mA                     | 2.4             |     |     | VDC  |
| V <sub>OL</sub>                                         |                     | I <sub>OL</sub> = 2 mA                      | 0.4             |     |     |      |
| DYNAMIC PERFORMANCE (PCM MODE, 2-V RMS OUTPUT) (1)(2)   |                     |                                             |                 |     |     |      |
| THD+N at V <sub>OUT</sub> = 0 dB                        |                     | f <sub>S</sub> = 44.1 kHz                   | 0.0004% 0.0008% |     |     |      |
|                                                         |                     | f <sub>S</sub> = 96 kHz                     | 0.0008%         |     |     |      |
|                                                         |                     | f <sub>S</sub> = 192 kHz                    | 0.0015%         |     |     |      |
| Dynamic range                                           |                     | EIAJ, A-weighted, f <sub>S</sub> = 44.1 kHz | 123             | 127 | dB  |      |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 96 kHz   | 127             |     |     |      |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 192 kHz  | 127             |     |     |      |
| Signal-to-noise ratio                                   |                     | EIAJ, A-weighted, f <sub>S</sub> = 44.1 kHz | 123             | 127 | dB  |      |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 96 kHz   | 127             |     |     |      |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 192 kHz  | 127             |     |     |      |
| Channel separation                                      |                     | f <sub>S</sub> = 44.1 kHz                   | 120             | 123 | dB  |      |
|                                                         |                     | f <sub>S</sub> = 96 kHz                     | 122             |     |     |      |
|                                                         |                     | f <sub>S</sub> = 192 kHz                    | 120             |     |     |      |
| Level linearity error                                   |                     | V <sub>OUT</sub> = −120 dB                  | ±1              |     |     | dB   |
| DYNAMIC PERFORMANCE (PCM Mode, 4.5-V RMS Output) (1)(3) |                     |                                             |                 |     |     |      |
| THD+N at V <sub>OUT</sub> = 0 dB                        |                     | f <sub>S</sub> = 44.1 kHz                   | 0.0004%         |     |     |      |
|                                                         |                     | f <sub>S</sub> = 96 kHz                     | 0.0008%         |     |     |      |
|                                                         |                     | f <sub>S</sub> = 192 kHz                    | 0.0015%         |     |     |      |
| Dynamic range                                           |                     | EIAJ, A-weighted, f <sub>S</sub> = 44.1 kHz | 129             |     |     | dB   |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 96 kHz   | 129             |     |     |      |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 192 kHz  | 129             |     |     |      |
| Signal-to-noise ratio                                   |                     | EIAJ, A-weighted, f <sub>S</sub> = 44.1 kHz | 129             |     |     | dB   |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 96 kHz   | 129             |     |     |      |
|                                                         |                     | EIAJ, A-weighted, f <sub>S</sub> = 192 kHz  | 129             |     |     |      |
| Channel separation                                      |                     | f <sub>S</sub> = 44.1 kHz                   | 124             |     |     | dB   |
|                                                         |                     | f <sub>S</sub> = 96 kHz                     | 123             |     |     |      |
|                                                         |                     | f <sub>S</sub> = 192 kHz                    | 121             |     |     |      |

(1) Filter condition:

THD+N: 20-Hz HPF, 20-kHz apogee LPF

Dynamic range: 20-Hz HPF, 20-kHz AES17 LPF, A-weighted

Signal-to-noise ratio: 20-Hz HPF, 20-kHz AES17 LPF, A-weighted

Channel separation: 20-Hz HPF, 20-kHz AES17 LPF

Analog performance specifications are measured using the System Two™ Cascade audio measurement system by Audio Precision™ in the averaging mode.

(2) Dynamic performance and dc accuracy are specified at the output of the postamplifier as shown in Figure 33.

(3) Dynamic performance and dc accuracy are specified at the output of the postamplifier as shown in Figure 34.

**ELECTRICAL CHARACTERISTICS (Continued)**

all specifications at  $T_A = 25^\circ\text{C}$ ,  $V_{CC1} = V_{CC2L} = V_{CC2R} = 5\text{ V}$ ,  $V_{DD} = 3.3\text{ V}$ ,  $f_S = 44.1\text{ kHz}$ , system clock =  $256 f_S$ , and 24-bit data, unless otherwise noted

| PARAMETER                                                           | TEST CONDITIONS                             | DSD1794ADB           |      |     | UNIT     |
|---------------------------------------------------------------------|---------------------------------------------|----------------------|------|-----|----------|
|                                                                     |                                             | MIN                  | TYP  | MAX |          |
| DYNAMIC PERFORMANCE (MONO MODE) (1)(2)                              |                                             |                      |      |     |          |
| THD+N at V <sub>OUT</sub> = 0 dB                                    | f <sub>S</sub> = 44.1 kHz                   | 0.0004%              |      |     |          |
|                                                                     | f <sub>S</sub> = 96 kHz                     | 0.0008%              |      |     |          |
|                                                                     | f <sub>S</sub> = 192 kHz                    | 0.0015%              |      |     |          |
| Dynamic range                                                       | EIAJ, A-weighted, f <sub>S</sub> = 44.1 kHz | 132                  |      |     | dB       |
|                                                                     | EIAJ, A-weighted, f <sub>S</sub> = 96 kHz   | 132                  |      |     |          |
|                                                                     | EIAJ, A-weighted, f <sub>S</sub> = 192 kHz  | 132                  |      |     |          |
| Signal-to-noise ratio                                               | EIAJ, A-weighted, f <sub>S</sub> = 44.1 kHz | 132                  |      |     | dB       |
|                                                                     | EIAJ, A-weighted, f <sub>S</sub> = 96 kHz   | 132                  |      |     |          |
|                                                                     | EIAJ, A-weighted, f <sub>S</sub> = 192 kHz  | 132                  |      |     |          |
| DSD MODE DYNAMIC PERFORMANCE (1) (3) (44.1 kHz, 64 f <sub>S</sub> ) |                                             |                      |      |     |          |
| THD+N at FS                                                         | 4.5 V rms                                   | 0.0005%              |      |     |          |
| Dynamic range                                                       | −60 dB, EIAJ, A-weighted                    | 128                  |      |     | dB       |
| Signal-to-noise ratio                                               | EIAJ, A-weighted                            | 128                  |      |     | dB       |
| ANALOG OUTPUT                                                       |                                             |                      |      |     |          |
| Gain error                                                          |                                             | −6                   | ±2   | 6   | % of FSR |
| Gain mismatch, channel-to-channel                                   |                                             | −3                   | ±0.5 | 3   | % of FSR |
| Bipolar zero error                                                  | At BPZ                                      | −2                   | ±0.5 | 2   | % of FSR |
| Output current                                                      | Full scale (0 dB)                           | 7.8                  |      |     | mA p-p   |
| Center current                                                      | At BPZ                                      | −6.2                 |      |     | mA       |
| DIGITAL FILTER PERFORMANCE                                          |                                             |                      |      |     |          |
| De-emphasis error                                                   |                                             | ±0.004               |      |     | dB       |
| FILTER CHARACTERISTICS-1: SHARP ROLLOFF                             |                                             |                      |      |     |          |
| Pass band                                                           | ±0.00001 dB                                 | 0.454 f <sub>S</sub> |      |     |          |
|                                                                     | −3 dB                                       | 0.49 f <sub>S</sub>  |      |     |          |
| Stop band                                                           |                                             | 0.546 f <sub>S</sub> |      |     |          |
| Pass-band ripple                                                    |                                             | ±0.00001             |      |     | dB       |
| Stop-band attenuation                                               | Stop band = 0.546 f <sub>S</sub>            | −130                 |      |     | dB       |
| Delay time                                                          |                                             | 55/f <sub>S</sub>    |      |     | s        |
| FILTER CHARACTERISTICS-2: SLOW ROLLOFF                              |                                             |                      |      |     |          |
| Pass band                                                           | ±0.04 dB                                    | 0.254 f <sub>S</sub> |      |     |          |
|                                                                     | −3 dB                                       | 0.46 f <sub>S</sub>  |      |     |          |
| Stop band                                                           |                                             | 0.732 f <sub>S</sub> |      |     |          |
| Pass-band ripple                                                    |                                             | ±0.001               |      |     | dB       |
| Stop-band attenuation                                               | Stop band = 0.732 f <sub>S</sub>            | −100                 |      |     | dB       |
| Delay time                                                          |                                             | 18/f <sub>S</sub>    |      |     | s        |

(1) Filter condition:

THD+N: 20-Hz HPF, 20-kHz apogee LPF

Dynamic range: 20-Hz HPF, 20-kHz AES17 LPF, A-weighted

Signal-to-noise ratio: 20-Hz HPF, 20-kHz AES17 LPF, A-weighted

Channel separation: 20-Hz HPF, 20-kHz AES17 LPF

Analog performance specifications are measured using the System Two Cascade audio measurement system by Audio Precision in the averaging mode.

(2) Dynamic performance and dc accuracy are specified at the output of the postamplifier as shown in Figure 34.

(3) Dynamic performance and dc accuracy are specified at the output of the postamplifier as shown in Figure 35.


## ELECTRICAL CHARACTERISTICS (Continued)

all specifications at  $T_A = 25^\circ\text{C}$ ,  $V_{CC1} = V_{CC2L} = V_{CC2R} = 5\text{ V}$ ,  $V_{DD} = 3.3\text{ V}$ ,  $f_S = 44.1\text{ kHz}$ , system clock =  $256 f_S$ , and 24-bit data, unless otherwise noted

| PARAMETER                 |                    | TEST CONDITIONS           | DSD1794ADB |     |      | UNIT |  |
|---------------------------|--------------------|---------------------------|------------|-----|------|------|--|
|                           |                    |                           | MIN        | TYP | MAX  |      |  |
| POWER SUPPLY REQUIREMENTS |                    |                           |            |     |      |      |  |
| V <sub>DD</sub>           | Voltage range      |                           | 3          | 3.3 | 3.6  | VDC  |  |
| V <sub>CC1</sub>          |                    |                           | 4.75       | 5   | 5.25 | VDC  |  |
| V <sub>CC2L</sub>         |                    |                           |            |     |      |      |  |
| V <sub>CC2R</sub>         |                    |                           |            |     |      |      |  |
| I <sub>DD</sub>           | Supply current (1) | f <sub>S</sub> = 44.1 kHz | 12         |     | 15   | mA   |  |
|                           |                    | f <sub>S</sub> = 96 kHz   | 23         |     |      |      |  |
|                           |                    | f <sub>S</sub> = 192 kHz  | 45         |     |      |      |  |
| I <sub>CC</sub>           |                    | f <sub>S</sub> = 44.1 kHz | 33         |     | 40   | mA   |  |
|                           |                    | f <sub>S</sub> = 96 kHz   | 35         |     |      |      |  |
|                           |                    | f <sub>S</sub> = 192 kHz  | 37         |     |      |      |  |
| Power dissipation (1)     |                    | f <sub>S</sub> = 44.1 kHz | 205        |     | 250  | mW   |  |
|                           |                    | f <sub>S</sub> = 96 kHz   | 250        |     |      |      |  |
|                           |                    | f <sub>S</sub> = 192 kHz  | 335        |     |      |      |  |
| TEMPERATURE RANGE         |                    |                           |            |     |      |      |  |
| Operation temperature     |                    |                           | −25        |     | 85   | °C   |  |
| θ <sub>JA</sub>           | Thermal resistance | 28-pin SSOP               | 100        |     |      | °C/W |  |

(1) Input is BPZ data.

## PIN ASSIGNMENTS

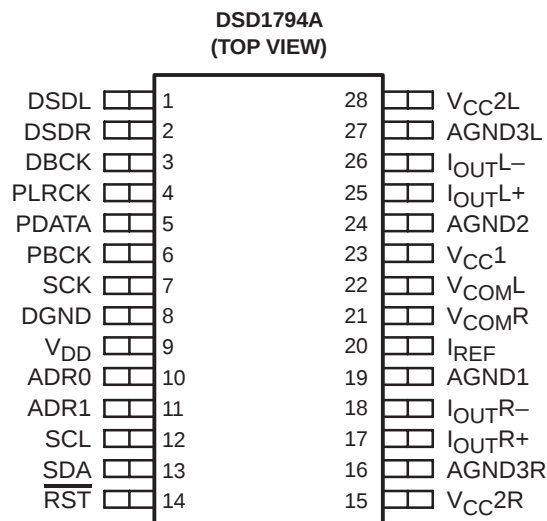

## Terminal Functions


| TERMINAL<br>NAME PIN    |    | I/O | DESCRIPTIONS                                                                                                                                       |
|-------------------------|----|-----|----------------------------------------------------------------------------------------------------------------------------------------------------|
| ADR0                    | 10 | I   | I <sup>2</sup> C address 0 (1)                                                                                                                     |
| ADR1                    | 11 | I   | I <sup>2</sup> C address 1 (1)                                                                                                                     |
| AGND1                   | 19 | –   | Analog ground (internal bias)                                                                                                                      |
| AGND2                   | 24 | –   | Analog ground (internal bias)                                                                                                                      |
| AGND3L                  | 27 | –   | Analog ground (L-channel DACFF)                                                                                                                    |
| AGND3R                  | 16 | –   | Analog ground (R-channel DACFF)                                                                                                                    |
| DBCK                    | 3  | I   | Bit clock input for DSD modes (1)                                                                                                                  |
| DGND                    | 8  | –   | Digital ground                                                                                                                                     |
| DSDL                    | 1  | I/O | L-channel audio data input when in DSD and external DF modes<br>PCM-mode zero flag for L-channel when in zero-flag output mode (2)                 |
| DSDR                    | 2  | I/O | R-channel audio data input when in DSD and external DF modes (2)<br>PCM-mode zero flag for R-channel when in zero-flag output mode                 |
| I <sub>OUTL</sub> +     | 25 | O   | L-channel analog current output +                                                                                                                  |
| I <sub>OUTL</sub> –     | 26 | O   | L-channel analog current output –                                                                                                                  |
| I <sub>OUTR</sub> +     | 17 | O   | R-channel analog current output +                                                                                                                  |
| I <sub>OUTR</sub> –     | 18 | O   | R-channel analog current output –                                                                                                                  |
| I <sub>REF</sub>        | 20 | –   | Output current reference bias pin                                                                                                                  |
| PBCK                    | 6  | I   | Bit clock input. Connected to GND in DSD mode (1)                                                                                                  |
| PDATA                   | 5  | I   | Serial audio data input for PCM-format operation (1)                                                                                               |
| PLRCK                   | 4  | I   | Left and right clock (f <sub>S</sub> ) input for PCM-format operation. WDCK clock input for external DF mode.<br>Connected to GND for DSD mode (1) |
| $\overline{\text{RST}}$ | 14 | I   | Reset (1)                                                                                                                                          |
| SCL                     | 12 | I   | I <sup>2</sup> C clock (1)                                                                                                                         |
| SCK                     | 7  | I   | System clock input (1)                                                                                                                             |
| SDA                     | 13 | I/O | I <sup>2</sup> C data (3)                                                                                                                          |
| V <sub>CC1</sub>        | 23 | –   | Analog power supply, 5 V                                                                                                                           |
| V <sub>CC2L</sub>       | 28 | –   | Analog power supply (L-channel DACFF), 5 V                                                                                                         |
| V <sub>CC2R</sub>       | 15 | –   | Analog power supply (R-channel DACFF), 5 V                                                                                                         |
| V <sub>COML</sub>       | 22 | –   | L-channel internal bias decoupling pin                                                                                                             |
| V <sub>COMR</sub>       | 21 | –   | R-channel internal bias decoupling pin                                                                                                             |
| V <sub>DD</sub>         | 9  | –   | Digital power supply, 3.3 V                                                                                                                        |

(1) Schmitt-trigger input, 5-V tolerant

(2) Schmitt-trigger input and output. 5-V tolerant input, and CMOS output

(3) Schmitt-trigger 5-V tolerant input and open-drain/3-state output


## FUNCTIONAL BLOCK DIAGRAM

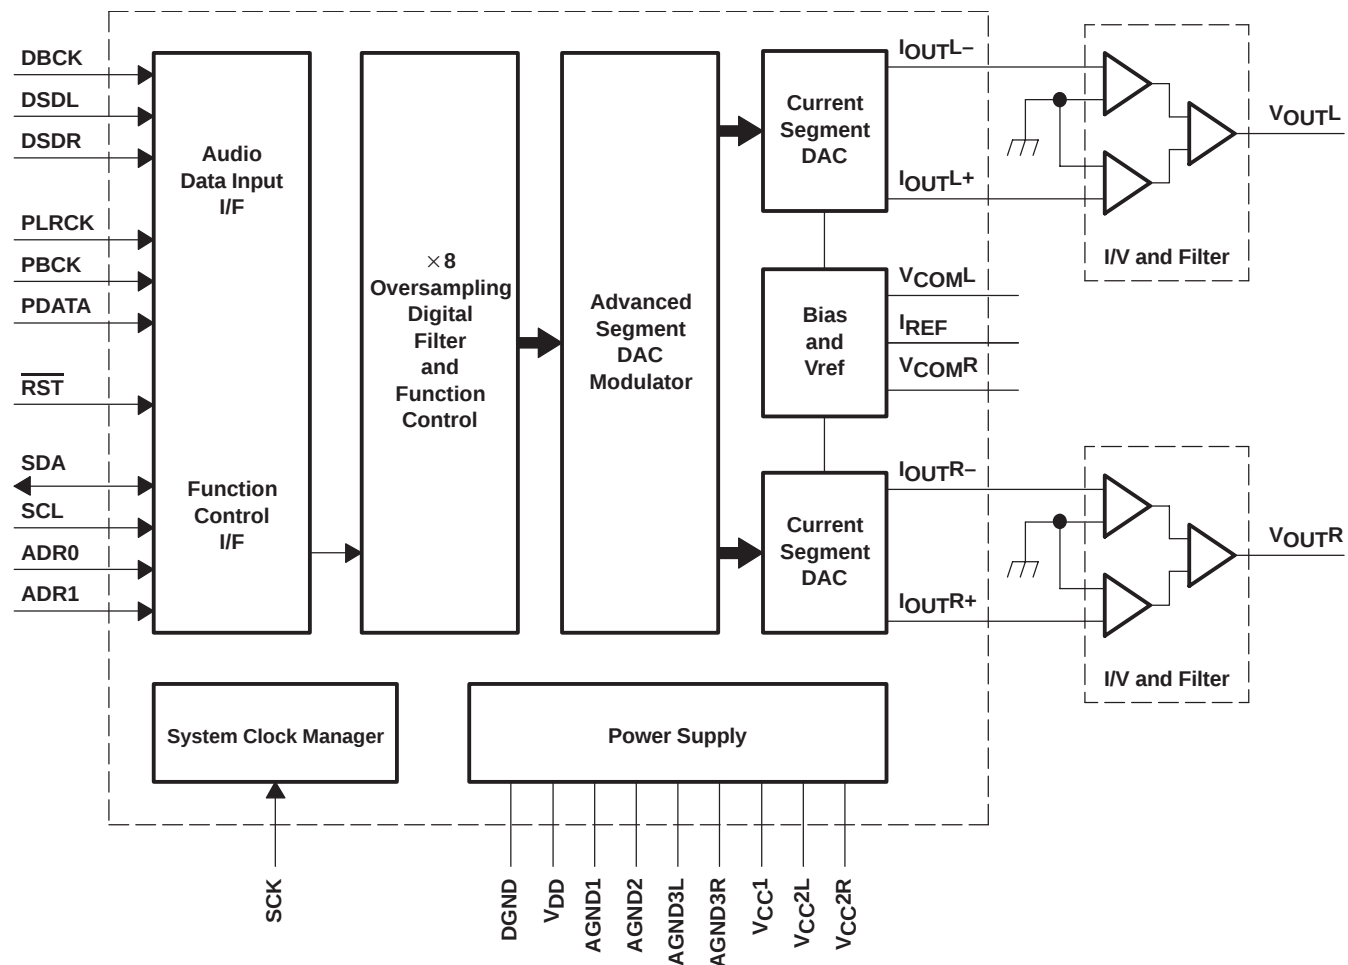


**TYPICAL PERFORMANCE CURVES**

**DIGITAL FILTER**


**Digital Filter Response**

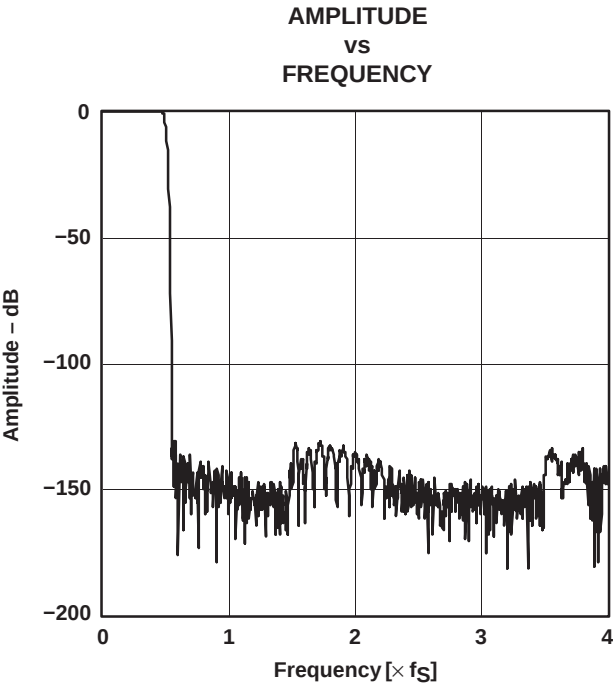


**Figure 1. Frequency Response, Sharp Rolloff**

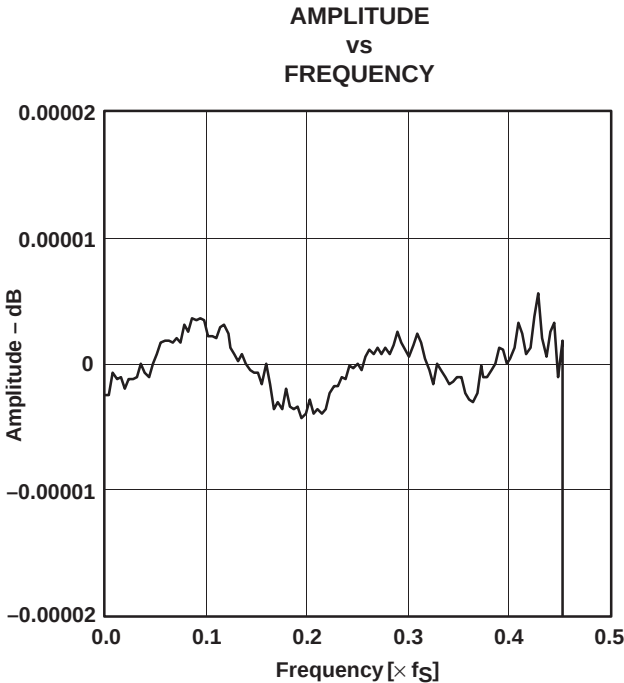

**Figure 2. Pass-Band Ripple, Sharp Rolloff**

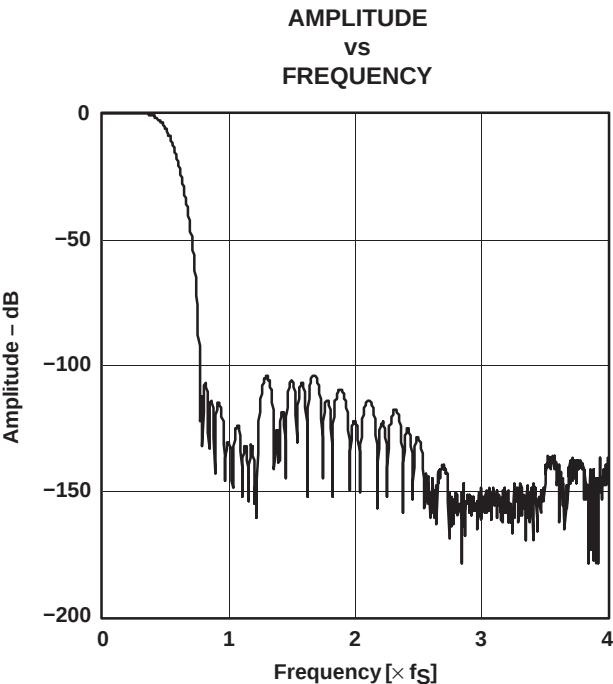


**Figure 3. Frequency Response, Slow Rolloff**

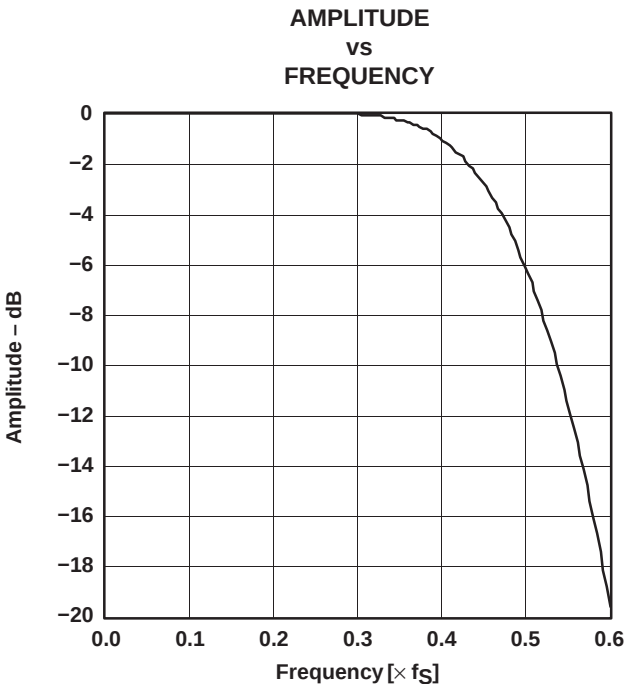


**Figure 4. Transition Characteristics, Slow Rolloff**


## De-Emphasis Filter

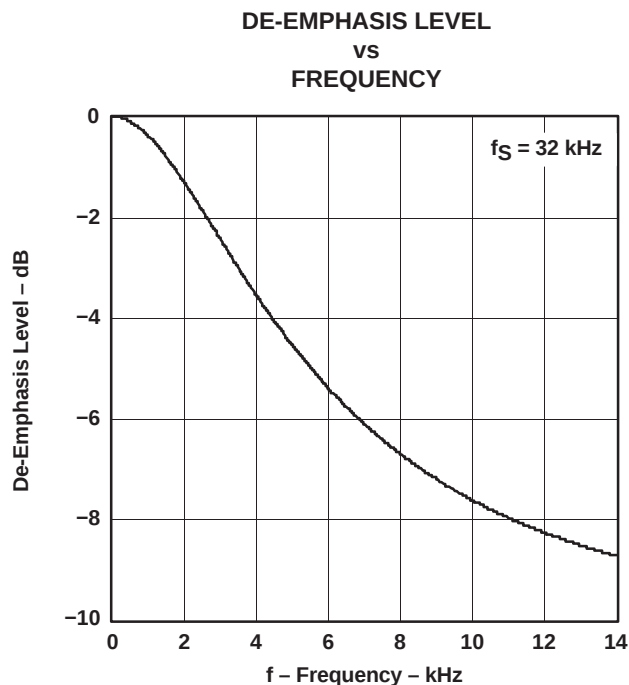


**Figure 5**

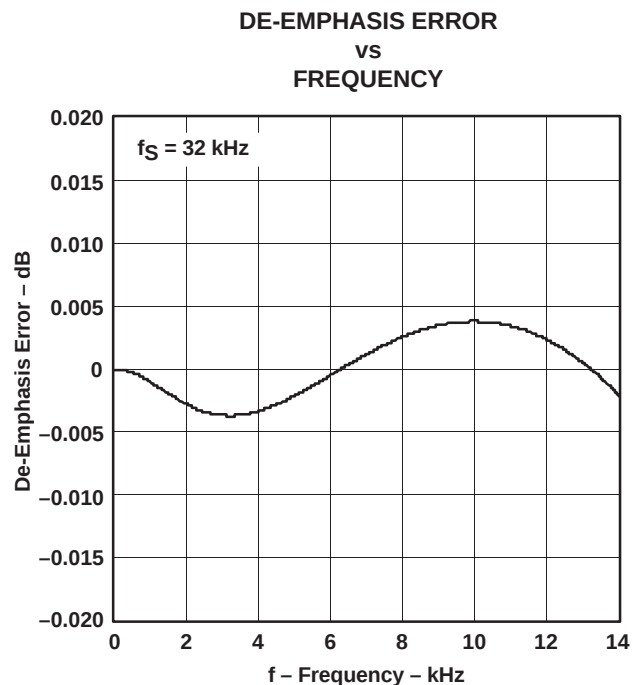

**Figure 6**

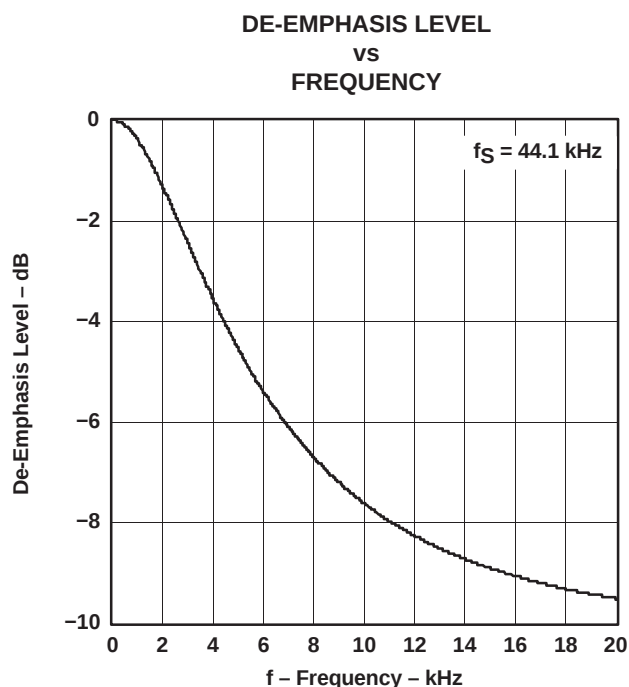

**Figure 7**

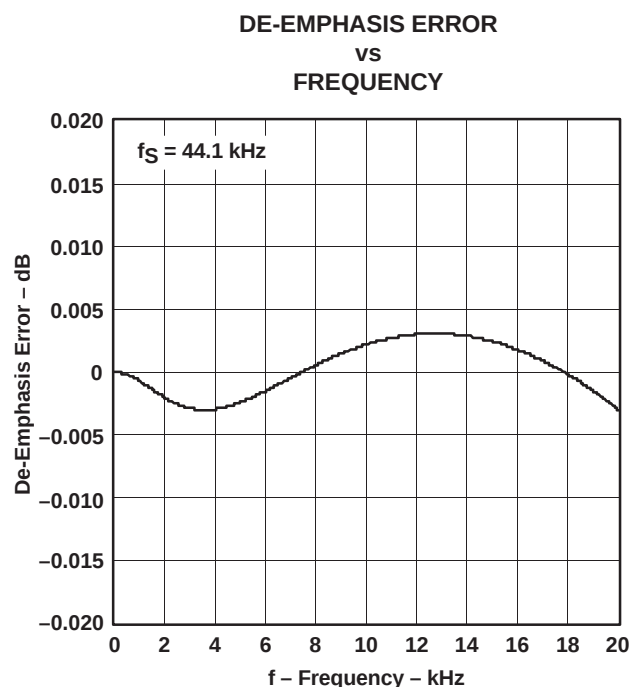

**Figure 8**

De-Emphasis Filter (Continued)

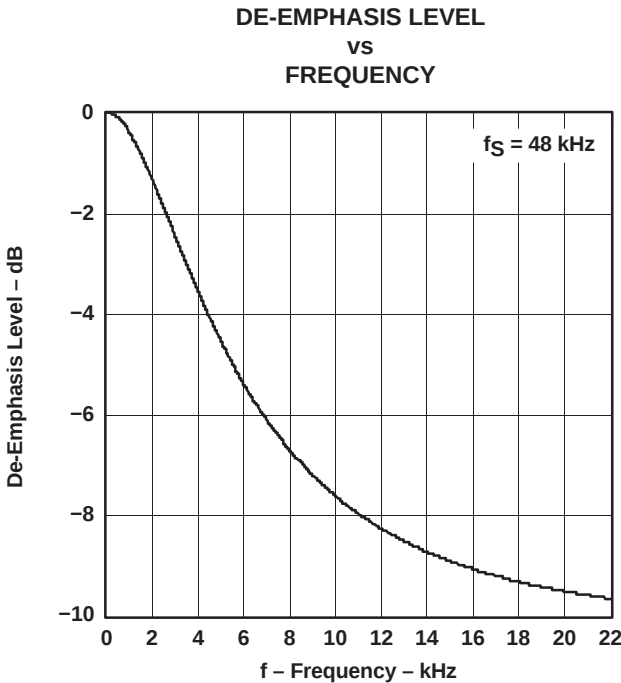


Figure 9

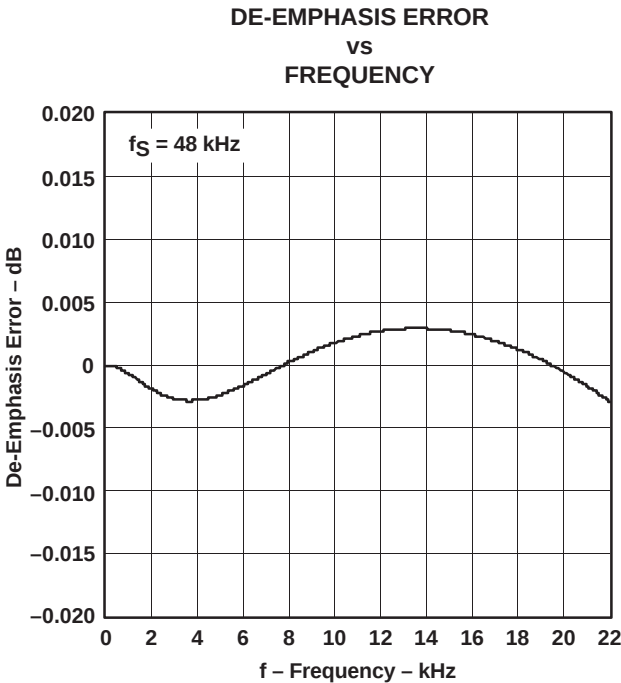


Figure 10

## ANALOG DYNAMIC PERFORMANCE

### Supply Voltage Characteristics

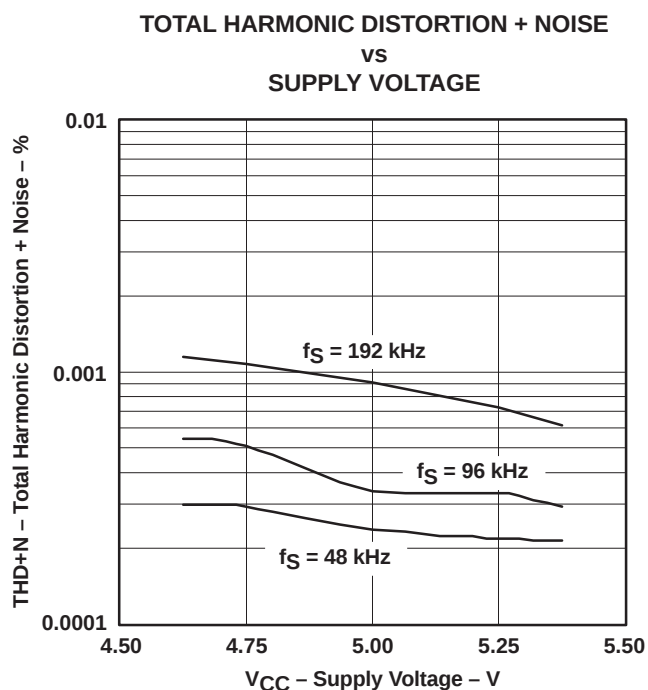


Figure 11

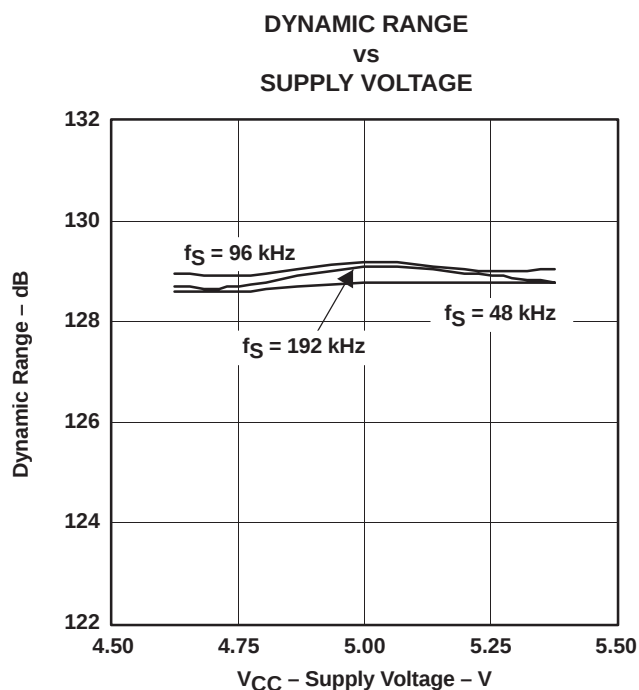


Figure 12

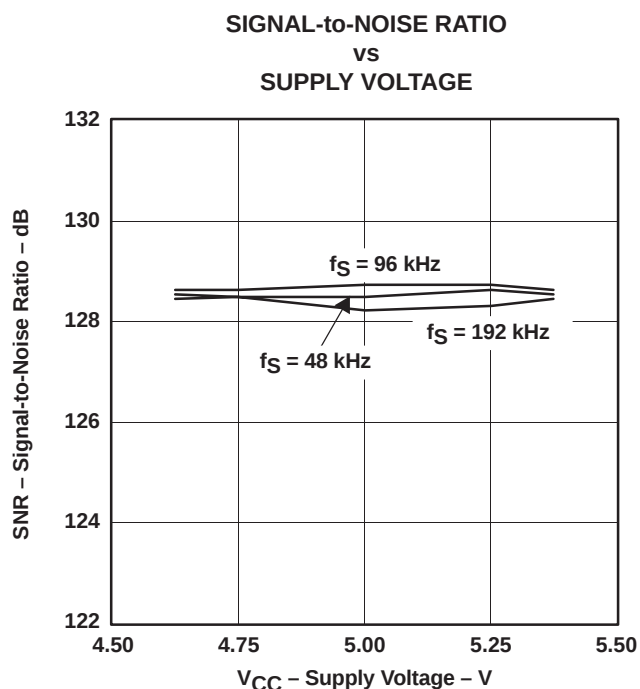


Figure 13

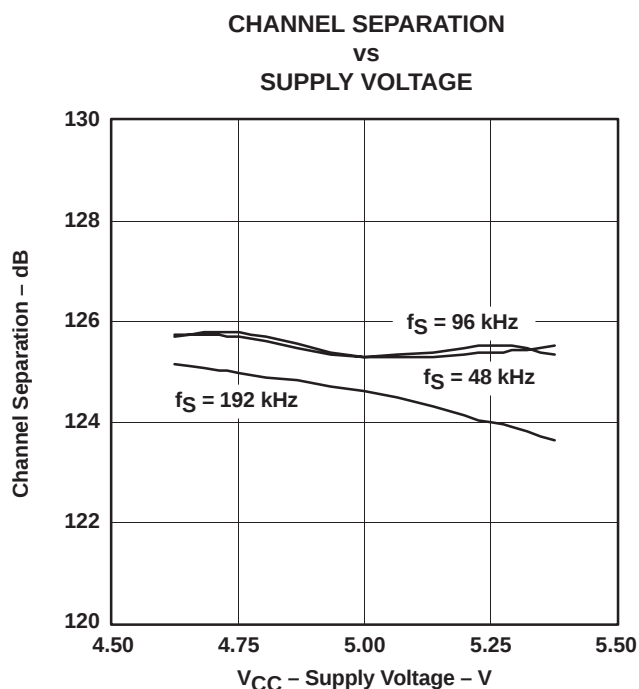


Figure 14

NOTE: PCM mode,  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{ V}$ , measurement circuit is Figure 34 ( $V_{OUT} = 4.5\text{ V rms}$ ).

Temperature Characteristics

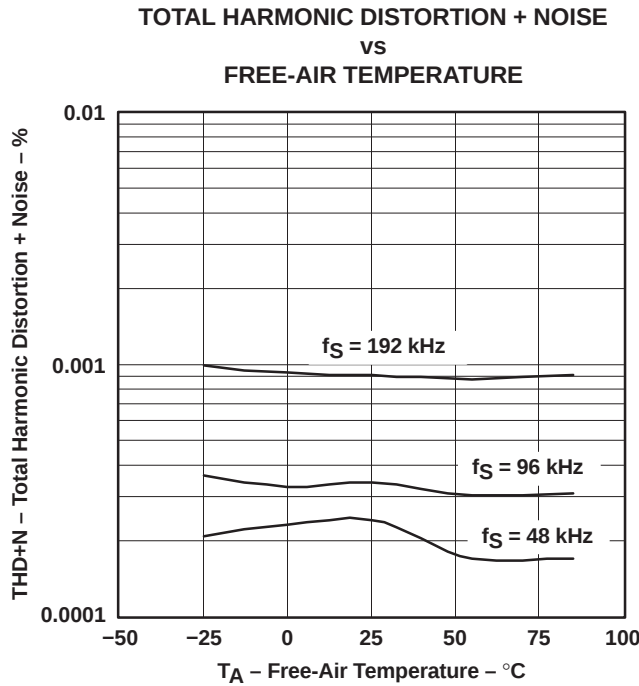


Figure 15

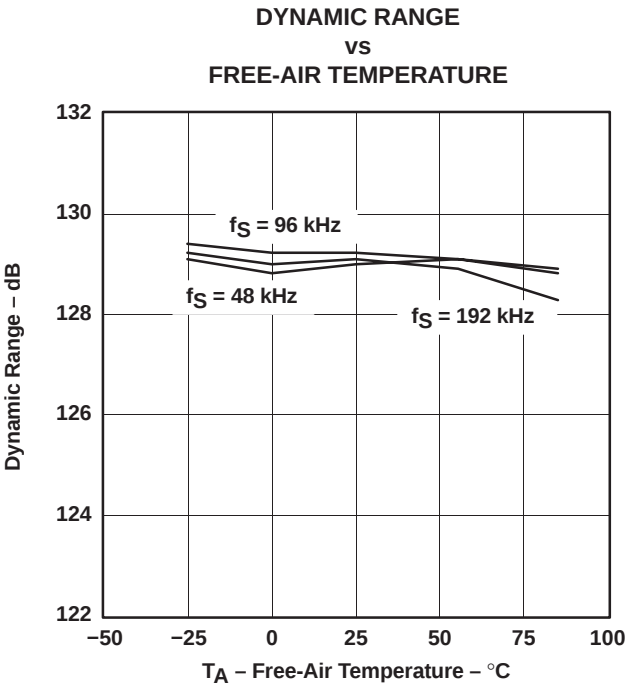


Figure 16

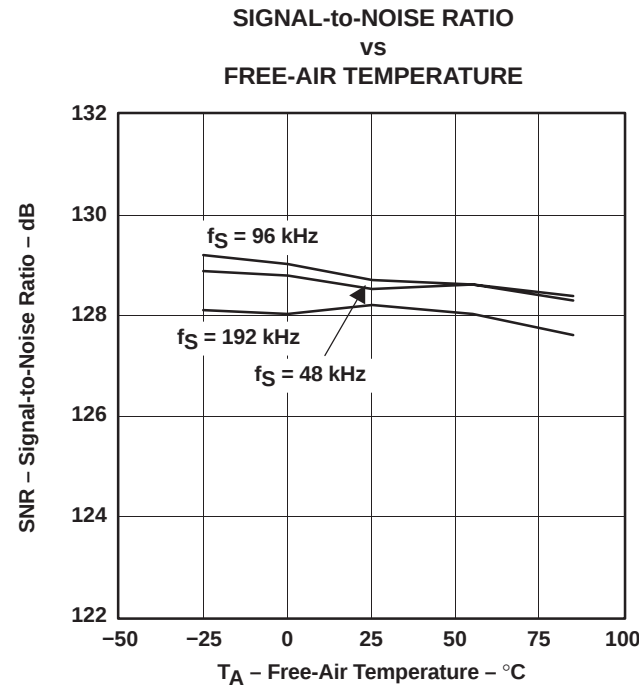


Figure 17


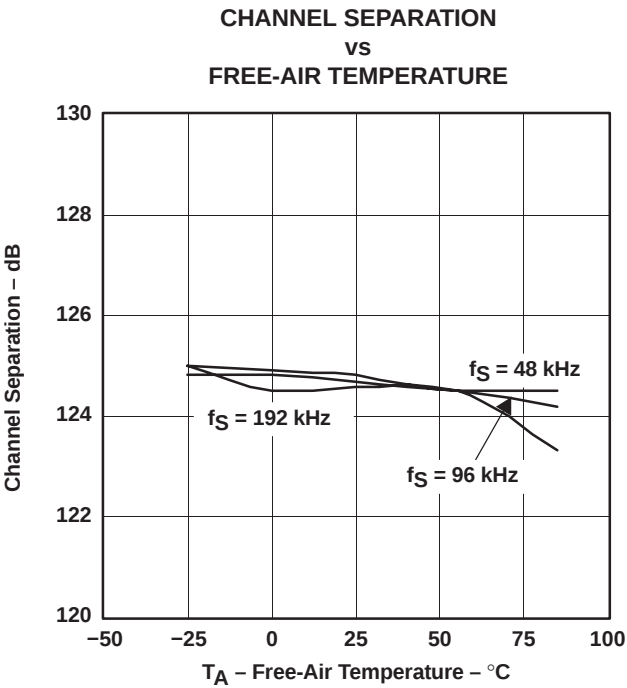



Figure 18

NOTE: PCM mode,  $V_{DD} = 3.3\text{ V}$ ,  $V_{CC} = 5\text{ V}$ , measurement circuit is Figure 34 ( $V_{OUT} = 4.5\text{ V rms}$ ).

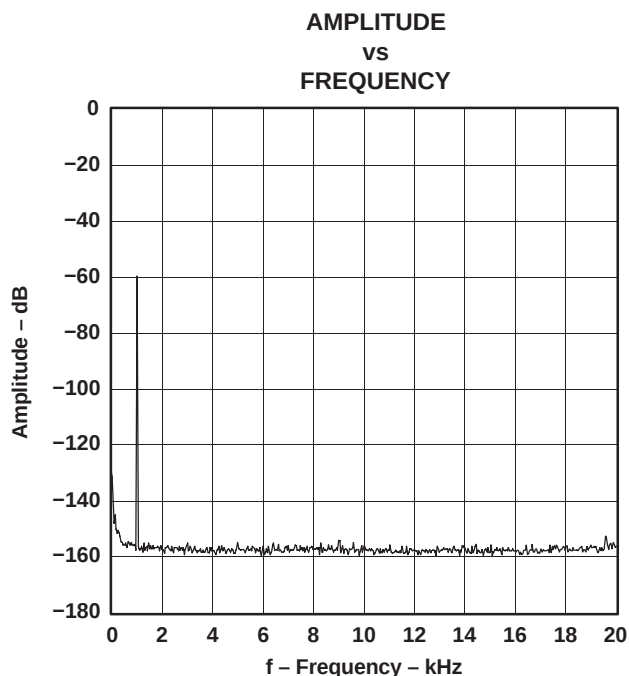


NOTE: PCM mode,  $f_S = 48$  kHz, 32768 point 8 average,  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3$  V,  $V_{CC} = 5$  V, measurement circuit is Figure 34.

**Figure 19. -60-dB Output Spectrum, BW = 20 kHz**

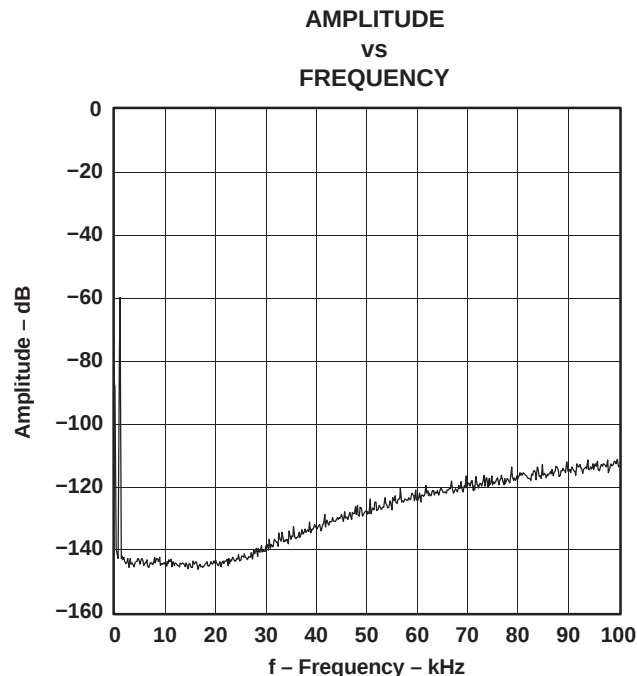

NOTE: PCM mode,  $f_S = 48$  kHz, 32768 point 8 average,  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3$  V,  $V_{CC} = 5$  V, measurement circuit is Figure 34.

**Figure 20. -60-dB Output Spectrum, BW = 100 kHz**

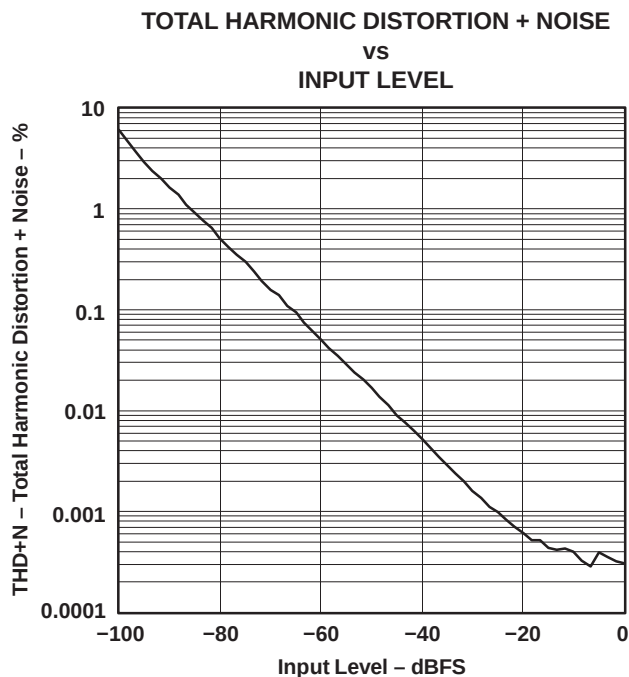

NOTE: PCM mode,  $f_S = 48$  kHz,  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3$  V,  $V_{CC} = 5$  V, measurement circuit is Figure 34.

**Figure 21. THD+N vs Input Level, PCM Mode**

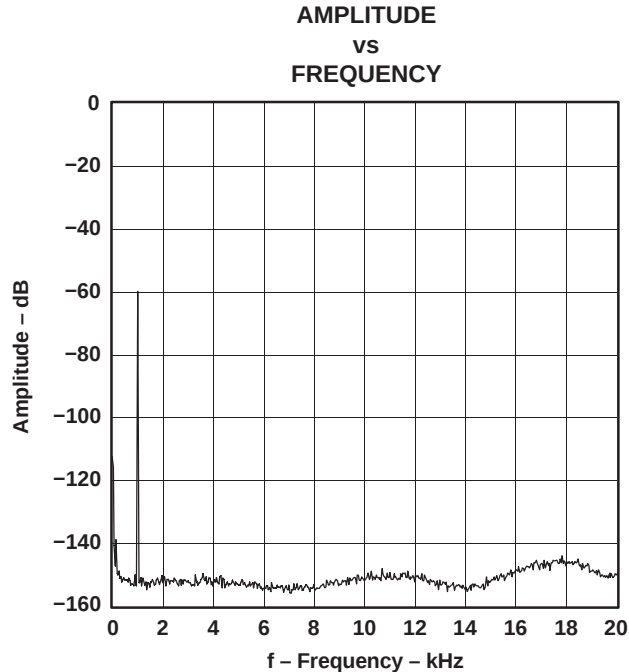


Figure 22. -60-dB Output Spectrum, DSD Mode

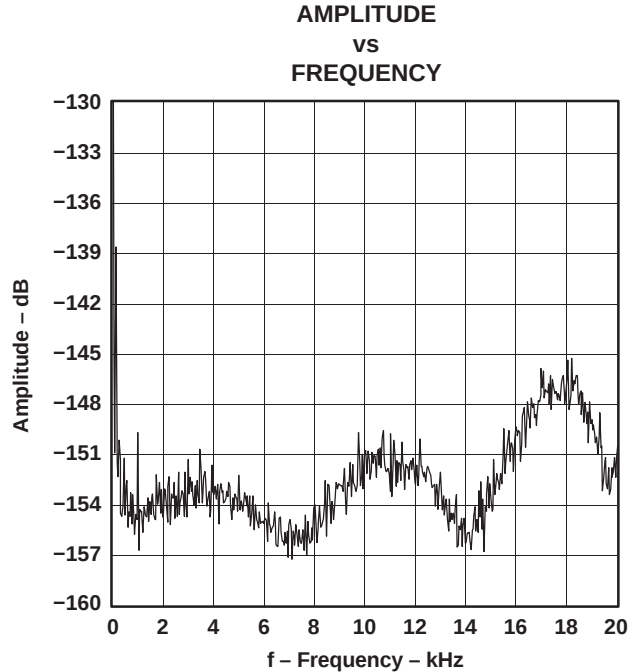


Figure 23. -150-dB Output Spectrum, DSD Mono Mode

NOTE: DSD mode (FIR-4), 32768 point 8 average,  $T_A = 25^{\circ}\text{C}$ ,  $V_{DD} = 3.3\text{ V}$ ,  $V_{CC} = 5\text{ V}$ , measurement circuit is Figure 36.

## SYSTEM CLOCK AND RESET FUNCTIONS

### System Clock Input

The DSD1794A requires a system clock for operating the digital interpolation filters and advanced segment DAC modulators. The system clock is applied at the SCK input (pin 7). The DSD1794A has a system clock detection circuit that automatically senses the frequency at which the system clock is operating. Table 1 shows examples of system clock frequencies for common audio sampling rates. If the oversampling rate of the delta-sigma modulator is selected as  $128 f_S$ , the system clock frequency is required to be over  $256 f_S$ .

Figure 24 shows the timing requirements for the system clock input. For optimal performance, it is important to use a clock source with low phase jitter and noise. One of the Texas Instruments PLL1700 family of multiclock generators is an excellent choice for providing the DSD1794A system clock.

Table 1. System Clock Rates for Common Audio Sampling Frequencies

| SAMPLING FREQUENCY | SYSTEM CLOCK FREQUENCY ( $f_{SCK}$ ) (MHz) |                      |                       |                       |                       |                       |
|--------------------|--------------------------------------------|----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
|                    | $128 f_S$                                  | $192 f_S$            | $256 f_S$             | $384 f_S$             | $512 f_S$             | $768 f_S$             |
| 32 kHz             | 4.096 <sup>(1)</sup>                       | 6.144 <sup>(1)</sup> | 8.192                 | 12.288                | 16.384                | 24.576                |
| 44.1 kHz           | 5.6488 <sup>(1)</sup>                      | 8.4672               | 11.2896               | 16.9344               | 22.5792               | 33.8688               |
| 48 kHz             | 6.144 <sup>(1)</sup>                       | 9.216                | 12.288                | 18.432                | 24.576                | 36.864                |
| 96 kHz             | 12.288                                     | 18.432               | 24.576                | 36.864                | 49.152 <sup>(1)</sup> | 73.728 <sup>(1)</sup> |
| 192 kHz            | 24.576                                     | 36.864               | 49.152 <sup>(1)</sup> | 73.728 <sup>(1)</sup> | (2)                   | (2)                   |

(1) This system clock rate is not supported in I<sup>2</sup>C fast mode.

(2) This system clock rate is not supported for the given sampling frequency.

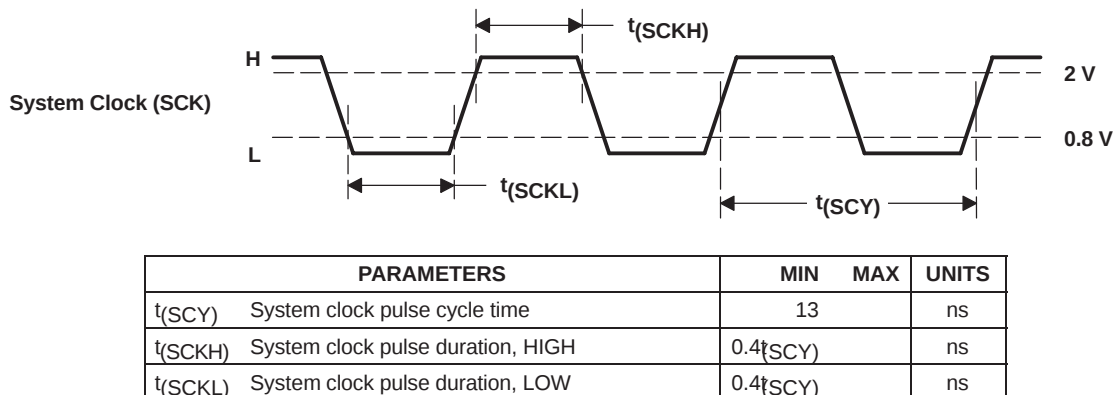


Figure 24. System Clock Input Timing

### Power-On and External Reset Functions

The DSD1794A includes a power-on reset function. Figure 25 shows the operation of this function. With  $V_{DD} > 2$  V, the power-on reset function is enabled. The initialization sequence requires 1024 system clocks from the time  $V_{DD} > 2$  V. After the initialization period, the DSD1794A is set to its default reset state, as described in the *MODE CONTROL REGISTERS* section of this data sheet.

The DSD1794A also includes an external reset capability using the  $\overline{RST}$  input (pin 14). This allows an external controller or master reset circuit to force the DSD1794A to initialize to its default reset state.

Figure 26 shows the external reset operation and timing. The  $\overline{RST}$  pin is set to logic 0 for a minimum of 20 ns. The  $\overline{RST}$  pin is then set to a logic 1 state, thus starting the initialization sequence, which requires 1024 system clock periods. The external reset is especially useful in applications where there is a delay between the DSD1794A power up and system clock activation.

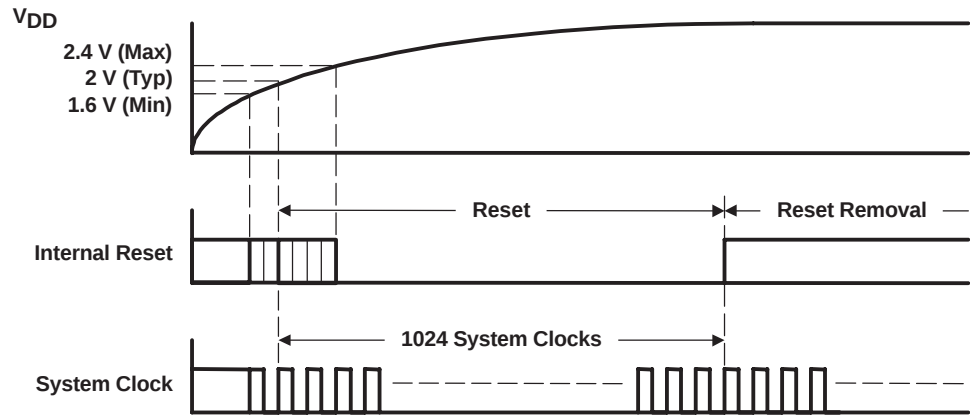


Figure 25. Power-On Reset Timing

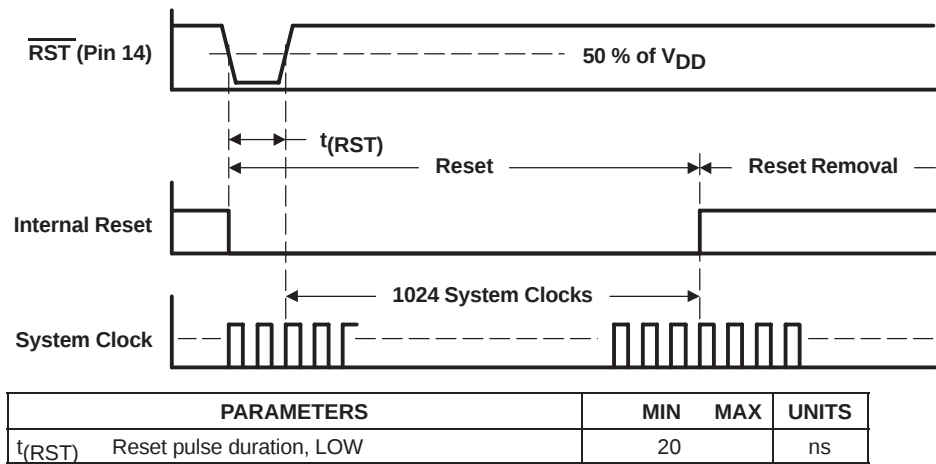


Figure 26. External Reset Timing

## AUDIO DATA INTERFACE

### Audio Serial Interface


The audio interface port is a 3-wire serial port. It includes PLRCK (pin 4), PBCK (pin 6), and PDATA (pin 5). PBCK is the serial audio bit clock, and it is used to clock the serial data present on PDATA into the serial shift register of the audio interface. Serial data is clocked into the DSD1794A on the rising edge of PBCK. PLRCK is the serial audio left/right word clock.

The DSD1794A requires the synchronization of PLRCK and the system clock, but does not need a specific phase relation between PLRCK and the system clock.

If the relationship between PLRCK and the system clock changes more than  $\pm 6$  PBCK, internal operation is initialized within  $1/f_S$  and analog outputs are forced to the bipolar zero level until resynchronization between PLRCK and the system clock is completed.

### PCM Audio Data Formats and Timing


The DSD1794A supports industry-standard audio data formats, including standard right-justified,  $I^2S$ , and left-justified. The data formats are shown in Figure 28. Data formats are selected using the format bits, FMT[2:0], in control register 18. The default data format is 24-bit  $I^2S$ . All formats require binary twos-complement, MSB-first audio data. Figure 27 shows a detailed timing diagram for the serial audio interface.

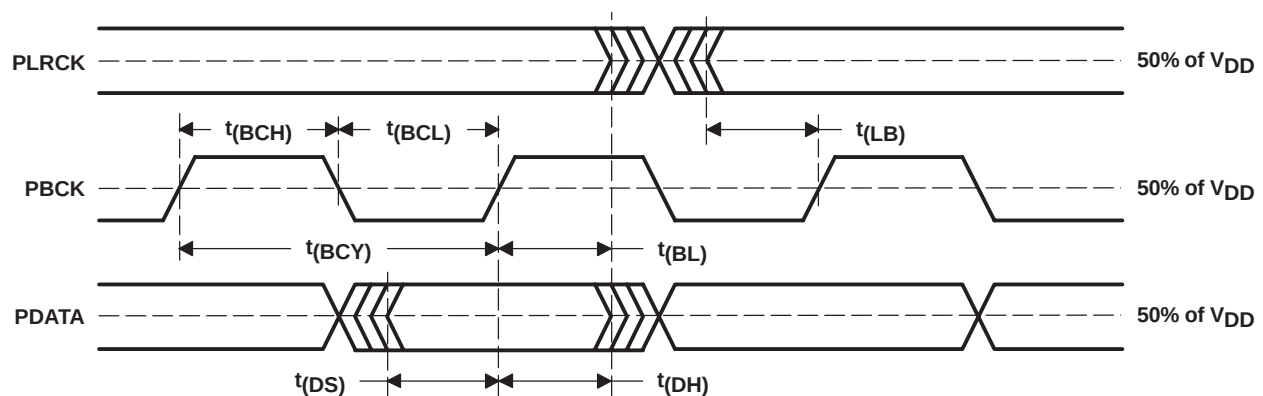


| PARAMETERS |                                | MIN                    | MAX | UNITS |
|------------|--------------------------------|------------------------|-----|-------|
| t(BCY)     | PBCK pulse cycle time          | 70                     |     | ns    |
| t(BCL)     | PBCK pulse duration, LOW       | 30                     |     | ns    |
| t(BCH)     | PBCK pulse duration, HIGH      | 30                     |     | ns    |
| t(BL)      | PBCK rising edge to PLRCK edge | 10                     |     | ns    |
| t(LB)      | PLRCK edge to PBCK rising edge | 10                     |     | ns    |
| t(DS)      | PDATA Setup time               | 10                     |     | ns    |
| t(DH)      | PDATA hold time                | 10                     |     | ns    |
| —          | PLRCK clock data               | 50% $\pm$ 2 bit clocks |     |       |

Figure 27. Timing of Audio Interface

**(1) Standard Data Format (Right Justified); L-Channel = HIGH, R-Channel = LOW**

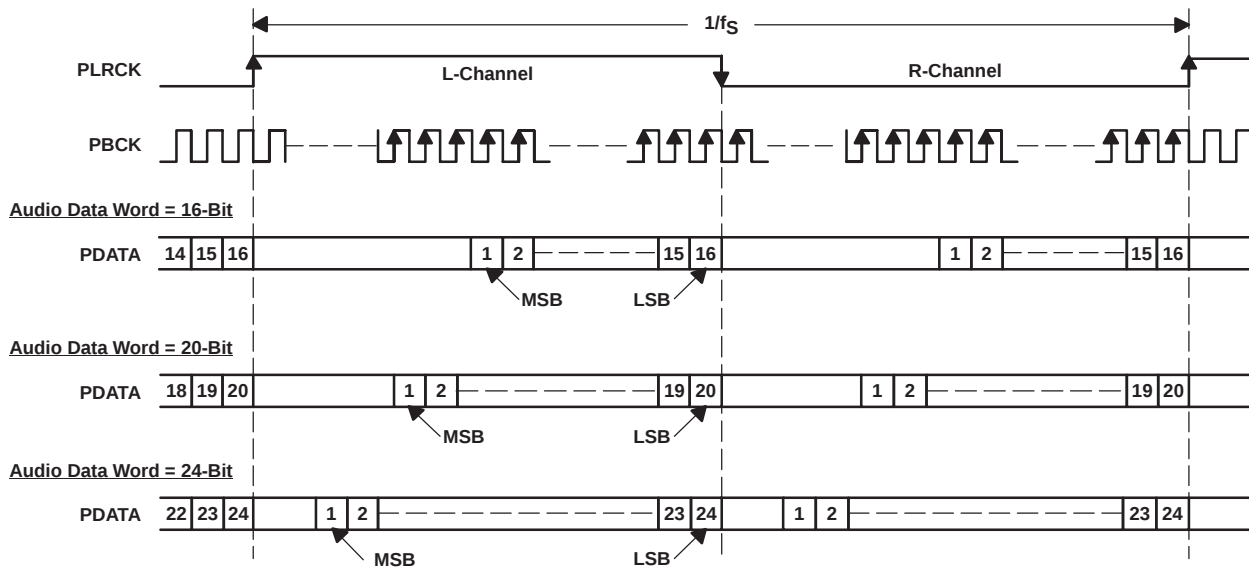

**(2) Left Justified Data Format; L-Channel = HIGH, R-Channel = LOW**

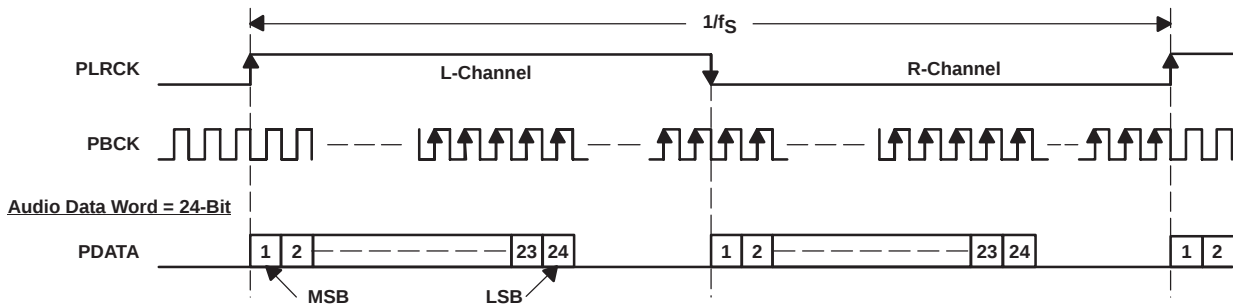

**(3) I<sup>2</sup>S Data Format; L-Channel = LOW, R-Channel = HIGH**

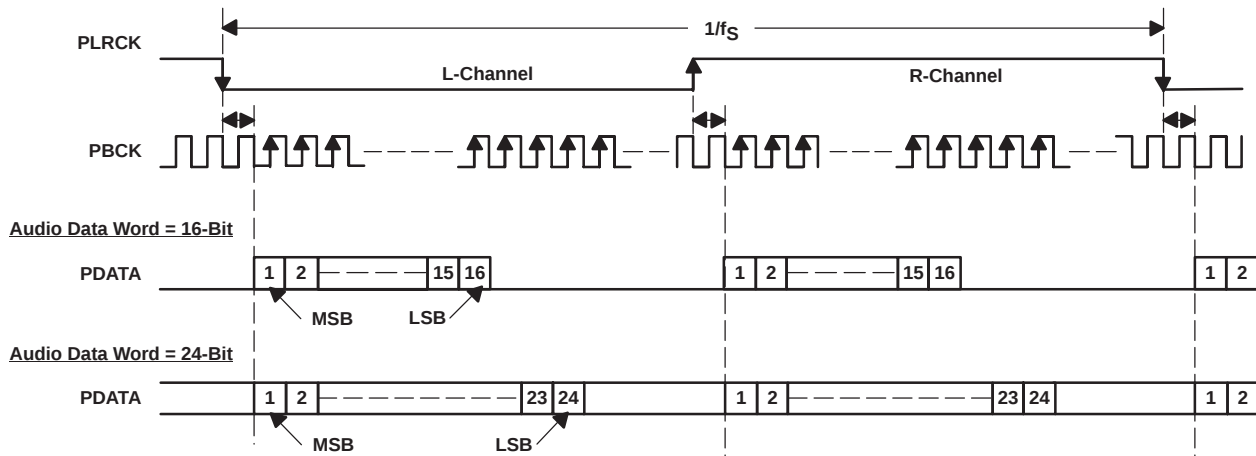


Figure 28. Audio Data Input Formats

## External Digital Filter Interface and Timing

The DSD1794A supports an external digital filter interface with a 3- or 4-wire synchronous serial port, which allows the use of an external digital filter. External filters include the Texas Instruments DF1704 and DF1706, the Pacific Microsonics PMD200, or a programmable digital signal processor.

In the external DF mode, PLRCK (pin 4), PBCK (pin 6) and PDATA (pin 5) are defined as WDCK, the word clock; BCK, the bit clock; and DATA, the monaural data, respectively. The external digital filter interface is selected by using the DFTH bit of control register 20, which functions to bypass the internal digital filter of the DSD1794A.

When the DFMS bit of control register 19 is set, the DSD1794A can process stereo data. In this case, DSDL (pin 1) and DSDR (pin 2) are defined as L-channel data and R-channel data input, respectively.

Detailed information for the external digital filter interface mode is provided in the *APPLICATION FOR EXTERNAL DIGITAL FILTER INTERFACE* section of this data sheet.

## Direct Stream Digital (DSD) Format Interface and Timing

The DSD1794A supports the DSD-format interface operation, which includes out-of-band noise filtering using an internal analog FIR filter. The DSD-format interface consists of a 3-wire synchronous serial port, which includes DBCK (pin 3), DSDL (pin 1), and DSDR (pin 2). DBCK is the serial bit clock. DSDL and DSDR are the L-channel and R-channel DSD data inputs, respectively. They are clocked into the DSD1794A on the rising edge of DBCK. PLRCK (pin 4) and PBCK (pin 6) are connected to GND in the DSD mode. The DSD-format interface is activated by setting the DSD bit of control register 20.

Detailed information for the DSD mode is provided in the *APPLICATION FOR DSD FORMAT (DSD MODE) INTERFACE* section of this data sheet.

## SERIAL CONTROL INTERFACE (I<sup>2</sup>C)

The DSD1794A supports the I<sup>2</sup>C serial bus and the data transmission protocol for standard and fast mode as a slave device. This protocol is explained in I<sup>2</sup>C specification 2.0.


### Slave Address

| MSB |   |   |   |   | LSB  |      |     |
|-----|---|---|---|---|------|------|-----|
| 1   | 0 | 0 | 1 | 1 | ADR1 | ADR0 | R/W |

The DSD1794A has 7 bits for its own slave address. The first five bits (MSBs) of the slave address are factory preset to 10011. The next two bits of the address byte are the device select bits which can be user-defined by the ADR1 and ADR0 terminals. A maximum of four DSD1794As can be connected on the same bus at one time. Each DSD1794A responds when it receives its own slave address.

### Packet Protocol

A master device must control packet protocol, which consists of start condition, slave address, read/write bit, data if write or acknowledge if read, and stop condition. The DSD1794A supports only slave receivers and slave transmitters.

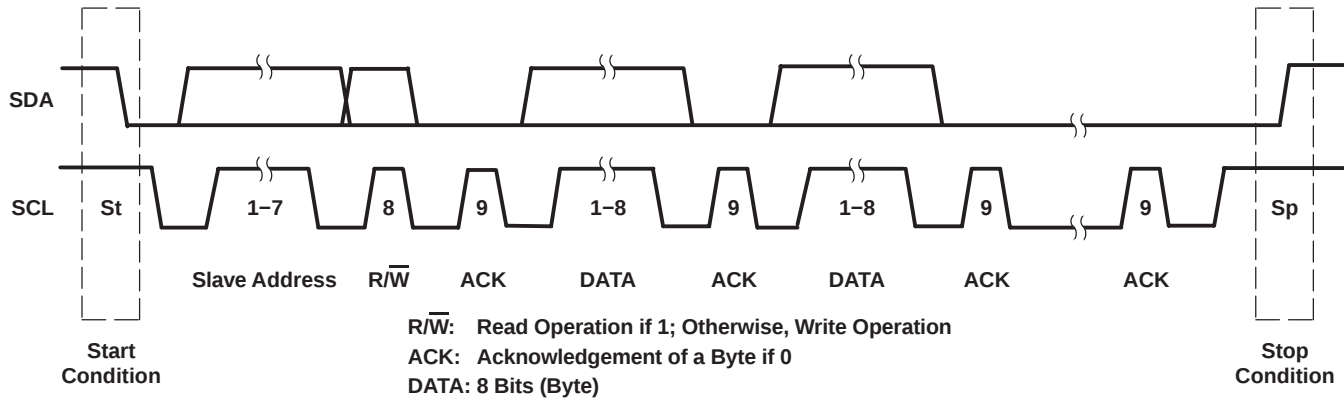

### Write operation

|             |    |               |     |     |      |     |      |     |     |     |    |
|-------------|----|---------------|-----|-----|------|-----|------|-----|-----|-----|----|
| Transmitter | M  | M             | M   | S   | M    | S   | M    | S   | ... | S   | M  |
| Data Type   | St | Slave Address | R/W | ACK | DATA | ACK | DATA | ACK | ... | ACK | Sp |

### Read operation

|             |    |               |     |     |      |     |      |     |     |      |    |
|-------------|----|---------------|-----|-----|------|-----|------|-----|-----|------|----|
| Transmitter | M  | M             | M   | S   | S    | M   | S    | M   | ... | M    | M  |
| Data Type   | St | Slave Address | R/W | ACK | DATA | ACK | DATA | ACK | ... | NACK | Sp |

M: Master Device

S: Slave Device

St: Start Condition

Sp: Stop Condition

**Figure 29. Basic I<sup>2</sup>C Framework**

### Write Register

A master can write to any DSD1794A registers using single or multiple accesses. The master sends a DSD1794A slave address with a write bit, a register address, and the data. If multiple access is required, the address is that of the starting register, followed by the data to be transferred. When the data are received properly, the index register is incremented by 1 automatically. When the index register reaches 0x7F, the next value is 0x0. When undefined registers are accessed, the DSD1794A does not send an acknowledgement. Figure 30 is a diagram of the write operation.

|             |    |               |   |     |             |     |              |     |              |     |     |     |    |
|-------------|----|---------------|---|-----|-------------|-----|--------------|-----|--------------|-----|-----|-----|----|
| Transmitter | M  | M             | M | S   | M           | S   | M            | S   | M            | S   | ... | S   | M  |
| Data Type   | St | Slave Address | W | ACK | Reg Address | ACK | Write Data 1 | ACK | Write Data 2 | ACK | ... | ACK | Sp |

M: Master Device

S: Slave Device

St: Start Condition

W: Write

ACK: Acknowledge

Sp: Stop Condition

**Figure 30. Write Operation**

### Read Register

A master can read the DSD1794A register. The value of the register address is stored in an indirect index register in advance. The master sends a DSD1794A slave address with a read bit after storing the register address. Then the DSD1794A transfers the data which the index register points to. When the data are transferred during a multiple access, the index register is incremented by 1 automatically. (When first going into read mode immediately following a write, the index register is not incremented. The master can read the register that was previously written.) When the index register reaches 0x7F, the next value is 0x0. The DSD1794A outputs some data when the index register is 0x10 to 0x1F, even if it is not defined in Table 3. Figure 31 is a diagram of the read operation.

|             |    |               |   |     |             |     |    |               |   |     |      |     |     |      |    |
|-------------|----|---------------|---|-----|-------------|-----|----|---------------|---|-----|------|-----|-----|------|----|
| Transmitter | M  | M             | M | S   | M           | S   | M  | M             | M | S   | S    | M   | ... | M    | M  |
| Data Type   | St | Slave Address | W | ACK | Reg Address | ACK | Sr | Slave Address | R | ACK | Data | ACK | ... | NACK | Sp |

M: Master Device                      S: Slave Device  
St: Start Condition                      Sr: Repeated Start Condition                      ACK: Acknowledge  
Sp: Stop Condition                      NACK: Not Acknowledge                      W: Write                      R: Read

NOTE: The slave address after the repeat start condition must be the same as the previous slave address.


**Figure 31. Read Operation**

## Noise Suppression

The DSD1794A incorporates noise suppression using the system clock (SCK). However, there must be no more than two noise spikes in 600 ns. The noise suppression works for SCK frequencies between 8 MHz and 40 MHz in fast mode. However, it works incorrectly in the following conditions.

### Case 1:


1.  $t_{(SCK)} > 120 \text{ ns}$  ( $t_{(SCK)}$ : period of SCK)
2.  $t_{(HI)} + t_{(D-HD)} < t_{(SCK)} \times 5$
3. Spike noise exists on the first half of the SCL HIGH pulse.
4. Spike noise exists on the SDA HIGH pulse just before SDA goes LOW.

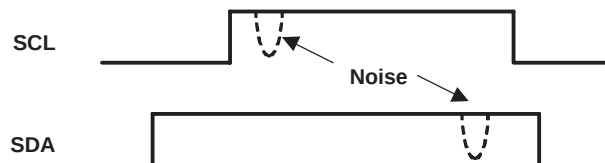

When these conditions occur at the same time, the data is recognized as LOW.

### Case 2:


1.  $t_{(SCK)} > 120 \text{ ns}$
2.  $t_{(S-HD)}$  or  $t_{(RS-HD)} < t_{(SCK)} \times 5$
3. Spike noise exists on both SCL and SDA during the hold time.

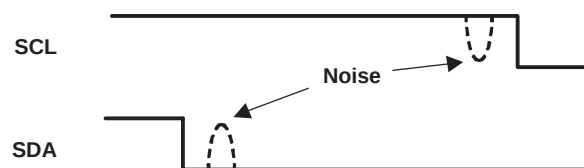

When these conditions occur at the same time, the DSD1794A fails to detect a start condition.


### Case 3:

1.  $t_{(SCK)} < 50 \text{ ns}$
2.  $t_{(SP)} > t_{(SCK)}$
3. Spike noise exists on SCL just after SCL goes LOW.
4. Spike noise exists on SDA just before SCL goes LOW.

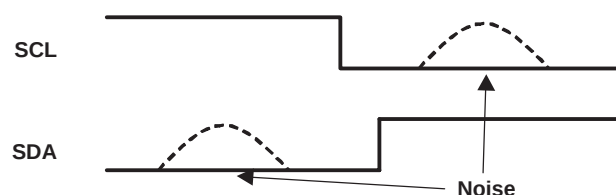

When these conditions occur at the same time, the DSD1794A erroneously detects a start or stop condition.

## TIMING DIAGRAM

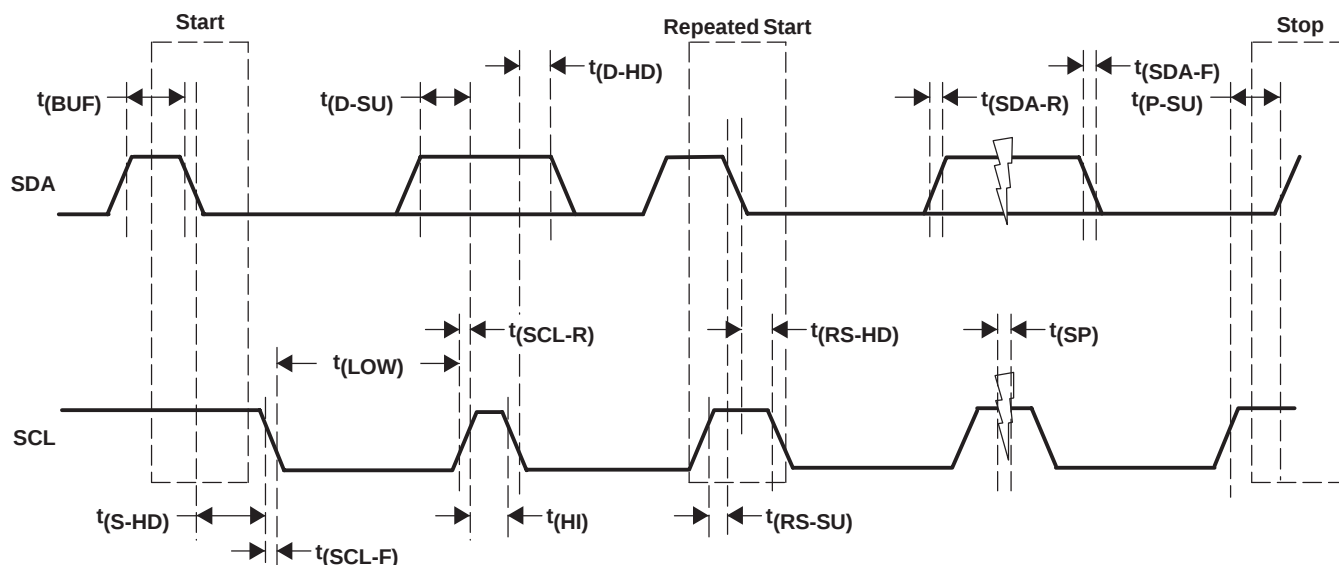

## TIMING CHARACTERISTICS

| PARAMETER      |                                                                                       | CONDITIONS | MIN            | MAX  | UNIT    |
|----------------|---------------------------------------------------------------------------------------|------------|----------------|------|---------|
| $f_{(SCL)}$    | SCL clock frequency                                                                   | Standard   |                | 100  | kHz     |
|                |                                                                                       | Fast       |                | 400  |         |
| $t_{(BUF)}$    | Bus free time between stop and start conditions                                       | Standard   | 4.7            |      | $\mu s$ |
|                |                                                                                       | Fast       | 1.3            |      |         |
| $t_{(LOW)}$    | Low period of the SCL clock                                                           | Standard   | 4.7            |      | $\mu s$ |
|                |                                                                                       | Fast       | 1.3            |      |         |
| $t_{(HI)}$     | High period of the SCL clock                                                          | Standard   | 4              |      | $\mu s$ |
|                |                                                                                       | Fast       | 600            |      |         |
| $t_{(RS-SU)}$  | Setup time for (repeated) start condition                                             | Standard   | 4.7            |      | $\mu s$ |
|                |                                                                                       | Fast       | 600            |      |         |
| $t_{(S-HD)}$   | Hold time for (repeated) start condition                                              | Standard   | 4              |      | $\mu s$ |
| $t_{(RS-HD)}$  |                                                                                       | Fast       | 600            |      |         |
| $t_{(D-SU)}$   | Data setup time                                                                       | Standard   | 250            |      | ns      |
|                |                                                                                       | Fast       | 100            |      |         |
| $t_{(D-HD)}$   | Data hold time                                                                        | Standard   | 0              | 900  | ns      |
|                |                                                                                       | Fast       | 0              | 900  |         |
| $t_{(SCL-R)}$  | Rise time of SCL signal                                                               | Standard   | $20 + 0.1 C_B$ | 1000 | ns      |
|                |                                                                                       | Fast       | $20 + 0.1 C_B$ | 300  |         |
| $t_{(SCL-R1)}$ | Rise time of SCL signal after a repeated start condition and after an acknowledge bit | Standard   | $20 + 0.1 C_B$ | 1000 | ns      |
|                |                                                                                       | Fast       | $20 + 0.1 C_B$ | 300  |         |
| $t_{(SCL-F)}$  | Fall time of SCL signal                                                               | Standard   | $20 + 0.1 C_B$ | 1000 | ns      |
|                |                                                                                       | Fast       | $20 + 0.1 C_B$ | 300  |         |
| $t_{(SDA-R)}$  | Rise time of SDA signal                                                               | Standard   | $20 + 0.1 C_B$ | 1000 | ns      |
|                |                                                                                       | Fast       | $20 + 0.1 C_B$ | 300  |         |
| $t_{(SDA-F)}$  | Fall time of SDA signal                                                               | Standard   | $20 + 0.1 C_B$ | 1000 | ns      |
|                |                                                                                       | Fast       | $20 + 0.1 C_B$ | 300  |         |
| $t_{(P-SU)}$   | Setup time for stop condition                                                         | Standard   | 4              |      | $\mu s$ |
|                |                                                                                       | Fast       | 600            |      |         |
| $C_{(B)}$      | Capacitive load for SDA and SCL line                                                  |            |                | 400  | pF      |
| $t_{(SP)}$     | Pulse duration of suppressed spike                                                    | Fast       |                | 50   | ns      |
| $V_{NH}$       | Noise margin at high level for each connected device (including hysteresis)           | Standard   |                |      | V       |
|                |                                                                                       | Fast       | $0.2 V_{DD}$   |      |         |

## MODE CONTROL REGISTERS

### User-Programmable Mode Controls

The DSD1794A includes a number of user-programmable functions which are accessed via mode control registers. The registers are programmed using the serial control interface, discussed in the *SERIAL CONTROL INTERFACE (I<sup>2</sup>C)* section of this data sheet. Table 2 lists the available mode-control functions, along with their default reset conditions and associated register index.

**Table 2. User-Programmable Function Controls**

| FUNCTION                                                                                                                                                                | DEFAULT                           | REGISTER                   | BIT                                        | PCM | DSD                | DF BYPASS |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------|--------------------------------------------|-----|--------------------|-----------|
| Digital attenuation control<br>0 dB to –120 dB and mute, 0.5 dB step                                                                                                    | 0 dB                              | Register 16<br>Register 17 | ATL[7:0] (for L-ch)<br>ATR[7:0] (for R-ch) | yes |                    |           |
| Attenuation load control—Disabled, enabled                                                                                                                              | Attenuation disabled              | Register 18                | ATLD                                       | yes |                    |           |
| Input audio data format selection<br>16-, 20-, 24-bit standard (right-justified) format<br>24-bit MSB-first left-justified format<br>16-/24-bit I <sup>2</sup> S format | 24-bit I <sup>2</sup> S format    | Register 18                | FMT[2:0]                                   | yes |                    | yes       |
| Sampling rate selection for de-emphasis<br>Disabled, 44.1 kHz, 48 kHz, 32 kHz                                                                                           | De-emphasis disabled              | Register 18                | DMF[1:0]                                   | yes | yes <sup>(1)</sup> |           |
| De-emphasis control—Disabled, enabled                                                                                                                                   | De-emphasis disabled              | Register 18                | DME                                        | yes |                    |           |
| Soft mute control—Mute disabled, enabled                                                                                                                                | Mute disabled                     | Register 18                | MUTE                                       | yes |                    |           |
| Output phase reversal—Normal, reverse                                                                                                                                   | Normal                            | Register 19                | REV                                        | yes | yes                | yes       |
| Attenuation speed selection<br>$\times 1 f_s$ , $\times (1/2)f_s$ , $\times (1/4)f_s$ , $\times (1/8)f_s$                                                               | $\times 1 f_s$                    | Register 19                | ATS[1:0]                                   | yes |                    |           |
| DAC operation control—Enabled, disabled                                                                                                                                 | DAC operation enabled             | Register 19                | OPE                                        | yes | yes                | yes       |
| Zero flag pin operation control<br>DSD data input, zero flag output                                                                                                     | DSD data input                    | Register 19                | ZOE                                        | yes |                    | yes       |
| Stereo DF bypass mode select<br>Monaural, stereo                                                                                                                        | Monaural                          | Register 19                | DFMS                                       |     |                    | yes       |
| Digital filter rolloff selection<br>Sharp rolloff, slow rolloff                                                                                                         | Sharp rolloff                     | Register 19                | FLT                                        | yes |                    |           |
| Infinite zero mute control<br>Disabled, enabled                                                                                                                         | Disabled                          | Register 19                | INZD                                       | yes |                    | yes       |
| System reset control<br>Reset operation, normal operation                                                                                                               | Normal operation                  | Register 20                | SRST                                       | yes | yes                | yes       |
| DSD interface mode control<br>DSD enabled, disabled                                                                                                                     | Disabled                          | Register 20                | DSD                                        |     | yes                |           |
| Digital-filter bypass control<br>DF enabled, DF bypass                                                                                                                  | DF enabled                        | Register 20                | DFTH                                       |     |                    | yes       |
| Monaural mode selection<br>Stereo, monaural                                                                                                                             | Stereo                            | Register 20                | MONO                                       | yes | yes                | yes       |
| Channel selection for monaural mode data<br>L-channel, R-channel                                                                                                        | L-channel                         | Register 20                | CHSL                                       | yes | yes                | yes       |
| Delta-sigma oversampling rate selection<br>$\times 64 f_s$ , $\times 128 f_s$ , $\times 32 f_s$                                                                         | $\times 64 f_s$                   | Register 20                | OS[1:0]                                    | yes | yes <sup>(2)</sup> | yes       |
| PCM zero output enable                                                                                                                                                  | Enabled                           | Register 21                | PCMZ                                       | yes |                    | yes       |
| DSD zero output enable                                                                                                                                                  | Disabled                          | Register 21                | DZ[1:0]                                    |     | yes                |           |
| Function available only for read                                                                                                                                        |                                   |                            |                                            |     |                    |           |
| Zero detection flag<br>Not zero, zero detected                                                                                                                          | Not zero = 0<br>Zero detected = 1 | Register 22                | ZFGL (for L-ch)<br>ZFGR (for R-ch)         | yes | yes                | yes       |

(1) When in DSD mode, DMF[1:0] is defined as DSD filter (analog FIR) performance selection.

(2) When in DSD mode, OS[1:0] is defined as DSD filter (analog FIR) operation rate selection.

## Register Map

The mode control register map is shown in Table 3. Registers 16–21 include an  $\overline{R/\overline{W}}$  bit, which determines whether a register read ( $\overline{R/\overline{W}} = 1$ ) or write ( $\overline{R/\overline{W}} = 0$ ) operation is performed. Register 22 is read-only.

**Table 3. Mode Control Register Map**

|             | B15                         | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7   | B6   | B5   | B4   | B3   | B2   | B1   | B0   |
|-------------|-----------------------------|-----|-----|-----|-----|-----|----|----|------|------|------|------|------|------|------|------|
| Register 16 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 0   | 0  | 0  | ATL7 | ATL6 | ATL5 | ATL4 | ATL3 | ATL2 | ATL1 | ATL0 |
| Register 17 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 0   | 0  | 1  | ATR7 | ATR6 | ATR5 | ATR4 | ATR3 | ATR2 | ATR1 | ATR0 |
| Register 18 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 0   | 1  | 0  | ATLD | FMT2 | FMT1 | FMT0 | DMF1 | DMF0 | DME  | MUTE |
| Register 19 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 0   | 1  | 1  | REV  | ATS1 | ATS0 | OPE  | ZOE  | DFMS | FLT  | INZD |
| Register 20 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 1   | 0  | 0  | RSV  | SRST | DSD  | DFTH | MONO | CHSL | OS1  | OS0  |
| Register 21 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 1   | 0  | 1  | RSV  | RSV  | RSV  | RSV  | RSV  | DZ1  | DZ0  | PCMZ |
| Register 22 | R                           | 0   | 0   | 1   | 0   | 1   | 1  | 0  | RSV  | RSV  | RSV  | RSV  | RSV  | RSV  | ZFGR | ZFGL |

## Register Definitions

|             | B15                         | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7   | B6   | B5   | B4   | B3   | B2   | B1   | B0   |
|-------------|-----------------------------|-----|-----|-----|-----|-----|----|----|------|------|------|------|------|------|------|------|
| Register 16 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 0   | 0  | 0  | ATL7 | ATL6 | ATL5 | ATL4 | ATL3 | ATL2 | ATL1 | ATL0 |
| Register 17 | $\overline{R/\overline{W}}$ | 0   | 0   | 1   | 0   | 0   | 0  | 1  | ATR7 | ATR6 | ATR5 | ATR4 | ATR3 | ATR2 | ATR1 | ATR0 |

### $\overline{R/\overline{W}}$ : Read/Write Mode Select

When  $\overline{R/\overline{W}} = 0$ , a write operation is performed.

When  $\overline{R/\overline{W}} = 1$ , a read operation is performed.

Default value: 0

### ATx[7:0]: Digital Attenuation Level Setting

These bits are available for read and write.

Default value: 1111 1111b

Each DAC output has a digital attenuator associated with it. The attenuator can be set from 0 dB to –120 dB, in 0.5-dB steps. Alternatively, the attenuator can be set to infinite attenuation (or mute).

The attenuation data for each channel can be set individually. However, the data load control (the ATLD bit of control register 18) is common to both attenuators. ATLD must be set to 1 in order to change an attenuator setting. The attenuation level can be set using the following formula:

$$\text{Attenuation level (dB)} = 0.5 \text{ dB} \cdot (\text{ATx}[7:0]_{\text{DEC}} - 255)$$

where  $\text{ATx}[7:0]_{\text{DEC}} = 0$  through 255

For  $\text{ATx}[7:0]_{\text{DEC}} = 0$  through 14, the attenuator is set to infinite attenuation. Table 4 shows attenuation levels for various settings.

**Table 4. Digital Attenuation Levels**

| ATx[7:0]   | Decimal Value | Attenuation Level Setting      |
|------------|---------------|--------------------------------|
| 1111 1111b | 255           | 0 dB, no attenuation (default) |
| 1111 1110b | 254           | –0.5 dB                        |
| 1111 1101b | 253           | –1.0 dB                        |
| ⋮          | ⋮             | ⋮                              |
| 0001 0000b | 16            | –119.5 dB                      |
| 0000 1111b | 15            | –120.0 dB                      |
| 0000 1110b | 14            | Mute                           |
| ⋮          | ⋮             | ⋮                              |
| 0000 0000b | 0             | Mute                           |

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7   | B6   | B5   | B4   | B3   | B2   | B1  | B0   |
|-------------|-----|-----|-----|-----|-----|-----|----|----|------|------|------|------|------|------|-----|------|
| Register 18 | R/W | 0   | 0   | 1   | 0   | 0   | 1  | 0  | ATLD | FMT2 | FMT1 | FMT0 | DMF1 | DMF0 | DME | MUTE |

#### **R/W: Read/Write Mode Select**

When  $R/\overline{W} = 0$ , a write operation is performed.

When  $R/\overline{W} = 1$ , a read operation is performed.

Default value: 0

#### **ATLD: Attenuation Load Control**

This bit is available for read and write.

Default value: 0

|          |                                        |
|----------|----------------------------------------|
| ATLD = 0 | Attenuation control disabled (default) |
| ATLD = 1 | Attenuation control enabled            |

The ATLD bit is used to enable loading of the attenuation data contained in registers 16 and 17. When ATLD = 0, the attenuation settings remain at the previously programmed levels, ignoring new data loaded from registers 16 and 17. When ATLD = 1, attenuation data written to registers 16 and 17 is loaded normally.

#### **FMT[2:0]: Audio Interface Data Format**

These bits are available for read and write.

Default value: 101

For the external digital filter interface mode (DFTH mode), this register is operated as shown in the *Application for Interfacing With an External Digital Filter* section of this data sheet.

| FMT[2:0] | Audio Data Format Selection                   |
|----------|-----------------------------------------------|
| 000      | 16-bit standard format, right-justified data  |
| 001      | 20-bit standard format, right-justified data  |
| 010      | 24-bit standard format, right-justified data  |
| 011      | 24-bit MSB-first, left-justified format data  |
| 100      | 16-bit I <sup>2</sup> S-format data           |
| 101      | 24-bit I <sup>2</sup> S-format data (default) |
| 110      | Reserved                                      |
| 111      | Reserved                                      |

The FMT[2:0] bits are used to select the data format for the serial audio interface.

#### **DMF[1:0]: Sampling Frequency Selection for the De-Emphasis Function**

These bits are available for read and write.

Default value: 00

| DMF[1:0] | De-Emphasis Sampling Frequency Selection |
|----------|------------------------------------------|
| 00       | Disabled (default)                       |
| 01       | 48 kHz                                   |
| 10       | 44.1 kHz                                 |
| 11       | 32 kHz                                   |

The DMF[1:0] bits are used to select the sampling frequency used by the digital de-emphasis function when it is enabled by setting the DME bit. The de-emphasis curves are shown in the *TYPICAL PERFORMANCE CURVES* section of this data sheet.

For the DSD mode, analog FIR filter performance can be selected using this register. A register map and filter response plots are shown in the *APPLICATION FOR DSD FORMAT (DSD MODE) INTERFACE* section of this data sheet.

**DME: Digital De-Emphasis Control**

This bit is available for read and write.

Default value: 0

|         |                                |
|---------|--------------------------------|
| DME = 0 | De-emphasis disabled (default) |
| DME = 1 | De-emphasis enabled            |

The DME bit is used to enable or disable the de-emphasis function for both channels.

**MUTE: Soft Mute Control**

This bit is available for read and write.

Default value: 0

|          |                         |
|----------|-------------------------|
| MUTE = 0 | MUTE disabled (default) |
| MUTE = 1 | MUTE enabled            |

The MUTE bit is used to enable or disable the soft mute function for both channels.

Soft mute is operated as a 256-step attenuator. The speed for each step to  $-\infty$  dB (mute) is determined by the attenuation rate selected in the ATS register.

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7  | B6   | B5   | B4  | B3  | B2   | B1  | B0   |
|-------------|-----|-----|-----|-----|-----|-----|----|----|-----|------|------|-----|-----|------|-----|------|
| Register 19 | R/W | 0   | 0   | 1   | 0   | 0   | 1  | 1  | REV | ATS1 | ATS0 | OPE | ZOE | DFMS | FLT | INZD |

**R/W: Read/Write Mode Select**

When  $R/\overline{W}$  = 0, a write operation is performed.

When  $R/\overline{W}$  = 1, a read operation is performed.

Default value: 0

**REV: Output Phase Reversal**

This bit is available for read and write.

Default value: 0

|         |                         |
|---------|-------------------------|
| REV = 0 | Normal output (default) |
| REV = 1 | Inverted output         |

The REV bit is used to invert the output phase for both channels.

**ATS[1:0]: Attenuation Rate Select**

These bits are available for read and write.

Default value: 00

| ATS[1:0] | Attenuation Rate Selection |
|----------|----------------------------|
| 00       | Every PLRCK (default)      |
| 01       | PLRCK/2                    |
| 10       | PLRCK/4                    |
| 11       | PLRCK/8                    |

The ATS[1:0] bits are used to select the rate at which the attenuator is decremented/incremented during level transitions.

### **OPE: DAC Operation Control**

This bit is available for read and write.

Default value: 0

|         |                                 |
|---------|---------------------------------|
| OPE = 0 | DAC operation enabled (default) |
| OPE = 1 | DAC operation disabled          |

The OPE bit is used to enable or disable the analog output for both channels. Disabling the analog outputs forces them to the bipolar zero level (BPZ) even if digital audio data is present on the input.

### **ZOE: Zero Flag Pin Operation Control**

This bit is available for read and write.

Default value: 0

|         |                          |
|---------|--------------------------|
| ZOE = 0 | DSD data input (default) |
| ZOE = 1 | Zero flag output         |

The ZOE bit is used to change the DSDL (pin 1) and DSDR (pin 2) pin assignments. When the ZOE bit is set to 0, DSDL and DSDR are inputs for L-channel and R-channel data. When the ZOE bit is set to 1, DSDL and DSDR become outputs for the L-channel and R-channel zero flags, respectively. See the PCMZ and DZ[1:0] bit descriptions of register 21.

### **DFMS: Stereo DF Bypass Mode Select**

This bit is available for read and write.

Default value: 0

|          |                      |
|----------|----------------------|
| DFMS = 0 | Monaural (default)   |
| DFMS = 1 | Stereo input enabled |

The DFMS bit is used to enable stereo operation in DF bypass mode. In the DF bypass mode, when DFMS is set to 0, the pin for the input data is PDATA (pin 5) only, therefore the DSD1794A operates as a monaural DAC. When DFMS is set to 1, the DSD1794A can operate as a stereo DAC with inputs of L-channel and R-channel data on DSDL (pin 1) and DSDR (pin 2), respectively.

### **FLT: Digital Filter Rolloff Control**

This bit is available for read and write.

Default value: 0

|         |                         |
|---------|-------------------------|
| FLT = 0 | Sharp rolloff (default) |
| FLT = 1 | Slow rolloff            |

The FLT bit is used to select the digital filter rolloff characteristic. The filter responses for these selections are shown in the *TYPICAL PERFORMANCE CURVES* section of this data sheet.

### **INZD: Infinite Zero Detect Mute Control**

This bit is available for read and write.

Default value: 0

|          |                                              |
|----------|----------------------------------------------|
| INZD = 0 | Infinite zero detect mute disabled (default) |
| INZD = 1 | Infinite zero detect mute enabled            |

The INZD bit is used to enable or disable the zero detect mute function. Setting INZD to 1 forces muted analog outputs to hold a bipolar zero level when the DSD1794A detects zero data in both channels continuously for 1024 sampling periods ( $1/f_S$ ). The infinite zero detect mute function does not work in the DSD mode.

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7  | B6   | B5  | B4   | B3   | B2   | B1  | B0  |
|-------------|-----|-----|-----|-----|-----|-----|----|----|-----|------|-----|------|------|------|-----|-----|
| Register 20 | R/W | 0   | 0   | 1   | 0   | 1   | 0  | 0  | RSV | SRST | DSD | DFTH | MONO | CHSL | OS1 | OS0 |

**R/W: Read/Write Mode Select**

When  $R/\overline{W} = 0$ , a write operation is performed.

When  $R/\overline{W} = 1$ , a read operation is performed.

Default value: 0

**SRST: System Reset Control**

This bit is available for write only.

Default value: 0

|          |                                                   |
|----------|---------------------------------------------------|
| SRST = 0 | Normal operation (default)                        |
| SRST = 1 | System reset operation (generate one reset pulse) |

The SRST bit is used to reset the DSD1794A to the initial system condition.

**DSD: DSD Interface Mode Control**

This bit is available for read and write.

Default value: 0

|         |                                       |
|---------|---------------------------------------|
| DSD = 0 | DSD interface mode disabled (default) |
| DSD = 1 | DSD interface mode enabled            |

The DSD bit is used to enable or disable the DSD interface mode.

**DFTH: Digital Filter Bypass (or Through Mode) Control**

This bit is available for read and write.

Default value: 0

|          |                                                     |
|----------|-----------------------------------------------------|
| DFTH = 0 | Digital filter enabled (default)                    |
| DFTH = 1 | Digital filter bypassed for external digital filter |

The DFTH bit is used to enable or disable the external digital filter interface mode.

**MONO: Monaural Mode Selection**

This bit is available for read and write.

Default value: 0

|          |                       |
|----------|-----------------------|
| MONO = 0 | Stereo mode (default) |
| MONO = 1 | Monaural mode         |

The MONO function is used to change the operation mode from the normal stereo mode to the monaural mode. When the monaural mode is selected, both DACs operate in a balanced mode for one channel of audio input data. Channel selection is available for L-channel or R-channel data, determined by the CHSL bit as described immediately following.

**CHSL: Channel Selection for Monaural Mode**

This bit is available for read and write.

Default value: 0

This bit is available when MONO = 1.

|          |                              |
|----------|------------------------------|
| CHSL = 0 | L-channel selected (default) |
| CHSL = 1 | R-channel selected           |

The CHSL bit selects L-channel or R-channel data to be used in monaural mode.

## OS[1:0]: Delta-Sigma Oversampling Rate Selection

These bits are available for read and write.

Default value: 00

| OS[1:0] | Operation Speed Select   |
|---------|--------------------------|
| 00      | 64 times $f_S$ (default) |
| 01      | 32 times $f_S$           |
| 10      | 128 times $f_S$          |
| 11      | Reserved                 |

The OS bits are used to change the oversampling rate of delta-sigma modulation. Use of this function enables the designer to stabilize the conditions at the post low-pass filter for different sampling rates. As an application example, programming to set 128 times in 44.1-kHz operation, 64 times in 96-kHz operation, and 32 times in 192-kHz operation allows the use of only a single type (cutoff frequency) of post low-pass filter. The 128- $f_S$  oversampling rate is not available at sampling rates above 100 kHz. If the 128- $f_S$  oversampling rate is selected, a system clock of more than 256  $f_S$  is required.

In DSD mode, these bits are used to select the speed of the bit clock for DSD data coming into the analog FIR filter.

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7  | B6  | B5  | B4  | B3  | B2  | B1  | B0   |
|-------------|-----|-----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|------|
| Register 21 | R/W | 0   | 0   | 1   | 0   | 1   | 0  | 1  | RSV | RSV | RSV | RSV | RSV | DZ1 | DZ0 | PCMZ |

## R/W: Read/Write Mode Select

When  $R/\overline{W} = 0$ , a write operation is performed.

When  $R/\overline{W} = 1$ , a read operation is performed.

Default value: 0

## DZ[1:0]: DSD Zero Output Enable

These bits are available for read and write.

Default value: 00

| DZ[1:0] | Zero Output Enable             |
|---------|--------------------------------|
| 00      | Disabled (default)             |
| 01      | Even pattern detect            |
| 1x      | 96 <sub>H</sub> pattern detect |

The DZ bits are used to enable or disable the output zero flags, and to select the zero pattern in the DSD mode. The DSD1794A sets zero flags when the number of 1s and 0s are equal in every 8 bits of DSD input data, or the DSD input data is 1001 0110 continuously for 200 ms.

## PCMZ: PCM Zero Output Enable

These bits are available for read and write.

Default value: 1

|          |                                   |
|----------|-----------------------------------|
| PCMZ = 0 | PCM zero output disabled          |
| PCMZ = 1 | PCM zero output enabled (default) |

The PCMZ bit is used to enable or disable the output zero flags in the PCM mode and the external DF mode. The DSD1794A sets the zero flags when the input data is continuously zero for 1024 LRCKs in the PCM mode or 1024 WDCKs in the external filter mode.

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7  | B6  | B5  | B4  | B3  | B2  | B1   | B0   |
|-------------|-----|-----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|-----|------|------|
| Register 22 | R   | 0   | 0   | 1   | 0   | 1   | 1  | 0  | RSV | RSV | RSV | RSV | RSV | RSV | ZFGR | ZFGL |

## R: Read Mode Select

Value is always 1, specifying the readback mode.

## ZFGx: Zero-Detection Flag

Where x = L or R, corresponding to the DAC output channel. These bits are available only for readback.

Default value: 00

|          |               |
|----------|---------------|
| ZFGx = 0 | Not zero      |
| ZFGx = 1 | Zero detected |

When the DSD1794A detects that audio input data is continuously zero, the ZFGx bit is set to 1 for the corresponding channel(s).

## TYPICAL CONNECTION DIAGRAM

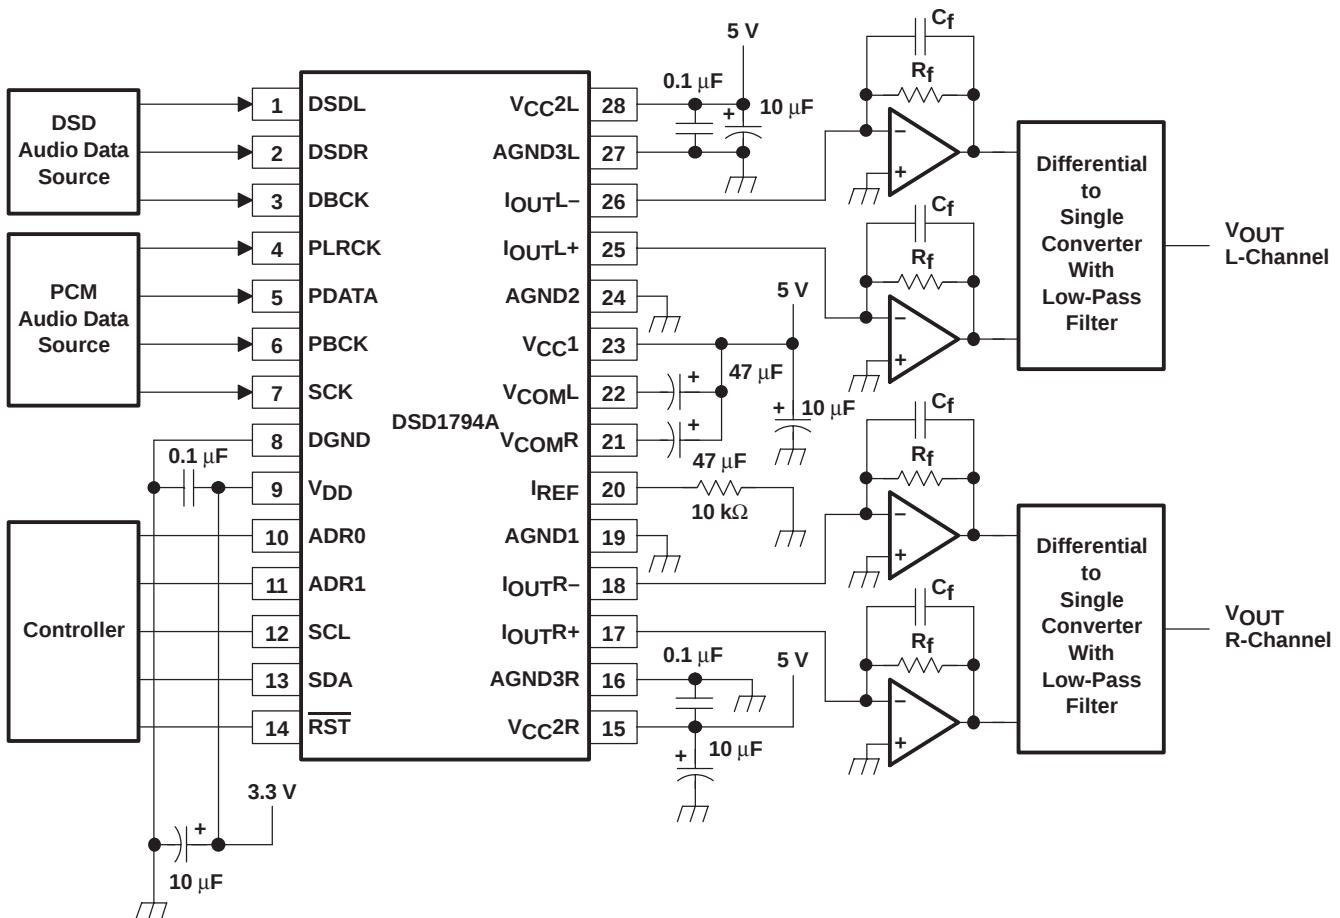


Figure 32. Typical Application Circuit

---

## APPLICATION INFORMATION

### APPLICATION CIRCUIT

The design of the application circuit is very important in order to actually realize the high S/N ratio of which the DSD1794A is capable. This is because noise and distortion that are generated in an application circuit are not negligible.

In the circuit of Figure 33, the output level is 2 V RMS and 127 dB S/N is achieved. The circuit of Figure 34 can realize the highest performance. In this case the output level is set to 4.5 V rms and 129 dB S/N is achieved (stereo mode). In monaural mode, if the output of the L-channel and R-channel is used as a balanced output, 132 dB S/N is achieved (see Figure 36).

Figure 35 shows a circuit for the DSD mode, which is a 4<sup>th</sup>-order LPF in order to reduce the out-of-band noise.

### I/V Section

The current of the DSD1794A on each of the output pins ( $I_{OUTL+}$ ,  $I_{OUTL-}$ ,  $I_{OUTR+}$ ,  $I_{OUTR-}$ ) is 7.8 mA p-p at 0 dB (full scale). The voltage output level of the I/V converter ( $V_i$ ) is given by following equation:

$$V_i = 7.8 \text{ mA p-p} \times R_f \text{ (} R_f \text{ feedback resistance of I/V converter)}$$

An NE5534 operational amplifier is recommended for the I/V circuit to obtain the specified performance. Dynamic performance such as the gain bandwidth, settling time, and slew rate of the operational amplifier affects the audio dynamic performance of the I/V section.

### Differential Section

The DSD1794A voltage outputs are followed by differential amplifier stages, which sum the differential signals for each channel, creating a single-ended I/V op-amp output. In addition, the differential amplifiers provide a low-pass filter function.

The operational amplifier recommended for the differential circuit is the Linear Technology LT1028, because its input noise is low.

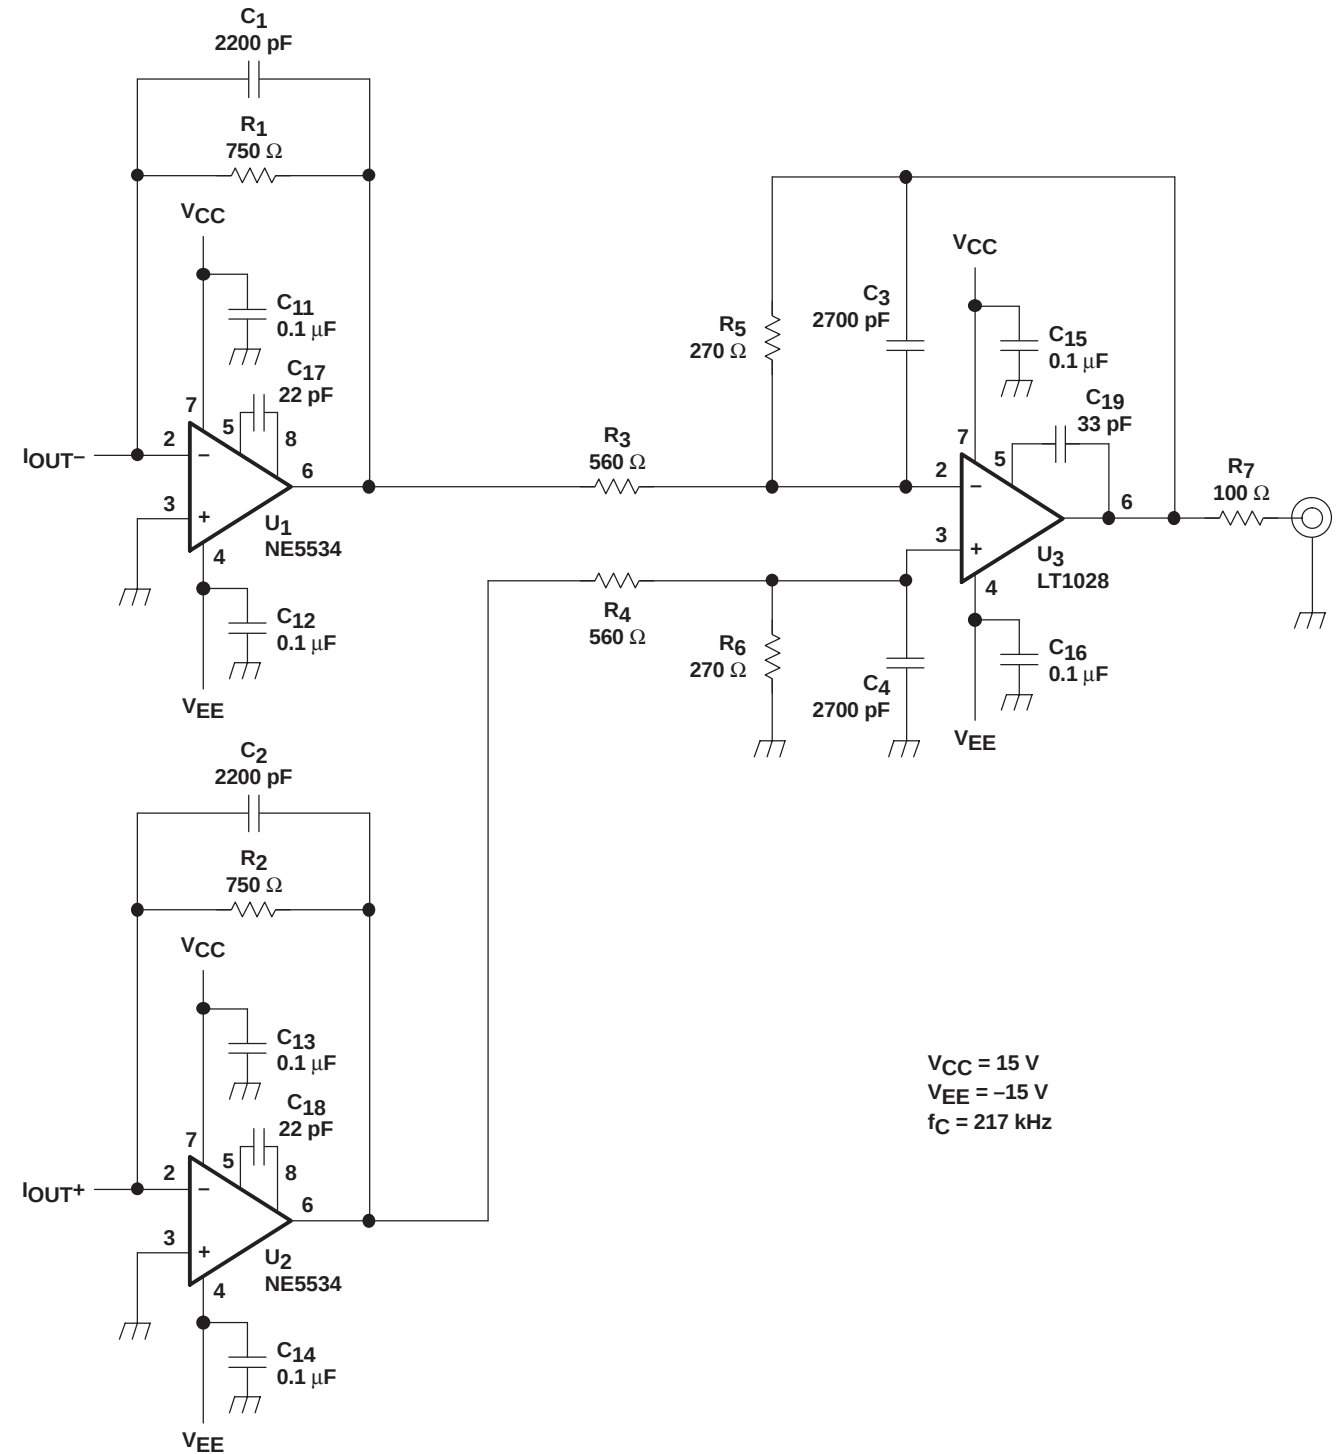


Figure 33. Measurement Circuit for PCM,  $V_{OUT} = 2$  V RMS

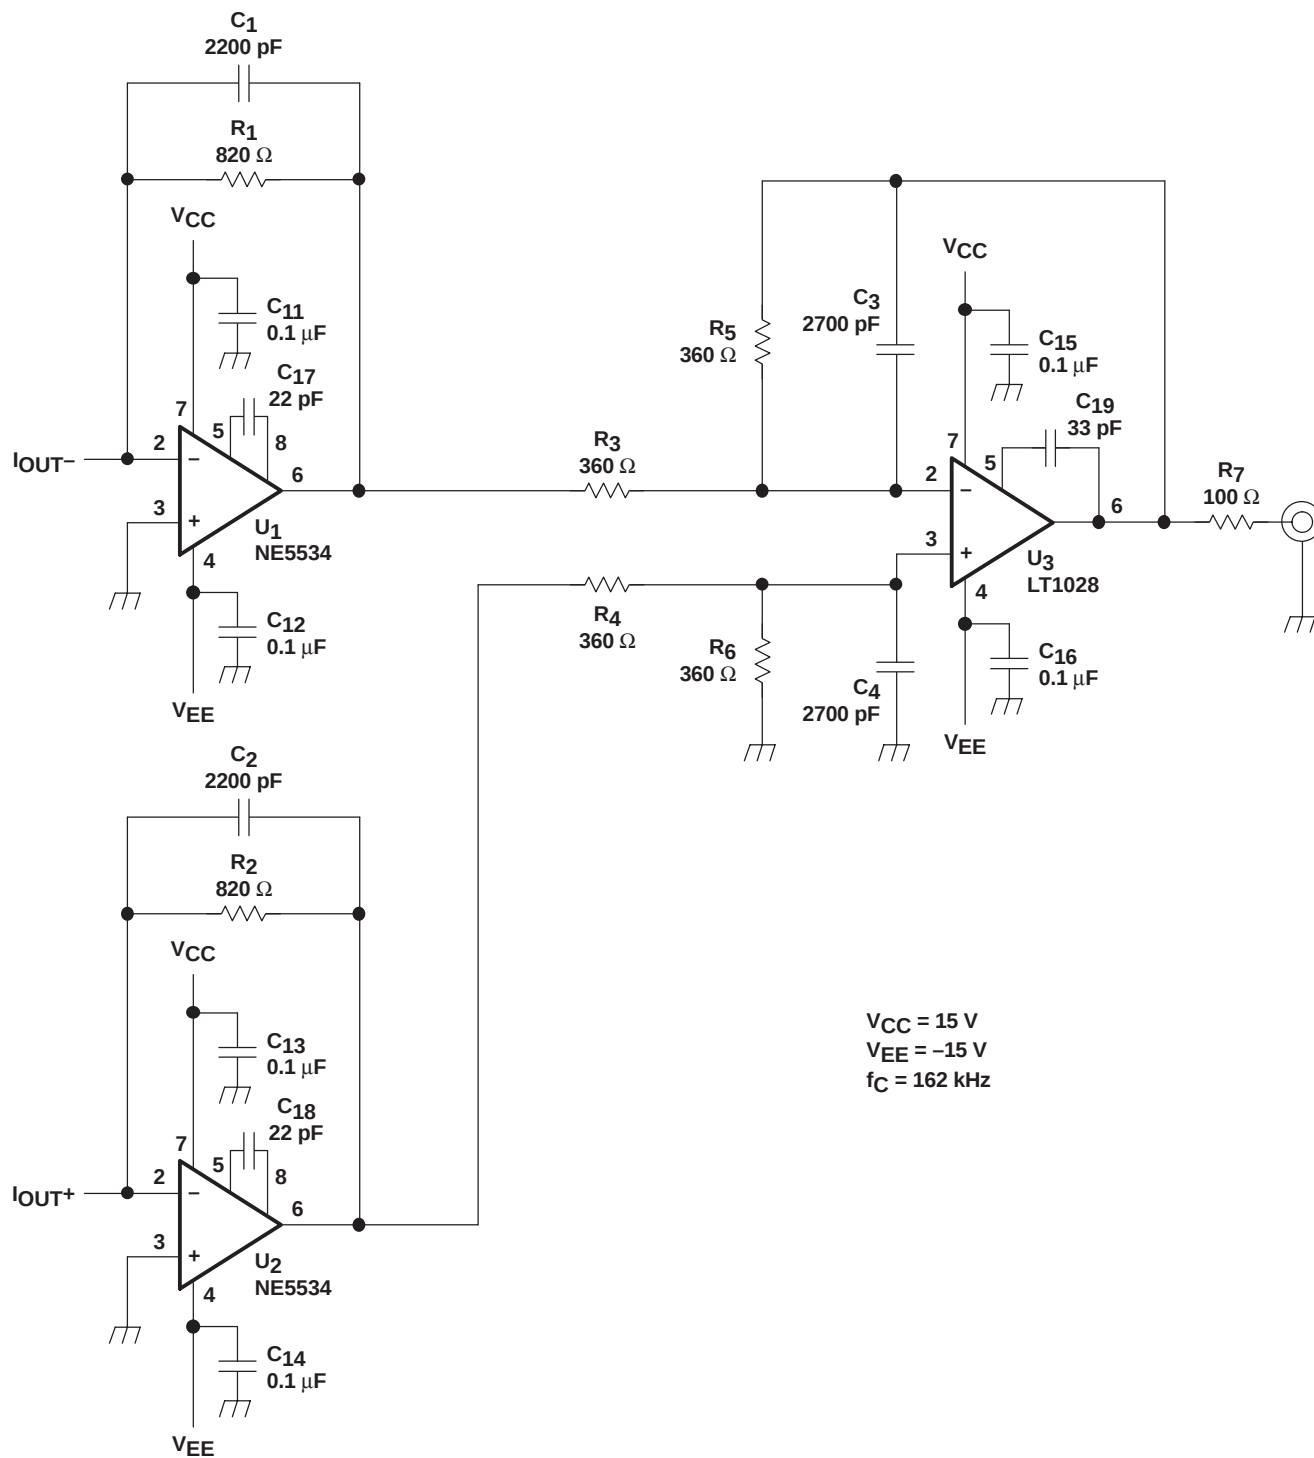


Figure 34. Measurement Circuit for PCM,  $V_{OUT} = 4.5\text{ V RMS}$

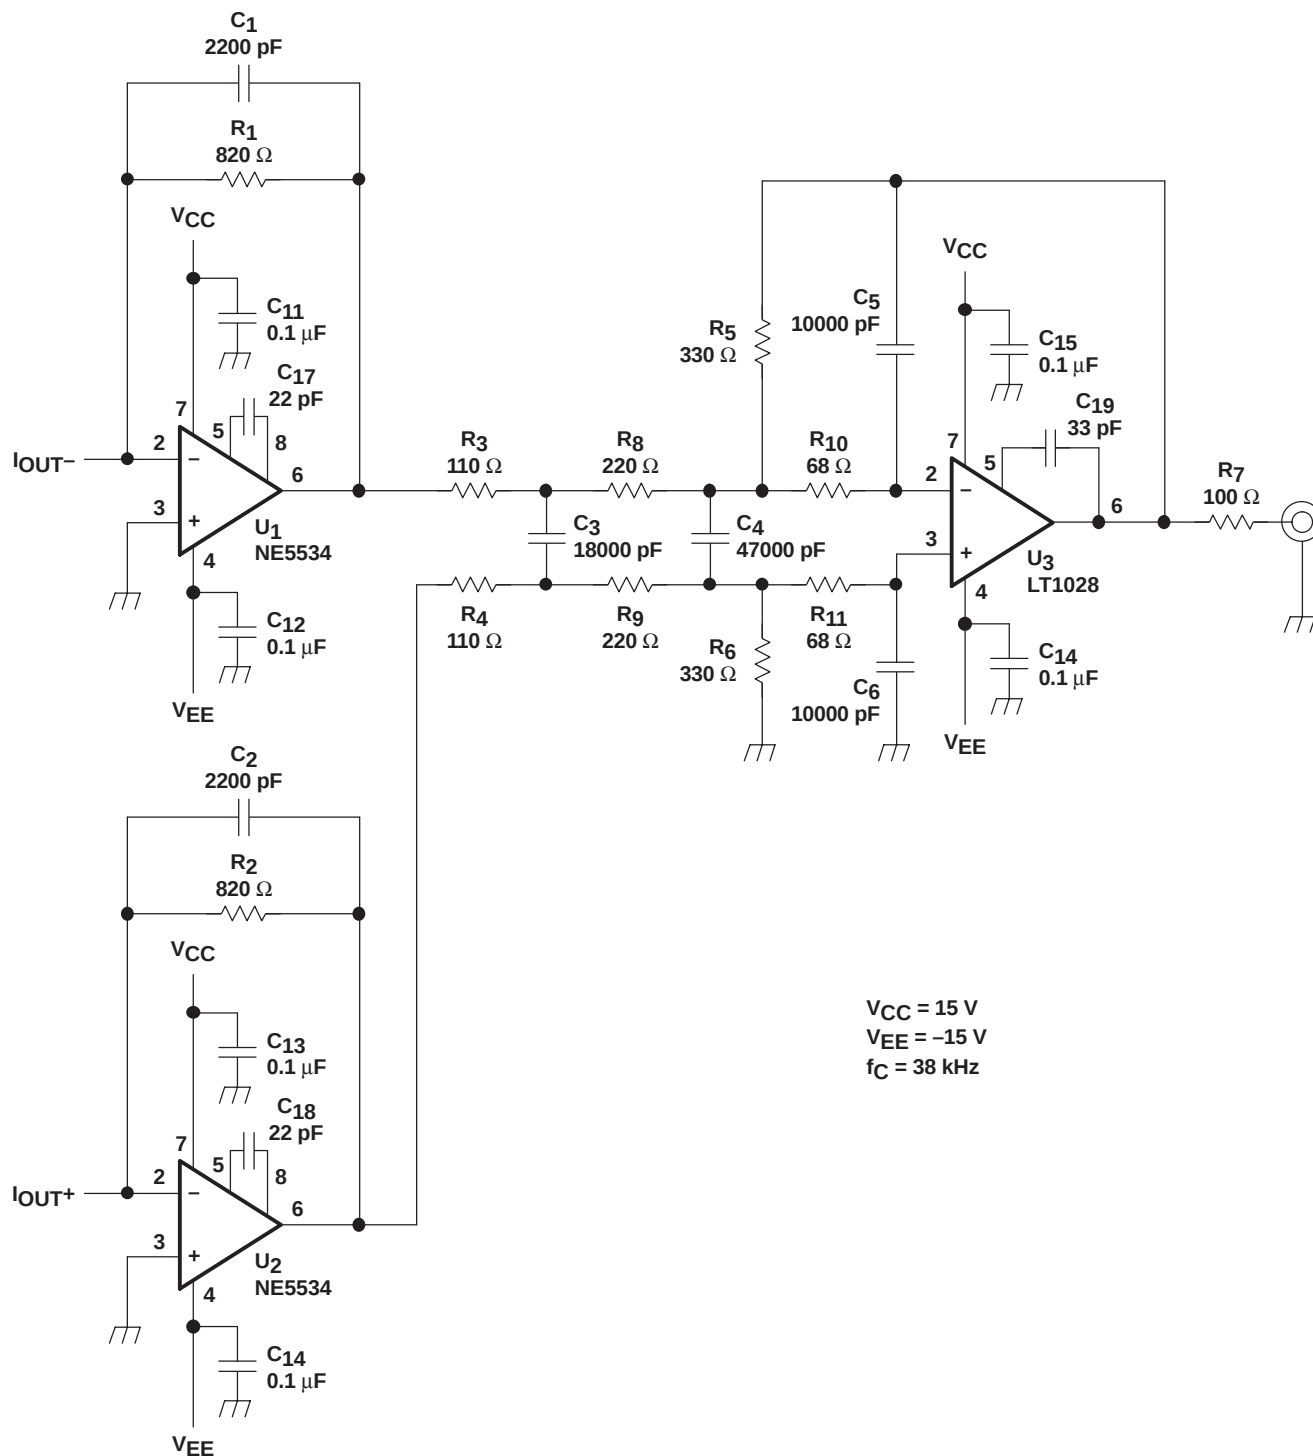


Figure 35. Measurement Circuit for DSD


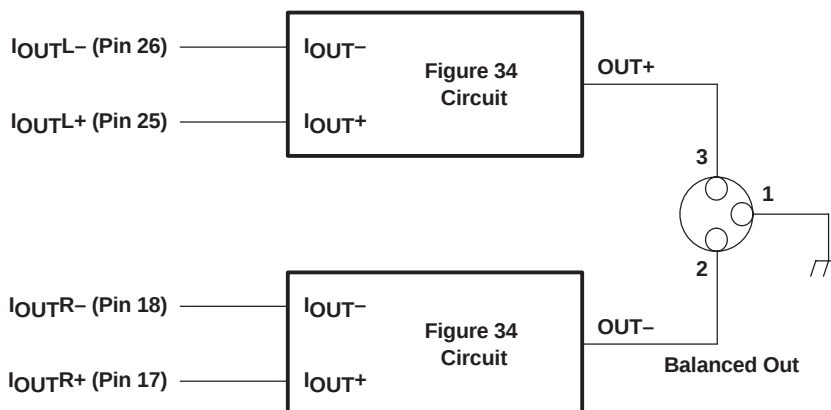


Figure 36. Measurement Circuit for Monaural Mode

## APPLICATION FOR EXTERNAL DIGITAL FILTER INTERFACE

DFMS = 0

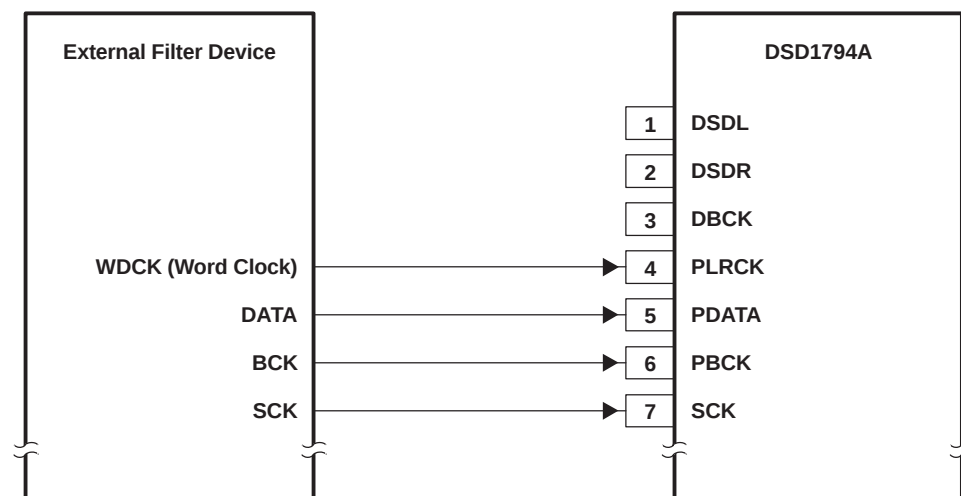

DFMS = 1

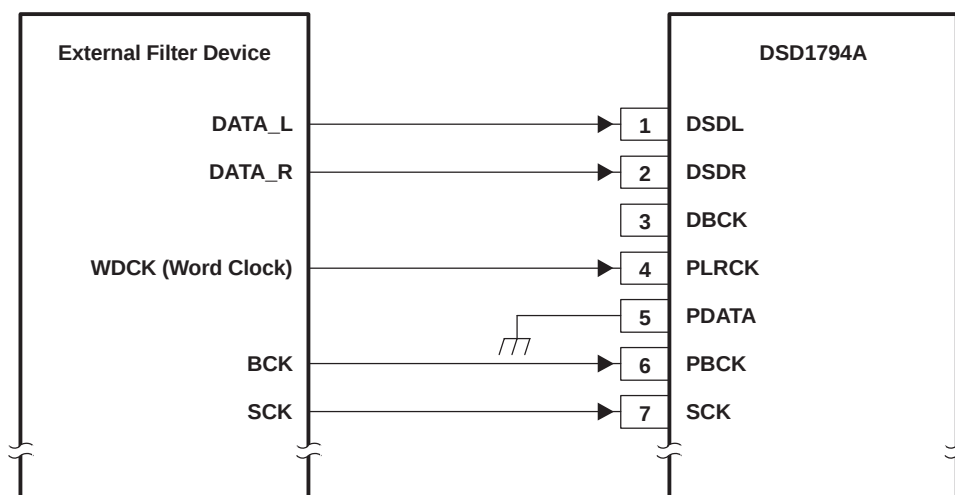


Figure 37. Connection Diagram for External Digital Filter (Internal DF Bypass Mode) Application

## Application for Interfacing With an External Digital Filter

For some applications, it may be desirable to use an external digital filter to perform the interpolation function, as it can provide improved stop-band attenuation when compared to the internal digital filter of the DSD1794A.

The DSD1794A supports several external digital filters, including:

- Texas Instruments DF1704 and DF1706
- Pacific Microsonics PMD200 HDCD filter/decoder IC
- Programmable digital signal processors

The external digital filter application mode is accessed by programming the following bit in the corresponding control register:

- DFTH = 1 (register 20)

The pins used to provide the serial interface for the external digital filter are shown in the connection diagram of Figure 37. The word clock (WDCK) signal must be operated at  $8\times$  or  $4\times$  the desired sampling frequency,  $f_S$ .

## System Clock (SCK) and Interface Timing

The DSD1794A in an application using an external digital filter requires the synchronization of WDCK and the system clock. The system clock is phase-free with respect to WDCK. Interface timing among WDCK, BCK, and DATA is shown in Figure 39.

## Audio Format

The DSD1794A in the external digital filter interface mode supports right-justified audio formats including 16-bit, 20-bit, and 24-bit audio data, as shown in Figure 38. The audio format is selected by the FMT[2:0] bits of control register 18.

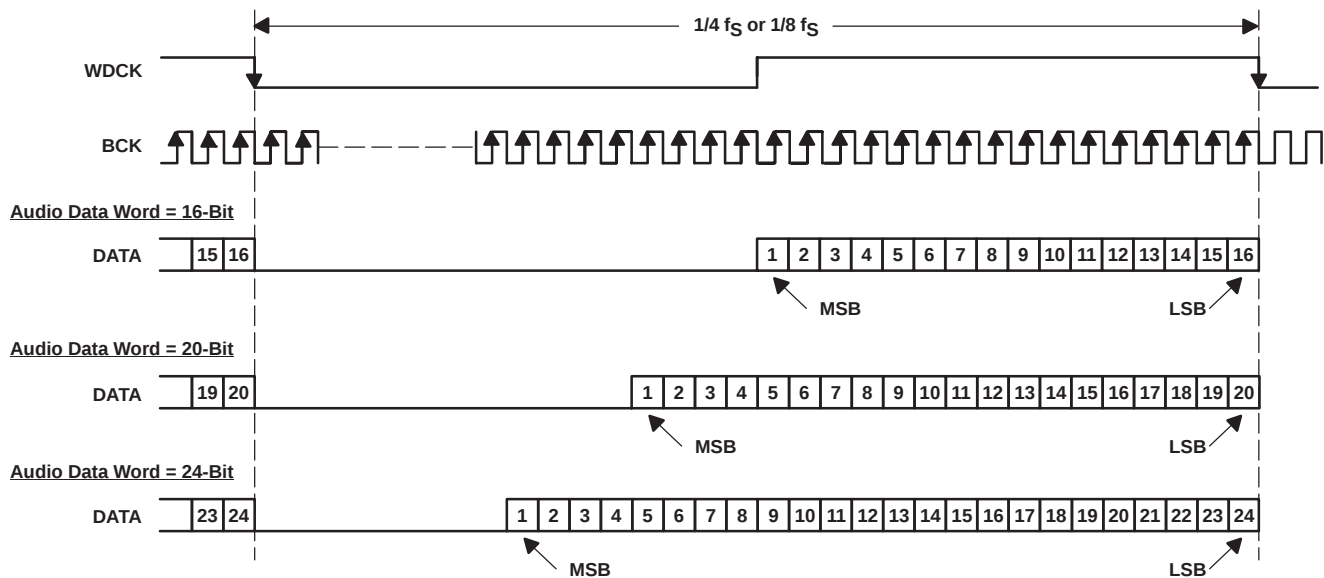


Figure 38. Audio Data Input Format for External Digital Filter (Internal DF Bypass Mode) Application

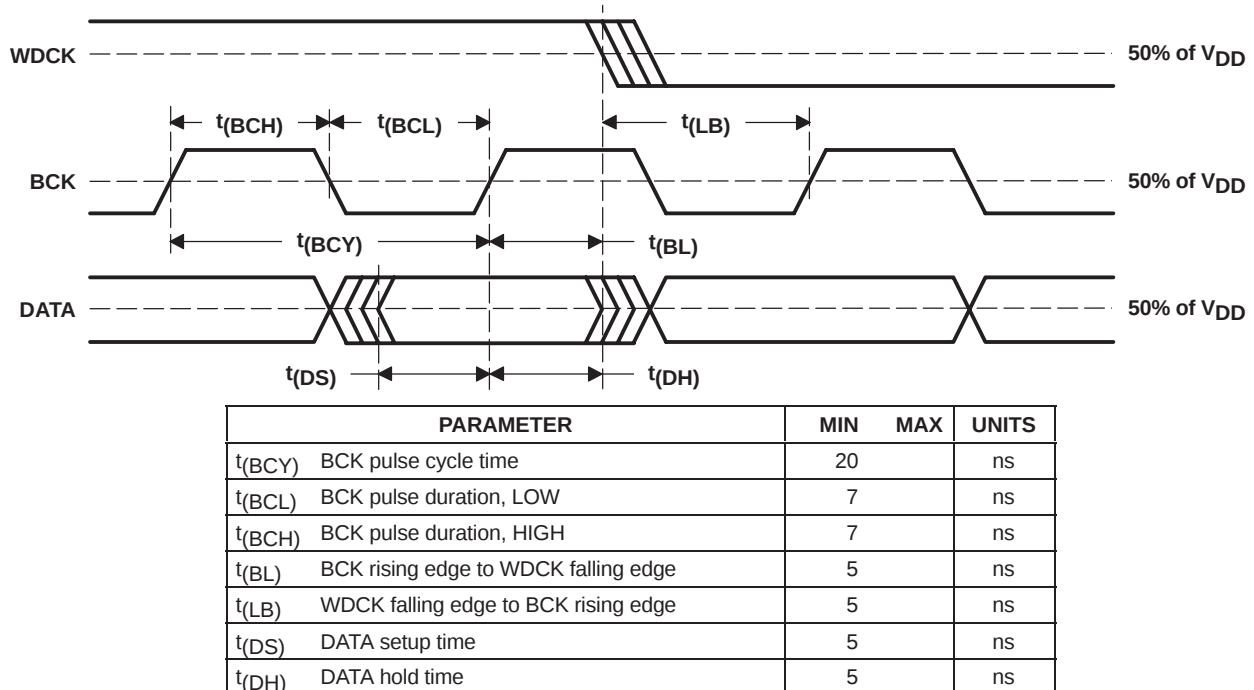


Figure 39. Audio Interface Timing for External Digital Filter (Internal DF Bypass Mode) Application

### Functions Available in the External Digital Filter Mode

The external digital filter mode allows access to the majority of the DSD1794A mode control functions.

The following table shows the register mapping available when the external digital filter mode is selected, along with descriptions of functions which are modified when using this mode selection.

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7  | B6   | B5   | B4   | B3   | B2   | B1   | B0   |
|-------------|-----|-----|-----|-----|-----|-----|----|----|-----|------|------|------|------|------|------|------|
| Register 16 | R/W | 0   | 0   | 1   | 0   | 0   | 0  | 0  | –   | –    | –    | –    | –    | –    | –    | –    |
| Register 17 | R/W | 0   | 0   | 1   | 0   | 0   | 0  | 1  | –   | –    | –    | –    | –    | –    | –    | –    |
| Register 18 | R/W | 0   | 0   | 1   | 0   | 0   | 1  | 0  | –   | FMT2 | FMT1 | FMT0 | –    | –    | –    | –    |
| Register 19 | R/W | 0   | 0   | 1   | 0   | 0   | 1  | 1  | REV | –    | –    | OPE  | –    | DFMS | –    | INZD |
| Register 20 | R/W | 0   | 0   | 1   | 0   | 1   | 0  | 0  | –   | SRST | 0    | 1    | MONO | CHSL | OS1  | OS0  |
| Register 21 | R/W | 0   | 0   | 1   | 0   | 1   | 0  | 1  | –   | –    | –    | –    | –    | –    | –    | PCMZ |
| Register 22 | R   | 0   | 0   | 1   | 0   | 1   | 1  | 0  | –   | –    | –    | –    | –    | –    | ZFGR | ZFGL |

NOTE: 1 indicates that the bit is required for selection of external digital filter mode.

– indicates that function is disabled. No operation even if data bit is set

### FMT[2:0]: Audio Data Format Selection

Default value: 000

| FMT[2:0] | Audio Data Format Select                |
|----------|-----------------------------------------|
| 000      | 16-bit right-justified format (default) |
| 001      | 20-bit right-justified format           |
| 010      | 24-bit right-justified format           |
| Other    | N/A                                     |


## OS[1:0]: Delta-Sigma Modulator Oversampling Rate Selection

Default value: 00

| OS[1:0] | Operation Speed Select |
|---------|------------------------|
| 00      | 8 times WDCK (default) |
| 01      | 4 times WDCK           |
| 10      | 16 times WDCK          |
| 11      | Reserved               |

The effective oversampling rate is determined by the oversampling performed by both the external digital filter and the delta-sigma modulator. For example, if the external digital filter is 8× oversampling, and the user selects OS[1:0] = 00, then the delta-sigma modulator oversamples by 8×, resulting in an effective oversampling rate of 64×. The 16× WDCK oversampling rate is not available above a 100-kHz sampling rate. If the oversampling rate selected is 16× WDCK, the system clock frequency must be over 256 f<sub>S</sub>.

## APPLICATION FOR DSD FORMAT (DSD MODE) INTERFACE

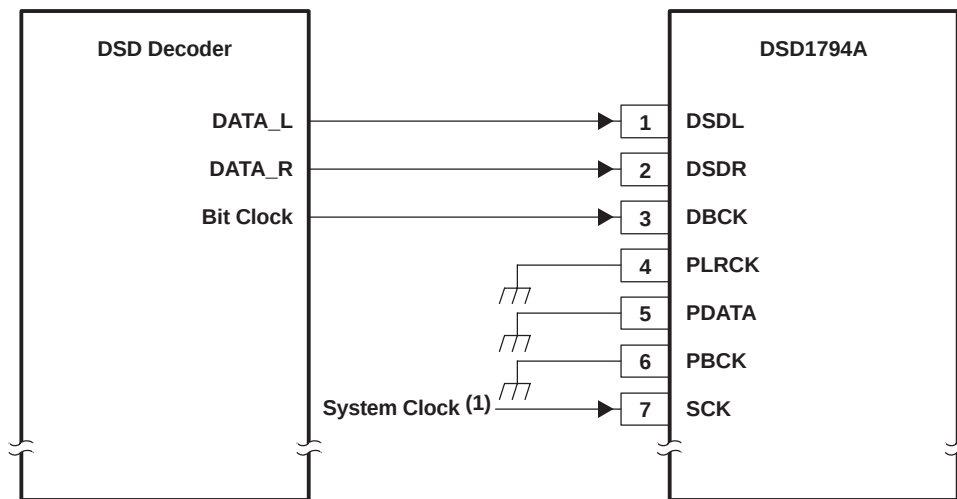

(1) The system clock is necessary for the initialization sequence and the I<sup>2</sup>C interface operation.

**Figure 40. Connection Diagram in DSD Mode**

### Feature

This mode is used for interfacing directly to a DSD decoder, which is found in Super Audio CD™ (SACD) applications. The DSD mode is accessed by programming the following bit in the corresponding control register.

DSD = 1 (register 20)

The DSD mode provides a low-pass filtering function to convert the 1-bit oversampled data stream to the analog domain. The filtering is provided using an analog FIR filter structure. Four FIR responses are available, and are selected by the DMF[1:0] bits of control register 18.

The DSD bit must be set before inputting DSD data, otherwise the DSD1794A erroneously detects the TDMCA mode, and commands are not accepted through the serial control interface.

### Pin Assignment When DSD Format Interface

- DSDL (pin 1): L-channel DSD data input
- DSDR (pin 2): R-channel DSD data input
- DBCK (pin 3): Bit clock (BCK) for DSD data


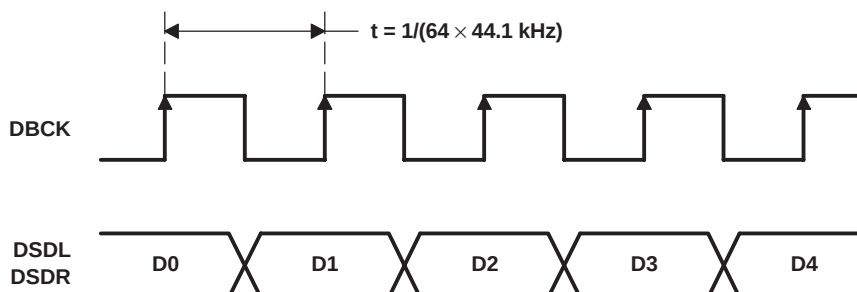


Figure 41. Normal Data Output Form From DSD Decoder

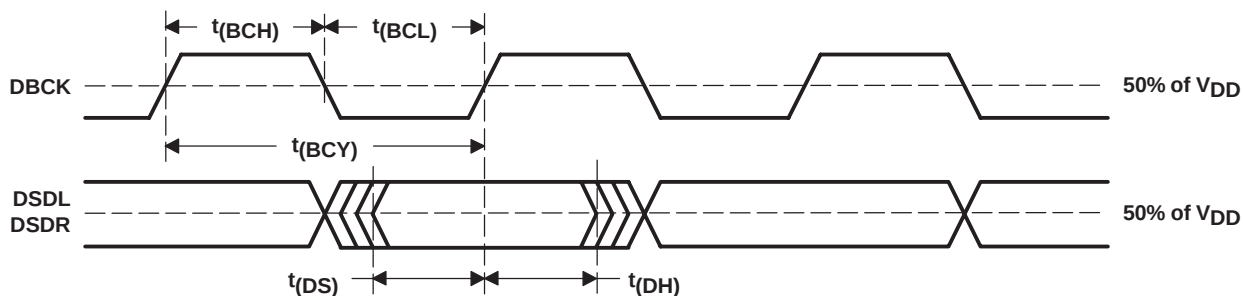

| PARAMETER                    | MIN               | MAX | UNITS |
|------------------------------|-------------------|-----|-------|
| t(BCY) DBCK pulse cycle time | 85 <sup>(1)</sup> |     | ns    |
| t(BCH) DBCK high-level time  | 30                |     | ns    |
| t(BCL) DBCK low-level time   | 30                |     | ns    |
| t(DS) DSDL, DSDR setup time  | 10                |     | ns    |
| t(DH) DSDL, DSDR hold time   | 10                |     | ns    |

(1) 2.8224 MHz × 4. (2.8224 MHz = 64 × 44.1 kHz. This value is specified as a sampling rate of DSD.)

Figure 42. Timing for DSD Audio Interface

## ANALOG FIR FILTER PERFORMANCE IN DSD MODE

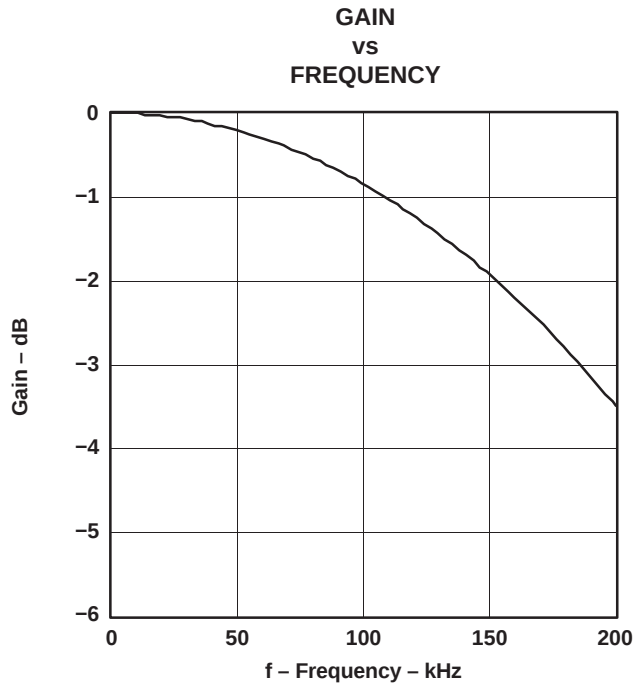


Figure 43. DSD Filter-1, Low BW

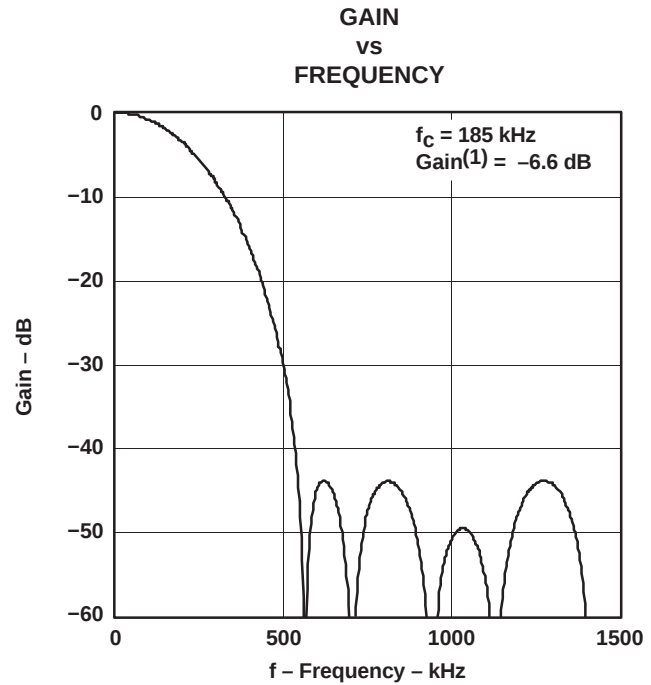


Figure 44. DSD Filter-1, High BW

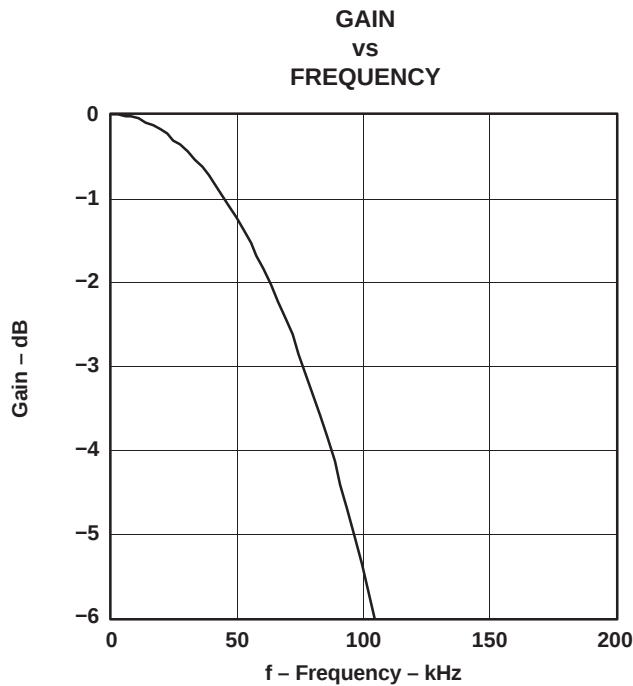


Figure 45. DSD Filter-2, Low BW

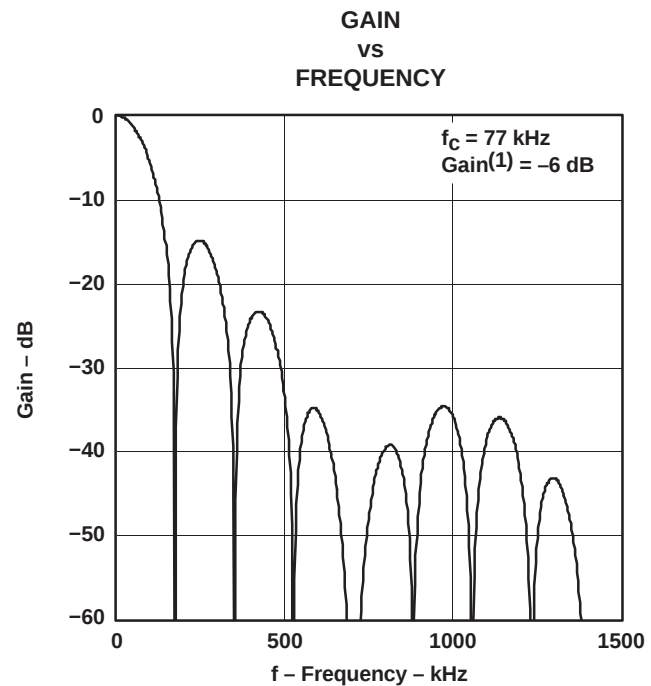


Figure 46. DSD Filter-2, High BW

(1) This gain is in comparison to PCM 0 dB, when the DSD input signal efficiency is 50%.

## ANALOG FIR FILTER PERFORMANCE IN DSD MODE (CONTINUED)

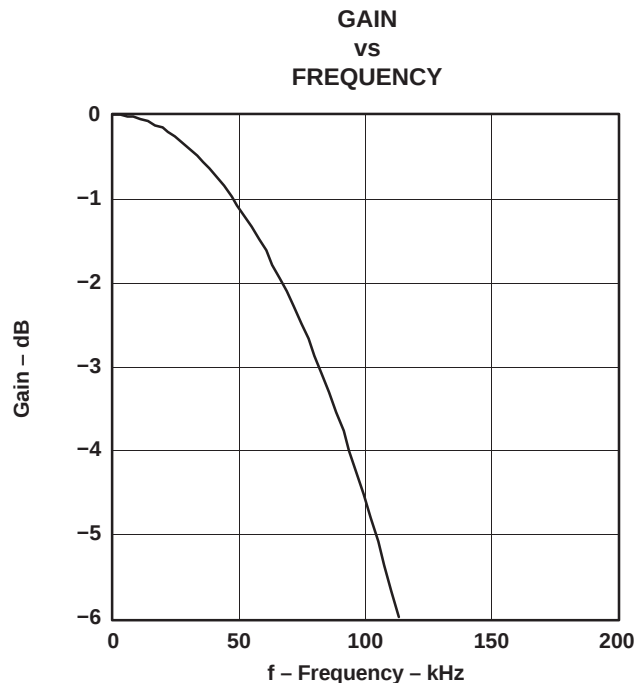


Figure 47. DSD Filter-3, Low BW

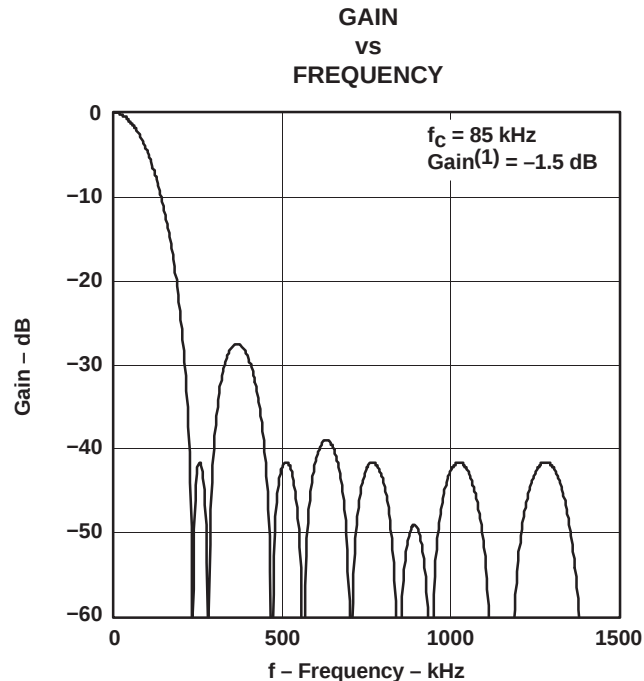


Figure 48. DSD Filter-3, High BW

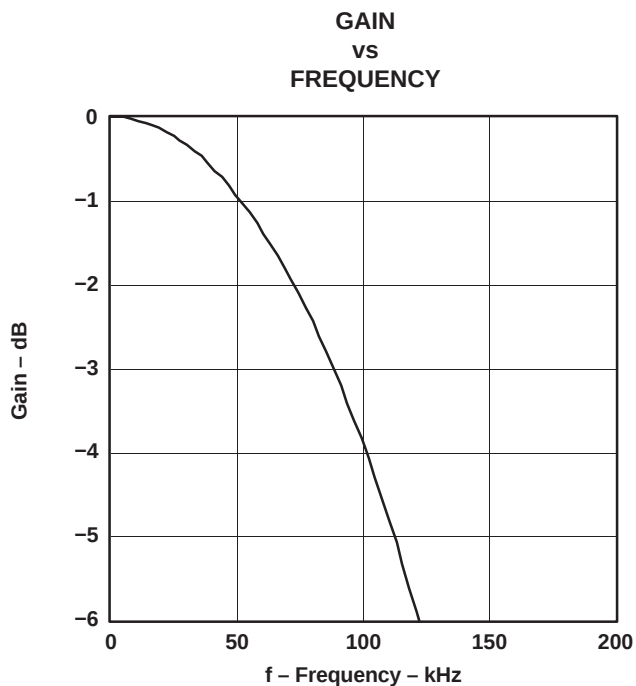


Figure 49. DSD Filter-4, Low BW

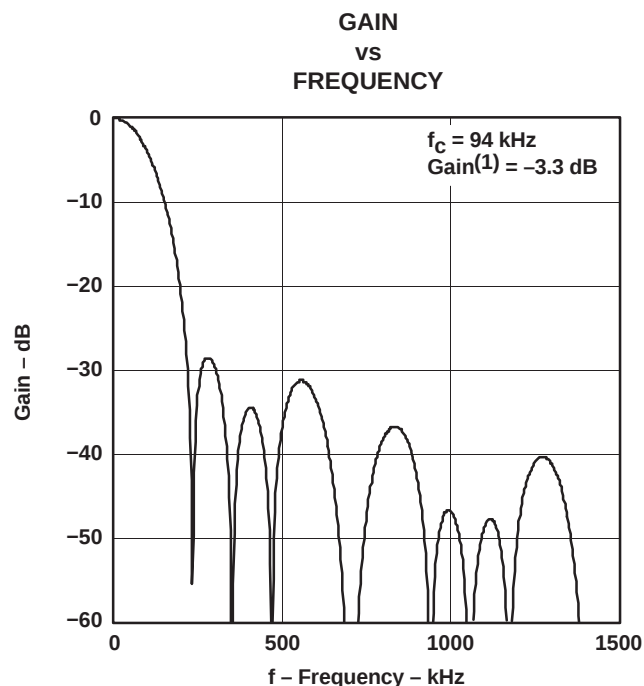


Figure 50. DSD Filter-4, High BW

(1) This gain is in comparison to PCM 0 dB, when the DSD input signal efficiency is 50%.

## DSD MODE CONFIGURATION AND FUNCTION CONTROLS

### Configuration for the DSD Interface Mode

DSD = 1 (Register 20, B5)

|             | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7  | B6   | B5 | B4  | B3   | B2   | B1   | B0   |
|-------------|-----|-----|-----|-----|-----|-----|----|----|-----|------|----|-----|------|------|------|------|
| Register 16 | R/W | 0   | 0   | 1   | 0   | 0   | 0  | 0  | –   | –    | –  | –   | –    | –    | –    | –    |
| Register 17 | R/W | 0   | 0   | 1   | 0   | 0   | 0  | 1  | –   | –    | –  | –   | –    | –    | –    | –    |
| Register 18 | R/W | 0   | 0   | 1   | 0   | 0   | 1  | 0  | –   | –    | –  | –   | DMF1 | DMF0 | –    | –    |
| Register 19 | R/W | 0   | 0   | 1   | 0   | 0   | 1  | 1  | REV | –    | –  | OPE | –    | –    | –    | –    |
| Register 20 | R/W | 0   | 0   | 1   | 0   | 1   | 0  | 0  | –   | SRST | 1  | –   | MONO | CHSL | OS1  | OS0  |
| Register 21 | R   | 0   | 0   | 1   | 0   | 1   | 0  | 1  | –   | –    | –  | –   | –    | DZ1  | DZ0  | –    |
| Register 22 | R   | 0   | 0   | 1   | 0   | 1   | 1  | 0  | –   | –    | –  | –   | –    | –    | ZFGR | ZFGL |

NOTE: – indicates that function is disabled. No operation even if data bit is set

### DMF[1:0]: Analog FIR Performance Selection

Default value: 00

| DMF[1:0] | Analog-FIR Performance Select |
|----------|-------------------------------|
| 00       | FIR-1 (default)               |
| 01       | FIR-2                         |
| 10       | FIR-3                         |
| 11       | FIR-4                         |

Plots for the four analog FIR filter responses are shown in the *TYPICAL PERFORMANCE CURVES* section of this data sheet.

### OS[1:0]: Analog-FIR Operation-Speed Selection

Default value: 00

| OS[1:0] | Operation Speed Select      |
|---------|-----------------------------|
| 00      | $f_{\text{DBCK}}$ (default) |
| 01      | $f_{\text{DBCK}}/2$         |
| 10      | Reserved                    |
| 11      | $f_{\text{DBCK}}/4$         |


The OS bit in the DSD mode is used to select the operating rate of the analog FIR. The OS bits must be set before setting the DSD bit to 1.

### Requirements for System Clock

The bit clock (DBCK) for the DSD mode is required at pin 3 of the DSD1794A. The frequency of the bit clock can be N times the sampling frequency. Generally, N is 64 in DSD applications.

The interface timing between the bit clock and DSDL and DSDR is required to meet the same setup-and hold-time specifications as shown in Figure 42.

## THEORY OF OPERATION

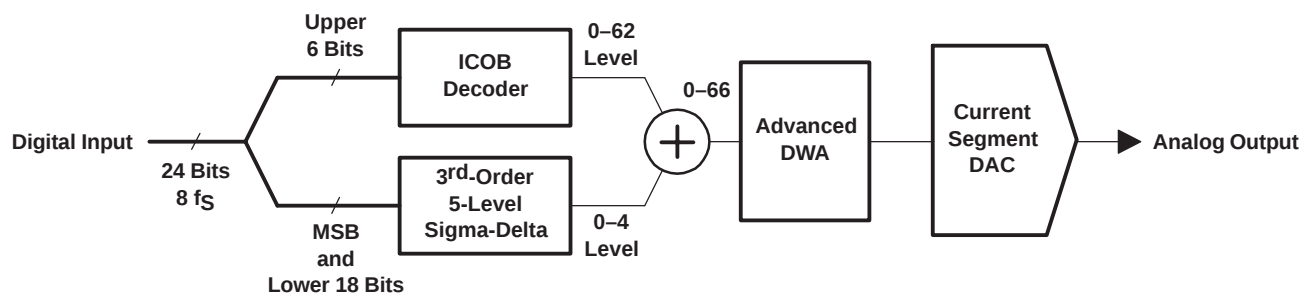

**Figure 51. Advanced Segment DAC**

The DSD1794A uses TI's advanced segment DAC architecture to achieve excellent dynamic performance and improved tolerance to clock jitter. The DSD1794A provides balanced current outputs.

Digital input data via the digital filter is separated into 6 upper bits and 18 lower bits. The 6 upper bits are converted to inverted complementary offset binary (ICOB) code. The lower 18 bits, associated with the MSB, are processed by a five-level third-order delta-sigma modulator operated at  $64 f_s$  by default. The 1 level of the modulator is equivalent to the 1 LSB of the ICOB code converter. The data groups processed in the ICOB converter and third-order delta-sigma modulator are summed together to an up to 66-level digital code, and then processed by data-weighted averaging (DWA) to reduce the noise produced by element mismatch. The data of up to 66 levels from the DWA is converted to an analog output in the differential-current segment section.


This architecture has overcome the various drawbacks of conventional multibit processing and also achieves excellent dynamic performance.

**Analog output**

The following table and Figure 52 show the relationship between the digital input code and analog output.

|                 | 800000 (–FS) | 000000 (BPZ) | 7FFFFFF (+FS) |
|-----------------|--------------|--------------|---------------|
| $I_{OUTN}$ [mA] | –2.3         | –6.2         | –10.1         |
| $I_{OUTP}$ [mA] | –10.1        | –6.2         | –2.3          |
| $V_{OUTN}$ [V]  | –1.725       | –4.65        | –7.575        |
| $V_{OUTP}$ [V]  | –7.575       | –4.65        | –1.725        |
| $V_{OUT}$ [V]   | –2.821       | 0            | 2.821         |

NOTE:  $V_{OUTN}$  is the output of U1,  $V_{OUTP}$  is the output of U2, and  $V_{OUT}$  is the output of U3 in the application circuit of Figure 33.

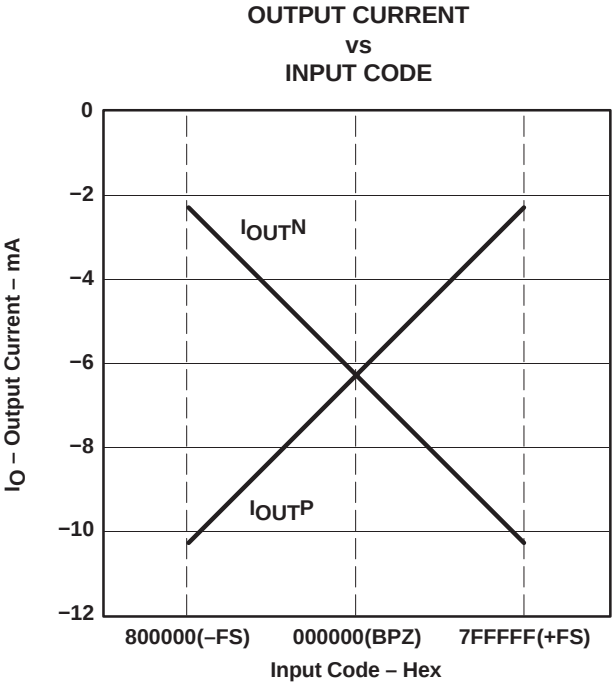

**Figure 52. The Relationship Between Digital Input and Analog Output**

## PACKAGING INFORMATION

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| DSD1794ADB       | ACTIVE                | SSOP         | DB              | 28   | 47          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| DSD1794ADBG4     | ACTIVE                | SSOP         | DB              | 28   | 47          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| DSD1794ADBR      | ACTIVE                | SSOP         | DB              | 28   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| DSD1794ADBRG4    | ACTIVE                | SSOP         | DB              | 28   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**TAPE AND REEL INFORMATION**

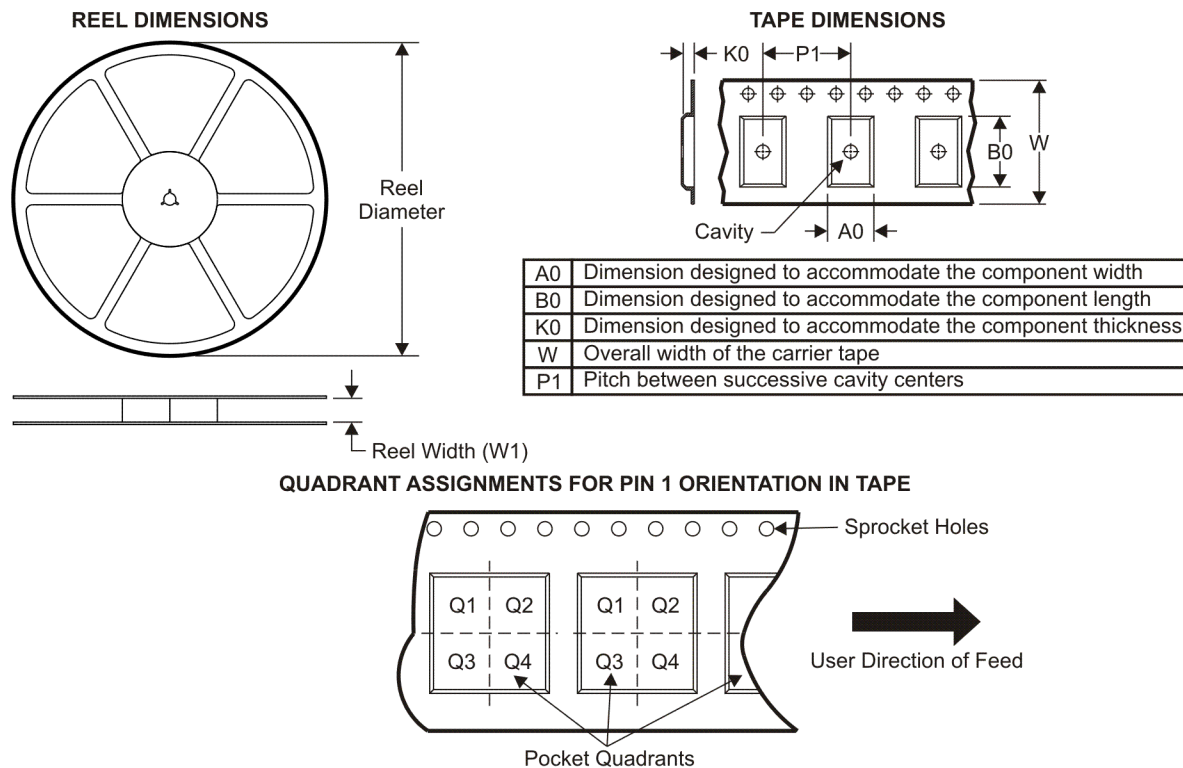

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DSD1794ADBR | SSOP         | DB              | 28   | 2000 | 330.0              | 17.4               | 8.5     | 10.8    | 2.4     | 12.0    | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

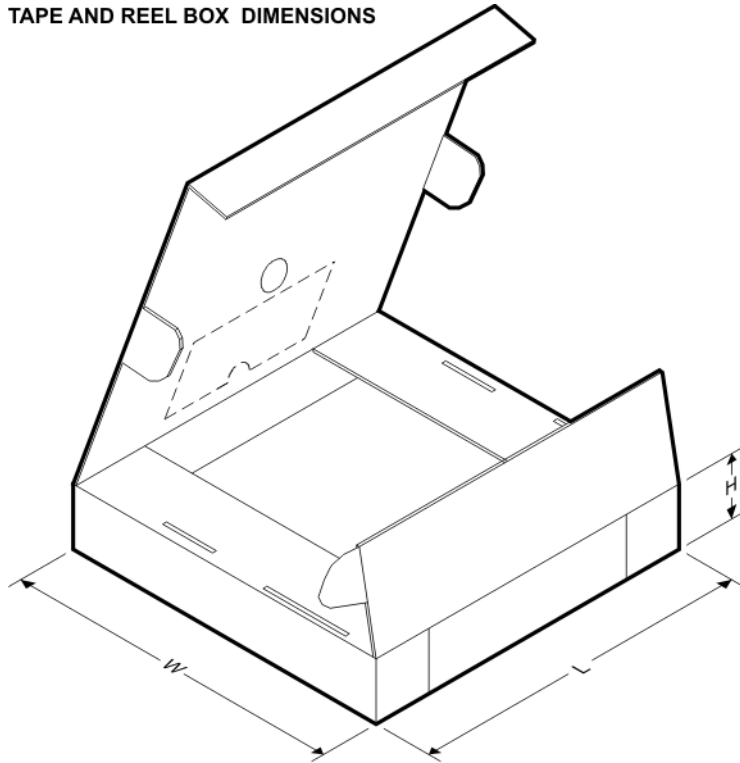


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DSD1794ADBR | SSOP         | DB              | 28   | 2000 | 336.6       | 336.6      | 28.6        |

## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

28 PINS SHOWN

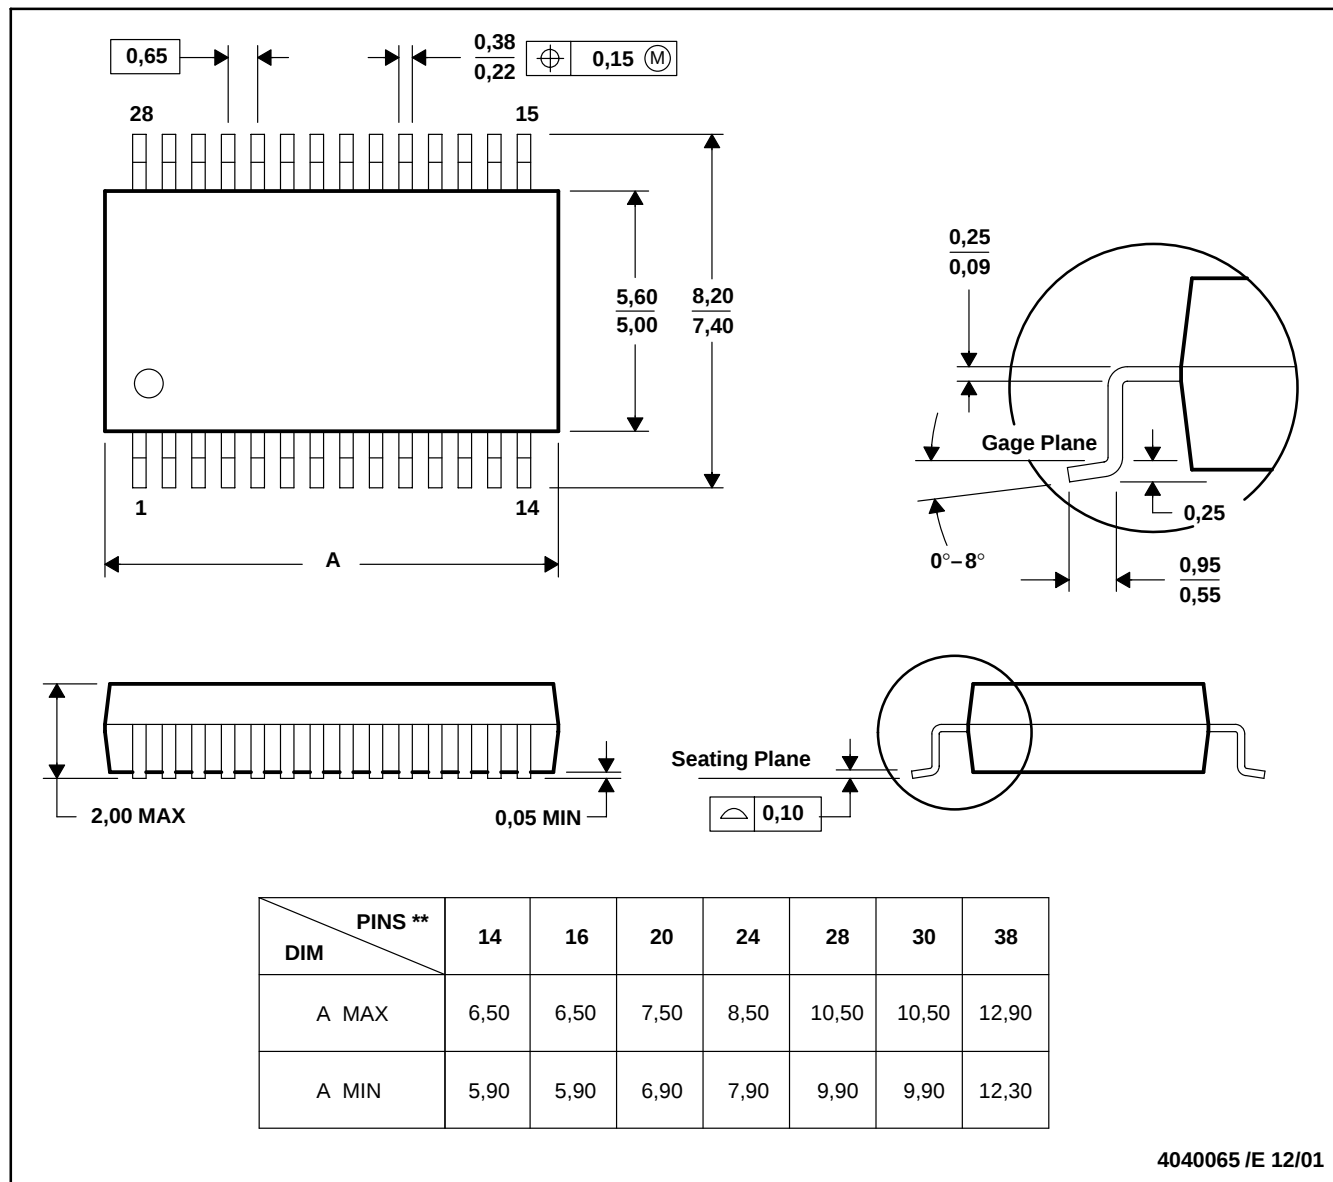

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-150

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Medical            | <a href="http://www.ti.com/medical">www.ti.com/medical</a>               |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2008, Texas Instruments Incorporated