

32-bit Single Chip Microcontroller

- Arm® 32-bit RISC CPU core Cortex®-M0+
- Embedded 256K-byte flash memory and 96K-byte RAM
- Various interfaces such as UART, QSPI, I²C, and USB that support DMA transfer
- Built-in memory display controller
- Low power memory display voltage booster

■ DESCRIPTIONS

The S1C31D01 is a 32-bit MCU with an Arm® Cortex®-M0+ processor included that features low-power operation. It incorporates a lot of serial interface circuits, a memory display controller, and a voltage booster. This MCU is suitable for various kinds of battery-driven controller applications.

■ FEATURES

Model	S1C31D01
CPU	
CPU core	Arm® 32-bit RISC CPU core Cortex®-M0+
Other	Serial-wire debug ports (SW-DP) and a micro trace buffer (MTB) included
Embedded Flash memory	
Capacity	256K bytes (for both instructions and data)
Erase/program count	1,000 times (min.) * When being programmed by the dedicated flash loader
Other	On-board programming function Flash programming voltage can be generated internally.
Embedded RAMs	
General-purpose RAM	96K bytes (shared with MDC and MTB)
Instruction cache	512 bytes
DMA Controller (DMAC)	
Number of channels	4 channels
Data transfer path	Memory to memory, memory to peripheral, and peripheral to memory
Transfer mode	Basic, ping-pong, scatter-gather
DMA trigger source	UART3, SPIA, QSPI, I ² C, USB, T16B, SNDA, ADC12A, and software
Clock generator (CLG)	
System clock source	4 sources (IOSC/OSC1/OSC3/EXOSC)
System clock frequency (operating frequency)	V _{D1} voltage mode = mode0: 21 MHz (max.) V _{D1} voltage mode = mode1: 2.1 MHz (max.)
IOSC oscillator circuit (boot clock source)	V _{D1} voltage mode = mode0: 20/16/12/8/2/1 MHz (typ.) software selectable V _{D1} voltage mode = mode1: 2/1 MHz (typ.) software selectable 10 μs (max.) starting time (time from cancelation of SLEEP state to vector table read by the CPU)
OSC1 oscillator circuit	32.768 kHz (typ.) crystal oscillator 32kHz (typ.) embedded oscillator Oscillation stop detection circuit included
OSC3 oscillator circuit	20.5 MHz (max.) crystal/ceramic oscillator
EXOSC clock input	21 MHz (max.) square or sine wave input
Other	Configurable system clock division ratio Configurable system clock used at wake up from SLEEP state Operating clock frequency for the CPU and all peripheral circuits is selectable.
I/O port (PPORT)	
Number of general-purpose I/O ports	57 bits (max.) Pins are shared with the peripheral I/O.
Number of input interrupt ports	53 bits (max.)
Number of ports that support universal port multiplexer (UPMUX)	30 bits A peripheral circuit I/O function selected via software can be assigned to each port.
Timers	
Watchdog timer (WDT2)	Generates NMI or watchdog timer reset. Programmable NMI/reset generation cycle
Real-time clock (RTCA)	128–1 Hz counter, second/minute/hour/day/day of the week/month/year counters Theoretical regulation function for 1-second correction Alarm and stopwatch functions
16-bit timer (T16)	8 channels Generates the SPIA and QSPI master clocks, and the ADC12A operating clock/trigger signal.
16-bit PWM timer (T16B)	2 channels Event counter/capture function PWM waveform generation function Number of PWM output or capture input ports: 6 ports/channel

S1C31D01

Model	S1C31D01
Supply voltage detector (SVD3)	
Number of channels	1 channel
Detection voltage	V _{DD} or an external voltage (2 external detection ports are available.)
Detection level	V _{DD} : 28 levels (1.8 to 5.0 V)/external voltage: 32 levels (1.2 to 5.0 V)
Other	Intermittent operation mode Generates an interrupt or reset according to the detection level evaluation.
Serial interfaces	
UART (UART3)	3 channels Baud-rate generator included, IrDA1.0 supported Open drain output, signal polarity, and baud rate division ratio are configurable. Infrared communication carrier modulation output function
Synchronous serial interface (SPIA)	2 channels 2 to 16-bit variable data length The 16-bit timer (T16) can be used for the baud-rate generator in master mode.
Quad synchronous serial interface (QSPI)	1 channel Supports single, dual, and quad transfer modes. Low CPU overhead memory mapped access mode that can directly read data from the external flash memory with XIP (eXecute-In-Place) mode.
I ² C (I2C) *1	2 channels Baud-rate generator included
USB 2.0 FS device controller (USB)	
Number of transceiver/receiver channels	1 channel
Transfer rate	FS (12 Mbps)
Clock source	OSC3 (12 MHz) + PLL
Number of endpoints	4 endpoints (3 general-purpose endpoints and endpoint 0)
Power supply	Voltage regulators for USB included
Sound generator (SNDA)	
Buzzer output function	512 Hz to 16 kHz output frequencies One-shot output function
Melody generation function	Pitch: 128 Hz to 16 kHz $\approx$ C3 to C6 Duration: 7 notes/rests (Half note/rest to thirty-second note/rest) Tempo: 16 tempos (30 to 480) Tie/slur may be specified.
IR remote controller (REMC3)	
Number of transmitter channels	1 channel
Other	EL lamp drive waveform can be generated (by the hardware) for an application example. Output inversion function
12-bit A/D converter (ADC12A)	
Conversion method	Successive approximation type
Resolution	12 bits
Number of conversion channels	1 channel
Number of analog signal inputs	8 ports/channel (The temperature sensor output is connected to a port.)
Temperature sensor/reference voltage generator (TSRVR)	
Temperature sensor circuit	Sensor output can be measured using ADC12A.
Reference voltage generator	Reference voltage for ADC12A is selectable from 2.0 V, 2.5 V, V _{DD} , and external input.
Memory display controller (MDC)	
Memory display interfaces	Parallel 6-bit color, SPI 1-bit black and white, SPI 3-bit color, 8-bit parallel/3-/4-wire serial 1/2/4/8 bpp grayscale
Orientations	0, 90, 180, 270 degrees rotation between display buffer and device
Host interface	Indirect 8-bit parallel, SPI, and QSPI
Graphics acceleration	Image/bitmap copy with scaling/rotation and shearing Drawing functions (line, rectangle, ellipse, arc) Copy and drawing functions can alpha-blend the source pixels with destination pixels.
Power generator	V _{MDL} : 2.7 to 3.4 V output software selectable V _{MDH} : 4.4 to 5.05 V output software selectable
Reset	
#RESET pin	Reset when the reset pin is set to low.
Power-on reset	Reset at power on.
Brown-out reset	Reset when the power supply voltage drops (when V _{DD} $\leq$ 1.45 V (typ.) is detected).
Key entry reset	Reset when the P00 to P01/P02/P03 keys are pressed simultaneously (can be enabled/disabled using a register).
Watchdog timer reset	Reset when the watchdog timer overflows (can be enabled/disabled using a register).
Supply voltage detector reset	Reset when the supply voltage detector detects the set voltage level (can be enabled/disabled using a register).
Interrupt	
Non-maskable interrupt	6 systems (Reset, NMI, HardFault, SVCALL, PendSV, SysTic)
Programmable interrupt	External interrupt: 1 system (4 levels) Internal interrupt: 28 systems

* Supply when MDC is not used.


- *1 The input filter in I2C (SDA and SCL inputs) does not comply with the standard for removing noise spikes less than 50 ns.
- *2 SLEEP mode refers to deep sleep mode in the Cortex®-M0+ processor. The RAM retains data even in SLEEP mode.
- *3 HALT mode refers to sleep mode in the Cortex®-M0+ processor.
- *4 Shown in parentheses are JEITA package names.

* Supply when MDC is not used.


S1C31D01

■ PIN CONFIGURATION DIAGRAMS

VFBGA5HX-81

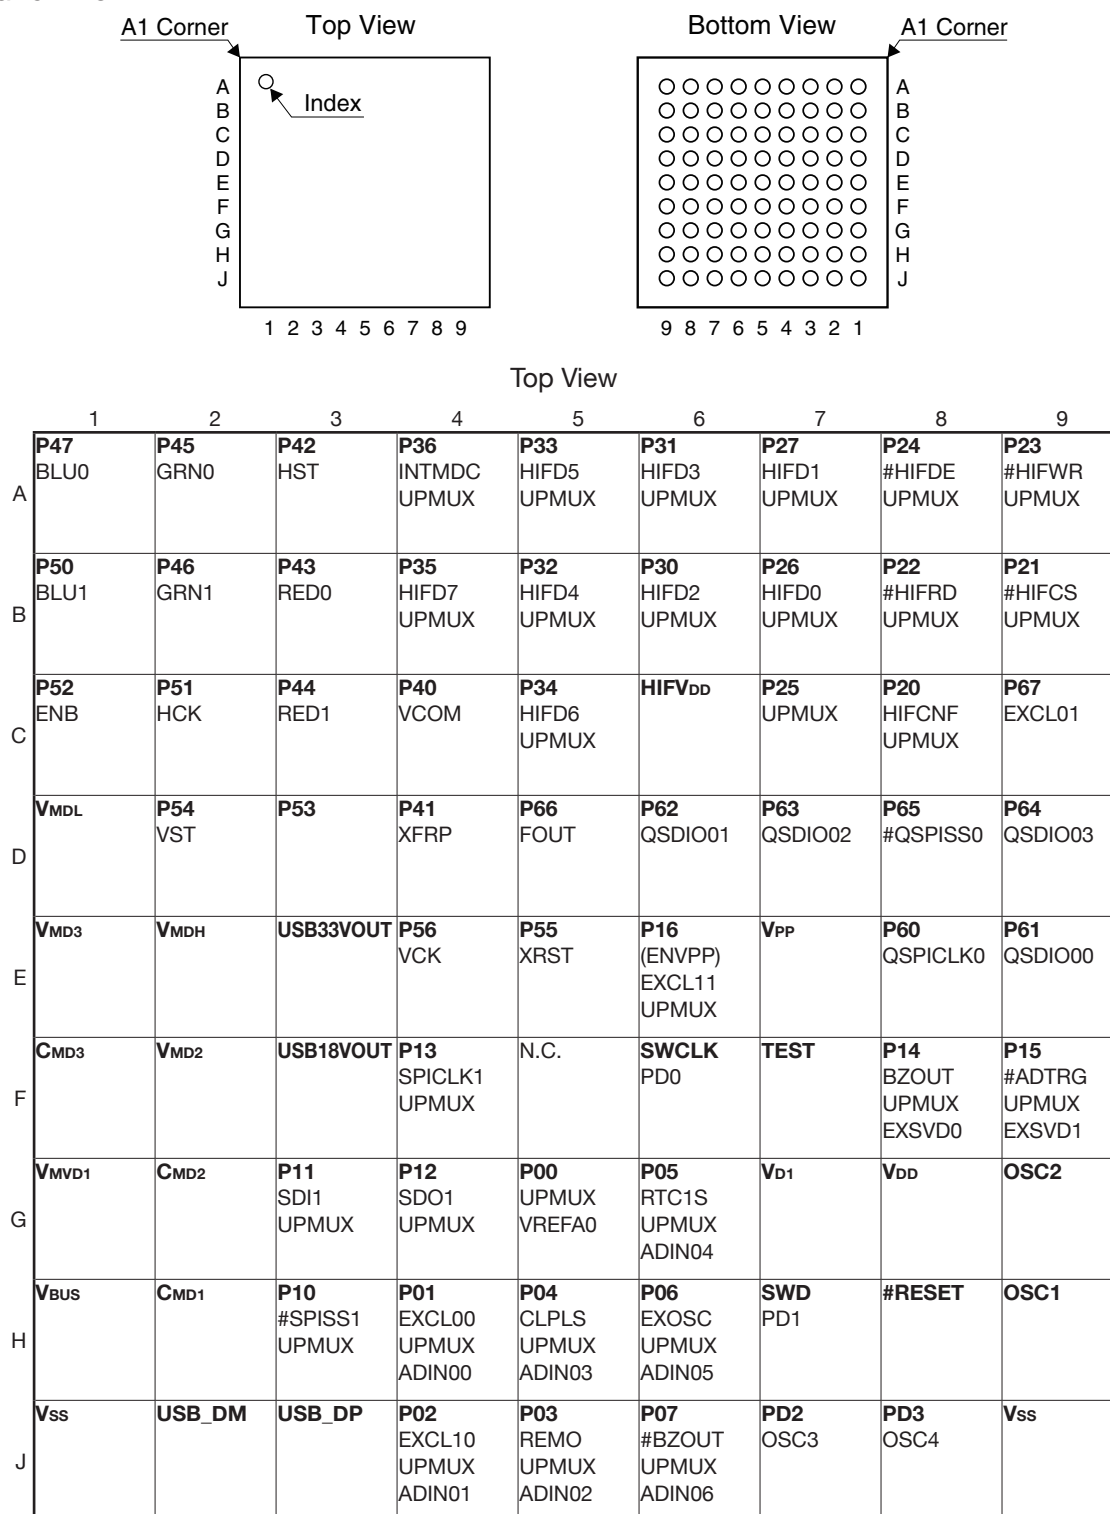


WCSP96

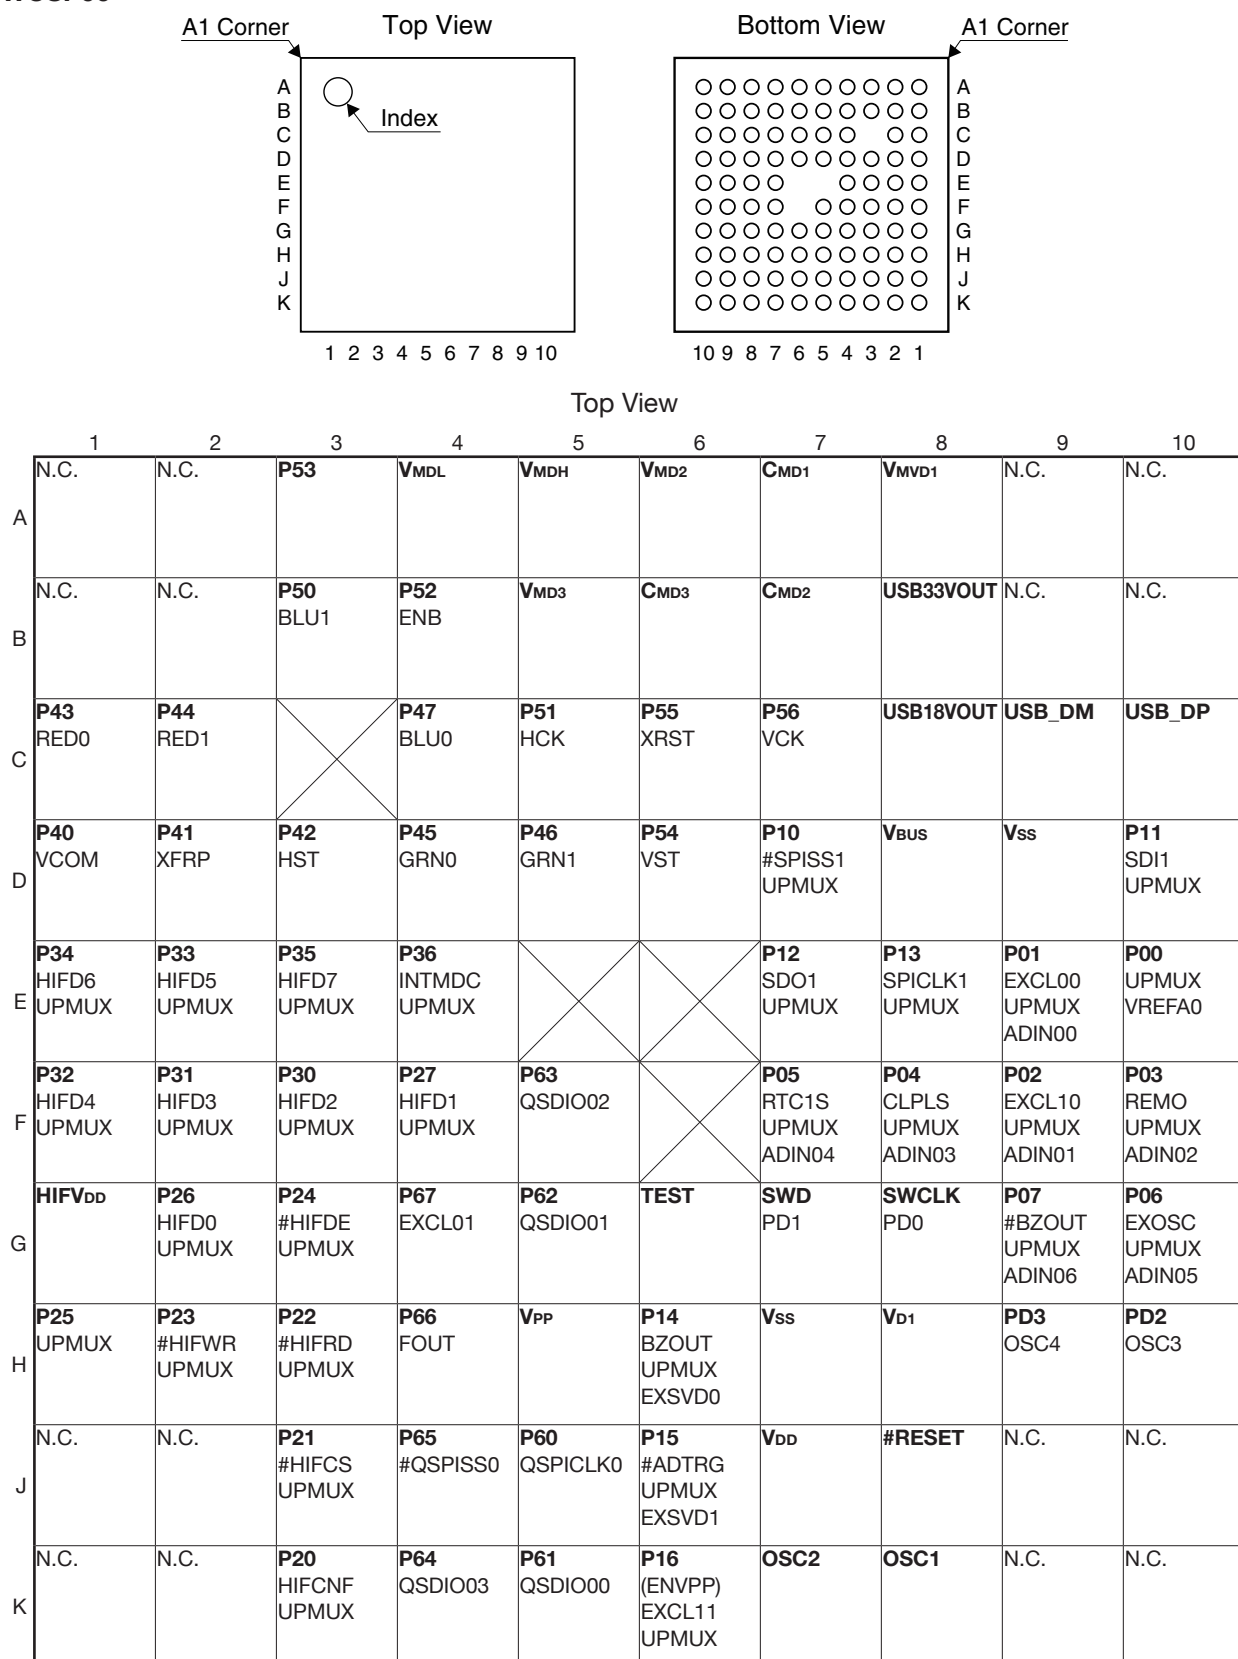


S1C31D01

TQFP14-80PIN

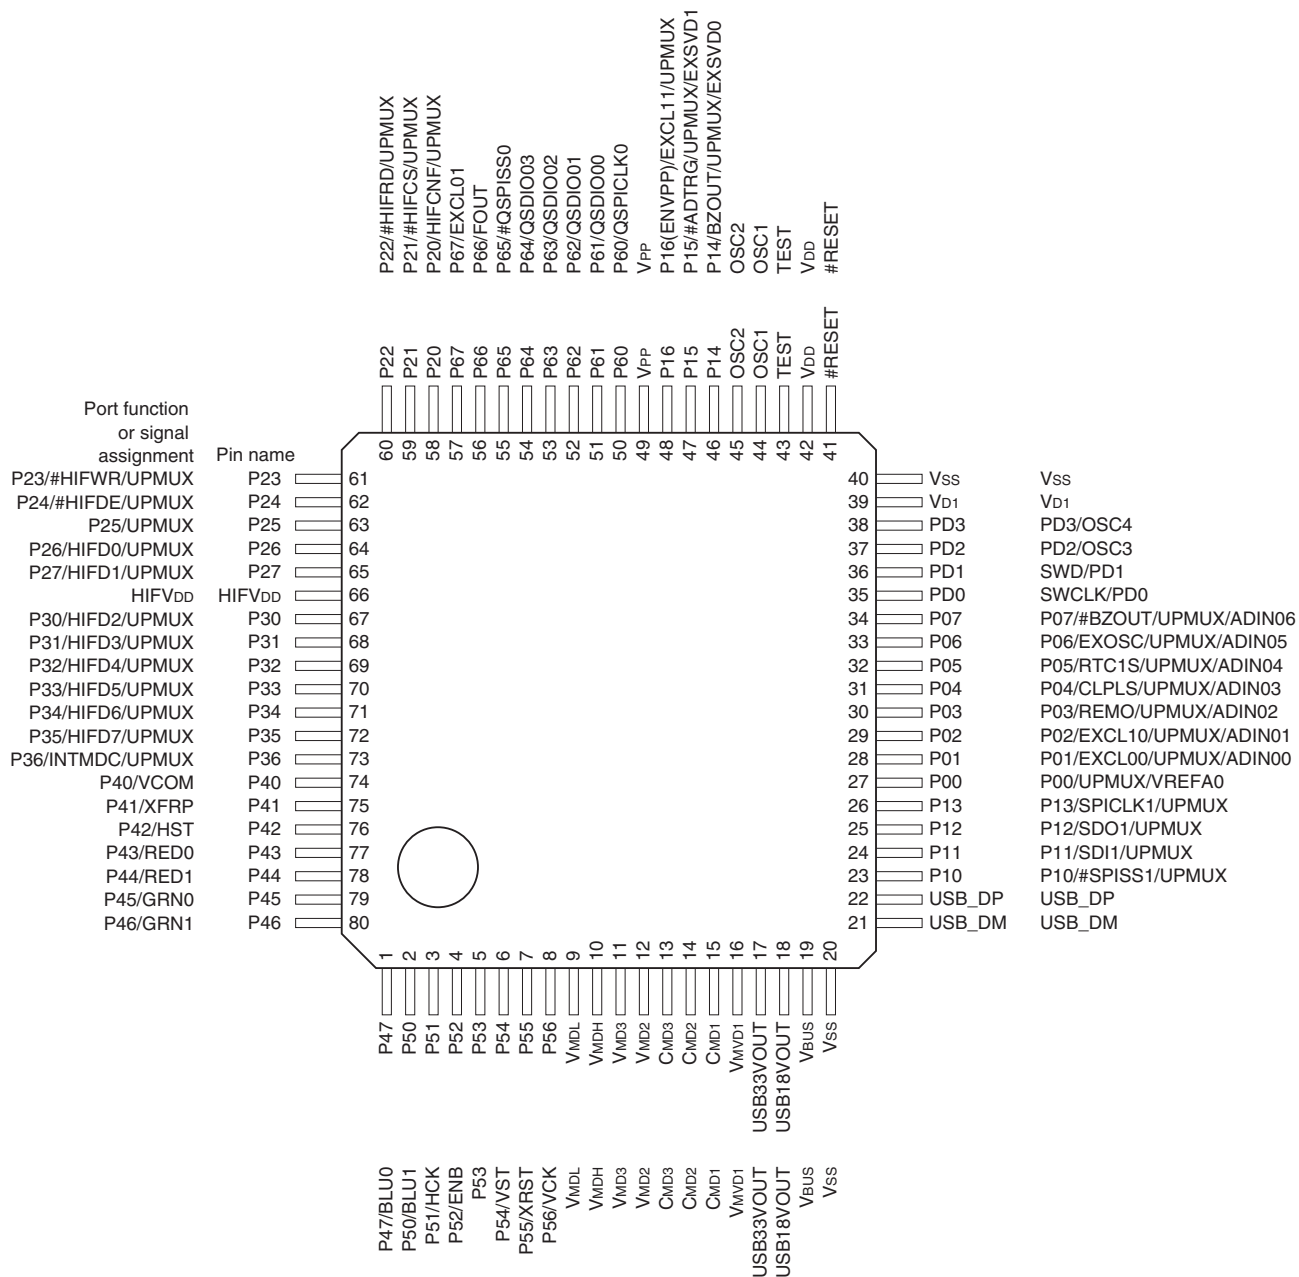

S1C31D01

Chip

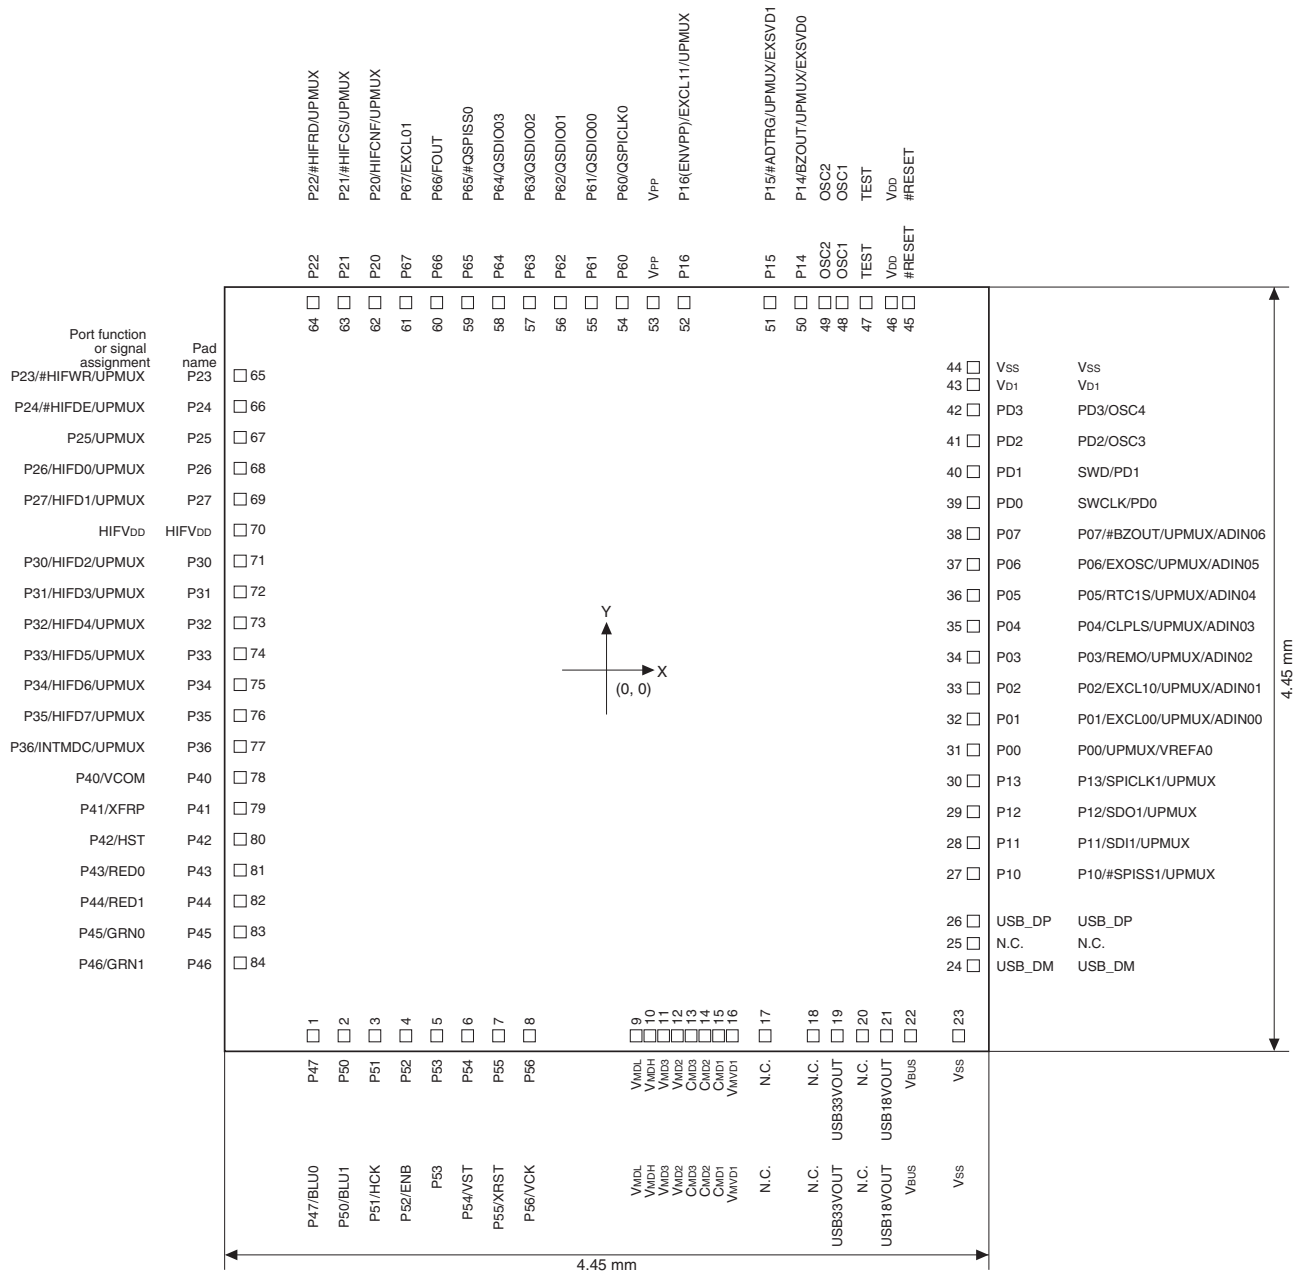

S1C31D01

PIN DESCRIPTIONS

Symbol meanings

Assigned signal: The signal listed at the top of each pin is assigned in the initial state. The pin function must be switched via software to assign another signal (see the “I/O Ports” chapter).

I/O:	I	= Input
	O	= Output
	I/O	= Input/output
	P	= Power supply
	A	= Analog signal
	Hi-Z	= High impedance state
Initial state:	I (Pull-up)	= Input with pulled up
	I (Pull-down)	= Input with pulled down
	Hi-Z	= High impedance state
	O (H)	= High level output
	O (L)	= Low level output

Tolerant fail-safe structure:



= Over voltage tolerant fail-safe type I/O cell included (see the “I/O Ports” chapter)

The over voltage tolerant fail-safe type I/O cell allows interfacing without passing unnecessary current even if a voltage exceeding V_{DD} is applied to the port. Also unnecessary current is not consumed when the port is externally biased without supplying V_{DD} .

Pin name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
V_{DD}	V_{DD}	P	–	–	Power supply (+)
V_{SS}	V_{SS}	P	–	–	GND
V_{PP}	V_{PP}	P	–	–	Power supply for Flash programming
V_{D1}	V_{D1}	A	–	–	V_{D1} regulator output
V_{MVD1}	V_{MVD1}	A	–	–	MDC power supply booster capacitor connect pin
C_{MD1-3}	C_{MD1-3}	A	–	–	MDC power supply booster capacitor connect pins
V_{MD2-3}	V_{MD2-3}	A	–	–	MDC power supply booster output
V_{MDL}	V_{MDL}	P	–	–	Memory display drive voltage output (2.7 to 3.4 V) * I/O power supply (for P4 and P5 port groups) when MDC is not used
V_{MDH}	V_{MDH}	P	–	–	Memory display drive voltage output (4.4 to 5.05 V)
$HIFV_{DD}$	$HIFV_{DD}$	P	–	–	Host interface and I/O power supply (for P2 and P3 port groups)
OSC1	OSC1	A	–	–	OSC1 oscillator circuit input
OSC2	OSC2	A	–	–	OSC1 oscillator circuit output
TEST	TEST	I	I (Pull-down)	–	Test mode enable input
#RESET	#RESET	I	I (Pull-up)	–	Reset input
P00	P00	I/O	Hi-Z	–	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	VREFA0	A			12-bit A/D converter Ch.0 reference voltage input
P01	P01	I/O	Hi-Z	–	I/O port
	EXCL00	I			16-bit PWM timer Ch.0 event counter input 0
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN00	A			12-bit A/D converter Ch.0 analog signal input 0
P02	P02	I/O	Hi-Z	–	I/O port
	EXCL10	I			16-bit PWM timer Ch.1 event counter input 0
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN01	A			12-bit A/D converter Ch.0 analog signal input 1
P03	P03	I/O	Hi-Z	–	I/O port
	REMO	O			IR remote controller transmit data output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN02	A			12-bit A/D converter Ch.0 analog signal input 2
P04	P04	I/O	Hi-Z	–	I/O port
	CLPLS	O			IR remote controller clear pulse output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN03	A			12-bit A/D converter Ch.0 analog signal input 3
P05	P05	I/O	Hi-Z	–	I/O port
	RTC1S	O			Real-time clock 1-second cycle pulse output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN04	A			12-bit A/D converter Ch.0 analog signal input 4

Pin name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
P06	P06	I/O	Hi-Z	–	I/O port
	EXOSC	I			Clock generator external clock input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN05	A			12-bit A/D converter Ch.0 analog signal input 5
P07	P07	I/O	Hi-Z	–	I/O port
	#BZOUT	O			Sound generator inverted output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	ADIN06	A			12-bit A/D converter Ch.0 analog signal input 6
P10	P10	I/O	Hi-Z	–	I/O port
	#SPISS1	I			Synchronous serial interface Ch.1 slave-select input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P11	P11	I/O	Hi-Z	–	I/O port
	SDI1	I			Synchronous serial interface Ch.1 data input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P12	P12	I/O	Hi-Z	–	I/O port
	SDO1	O			Synchronous serial interface Ch.1 data output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P13	P13	I/O	Hi-Z	–	I/O port
	SPICLK1	I/O			Synchronous serial interface Ch.1 clock input/output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P14	P14	I/O	Hi-Z	✓	I/O port
	BZOUT	O			Sound generator output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	EXSVD0	A			Supply voltage detector external voltage detection input 0
P15	P15	I/O	Hi-Z	✓	I/O port
	#ADTRG	I			12-bit A/D converter Ch.0 trigger input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
	EXSVD1	A			Supply voltage detector external voltage detection input 1
P16	P16 (ENVPP)	I/O	Hi-Z	–	I/O port (Flash programming control signal output)
	EXCL11	I			16-bit PWM timer Ch.1 event counter input 1
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P20	P20	I/O	Hi-Z	–	I/O port
	HIFCNF	I			Host interface configuration input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P21	P21	I/O	Hi-Z	–	I/O port
	#HIFCS	I			Indirect 8-bit host interface chip-select input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P22	P22	I/O	Hi-Z	–	I/O port
	#HIFRD	I			Indirect 8-bit host interface read input
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P23	P23	I/O	Hi-Z	–	I/O port
	#HIFWR (HSPICLK)	I			Indirect 8-bit host interface write input (SPI/QSPI host interface clock input)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P24	P24	I/O	Hi-Z	–	I/O port
	#HIFDE (#HSPISS)	I			Indirect 8-bit host interface device enable input (SPI/QSPI host interface slave-select input)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P25	P25	I/O	Hi-Z	–	I/O port
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P26	P26	I/O	Hi-Z	–	I/O port
	HIFD0 (HSPID0)	I/O			Indirect 8-bit host interface D0 input/output (SPI/QSPI host interface data input/output)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P27	P27	I/O	Hi-Z	–	I/O port
	HIFD1 (HSPID1)	I/O			Indirect 8-bit host interface D1 input/output (SPI/QSPI host interface data input/output)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P30	P30	I/O	Hi-Z	–	I/O port
	HIFD2 (HSPID2)	I/O			Indirect 8-bit host interface D2 input/output (SPI/QSPI host interface data input/output)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)

S1C31D01

Pin name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
P31	P31	I/O	Hi-Z	–	I/O port
	HIFD3 (HSPID3)	I/O			Indirect 8-bit host interface D3 input/output (SPI/QSPI host interface data input/output)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P32	P32	I/O	Hi-Z	–	I/O port
	HIFD4 (HSPISEL0)	I/O			Indirect 8-bit host interface D4 input/output (SPI/QSPI host interface SPI mode-select input)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P33	P33	I/O	Hi-Z	–	I/O port
	HIFD5 (HSPISEL1)	I/O			Indirect 8-bit host interface D5 input/output (SPI/QSPI host interface SPI mode-select input)
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P34	P34	I/O	Hi-Z	–	I/O port
	HIFD6	I/O			Indirect 8-bit host interface D6 input/output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P35	P35	I/O	Hi-Z	–	I/O port
	HIFD7	I/O			Indirect 8-bit host interface D7 input/output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P36	P36	I/O	Hi-Z	–	I/O port
	INTMDC	O			Host interface interrupt output
	UPMUX	I/O			User-selected I/O (universal port multiplexer)
P40	P40	I/O	Hi-Z	–	I/O port
	VCOM/FR (COM)	O			6-bit color panel interface VCOM/FRP output (SPI panel interface COM output)
P41	P41	I/O	Hi-Z	–	I/O port
	XFRP	O			6-bit color panel interface XFRP output
P42	P42	I/O	Hi-Z	–	I/O port
	HST (SCS, XCS)	O			6-bit color panel interface HST output (SPI panel interface SCS output, 8-bit parallel/3-/4-wire serial grayscale panel interface XCS output)
P43	P43	I/O	Hi-Z	–	I/O port
	RED0 (DOUT2)	O			6-bit color panel interface RED0 output (8-bit parallel grayscale panel interface DOUT2 output)
P44	P44	I/O	Hi-Z	–	I/O port
	RED1 (DOUT3)	O			6-bit color panel interface RED1 output (8-bit parallel grayscale panel interface DOUT3 output)
P45	P45	I/O	Hi-Z	–	I/O port
	GRN0 (DOUT4)	O			6-bit color panel interface GRN0 output (8-bit parallel grayscale panel interface DOUT4 output)
P46	P46	I/O	Hi-Z	–	I/O port
	GRN1 (DOUT5)	O			6-bit color panel interface GRN1 output (8-bit parallel grayscale panel interface DOUT5 output)
P47	P47	I/O	Hi-Z	–	I/O port
	BLU0 (DOUT6)	O			6-bit color panel interface BLU0 output (8-bit parallel grayscale panel interface DOUT6 output)
P50	P50	I/O	Hi-Z	–	I/O port
	BLU1 (DOUT7)	O			6-bit color panel interface BLU1 output (8-bit parallel grayscale panel interface DOUT7 output)
P51	P51	I/O	Hi-Z	–	I/O port
	HCK (DOUT1)	O			6-bit color panel interface HCK output (8-bit parallel grayscale panel interface DOUT1 output)
P52	P52	I/O	Hi-Z	–	I/O port
	ENB (SDO, XWR)	O			6-bit color panel interface ENB output (SPI panel interface SDO output, 8-bit parallel grayscale panel interface XWR output, 3-/4-wire serial grayscale panel interface SDO output)
P53	P53	I/O	Hi-Z	–	I/O port
P54	P54	I/O	Hi-Z	–	I/O port
	VST (SCLK, XRD, SCL)	O			6-bit color panel interface VST output (SPI panel interface SCLK output, 8-bit parallel grayscale panel interface XRD output, 3-/4-wire serial grayscale panel interface SCL output)
P55	P55	I/O	Hi-Z	–	I/O port
	XRST (A0)	O			6-bit color panel interface XRST output (4-wire serial grayscale panel interface A0 output)

Pin name	Assigned signal	I/O	Initial state	Tolerant fail-safe structure	Function
P56	P56	I/O	Hi-Z	–	I/O port
	VCK (DOUT0)	O			6-bit color panel interface VCK output (8-bit parallel grayscale panel interface DOUT0 output)
P60	P60	I/O	Hi-Z	–	I/O port
	QSPICLK0	I/O			Quad synchronous serial interface Ch.0 clock input/output
P61	P61	I/O	Hi-Z	–	I/O port
	QSDIO00	I/O			Quad synchronous serial interface Ch.0 data input/output
P62	P62	I/O	Hi-Z	–	I/O port
	QSDIO01	I/O			Quad synchronous serial interface Ch.0 data input/output
P63	P63	I/O	Hi-Z	–	I/O port
	QSDIO02	I/O			Quad synchronous serial interface Ch.0 data input/output
P64	P64	I/O	Hi-Z	–	I/O port
	QSDIO03	I/O			Quad synchronous serial interface Ch.0 data input/output
P65	P65	I/O	Hi-Z	–	I/O port
	#QSPISS0	I/O			Quad synchronous serial interface Ch.0 slave-select input/output
P66	P66	I/O	Hi-Z	–	I/O port
	FOUT	O			Clock external output
P67	P67	I/O	Hi-Z	–	I/O port
	EXCL01	I			16-bit PWM timer Ch.0 event counter input 1
PD0	SWCLK	I	I (Pull-up)	–	Serial-wire debugger clock input
	PD0	I/O			I/O port
PD1	SWD	I/O	I (Pull-up)	–	Serial-wire debugger data input/output
	PD1	I/O			I/O port
PD2	PD2	I/O	Hi-Z	–	I/O port
	OSC3	A			OSC3 oscillator circuit input
PD3	PD3	I/O	Hi-Z	–	I/O port
	OSC4	A			OSC3 oscillator circuit output
USB_DP	USB_DP	I/O	I	–	USB D+ signal input/output
USB_DM	USB_DM	I/O	I	–	USB D- signal input/output
V _{BUS}	V _{BUS}	P	–	–	USB V _{BUS} input (5 V input allowed)
USB18VOUT	USB18VOUT	P	–	–	USB 1.8 V regulator output
USB33VOUT	USB33VOUT	P	–	–	USB 3.3 V regulator output


Universal port multiplexer (UPMUX)

The universal port multiplexer (UPMUX) allows software to select the peripheral circuit input/output function to be assigned to each pin from those listed below. Note, however, that a function cannot be assigned to two or more pins simultaneously.

Peripheral circuit	Signal to be assigned	I/O	Channel number <i>n</i>	Function
I ² C (I2C)	SCL _{<i>n</i>}	I/O	<i>n</i> = 0, 1	I2C Ch. <i>n</i> clock input/output
	SDA _{<i>n</i>}	I/O		I2C Ch. <i>n</i> data input/output
UART (UART3)	USIN _{<i>n</i>}	I	<i>n</i> = 0–2	UART3 Ch. <i>n</i> data input
	USOUT _{<i>n</i>}	O		UART3 Ch. <i>n</i> data output
Synchronous serial interface (SPIA)	SDI _{<i>n</i>}	I	<i>n</i> = 0	SPIA Ch. <i>n</i> data input
	SDO _{<i>n</i>}	O		SPIA Ch. <i>n</i> data output
	SPICLK _{<i>n</i>}	I/O		SPIA Ch. <i>n</i> clock input/output
	#SPISS _{<i>n</i>}	I		SPIA Ch. <i>n</i> slave-select input
16-bit PWM timer (T16B)	TOUT _{<i>n</i>} 0/CAP _{<i>n</i>} 0	I/O	<i>n</i> = 0–5	T16B Ch. <i>n</i> PWM output/capture input 0
	TOUT _{<i>n</i>} 1/CAP _{<i>n</i>} 1	I/O		T16B Ch. <i>n</i> PWM output/capture input 1

S1C31D01

■ BASIC EXTERNAL CONNECTION DIAGRAM

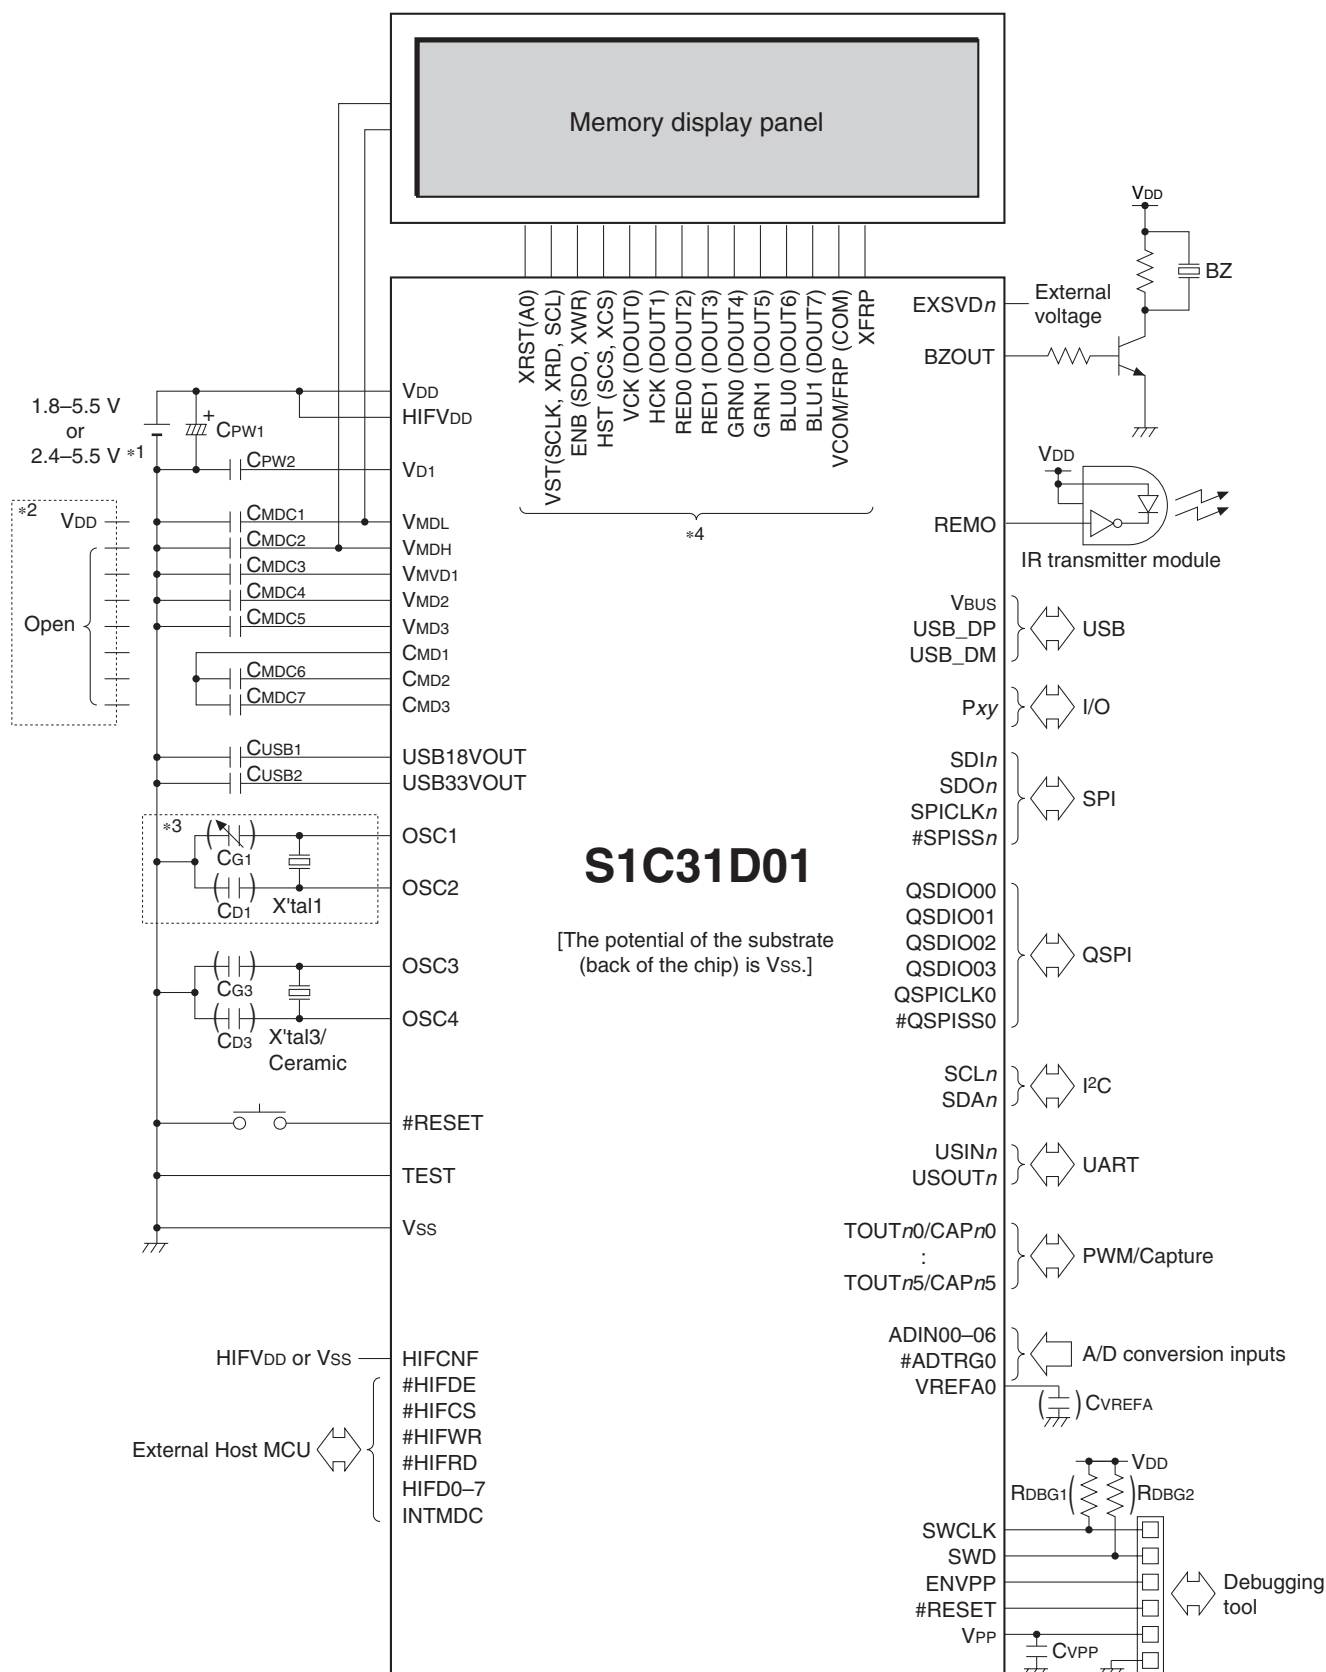

NOTICE : PLEASE READ CAREFULLY BELOW BEFORE USING THIS DOCUMENT

The contents of this document are subject to change without notice.

1. This document may not be copied, reproduced, or used for any other purpose, in whole or in part, without the consent of the Seiko Epson Corporation ("Epson").
2. Before purchasing or using Epson products, please contact our sales representative for the latest information and always be sure to check the latest information published on Epson's official web sites and other sources.
3. Information provided in this document such as application circuits, programs, usage, etc., are for reference purposes only. Using the application circuits, programs, usage, etc. in the design of your equipment or systems is your own responsibility. Epson makes no guarantees against any infringements or damages to any third parties' intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson is committed to constantly improving quality and reliability, but semiconductor products in general are subject to malfunction and failure. By using Epson products, you shall be responsible for your hardware. Software and systems must be designed well enough to prevent death or injury as well as any property damage even if any of the malfunctions or failures might be caused by Epson products. When designing your products using Epson products, please be sure to check and comply with the latest information regarding Epson products (this document, specifications, data sheets, manuals, Epson's web site, etc.). When using the information included above materials such as product data, charts, technical contents, programs, algorithms and application circuit examples, you shall evaluate your products both on a stand-alone basis as well as within your overall systems. You shall be solely responsible for deciding whether or not to adopt and use Epson products.
5. Epson has prepared this document and programs provided in this document carefully to be accurate and dependable, but Epson does not guarantee that the information and the programs are always accurate and complete. Epson assumes no responsibility for any damages which you incur due to misinformation in this document and the programs.
6. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
7. Epson products have been designed, developed and manufactured to be used in general electronic applications (office equipment, communications equipment, measuring instruments, home electronics, etc.) and applications individually listed in this document ("General Purpose"). Epson products are NOT intended for any use beyond the General Purpose uses that requires particular/higher quality or reliability in order to refrain from causing any malfunction or failure leading to death, injury, serious property damage or severe impact on society, including, but not limited to those listed below. Therefore, you are advised to use Epson products only for General Purpose uses. Should you desire to buy and use Epson products for a particular purpose other than a General Purpose use, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any particular purpose. Please be sure to contact our sales representative and obtain approval in advance.
 - [Particular purpose]
 - Space equipment (artificial satellites, rockets, etc.)
 - Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.)
 - Medical equipment (other than applications individually listed in this document) / Relay equipment to be placed on ocean floor
 - Power station control equipment / Disaster or crime prevention equipment / Traffic control equipment / Financial equipment
 - Other applications requiring similar levels of reliability as those listed above
8. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for developing weapons of mass destruction, or any other military purposes or applications. If exporting Epson products or our associated technologies, you shall comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A. (EAR) and other export-related laws and regulations in Japan and any other countries and follow the required procedures as provided by the relevant laws and regulations.
9. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document.
10. Epson assumes no responsibility for any damages (whether direct or indirect) incurred by any third party that you assign, transfer, loan, etc., Epson products to.
11. For more details or other concerns about this document, please contact our sales representative.
12. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

(Rev. e1.0, 2021.9)

©Seiko Epson Corporation 2022, All rights reserved.

SEIKO EPSON CORPORATION

Sales & Marketing Division

MD Sales & Marketing Department
JR Shinjuku Miraina Tower, 4-1-6 Shinjuku,
Shinjuku-ku, Tokyo 160-8801, Japan

EPSON semiconductor website

https://global.epson.com/products_and_drivers/semicon/

Document Code: 413344702
First issue September 2016
Revised August 2022 in JAPAN ©