

# FAN8036

## 5-CH Motor Driver + 2-Regulator

### Features

- 4-CH Balanced Transformerless (BTL) Driver
- 1-CH (Forward Reverse) Control DC Motor Driver
- Operating Supply Voltage (4.5V ~ 13.2V)
- Built in Thermal Shut Down Circuit (TSD)
- Built in Channel Mute Circuit
- Built in Power Save Mode Circuit
- Built in TSD Monitor Circuit
- Built in 2 Regulators
- Built in 2-OP AMPs

### Description

The FAN8036 is a monolithic integrated circuit suitable for a 5-CH motor driver which drives the tracking actuator, focus actuator, sled motor, spindle motor, and tray motor of the CDP/CAR-CD/DVDP systems.

48-QFPH-1414




### Typical Application

- Compact Disk Player
- Video Compact Disk Player
- Car Compact Disk Player
- Digital Video Disk Player

### Ordering Information

| Device     | Package      | Operating Temperature |
|------------|--------------|-----------------------|
| FAN8036L   | 48-QFPH-1414 | -35°C ~ +85°C         |
| FAN8036_NL | 48-QFPH-1414 | -35°C ~ +85°C         |

## Pin Assignments

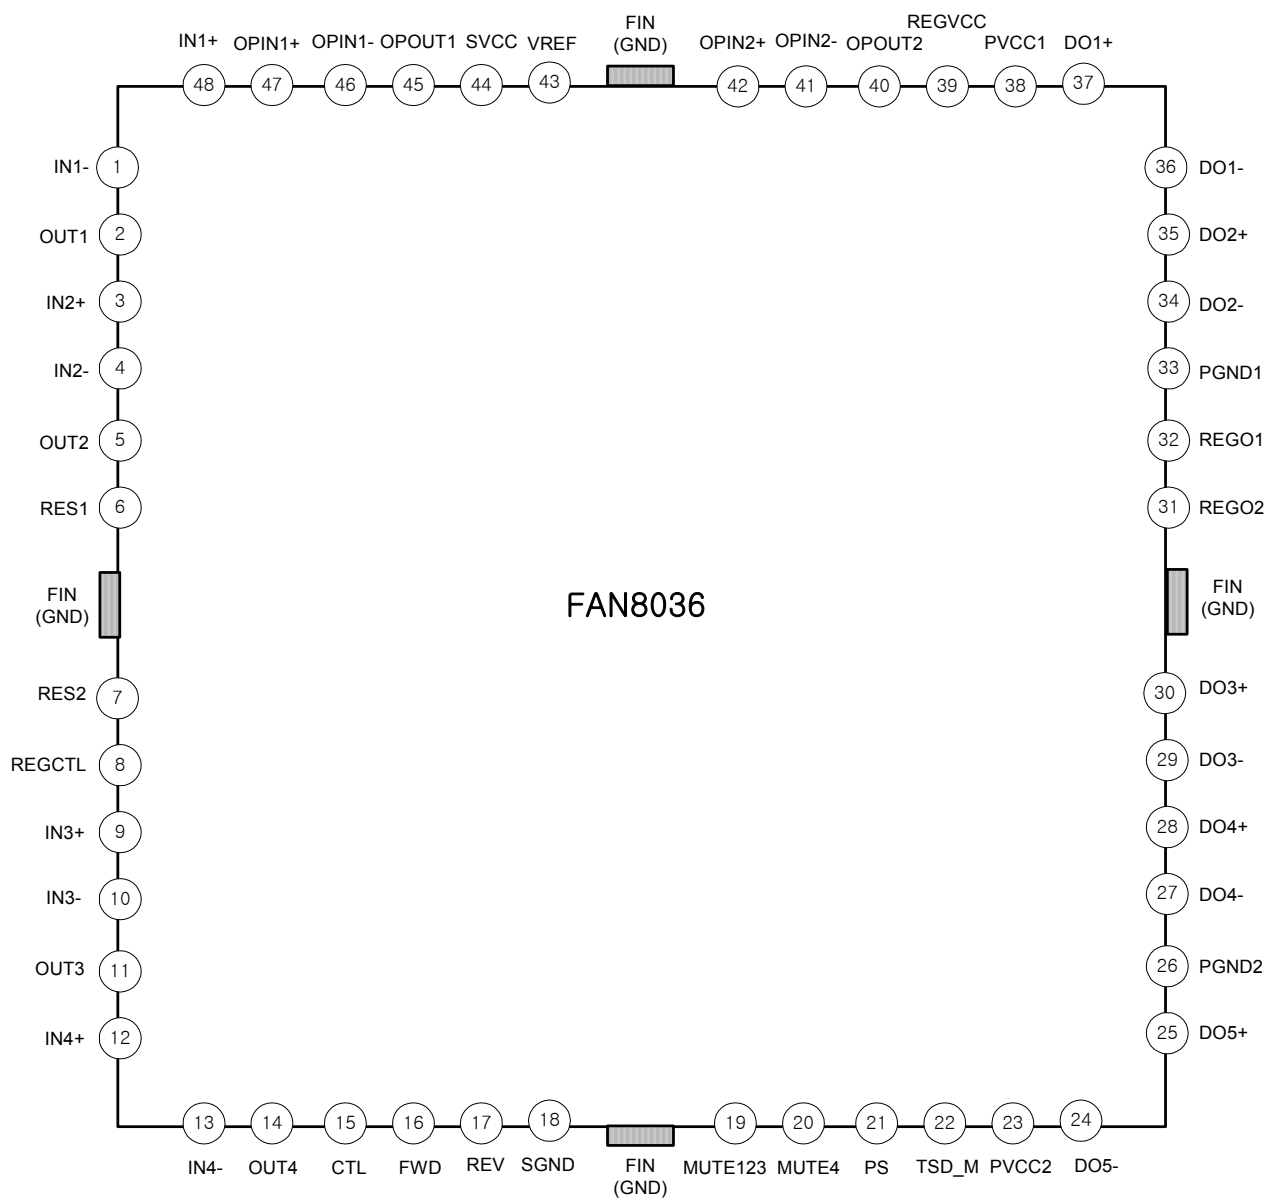


## Pin Definitions

| Pin Number | Pin Name | I/O | Pin Function Description                 |
|------------|----------|-----|------------------------------------------|
| 1          | IN1–     | I   | CH1 OP-AMP Input (–)                     |
| 2          | OUT1     | O   | CH1 OP-AMP Output                        |
| 3          | IN2+     | I   | CH2 OP-AMP Input (+)                     |
| 4          | IN2–     | I   | CH2 OP-AMP Input (–)                     |
| 5          | OUT2     | O   | CH2 OP-AMP Output                        |
| 6          | RES1     | I   | Regulator1 Reset                         |
| 7          | RES2     | I   | Regulator2 Reset                         |
| 8          | REGCTL   | I   | Regulator2 Control Voltage               |
| 9          | IN3+     | I   | CH3 OP-AMP Input (+)                     |
| 10         | IN3–     | I   | CH3 OP-AMP Input (–)                     |
| 11         | OUT3     | O   | CH3 OP-AMP Output                        |
| 12         | IN4+     | I   | CH4 OP-AMP Input (+)                     |
| 13         | IN4–     | I   | CH4 OP-AMP Input (–)                     |
| 14         | OUT4     | O   | CH4 OP-AMP Output                        |
| 15         | CTL      | I   | CH5 Motor Speed Control                  |
| 16         | FWD      | I   | CH5 Forward Input                        |
| 17         | REV      | I   | CH5 Reverse Input                        |
| 18         | SGND     | -   | Signal Ground                            |
| 19         | MUTE123  | I   | Mute for CH1,2,3                         |
| 20         | MUTE4    | I   | Mute for CH4                             |
| 21         | PS       | I   | Power Save                               |
| 22         | TSD-M    | O   | TSD Monitor                              |
| 23         | PVCC2    | -   | Power Supply Voltage 2 (for CH3,CH4,CH5) |
| 24         | DO5–     | O   | CH5 Drive Ouptut (–)                     |
| 25         | DO5+     | O   | CH5 Drive Output (+)                     |
| 26         | PGND2    | -   | Power Ground 2 (for CH3,CH4,CH5)         |
| 27         | DO4–     | O   | CH4 Drive Ouptut (–)                     |
| 28         | DO4+     | O   | CH4 Drive Output (+)                     |
| 29         | DO3–     | O   | CH3 Drive Ouptut (–)                     |
| 30         | DO3+     | O   | CH3 Drive Output (+)                     |
| 31         | REGO2    | O   | Regulator2 Ouptut                        |
| 32         | REGO1    | O   | Regulator1 Ouptut                        |





**Pin Definitions** (Continued)

| Pin Number | Pin Name | I/O | Pin Function Description                |
|------------|----------|-----|-----------------------------------------|
| 33         | PGND1    | -   | Power Ground 1 (for CH1, CH2)           |
| 34         | DO2–     | O   | CH2 Drive Ouptut (–)                    |
| 35         | DO2+     | O   | CH2 Drive Output (+)                    |
| 36         | DO1–     | O   | CH1 Drive Ouptut (–)                    |
| 37         | DO1+     | O   | CH1 Drive Output (+)                    |
| 38         | PVCC1    | -   | Power Supply Voltage 1 (for CH1, CH2)   |
| 39         | REGVCC   | -   | Regulator Supply Voltage( Regulator1,2) |
| 40         | OPOUT2   | O   | Normal OP-AMP2 Output                   |
| 41         | OPIN2–   | I   | Normal OP-AMP2 Input (–)                |
| 42         | OPIN2+   | I   | Normal OP-AMP2 Input (+)                |
| 43         | VREF     | I   | Bias Voltage Input                      |
| 44         | SVCC     | -   | Signal & OPAMPs Supply Voltage          |
| 45         | OPOUT1   | O   | Normal OP-AMP1 Output                   |
| 46         | OPIN1–   | I   | Normal OP-AMP1 Input (–)                |
| 47         | OPIN1+   | I   | Normal OP-AMP1 Input (+)                |
| 48         | IN1+     | I   | CH1 OP-AMP Intput (+)                   |

## Internal Block Diagram

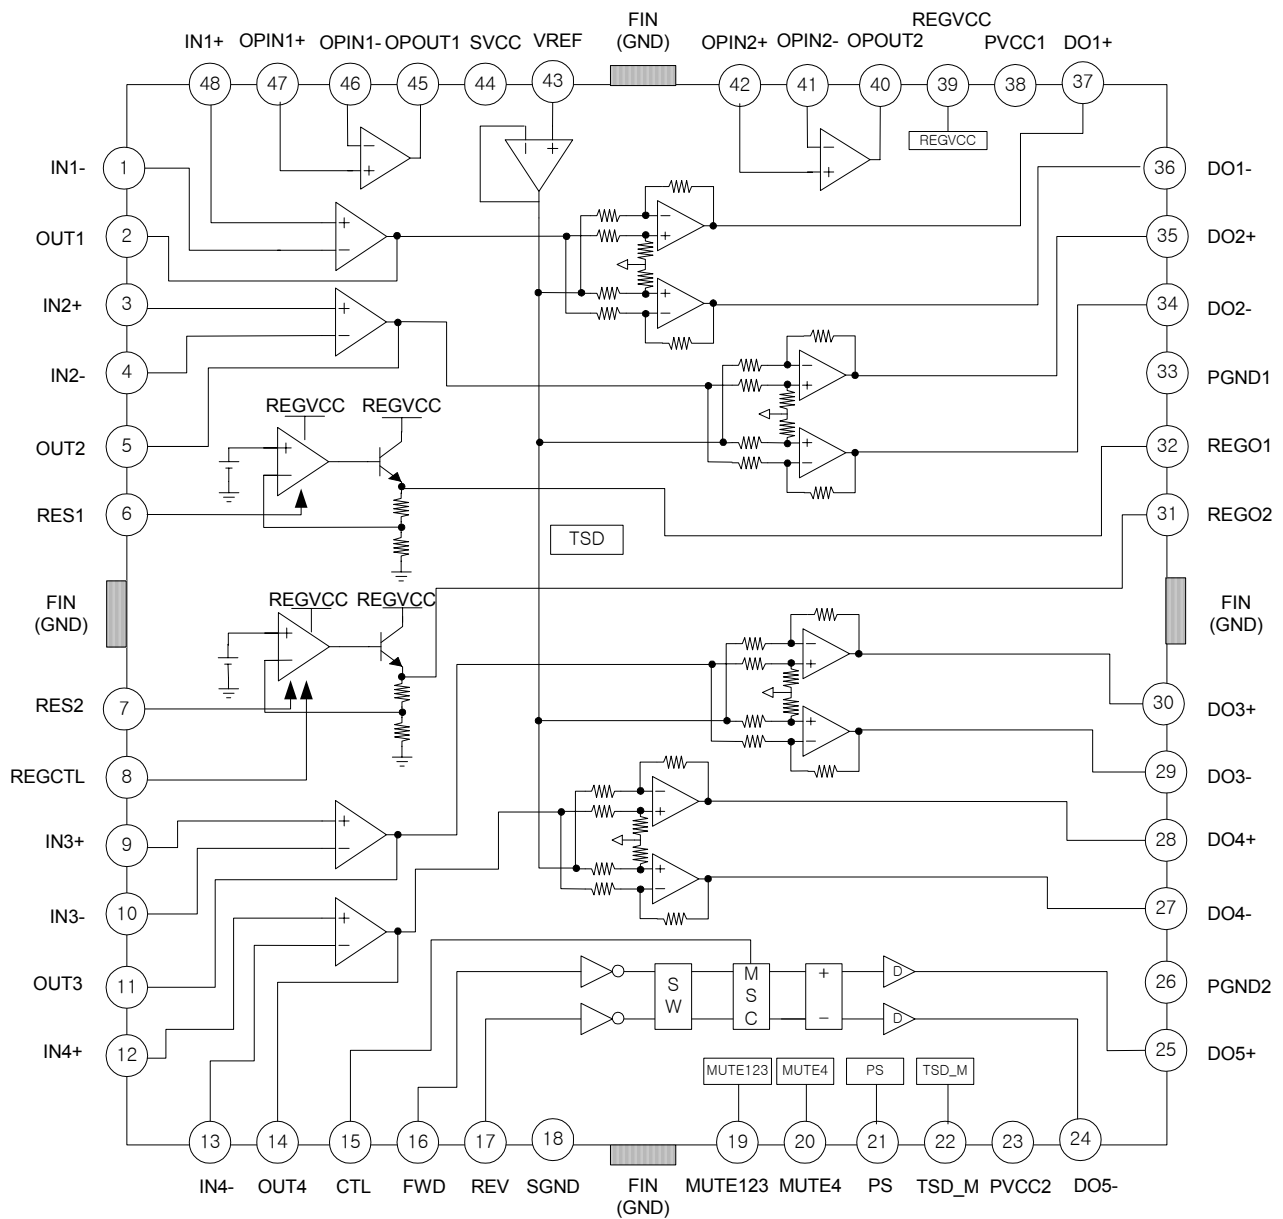

Equivalent Circuits
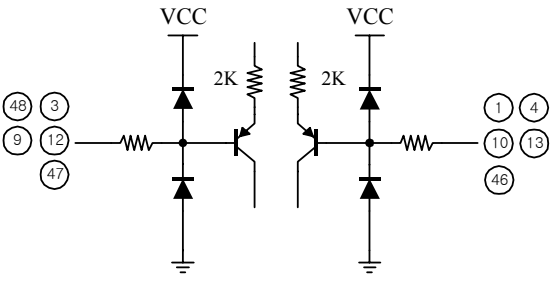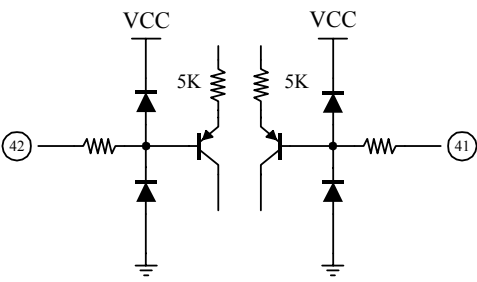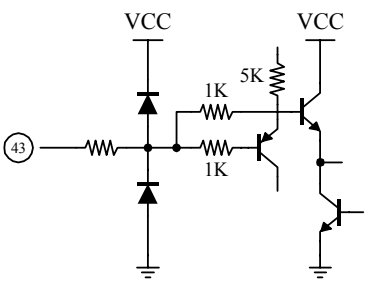
| Description                     | Pin No                       | Internal Circuit                                                                     |
|---------------------------------|------------------------------|--------------------------------------------------------------------------------------|
| BTL INPUT<br>&<br>OP AMP1 INPUT | 48,3,9,12,47<br>1,4,10,13,46 |    |
| OP AMP2 INPUT                   | 41,42                        |   |
| VREF                            | 43                           |  |
| BTL OP AMP OUT<br>OP AMP1 OUT   | 2,5,11,14,45                 |  |

**Equivalent Circuits** (Continued)




| Description | Pin No | Internal Circuit |
|-------------|--------|------------------|
| OP AMP2 OUT | 40     |                  |
| MUTE123,4   | 19,20  |                  |
| CTL         | 15     |                  |
| TSD-M       | 22     |                  |

**Equivalent Circuits** (Continued)

| Description             | Pin No                      | Internal Circuit |
|-------------------------|-----------------------------|------------------|
| PS                      | 21                          |                  |
| FWD,REV                 | 16,17                       |                  |
| BTL CH1,2,3,4<br>OUTPUT | 27,28,29,30,<br>34,35,36,37 |                  |
| BTL CH5<br>OUTPUT       | 24,25                       |                  |



# Equivalent Circuits (Continued)


| Description | Pin No | Internal Circuit                                                                     |
|-------------|--------|--------------------------------------------------------------------------------------|
| REGO1,2     | 31,32  |    |
| RES1,2      | 6,7    |   |
| REGCTL      | 8      |  |

## Absolute Maximum Ratings ( Ta=25°C)

| Parameter              | Symbol         | Value             | Unit |
|------------------------|----------------|-------------------|------|
| Maximum Supply Voltage | SVCCMAX        | 18                | V    |
|                        | PVCC1          | 18                | V    |
|                        | PVCC2          | 18                | V    |
|                        | REGVCC         | 18                | V    |
| Power Dissipation      | P <sub>D</sub> | 3 <sup>note</sup> | W    |
| Operating Temperature  | TOPR           | -35 ~ +85         | °C   |
| Storage Temperature    | TSTG           | -55 ~ +150        | °C   |
| Maximum Output Current | IOMAX          | 1                 | A    |

### Note:

1. When mounted on the PCB of which size is 114mm × 76mm × 1.6mm.
2. Power dissipation is derated with the rate of -24mW/°C for TA≥25°C.
3. Do not exceed P<sub>D</sub> and SOA.

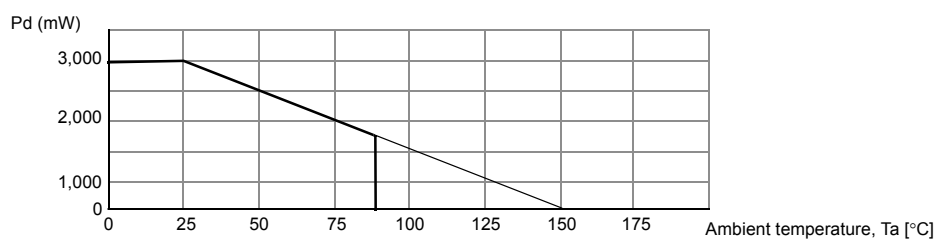

## Recommended Operating Conditions ( Ta=25°C)

| Parameter                | Symbol | Min. | Typ. | Max. | Unit |
|--------------------------|--------|------|------|------|------|
| Operating Supply Voltage | SVCC   | 4.5  | -    | 13.2 | V    |
|                          | PVCC1  | SVCC | -    | 13.2 | V    |
|                          | PVCC2  | SVCC | -    | 13.2 | V    |
|                          | REGVCC | 7    | -    | 13.2 | V    |

## Electrical Characteristics

(SVCC = 5V, PVCC1 = PVCC2 = 8V, T<sub>A</sub> = 25°C, unless otherwise specified)

| Parameter                                      | Symbol                | Conditions                                        | Min. | Typ. | Max. | Unit |
|------------------------------------------------|-----------------------|---------------------------------------------------|------|------|------|------|
| Quiescent Circuit Current                      | ICC                   | Under no-load                                     | -    | 20   | -    | mA   |
| Power Save On Current                          | IPS <sup>*note1</sup> | Under no-load                                     | -    | -    | 1    | mA   |
| Power Save On Voltage                          | VPSON                 | Pin21 = Variation                                 | -    | -    | 0.5  | V    |
| Power Save Off Voltage                         | VPSOFF                | Pin21 = Variation                                 | 2    | -    | -    | V    |
| Mute123 On Voltage                             | VMON123               | Pin19 = Variation                                 | -    | -    | 0.5  | V    |
| Mute123 Off Voltage                            | VMOFF123              | Pin19 = Variation                                 | 2    | -    | -    | V    |
| Mute4 On Voltage                               | VMON4                 | Pin20 = Variation                                 | -    | -    | 0.5  | V    |
| Mute4 Off Voltage                              | VMOFF4                | Pin20 = Variation                                 | 2    | -    | -    | V    |
| <b>BTL DRIVER CIRCUIT</b>                      |                       |                                                   |      |      |      |      |
| Output Offset Voltage                          | VOO                   | V <sub>IN</sub> = 2.5V                            | -100 | -    | +100 | mV   |
| Maximum Output Voltage1                        | VOM1                  | R <sub>L</sub> = 10Ω, CH1,2                       | 4.5  | 6.0  | -    | V    |
| Maximum Output Voltage2                        | VOM2                  | R <sub>L</sub> = 18Ω, CH3,4,5                     | 5.5  | 6.5  | -    | V    |
| Closed-loop Voltage Gain                       | AVF                   | V <sub>IN</sub> = 0.1V <sub>rms</sub>             | 16.8 | 18   | 19.2 | dB   |
| Ripple Rejection Ratio <sup>*note2</sup>       | RR                    | V <sub>IN</sub> = 0.1V <sub>rms</sub> , f = 120Hz | -    | 60   | -    | dB   |
| Slew Rate <sup>*note2</sup>                    | SR                    | Square, V <sub>out</sub> = 4V <sub>p-p</sub>      | 1    | 2    | -    | V/μs |
| <b>INPUT OPAMP CIRCUIT</b>                     |                       |                                                   |      |      |      |      |
| Input Offset Voltage1                          | VOF1                  | -                                                 | -10  | -    | +10  | mV   |
| Input Bias Current1                            | IB1                   | -                                                 | -    | -    | 400  | nA   |
| High Level Output Voltage1                     | VOH1                  | -                                                 | 4.4  | 4.7  | -    | V    |
| Low Level Output Voltage1                      | VOL1                  | -                                                 | -    | 0.2  | 0.5  | V    |
| Output Sink Current1                           | ISINK1                | R <sub>L</sub> = 50Ω                              | 1    | 2    | -    | mA   |
| Output Source Current1                         | ISOU1                 | R <sub>L</sub> = 50Ω                              | 1    | 2    | -    | mA   |
| Common Mode Input Range1 <sup>*note2</sup>     | V <sub>icm1</sub>     | -                                                 | -0.3 | -    | 4.0  | V    |
| Open Loop Voltage Gain1 <sup>*note2</sup>      | GVO1                  | V <sub>IN</sub> = -75dB                           | -    | 80   | -    | dB   |
| Ripple Rejection Ratio1 <sup>*note2</sup>      | RR1                   | V <sub>IN</sub> = -20dB, f = 120Hz                | -    | 65   | -    | dB   |
| Common Mode Rejection Ratio1 <sup>*note2</sup> | CMRR1                 | V <sub>IN</sub> = -20dB                           | -    | 80   | -    | dB   |
| Slew Rate1 <sup>*note2</sup>                   | SR1                   | Square, V <sub>out</sub> = 3V <sub>p-p</sub>      | -    | 1.5  | -    | V/μs |

### Note :

- When the voltage at pin 39 goes below 0.5V, the power save circuit makes the main bias current sources stop operating. As a result, the whole circuits are disable. ( The whole circuits mean the driver circuit, the input OP amp circuit, and the normal OP amp circuit.)
- Guaranteed field.(No EDS/Final test)

**Electrical Characteristics** (Continued)

(SVCC = 5V, PVCC1 = PVCC2 = 8V, TA = 25°C, unless otherwise specified)

| Parameter                          | Symbol | Conditions                           | Min. | Typ. | Max. | Unit |
|------------------------------------|--------|--------------------------------------|------|------|------|------|
| <b>NORMAL OP AMP CIRCUIT 1</b>     |        |                                      |      |      |      |      |
| Input Offset Voltage 2             | VOF2   | -                                    | -10  | -    | +10  | mV   |
| Input Bias Current 2               | IB2    | -                                    | -    | -    | 400  | nA   |
| High Level Output Voltage 2        | VOH2   | -                                    | 4.4  | 4.7  | -    | V    |
| Low Level Output Voltage 2         | VOL2   | -                                    | -    | 0.2  | 0.5  | V    |
| Output Sink Current 2              | ISINK2 | RL = 50Ω                             | 2    | 4    | -    | mA   |
| Output Source Current 2            | ISOU2  | RL = 50Ω                             | 2    | 4    | -    | mA   |
| Common Mode Input Range 2*note     | Vicm2  | -                                    | -0.3 | -    | 4.0  | V    |
| Open Loop Voltage Gain 2*note      | GVO2   | VIN = -75dB                          | -    | 80   | -    | dB   |
| Ripple Rejection Ratio 2*note      | RR2    | VIN = -20dB, f = 120Hz               | -    | 65   | -    | dB   |
| Common Mode Rejection Ratio 2*note | CMRR2  | VIN = -20dB                          | -    | 80   | -    | dB   |
| Slew Rate 2*note                   | SR2    | Square, Vout = 3Vp-p                 | -    | 1.5  | -    | V/μs |
| <b>NORMAL OP AMP CIRCUIT 2</b>     |        |                                      |      |      |      |      |
| Input Offset Voltage 3             | VOF3   | -                                    | -15  | -    | +15  | mV   |
| Input Bias Current 3               | IB3    | -                                    | -    | -    | 400  | nA   |
| High Level Output Voltage 3        | VOH3   | -                                    | 3    | 3.8  | -    | V    |
| Low Level Output Voltage 3         | VOL3   | -                                    | -    | 1.0  | 1.5  | V    |
| Output Sink Current 3              | ISINK3 | RL = 50Ω                             | 10   | -    | -    | mA   |
| Output Source Current 3            | ISOU3  | RL = 50Ω                             | 10   | -    | -    | mA   |
| Open Loop Voltage Gain 3*note      | GVO3   | VIN = -75dB                          | -    | 80   | -    | dB   |
| Ripple Rejection Ratio 3*note      | RR3    | VIN = -20dB, f = 120Hz               | -    | 65   | -    | dB   |
| Common Mode Rejection Ratio 3*note | CMRR3  | VIN = -20dB                          | -    | 80   | -    | dB   |
| Slew Rate 3*note                   | SR3    | Square, Vout = 3Vp-p                 | -    | 1.5  | -    | V/μs |
| <b>TRAY DRIVE CIRCUIT</b>          |        |                                      |      |      |      |      |
| Input High Level Voltage           | VIH    | -                                    | 2    | -    | -    | V    |
| Input Low Level Voltage            | VIL    | -                                    | -    | -    | 0.5  | V    |
| Output Voltage 1                   | VO1    | PVCC2 = 8V, VCTL = 3V,<br>RL = 45Ω   | -    | 6    | -    | V    |
| Output Voltage 2                   | VO2    | PVCC2 = 8V, VCTL = 1.5V,<br>RL = 10Ω | -    | 3    | -    | V    |
| Output Load Regulation             | ΔVRL   | VCTL=3V, IL=100mA →<br>400mA         | -    | 300  | 700  | mV   |
| Output Offset Voltage 1            | VOO1   | VIN = 5V, 5V                         | -40  | -    | +40  | mV   |
| Output Offset Voltage 2            | VOO2   | VIN = 0V, 0V                         | -40  | -    | +40  | mV   |

**Note:** Guaranteed field.(No EDS/Final test)

**Electrical Characteristics** (Continued)(SVCC = 5V, PVCC1 = PVCC2 = 8V, T<sub>A</sub> = 25°C, unless otherwise specified)


| Parameter                             | Symbol           | Conditions                                                    | Min.  | Typ. | Max.  | Unit |
|---------------------------------------|------------------|---------------------------------------------------------------|-------|------|-------|------|
| <b>REGULATOR1 CIRCUIT</b> (REGVCC=8V) |                  |                                                               |       |      |       |      |
| Load regulation                       | $\Delta V_{RL1}$ | $I_L=0 \rightarrow \square 200\text{mA}$                      | -80   | 0    | 0     | mV   |
| Line regulation                       | $\Delta V_{CC1}$ | $I_L=200\text{mA}, V=7\text{V} \rightarrow \square 9\text{V}$ | -20   | 0    | +30   | mV   |
| Regulator output voltage 1            | VREG1            | $I_L=100\text{mA}$                                            | 4.75  | 5.0  | 5.25  | V    |
| Regulator reset on voltage 1          | Reson1           | Pin6=Variation                                                | -     | -    | 0.5   | V    |
| Regulator reset off voltage 1         | Resoff1          | Pin6=Variation                                                | 2     | -    | SVCC  | V    |
| Ripple Rejection 1 <sup>*note</sup>   | RR1              | Vin=1Vp-p, f=120Hz                                            | -     | 55   | -     | dB   |
| <b>REGULATOR2 CIRCUIT</b> (REGVCC=8V) |                  |                                                               |       |      |       |      |
| Load regulation                       | $\Delta V_{RL2}$ | $I_L=0 \rightarrow \square 200\text{mA}$                      | -80   | 0    | 0     | mV   |
| Line regulation                       | $\Delta V_{CC2}$ | $I_L=200\text{mA}, V=7\text{V} \rightarrow \square 9\text{V}$ | -20   | 0    | +30   | mV   |
| Regulator output voltage 2 range      | VREG2R           | $I_L=100\text{mA}$                                            | 1.5   | -    | 4.5   | V    |
| Regulator output voltage 2            | VREG2            | $I_L=100\text{mA}, V_{REGCTL}=0\text{V}$                      | 1.482 | 1.56 | 1.638 | V    |
|                                       |                  | $I_L=100\text{mA}, V_{REGCTL}=1.9\text{V}$                    | 3.135 | 3.3  | 3.465 | V    |
| Regulator reset on voltage 2          | Reson2           | Pin7=Variation                                                | -     | -    | 0.5   | V    |
| Regulator reset off voltage 2         | Resoff2          | Pin7=Variation                                                | 2     | -    | SVCC  | V    |
| Control Gain                          | GREGCTL          | -                                                             | 0.75  | 0.95 | 1.15  | V/V  |
| Ripple Rejection 2 <sup>*note</sup>   | RR2              | Vin=1Vp-p, f=120Hz                                            | -     | 55   | -     | dB   |

**Note:** Guaranteed field.(No EDS/Final test)

## Application Information

### 1. Thermal Shutdown


- The TSD circuit is activated at the junction temperature of 160°C and deactivated at 135°C with the hysteresis of 25°C. During the thermal shutdown, the TSD circuit keeps all the output driver off.

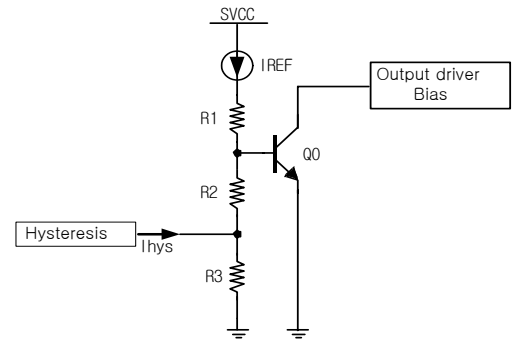

### 2. CH Mute Function

- When the mute pin is high, the TR Q1 is on and Q2 is off, so the bias circuit is enabled. When the mute pin is low (GND), the TR Q1 is off and Q2 is on, so the bias circuit is disabled.
- During the mute on state, all the circuit blocks except for the variable regulator remain off, and the low power quiescent state is established.
- Truth table is as follows;


| Pin 19, 20 | Mute     |
|------------|----------|
| High       | Mute-Off |
| Low        | Mute-On  |

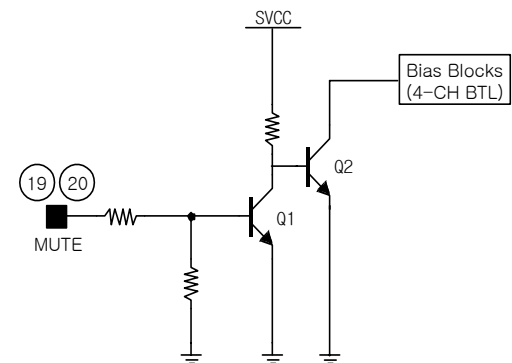

### 3. Power Save Function

- When the pin21 is high, the TR Q3 becomes on and Q4 off, so the bias circuit is enabled. When the pin21 is low (GND), the TR Q3 becomes off and Q4 is on, so the bias circuit is disabled.
- During the power save on state, this function keeps all the circuit blocks off, and the low power quiescent state is established.
- Truth table is as follows;


| Pin21 | Power Save     |
|-------|----------------|
| High  | Power Save Off |
| Low   | Power Save On  |

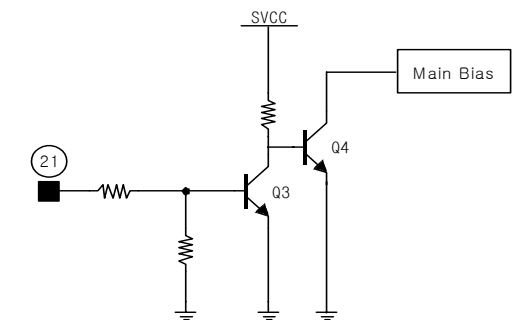


### 4. TDS Monitor Function

- Pin 22 is TSD monitor pin, which detects the state of the TSD block and generates the TSD-monitor signal.
- In the normal state Q5 is on, and Q6 is off. When the TSD block is activated Q5 becomes off, and thus the voltage of pin22 keeps low.
- Truth table is as follows;

| TSD     | Pin22 |
|---------|-------|
| TSD Off | High  |
| TSD On  | Low   |



## 5. Focus, Tracking Actuator, Spindle, Sled Motor Drive Part

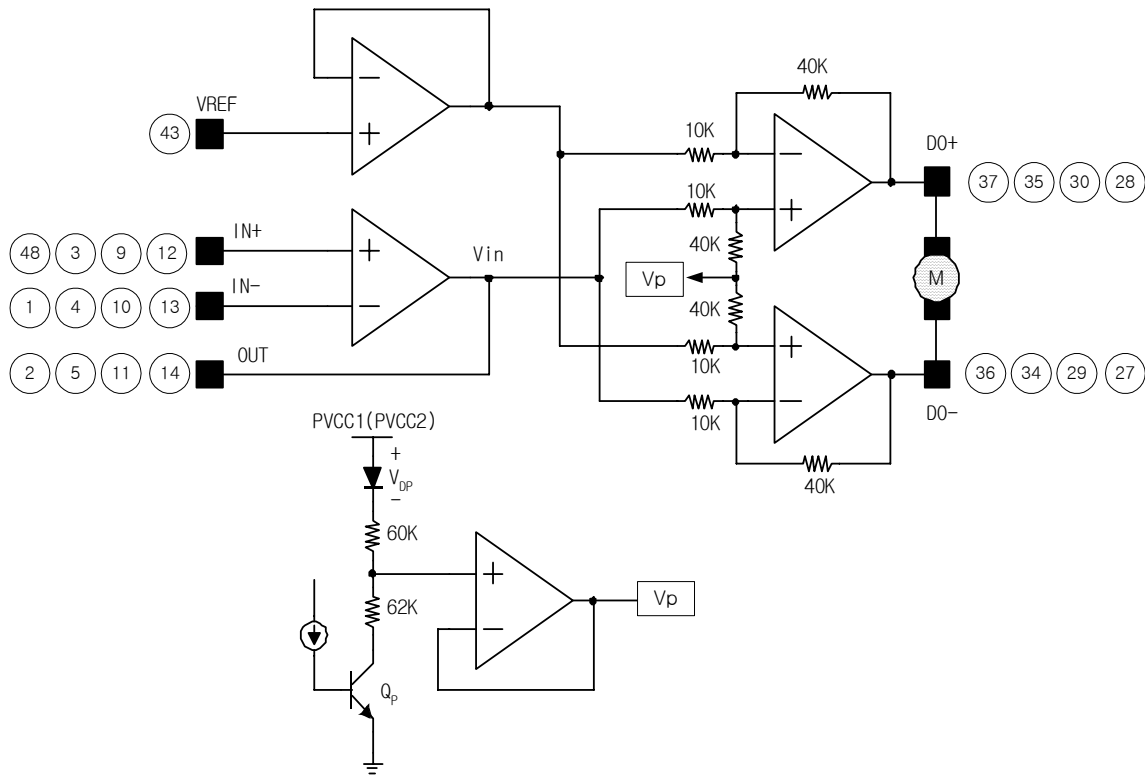

- The Vref at pin 43 is for eliminating the dc components from the input signals and can set by an external circuit.
- The voltage gain from Vin to output is as follows ;

$$V_{in} = V_{ref} + \Delta V$$

$$DOP = V_D + 4\Delta V$$

$$DON = V_D - 4\Delta V$$


$$V_{out} = DOP - DON = 8\Delta V$$

$$\text{Gain} = 20 \log \frac{V_{out}}{\Delta V} = 20 \log 8 = 18 \text{dB}$$

- Where  $\Delta V$  means just ac component.
- The total input to output voltage gain is the sum of the input OP amp network gain and 18dB.
- The output stage is the balanced transformerless (BTL) driver.
- The bias voltage  $V_p$  is expressed as ;

$$\begin{aligned} V_P &= (PVCC1 - V_{DP} - V_{CESAT} Q_P) \times \frac{62k}{60k + 62k} + V_{CESAT} Q_P \\ &= \frac{PVCC1 - V_{DP} - V_{CESAT} Q_P}{1.97} + V_{CESAT} Q_P \end{aligned} \quad \text{----- (1)}$$

## 6. Tray, Changer,panel Motor Drive Part

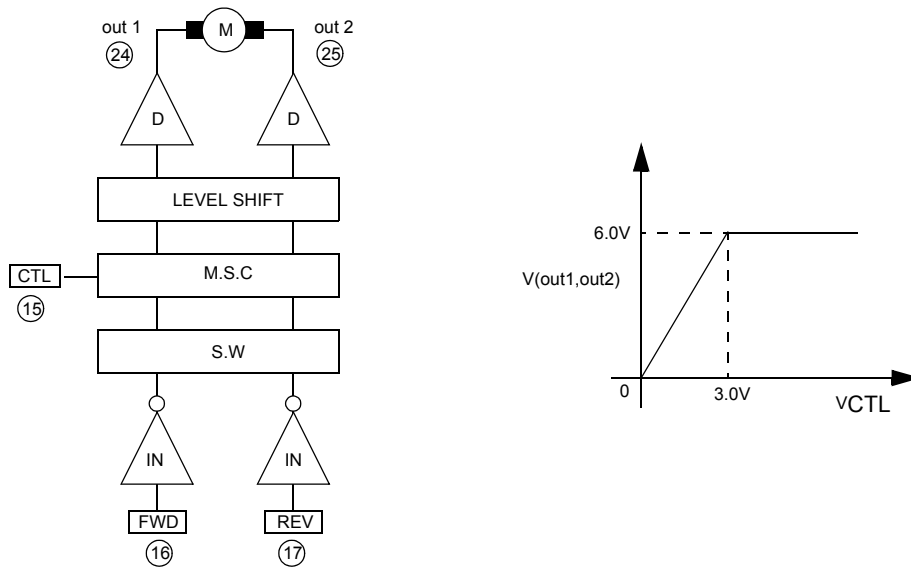

- Rotational direction control


The forward and reverse rotational direction is controlled by FWD (pin16) and REV (pin17) and the input conditions are as follows;

| INPUT |     | OUTPUT |       |                |
|-------|-----|--------|-------|----------------|
| FWD   | REV | OUT 1  | OUT 2 | State          |
| H     | H   | Vp     | Vp    | Brake          |
| H     | L   | H      | L     | Forward        |
| L     | H   | L      | H     | Reverse        |
| L     | L   | -      | -     | High impedance |

- Where Vp(Power reference voltage) is approximately 3.75V at  $PV_{CC2}=8V$  according to equation (1).
- Motor speed control (When  $SV_{CC}=5V$ ,  $PV_{CC2}=8V$ )
  - The maximum torque is obtained when the pin15(CTL) is open.
  - If the voltage of the pin15 (CTL) is 0V, the motor will not operate.
  - When the control voltage (pin15) is between 0 and 3.0V, the differential output voltage  $V(\text{out1, out2})$  is about two times of control voltage. The output gain is 6dB.
  - When the control voltage is greater than 3.0V, the output voltage is saturated at the 6.0V because of the output swing limitation.





## 7. Regulator1 Part

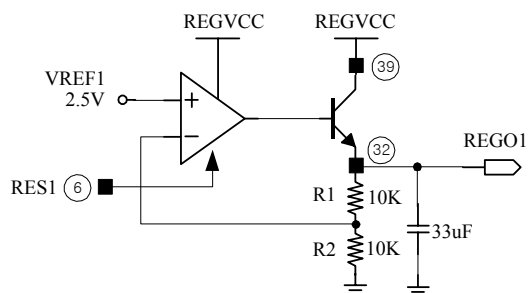


- The output voltage of the regulator1 is fixed to 5V.
- When power save on or TSD on, regulator1 is disabled.
- Truth table is as follows;

| RES1(Pin6) | REGO1    |
|------------|----------|
| HIGH       | Active   |
| LOW        | Deactive |

## 8. Regulator2 Part

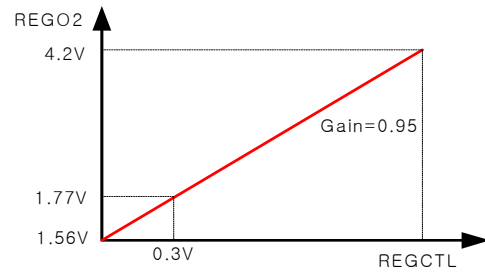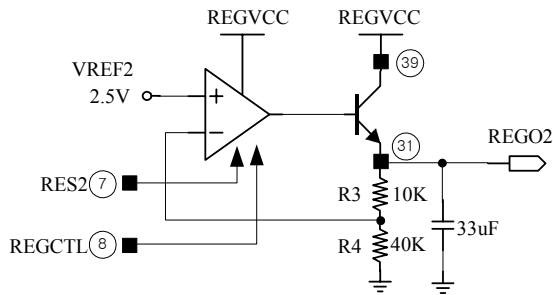

- The output of the regulator2 is variable.
- The input impedance of the REGCTL pin is 50kΩ.
- The REGCTL input circuit is as follows;

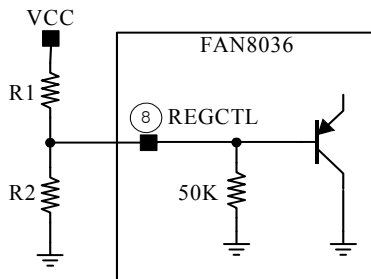



- The output voltage(VREGO2) is decided as follows;

$$V_{REGO2} = (1.56V + V_{REGCTL}) \times 0.95$$

- When the REGCTL pin is connect to the ground or open, the regulator output voltage become 1.56V.
- When power save on or TSD on, regulator2 is disabled.
- Truth table is as follows;


| RES2(Pin7) | REGO2    |
|------------|----------|
| HIGH       | Active   |
| LOW        | Deactive |

## Test Circuits

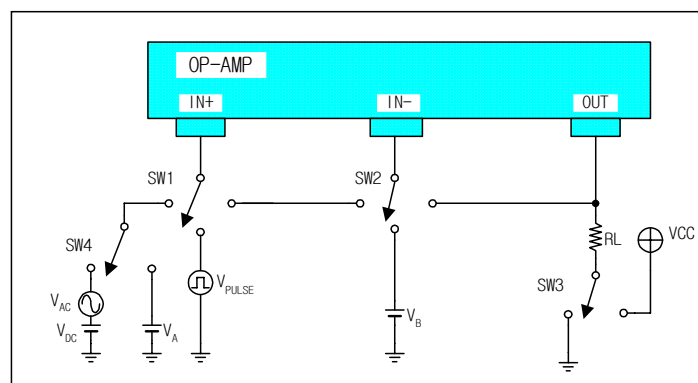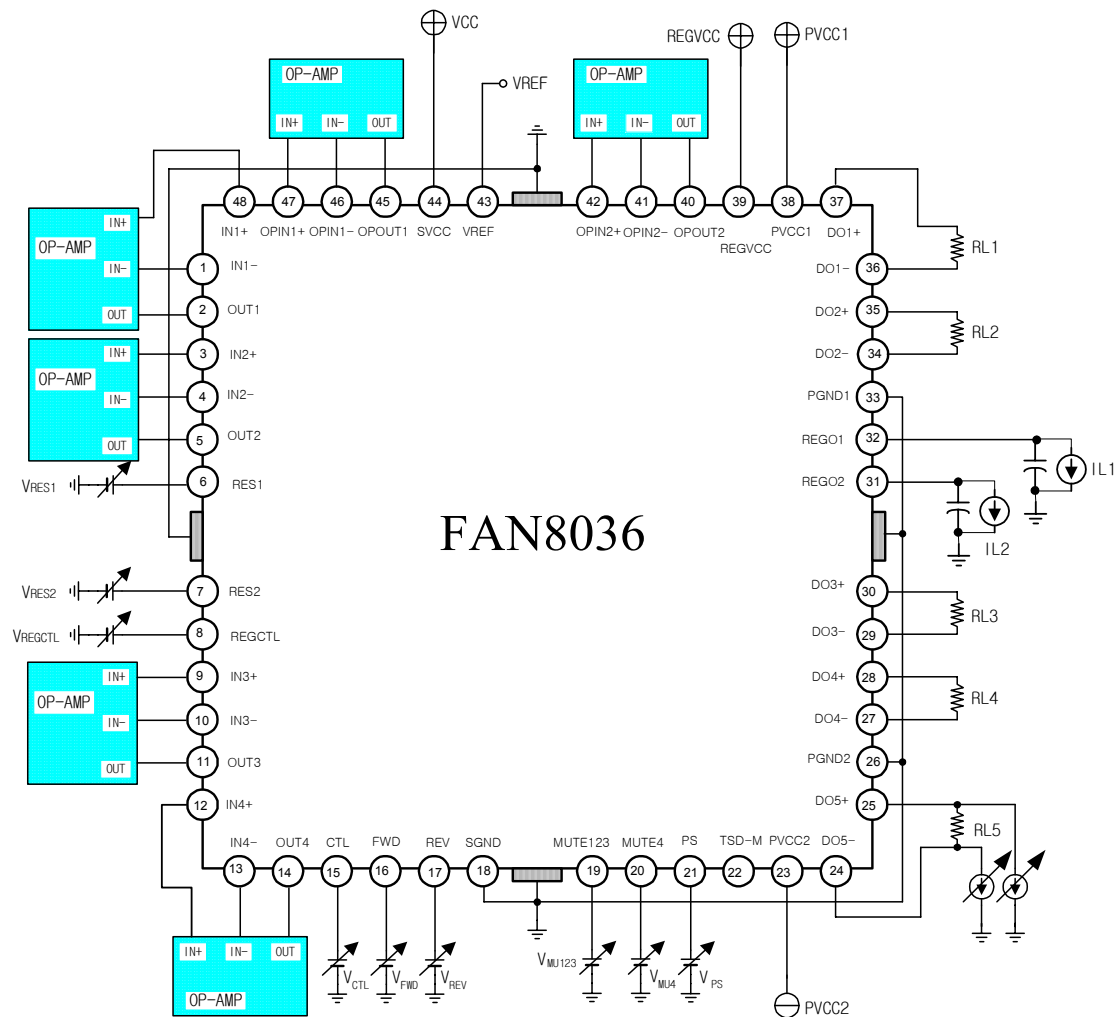


## Typical Application Circuits 1

[Voltage control mode]

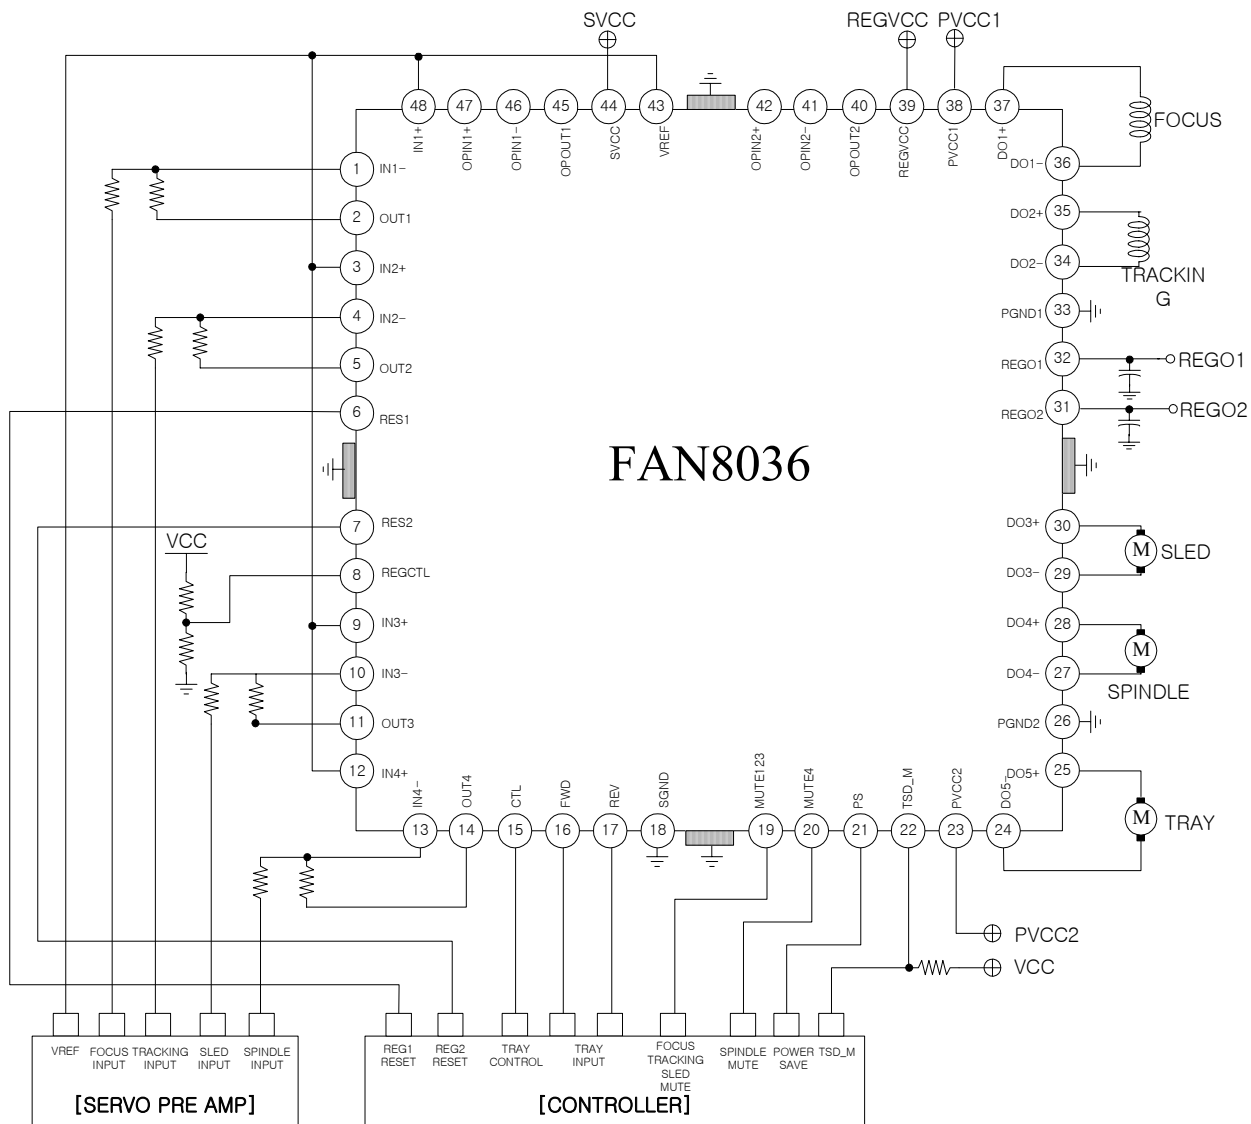

## Typical Application Circuits 2

[Differential PWM control mode ]

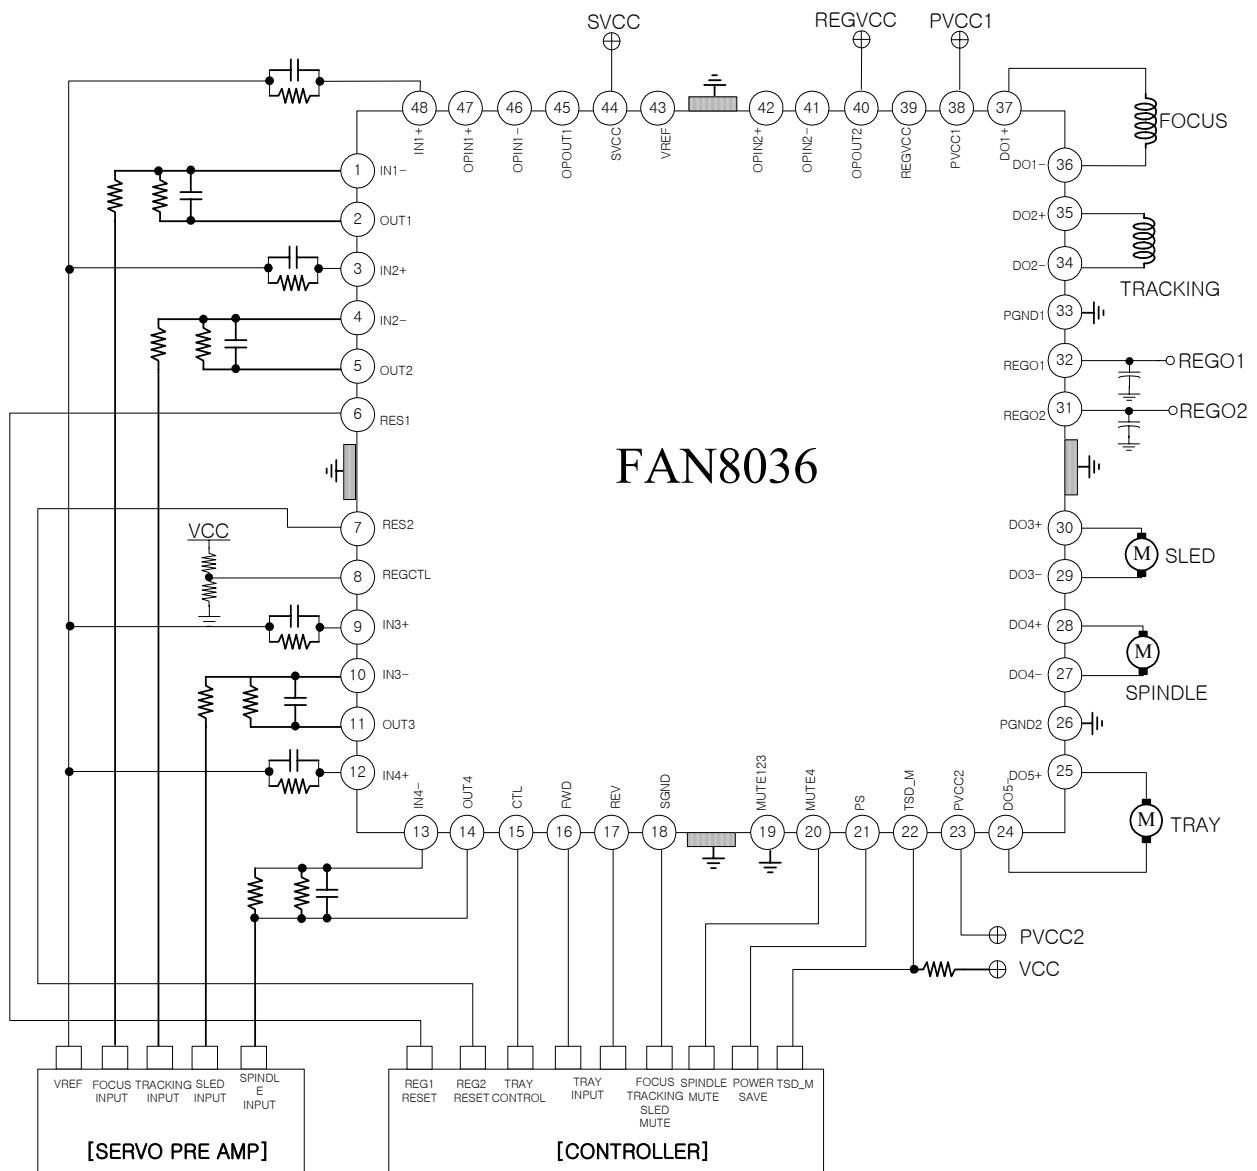

### Notes:

Radiation pin is connected to the internal GND of the package.



#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.