



Am26LS38

Quad Differential Backplane Transceiver

DISTINCTIVE CHARACTERISTICS


- 10 Mb data rate
- 0.45 V DC noise margin
- Biasing line terminations allow low voltage swing while maintaining high noise margin
- Pair delay 55 ns maximum
- Controlled driver skew to minimize noise
- Driver register and receiver latch with register bypass mode
- Driver output short-circuit protected to V_{CC} limits
- Outputs disabled during power-up and down
- Three-state receiver outputs maintain Hi-Z during power-up and down and over V_{CC} range

GENERAL DESCRIPTION

The Am26LS38 is a high performance backplane transceiver designed to integrate Schottky TTL performance, high noise immunity and wired logic capability into a low cost differential backplane structure. The resulting

backplane can have up to 24 receiver unit loads in a party-line, wired-OR logic configuration, with a guaranteed fail-safe state, and operates from a single 5 V power supply.

BLOCK DIAGRAM

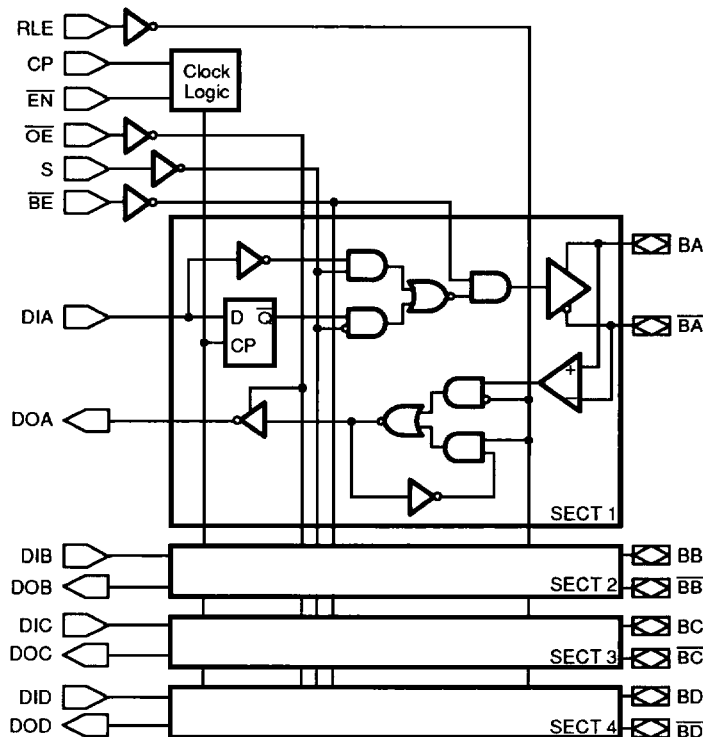


02163D-1

CONNECTION DIAGRAM

Top View

DIP

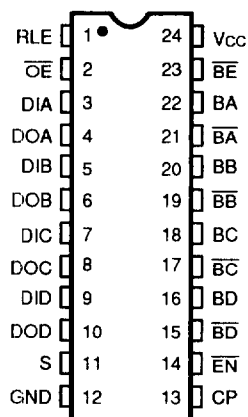


02163D-2

Note:

Pin 1 is marked for orientation.

SYSTEM CONFIGURATION DIAGRAM

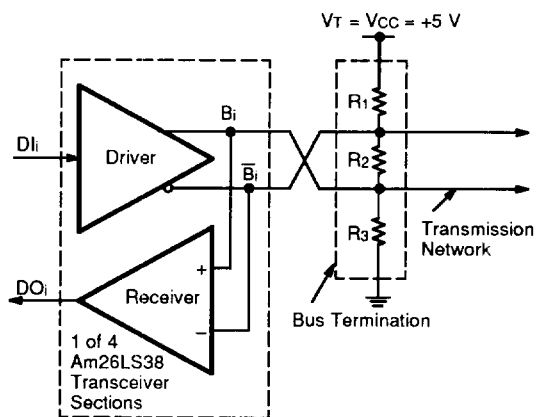


02163D-3

ORDERING INFORMATION

Standard Products

AMD standard products are available in several packages and operating ranges. The order number (Valid Combination) is formed by a combination of:

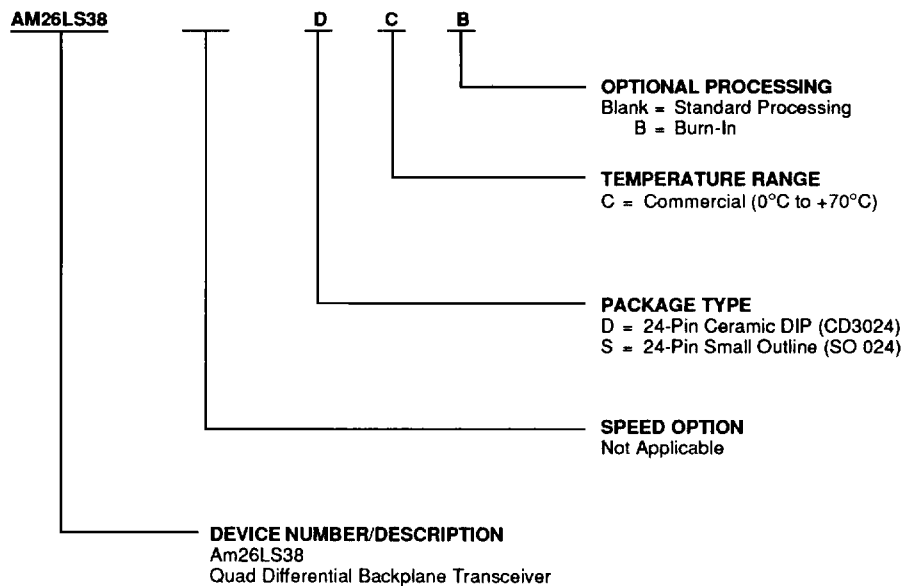

Valid Combinations	
AM26LS38	DC, DCB, SC

Valid Combinations

Valid Combinations list configurations planned to be supported in volume for this device. Consult the local AMD sales office to confirm availability of specific valid combinations and to check on newly released combinations.

PIN DESCRIPTION

Pin No.	Name	I/O	Description
22, 20 18, 16, 21, 19, 17, 15	BA, BB, BC, BD (B _i), BA, BB, BC, BD (B _i)	I/O	Paired open emitter (B _i)/ open collector ($\bar{B}_i$) driver outputs and receiver inputs. The driver outputs are either simultaneously active or simultaneously inactive. In the inactive state (D _i = LOW) both drivers (B _i and $\bar{B}_i$) are turned off and the voltage differential representing the OFF state is determined by the line terminating resistor networks. In the active state (D _i = HIGH), both drivers are driven on and act to reverse the voltage differential across the line to produce the ON state. The open-emitter/open-collector outputs are always connected in a wired-OR (or wired-AND) configuration. A driver is disabled by making its outputs inactive.
23	$\overline{BE}$	I	Bus Enable operates to enable or disable all output drivers by making them inactive when $\overline{BE}$ = HIGH and controlled by data input when $\overline{BE}$ = LOW.
13	CP	I	Clock Pulse input to the driver register enters data on the LOW-to-HIGH transition.
3, 5, 7, 9	DIA, DIB, DIC, DID (D _i)	I	Data inputs each driver's buffer or register. A HIGH input to D _i will result in an active (ON) output. A LOW input will cause an inactive (OFF) output.
4, 6, 8, 10	DOA, DOB, DOC, DOD (DO _i)	O	Receiver data latch outputs. An inactive bus (OFF state) will produce a LOW DO _i output and an active bus (ON state) will produce a HIGH DO _i output.
14	$\overline{EN}$	I	Clock Enable for the driver registers. $\overline{EN}$ = LOW enables D _i data to be clocked into the respective register. $\overline{EN}$ = HIGH acts to hold previous data in each register regardless of the state of CP.
2	$\overline{OE}$	I	Output Enable for the receiver latch output buffer. When $\overline{OE}$ is LOW the outputs are enabled. When $\overline{OE}$ is HIGH all receiver outputs are in the high impedance state.
1	RLE	I	Receiver Latch Enable for the receiver latches. When RLE is HIGH the latches are transparent. When RLE is LOW received data meeting the setup and hold requirements relative to the HIGH-to-LOW transition of RLE will be stored.
11	S	I	Select input control for the drivers. When S is HIGH driver data from the registers will be selected (Register Mode). When S is LOW (Buffer Mode) the drivers respond to the D _i inputs directly, bypassing the driver registers.

Inputs									Outputs			Function
RLE	CP	$\overline{EN}$	$\overline{OE}$	S	$\overline{BE}$	D _i	B _i	$\bar{B}_i$	B _i	$\bar{B}_i$	DO _i	
H	X	X	L	L	L	L	NA	NA	L	H	L	Driver buffer mode (loop test)
H	X	X	L	L	L	H	NA	NA	H	L	H	
H	↑	L	L	H	L	L	NA	NA	L	H	L	Driver register mode
H	↑	L	L	H	L	H	NA	NA	H	L	H	
H	X	X	L	X	H	X	L	H	NA	NA	L	Receiver latch mode
H	X	X	L	X	H	X	H	L	NA	NA	H	
L	X	X	L	X	H	X	X	X	X	X	DO _{in-1}	Receiver in circulation
X	X	X	H	X	H	X	X	X	X	X	Z	Receiver output in high impedance state

H = HIGH

L = LOW

↑ = LOW-to-HIGH transition of clock

DO_{in-1} = Previous state of DO_i

Z = High impedance

X = Don't care

NA = Not applicable

FUNCTIONAL DESCRIPTION

The Am26LS38 represents a new approach in backplane transceiver design. Its unipolar differential signaling scheme minimizes problems associated with crosstalk and the loss of noise immunity due to common mode voltage while providing high speed, party line and wired logic capabilities.

A good ground system and shielding are the best methods for limiting noise on the backplane. Ground planes can significantly reduce inductive ground voltage ringing. Where multilayer PC backplane are not a reasonable choice, a differential bus can be created using the Am26LS38 and twisted pair or any balanced transmission medium.

A backplane designed with an Am26LS38 has 3 main elements: 1) a driver section, 2) a receiver section, 3) and a controlled impedance differential line with a pre-biasing line termination. The scheme for driver, receiver, and termination resistors is shown in Figure A.

System Operation

The system has two operational states.

1. Active – driver outputs on
2. Passive – driver outputs off

This 2-state (active/passive) operation makes passive or wired logic functions possible. In the passive state, the lines assume a known polarity and voltage (pre-biased bus). The passive bus state may be assigned either the false (wired-OR) or true (wired-AND) sense, potentially reducing the number of backplane signal lines.

The 2-state driver employs active pull-down (open collector) and active pull-up (open emitter) output stages (Figure A). When a driver is active, both output stages turn on. This impresses a 0.5 V minimum voltage differential on the bus, reversing the voltage across R_2 . In the passive mode both output stages are off. The voltage levels and polarities return to the conditions set by the pre-biasing resistive network. In either state the voltage across the differential lines are symmetrical about $V_{CC}/2$. The system achieves high speeds because the voltage levels required to change state are very close together.

The receiver is designed with a ± 50 mV threshold voltage. This low threshold level combined with a driver output greater than 500 mV provides a high degree of tolerance to attenuation and reflection effects in the cable. Receiver hysteresis provides differential noise immunity. Without hysteresis, a small amount of noise around the switching threshold could cause errors.

Propagation delay skew ($t_{PHL} - t_{PLH}$) is controlled. The system allows up to 1.5 V of common mode voltage.

Terminating the Transmission Line or Bus

Common mode reflections in the line can be reduced significantly by symmetrically terminating the bus. This increases the tolerance to common mode noise. Centering the network at $V_{CC}/2$ ($R_1 = R_3$) further improves the performance by causing all induced noise and reflections to appear as a common mode signal (Figure B).


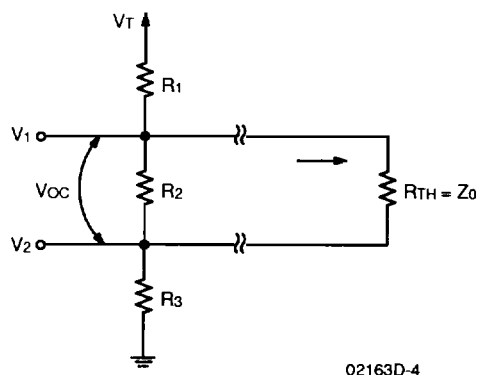


Figure B. Termination Circuit

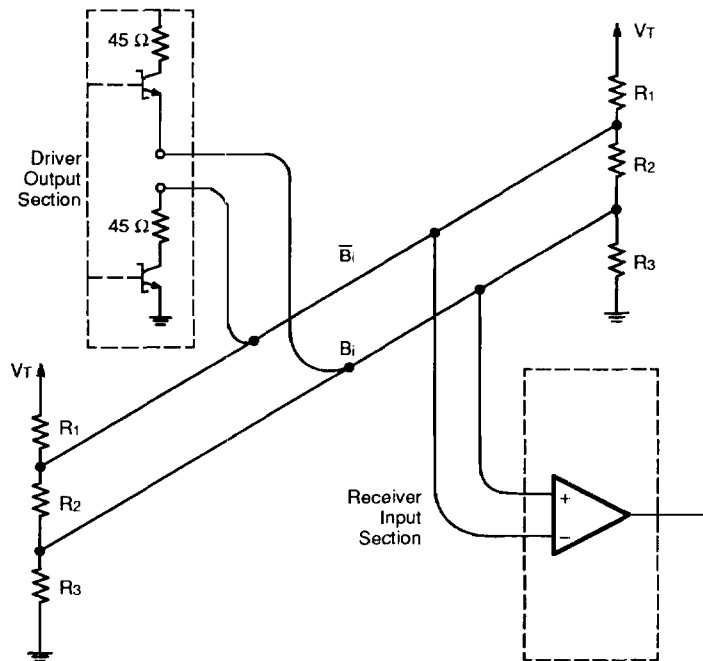

02163D-5

Figure A. The Scheme for Driver, Receiver, and Termination Resistors

A first order approximation of resistor values may be developed by letting the ratio of R_1 to R_2 be 2:1, and the Thevenin equivalent resistance of the termination equal the characteristic impedance of the line (Z_0).

Then:

$$(1) V_{OC} = V_T \frac{R_2}{R_2 + 2R_1}$$

$$(2) R_{TH} = \frac{2R_1R_2}{2R_1 + R_2}$$

From equation (1) and (2),

$$(3) R_1 = \frac{V_T R_{TH}}{2V_{OC}}$$

$$(4) R_2 = \frac{V_T R_{TH}}{V_T - V_{OC}}$$


If $V_T = 5 \text{ V}$, $V_{OC} = 1.0 \text{ V}$, and $R_{TH} = 90 \Omega = Z_0$, we can derive that $R_1 \sim 220 \Omega$, $R_2 \sim 110 \Omega$.

Second order adjustments require attention to unit loading factors (receiver differential input resistance is in parallel with R_2), transmission rates and a host of other factors.

Data Path


Figure C shows the data path from one driver to another receiver for one bit of the bus interface.

The transmit register or buffer and receiver latch are configured to provide two modes of operation. The register and latch can provide local storage for output and input data. In the non-storage mode the buffer input to the driver can be selected and the receiver can be wired transparent. Incorporating storage on-chip provides improved speed and lower package count without significant penalty in the non-storage mode.

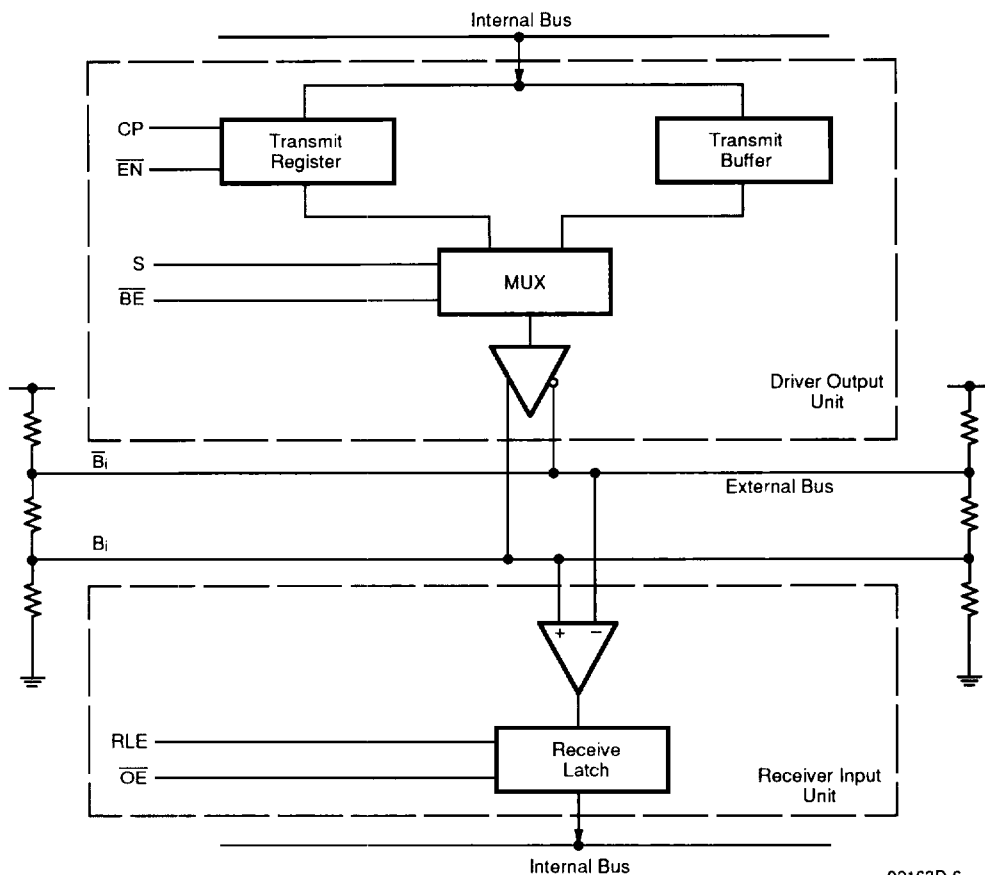

02163D-6

Figure C. The Data Path for One Bit of the Bus Interface

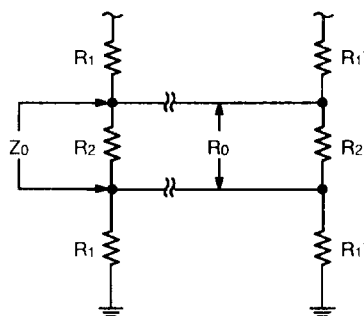

02163D-7

Equivalent Circuit Recommended Termination

Termination Resistors and Equivalent Impedance

Z_0	$R_1 = R_1'$	$R_2 = R_2'$
90 Ω	220 Ω	110 Ω
120 Ω	300 Ω	150 Ω

Minimum line V_0 (differential voltage) = 0.5 V

Equivalent Termination Versus DC Resistance

Z_0	R_0
88.0 Ω	44.0 Ω
120.0 Ω	60.0 Ω

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	7.0 V
Common Mode Range	0 to V _{CC}
Differential Mode Range (REC)	0 to V _{CC}
Logic Inputs	5.5 V
Storage Temperature Range	−65°C to +150°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to absolute maximum ratings for extended periods may affect device reliability.

OPERATING RANGES

Commercial (C) Devices

Temperature	0°C to +70°C
Supply Voltage	+4.75 V to +5.25 V

Operating ranges define those limits between which the functionality of the device is guaranteed.

DC CHARACTERISTICS over operating ranges unless otherwise specified

Parameter Symbol	Parameter Description	Test Conditions		Min	Typ.	Max	Unit
Bus Driver Output							
V _O	Output Differential Voltage (Driver Active) V _{Bi} – $\overline{V_{Bi}}$	$\overline{BE}$ = LOW D _{li} = HIGH Test Circuit #1		0.5			V
I _{SS}	Output Current	D _{li} = HIGH Test Circuit #2 $\overline{BE}$ = LOW	I _a	–22.5	–55	–115	mA
			I _b	+22.5	+55	+115	mA
I _{SC}	Output Short Circuit Current	V _{CC} = 5.5 V		–75	–150	–250	mA
Bus Receiver Input							
V _{TH}	Differential Input Threshold Voltage	V _{CM} = 0 to V _{CC} V _{OUT} = V _{OL} or V _{OH}		–50	±10	+50	mV
R _{IN}	Input Resistance to GND	0 ≤ V _{CC} ≤ V _{CC} Max		4	5.7		kΩ
R _{IN}	Differential Input Resistance	0 ≤ V _{CC} ≤ V _{CC} Max		8	11.4		kΩ
V _{OS}	Center Voltage	Test Circuit #3 Active and Passive		2.0	V _{CC} /2	3.0	V
V _{OS} – $\overline{V_{OS}}$	Center Voltage Difference (Active vs. Passive)	Test Circuit #3			90	300	mV
Non-Bus Input and Outputs							
V _{OH}	Output HIGH Voltage	ΔV _{IN} = +0.1 V	I _{OH} = –15 mA	2.4	3.4		V
			I _{OH} = –24 mA	2.0	3.3		V
V _{OL}	Output LOW Voltage	ΔV _{IN} = –0.1 V	MIL, I _{OL} = 32 mA			0.5	V
			COM'L, I _{OL} = 48 mA			0.5	V
V _{IH}	Input HIGH Voltage	Guaranteed Input Logical HIGH Voltage for All Inputs		2.0			V
V _{IL}	Input LOW Voltage	Guaranteed Input Logical LOW Voltage for All Inputs				0.8	V
I _{IL}	Input LOW Current	V _{IN} = 0.4 V	Data		–275	–400	μA
			Control		–0.65	–1.0	mA
			Clock		–0.65	–1.0	mA
I _{IH}	Input HIGH Current	V _{IN} = 2.7 V			0.1	+50	μA
I _{SC}	Output Short Circuit Current	V _{CC} = 5.5 V		–75	–150	–250	mA
I _I	Input Leakage Current	V _{IN} = 5.5 V				1	mA
V _{IC}	Input Clamp Voltage	I _{IN} = –18 mA			–0.75	–1.2	V
I _{OZ}	Leakage Current Passive	V _O = 2.4 V				+50	μA
		V _O = 0.4 V				–50	μA
I _{CC}	Power Supply Current	$\overline{BE}$, $\overline{OE}$ = HIGH				145	mA



SWITCHING CHARACTERISTICS ($T_A = +25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$)

Parameter Symbol	Parameter Description		Test Conditions	Min	Typ.	Max	Unit
tDBA	Dli to Bi/Bi Propagation Delay	Active	$\overline{BE} = \text{LOW}$ Test Circuit #1		7	10	ns
tDBP		Passive	S = LOW		7	10	ns
tCBA	CP to Bi/Bi Propagation Delay	Active	$\overline{BE} = \text{LOW}$ Test Circuit #1		10.5	16	ns
tCBP		Passive	S = HIGH		13	16	ns
tPA	$\overline{BE}$ to Bi/Bi Propagation Delay	Active	Dli = HIGH Test Circuit #1		8.5	12	ns
tPP		Passive	S = LOW		4	8	ns
ts	Dli to Clock Setup Time		$\overline{BE} = \text{LOW}$	5	2.5		ns
tH	Dli to Clock Hold Time			2	0		ns
ts	$\overline{EN}$ to Clock Setup Time			8	4		ns
tH	$\overline{EN}$ to Clock Hold Time			0	−4		ns
ts	Bi/Bi to RLE Setup Time			5	2.5		ns
tH	Bi/Bi to RLE Hold Time			2	0.7		ns
tPLZ/PHZ	$\overline{OE}$ to DOi Disable Time		CL = 50 pF Test Circuit #4			20	ns
tPLZ/PHZ			CL = 5 pF Test Circuit #4			13	ns
tPZL	$\overline{OE}$ to DOi Disable Time		Test Circuit #4			17	ns
tPZH						17	ns
tPLH	RLE to DOi		$\overline{OE} = \text{LOW}$ Test Circuit #4		11	13	ns
tPHL					14	17	ns
tPRX	Bi/Bi to DOi		$RLE = \text{HIGH}$ $\overline{OE} = \text{LOW}$ Test Circuit #4		12	17	ns
tPLH	$\overline{BE}$ to DOi Propagation Delay		$RLE = \text{HIGH}$ Test Circuits		15	25	ns
tPHL			$\overline{OE} = \text{LOW}$ #1, #4				
tPLH	Dli to DOi (Buffer Mode)		S = LOW Test Circuits		18	25	ns
tPHL			$RLE = \text{HIGH}$ #1, #4 $\overline{OE} = \text{LOW}$				
tPLH	CP to DOi (Register Mode)		S = HIGH Test Circuits		22	28	ns
tPHL			$RLE = \text{HIGH}$ #1, #4 $\overline{OE} = \text{LOW}$				
tPWL	Clock Pulse Width	LOW		10	3		ns
tPWH		HIGH		10	5		ns
tPWH	RLE Pulse Width	HIGH		10	6		ns
tSKEW	Propagation Delay Skew ($t_{PLH} - t_{PHL}$)		$V_{CC} = 5\text{ V}$ Test Circuit #1 $C_L = 50\text{ pF}$ Measurement $V_{CC}/2$		±1	±5	ns


SWITCHING CHARACTERISTICS over operating range unless otherwise specified

Parameter Symbol	Parameter Description		Test Conditions	T _A = 0 to +70°C V _{CC} = 5.0 V ±10%		Unit
				Min	Max	
t _{DBA}	D _I to B _i / $\overline{B}_i$ Propagation Delay	Active	$\overline{B}\overline{E}$ = LOW Test Circuit #1		12	ns
t _{DBP}		Passive	S = LOW		12	ns
t _{CBA}	CP to B _i / $\overline{B}_i$ Propagation Delay	Active	$\overline{B}\overline{E}$ = LOW Test Circuit #1		20	ns
t _{CBP}		Passive	S = HIGH		20	ns
t _{PA}	$\overline{B}\overline{E}$ to B _i / $\overline{B}_i$ Propagation Delay	Active	D _I = HIGH Test Circuit #1		17	ns
t _{PP}		Passive	S = LOW		12	ns
t _S	D _I to Clock Setup Time		$\overline{B}\overline{E}$ = LOW	7		ns
t _H	D _I to Clock Hold Time			3		ns
t _S	$\overline{E}\overline{N}$ to Clock Setup Time			10		ns
t _H	$\overline{E}\overline{N}$ to Clock Hold Time			0		ns
t _S	B _i / $\overline{B}_i$ to RLE Setup Time			7		ns
t _H	B _i / $\overline{B}_i$ to RLE Hold Time			3		ns
t _{PLZ} /t _{PHZ}	$\overline{O}\overline{E}$ to DO _i Disable Time		C _L = 50 pF Test Circuit #4		17	ns
t _{PLZ} /t _{PHZ}			C _L = 5 pF Test Circuit #4		10	ns
t _{PZL}	$\overline{O}\overline{E}$ to DO _i Enable Time		Test Circuit #4		15	ns
t _{PZH}					15	ns
t _{PLH}	RLE to DO _i		$\overline{O}\overline{E}$ = LOW Test Circuit #4		15	ns
t _{PHL}					20	ns
t _{PRX}	B _i /B _i to DO _i		RLE = HIGH $\overline{O}\overline{E}$ = LOW Test Circuit #4		21	ns
t _{PLH}	$\overline{B}\overline{E}$ to DO _i Propagation Delay		RLE = HIGH Test Circuits		32	ns
t _{PHL}			$\overline{O}\overline{E}$ = LOW #1, #4			
t _{PLH}	D _I to DO _i (Buffer Mode)		S = LOW Test Circuits		30	ns
t _{PHL}			RLE = HIGH #1, #4 $\overline{O}\overline{E}$ = LOW			
t _{PLH}	CP to DO _i (Register Mode)		S = HIGH Test Circuits		35	ns
t _{PHL}			RLE = HIGH #1, #4 $\overline{O}\overline{E}$ = LOW			
t _{PWL}	Clock Pulse Width	LOW		10		ns
t _{PWH}		HIGH		10		ns
t _{PWH}	RLE Pulse Width	HIGH		13		ns
t _{SKW}	Propagation Delay Skew (t _{PLH} – t _{PHL})		V _{CC} = 5 V Test Circuit #1 C _L = 50 pF Measurement V _{CC} /2		±7	ns


KEY TO SWITCHING WAVEFORMS

WAVEFORM	INPUTS	OUTPUTS
	Must Be Steady	Will Be Steady
	May Change from H to L	Will Be Changing from H to L
	May Change from L to H	Will Be Changing from L to H
	Don't Care, Any Change Permitted	Changing, State Unknown
	Does Not Apply	Center Line is High Impedance "Off" State

KS000010

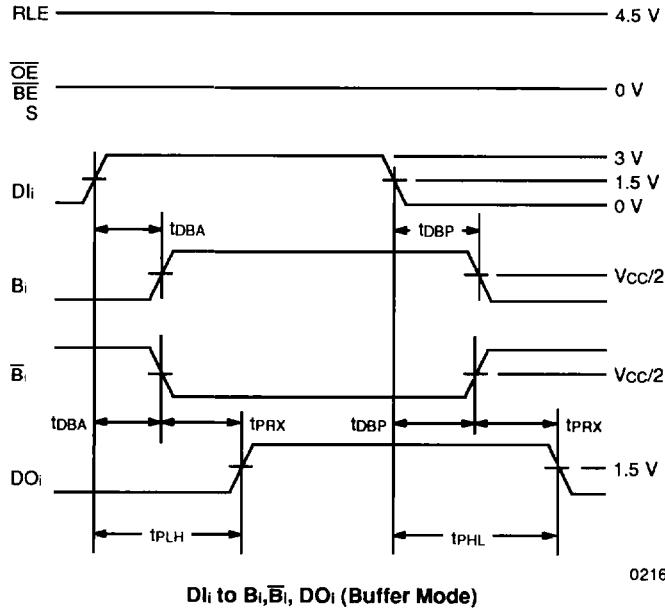


02163C-8

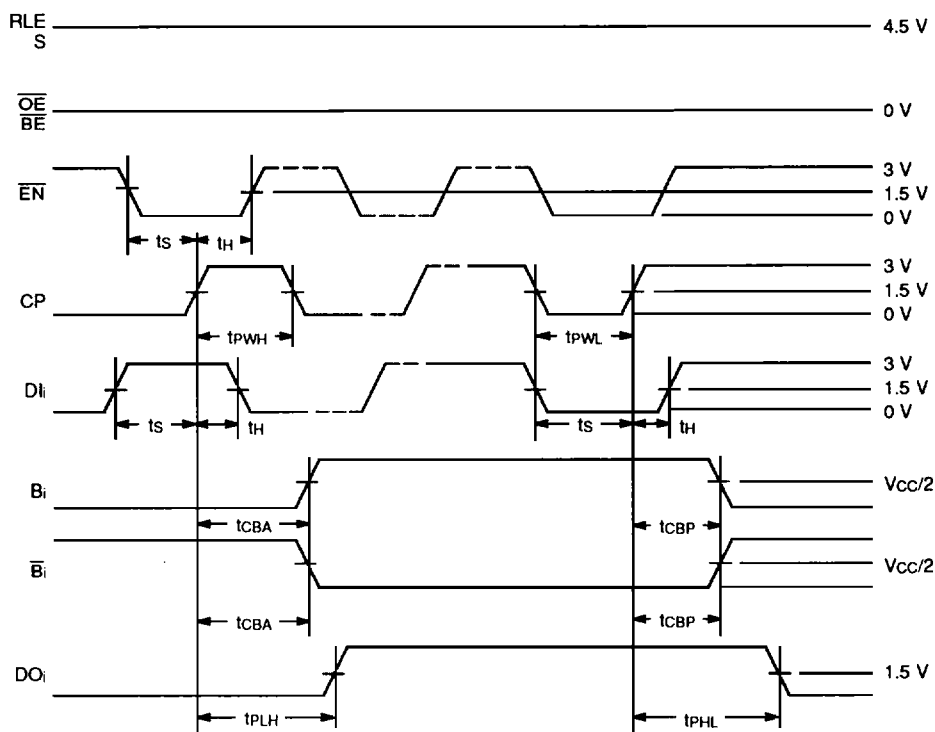


02163C-9

CP to B_i , $\bar{B}_i$, DO_i (Register Mode)

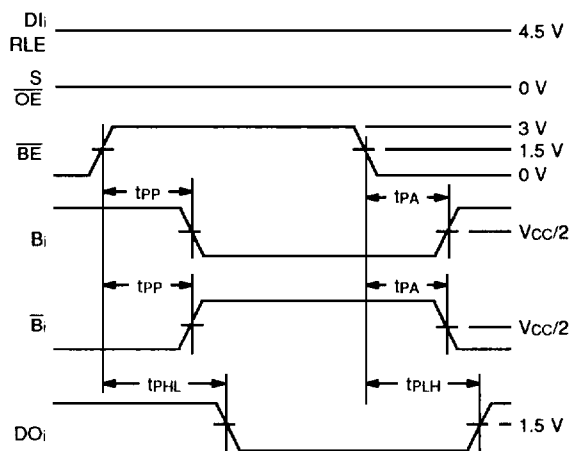


02163C-10

$\bar{B}_E$ to B_i , $\bar{B}_i$, DO_i (Passive and Active)




Output to Output

02163C-11

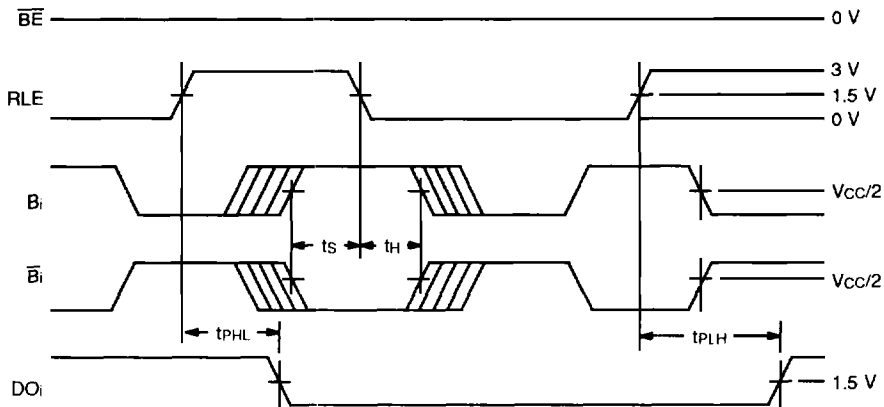

RLE to DO_i


02163-012C

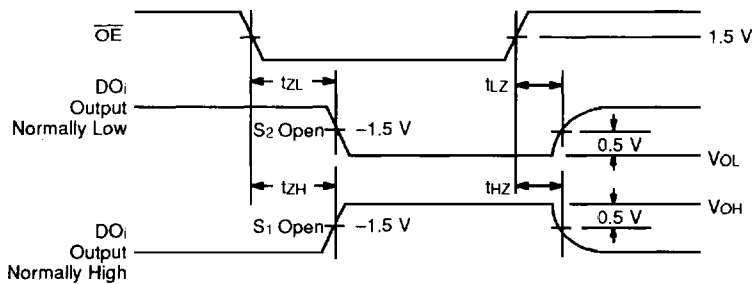

$\bar{O}E$ to DO_i


02163-013C

SWITCHING TEST CIRCUITS

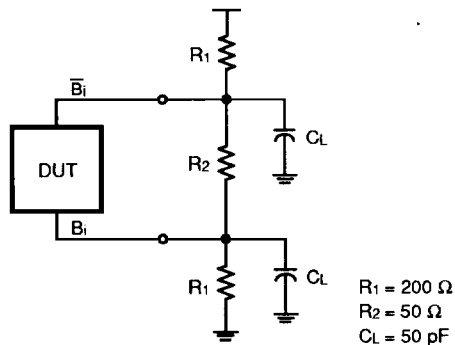


Test Circuit #1

02163C-14

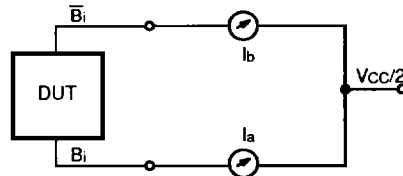


Test Circuit #2

02163C-15



Test Circuit #3

02163C-16

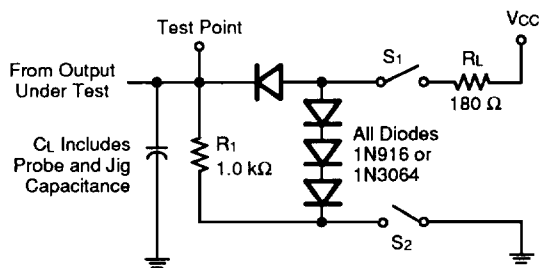

Test Circuit #4

02163C-17


Notes:

1. $C_L = 50\ \text{pF}$ unless otherwise specified.
2. S_1 and S_2 are closed except where shown.

PHYSICAL DIMENSIONS*


CD3024

24-Pin Ceramic DIP (measured in inches)

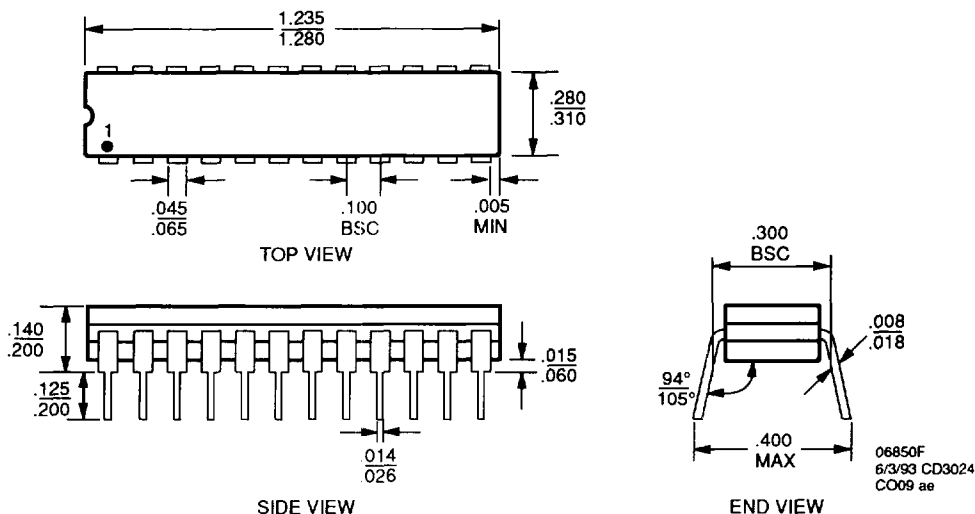

SO 024

24-Pin Small Outline (measured in inches)

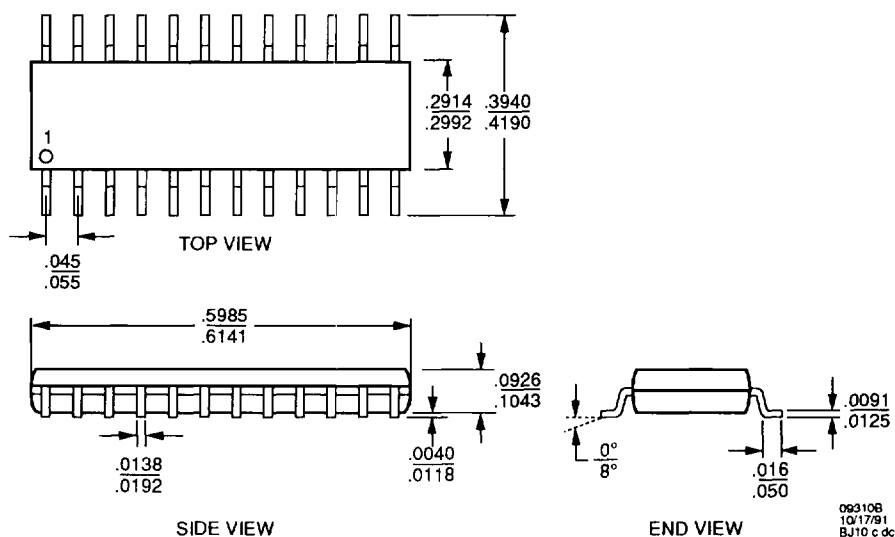

*For reference only. BSC is an ANSI standard for Basic Space Centering.

Trademarks

Copyright © 1993 Advanced Micro Devices, Inc. All rights reserved.

AMD is a registered trademark of Advanced Micro Devices, Inc.

Product names used in this publication are for identification purposes only and may be trademarks of their respective companies.

Sales Offices

North American

ALABAMA	(205) 882-9122
ARIZONA	(602) 242-4400
CALIFORNIA,	
Culver City	(310) 645-1524
Newport Beach	(714) 752-6262
Sacramento(Roseville)	(916) 786-6700
San Diego	(619) 560-7030
San Jose	(408) 452-0500
Woodland Hills	(818) 878-9988
CANADA, Ontario,	
Kanata	(613) 592-0060
Willowdale	(416) 222-7800
COLORADO	(303) 741-2900
CONNECTICUT	(203) 264-7800
FLORIDA,	
Clearwater	(813) 530-9971
Boca Raton	(407) 361-0050
Orlando (Longwood)	(407) 862-9292
GEORGIA	(404) 449-7920
IDAHO	(208) 377-0393
ILLINOIS,	
Chicago (Itasca)	(708) 773-4422
Naperville	(708) 505-9517
MARYLAND	(301) 381-3790
MASSACHUSETTS	(617) 273-3970
MINNESOTA	(612) 938-0001
NEW JERSEY,	
Cherry Hill	(609) 662-2900
Parsippany	(201) 299-0002
NEW YORK,	
Brewster	(914) 279-8323
Rochester	(716) 425-8050
NORTH CAROLINA	
Charlotte	(704) 875-3091
Raleigh	(919) 878-8111
OHIO,	
Columbus (Westerville)	(614) 891-6455
Dayton	(513) 439-0268
OREGON	(503) 245-0080
PENNSYLVANIA	(215) 398-8006
TEXAS,	
Austin	(512) 346-7830
Dallas	(214) 934-9099
Houston	(713) 376-8084

International

BELGIUM, Antwerpen	TEL	(03) 248 43 00
	FAX	(03) 248 46 42
FRANCE, Paris	TEL	(1) 49-75-10-10
	FAX	(1) 49-75-10-13
GERMANY,		
Bad Homburg	TEL	(06172)-24061
	FAX	(06172)-23195
München	TEL	(089) 45053-0
	FAX	(089) 406490
HONG KONG,		
Wanchai	TEL	(852) 865-4525
	FAX	(852) 865-4335
ITALY, Milano	TEL	(02) 3390541
	FAX	(02) 38103458
JAPAN,		
Atsugi	TEL	(0462) 29-8460
	FAX	(0462) 29-8458
Kanagawa	TEL	(0462) 47-2911
	FAX	(0462) 47-1729

International (Continued)

Tokyo	TEL	(03) 3346-7550
	FAX	(03) 3342-5196
Osaka	TEL	(06) 243-3250
	FAX	(06) 243-3253
KOREA, Seoul	TEL	(82) 2-784-0030
	FAX	(82) 2-784-8014
LATIN AMERICA,		
Ft. Lauderdale	TEL	(305) 484-8600
	FAX	(305) 485-9736
SINGAPORE	TEL	(65) 3481188
	FAX	(65) 3480161
SWEDEN,		
Stockholm area	TEL	(08) 98 61 80
(Bromma)	FAX	(08) 98 09 06
TAIWAN, Taipei	TEL	(886) 2-7153536
	FAX	(886) 2-7122183
UNITED KINGDOM,		
Manchester area	TEL	(0925) 830380
(Warrington)	FAX	(0925) 830204
London area	TEL	(0483) 740440
(Woking)	FAX	(0483) 756196

North American Representatives

CANADA	
Burnaby, B.C. - DAVETEK MARKETING	(604) 430-3680
Kanata, Ontario - VITEL ELECTRONICS	(613) 592-0060
Mississauga, Ontario - VITEL ELECTRONICS	(416) 564-9720
Lachine, Quebec - VITEL ELECTRONICS	(514) 636-5951
ILLINOIS	
Skokie - INDUSTRIAL REPRESENTATIVES, INC	(708) 967-8430
IOWA	
LORENZ SALES	(319) 377-4666
KANSAS	
Merriam - LORENZ SALES	(913) 469-1312
Wichita - LORENZ SALES	(316) 721-0500
MICHIGAN	
Holland - COM-TEK SALES, INC	(616) 335-8418
Brighton - COM-TEK SALES, INC	(313) 227-0007
MINNESOTA	
Mel Foster Tech. Sales, Inc.	(612) 941-9790
MISSOURI	
LORENZ SALES	(314) 997-4558
NEBRASKA	
LORENZ SALES	(402) 475-4660
NEW MEXICO	
THORSON DESERT STATES	(505) 883-4343
NEW YORK	
East Syracuse - NYCOM, INC	(315) 437-8343
Hauppauge - COMPONENT CONSULTANTS, INC	(516) 273-5050
OHIO	
Centerville - DOLFUSS ROOT & CO	(513) 433-6776
Columbus - DOLFUSS ROOT & CO	(614) 885-4844
Westlake - DOLFUSS ROOT & CO	(216) 899-9370
PENNSYLVANIA	
RUSSELL F. CLARK CO., INC.	(412) 242-9500
PUERTO RICO	
COMP REP ASSOC, INC	(809) 746-6550
UTAH	
Front Range Marketing	(801) 288-2500
WASHINGTON	
ELECTRA TECHNICAL SALES	(206) 821-7442
WISCONSIN	
Brookfield - INDUSTRIAL REPRESENTATIVES, INC	(414) 574-9399

Advanced Micro Devices reserves the right to make changes in its product without notice in order to improve design or performance characteristics. The performance characteristics listed in this document are guaranteed by specific tests, guard banding, design and other practices common to the industry. For specific testing details, contact your local AMD sales representative. The company assumes no responsibility for the use of any circuits described herein.



Advanced Micro Devices, Inc. 901 Thompson Place, P.O. Box 3453, Sunnyvale, CA 94088, USA
Tel: (408) 732-2400 • TWX: 910-339-9280 • TELEX: 34-6306 • TOLL FREE: (800) 538-8450
APPLICATIONS HOTLINE & LITERATURE ORDERING • TOLL FREE: (800) 222-9323 • (408) 749-5703



RECYCLED &
RECYCLABLE

© 1993 Advanced Micro Devices, Inc.
02163D 8/12/93
CP-17M-9/93-0 Printed in USA