

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS
PROM VERSION of M37450M8-XXXSP/FP

DESCRIPTION

The M37450E8-XXXSP is a single-chip microcomputer designed with CMOS silicon gate technology. It is housed in a 64-pin shrink plastic molded DIP. The features of this chip are similar to those of the M37450M8-XXXSP except that this chip has a 16384-byte PROM built-in. This single-chip microcomputer is useful for office automation appliances and consumer appliance controllers.

In addition to its simple instruction sets, the PROM, RAM and I/O addresses are placed on the same memory map to enable easy programming. Since general purpose PROM writes can be used for small quantity production runs. It also has a unique feature that enables it to be used as a slave microcomputer.

The M37450E8SS and the M37450E8FS are the window type (M37450E8FS is housed in a 80-pin ceramic QFN package). The differences between the M37450E8-XXXSP and the M37450E8-XXXFP, and between the M37450E8SS and the M37450E8FS are the package outline and the power dissipation ability (absolute maximum ratings).


FEATURES

- Number of basic instructions 71
69 MELPS 740 basic instructions + 2 multiply/divide instructions
- Memory size EPROM 16384 bytes
RAM 384 bytes
- Instruction execution time
(minimum instructions at 10 MHz frequency) 0.8μs
- Single power supply 5V±5%
- Power dissipation normal operation mode
(at 10 MHz frequency) 30mW
- Subroutine nesting 96 levels max.
- Interrupt 15 events
- Master CPU bus interface 1 byte
- 16-bit timer 3
- 8-bit timer (Serial I/O use) 1
- Serial I/O (UART or clock synchronous) 1
- A-D converter (8-bit resolution) 3 channels (DIP)
8 channels (QFP)
- D-A converter (8-bit resolution) 2 channels
- PWM output (8-bit or 16-bit) 1
- Programmable I/O ports
(Ports P0, P1, P2, P3, P5, P6) 48
- Input port (Port P4) 3 (DIP), 8 (QFP)
- Output ports (Ports D-A₁, D-A₂) 2
- EPROM (equivalent to the M5L27256)
program voltage 12.5V


APPLICATION

Slave controller for PPCs, facsimiles, and page printers
HDD, optical disk, inverter, and industrial motor controllers
Industrial robots and machines

PIN CONFIGURATION (TOP VIEW)

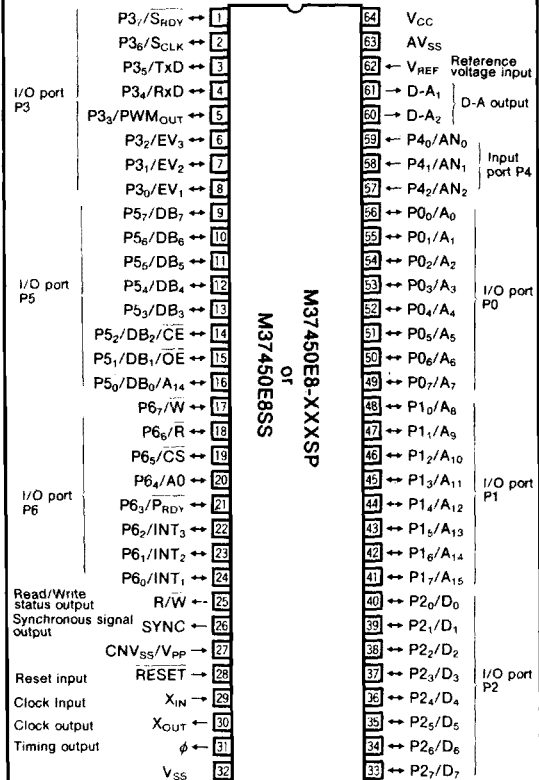

Outline 64P4B(OTP)
64S1B(Window)

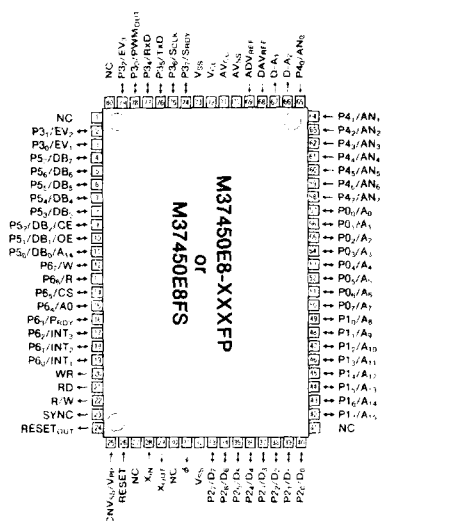


Outline 80P6(OTP)
80D0(Window)

NC: No connection

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP


M37450E8-XXXSP, M37450E8SS BLOCK DIAGRAM

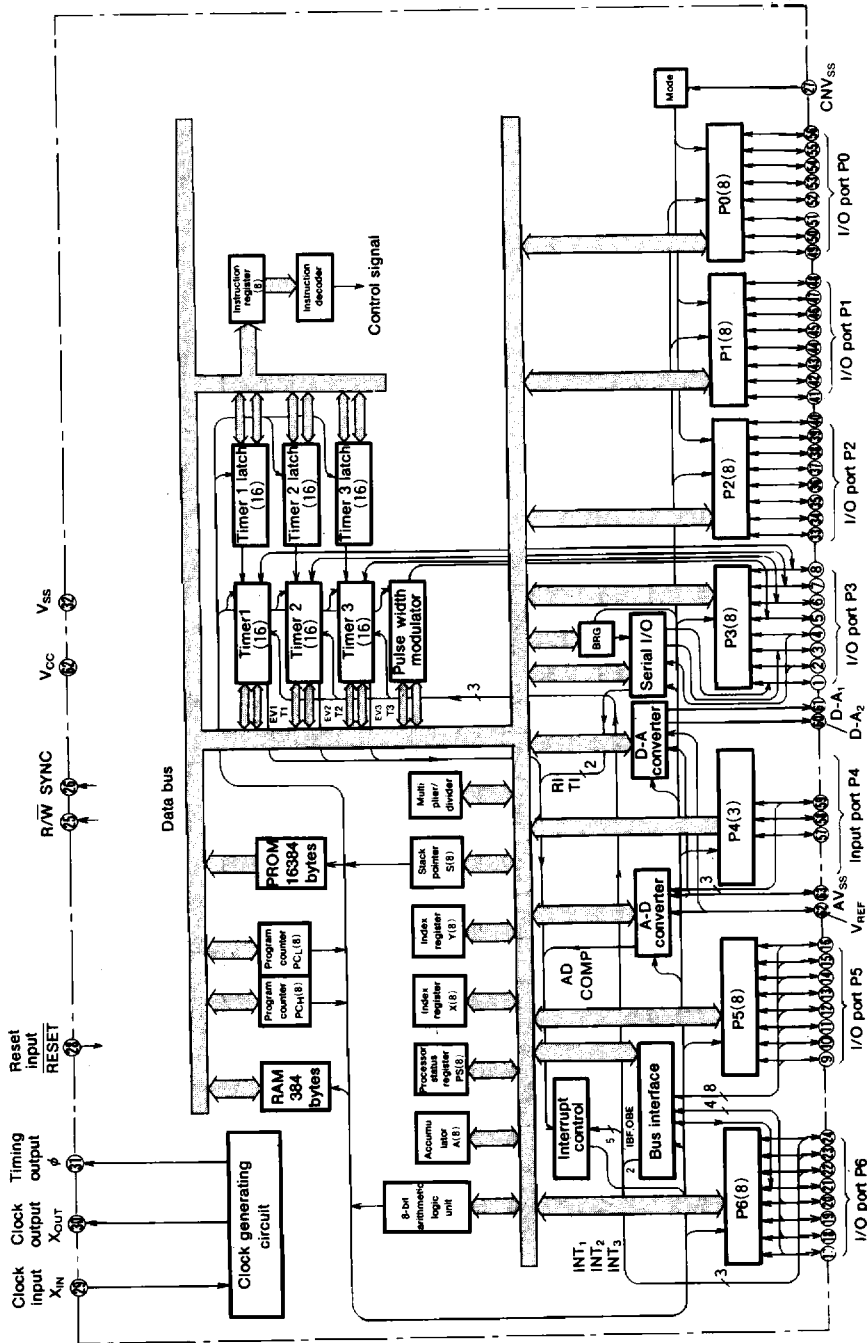

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

M37450E8-XXXFP, M37450E8FS BLOCK DIAGRAM

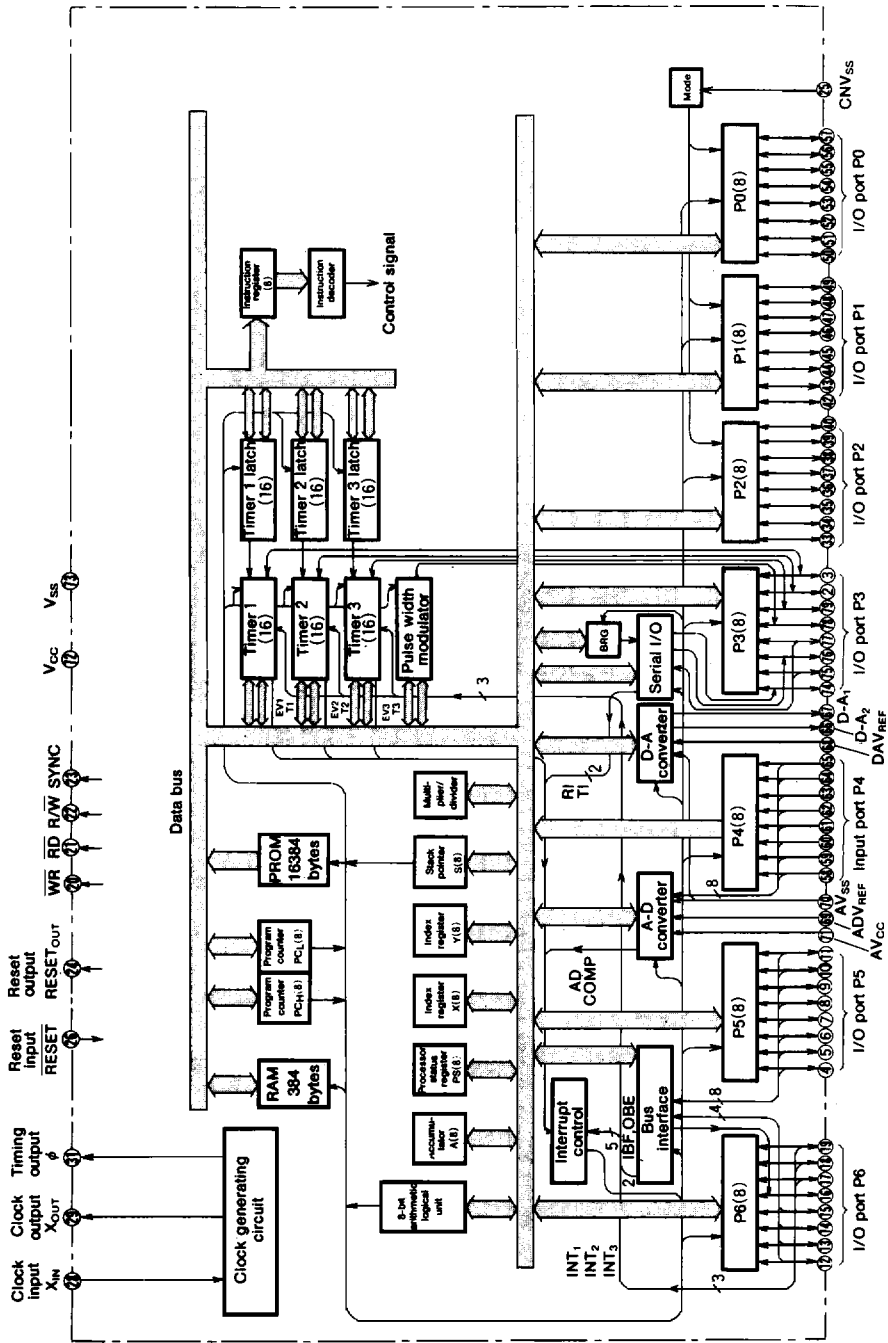

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

FUNCTIONS OF M37450E8-XXXSP/FP, M37450E8SS/FS

Parameter			Functions
Number of basic instructions			71(69 MELPS 740 basic instructions+2)
Instruction execution time			0.8μs (minimum instructions, at 10MHz frequency)
Clock frequency			10MHz (max.)
Memory size	PROM		16384 bytes
	RAM		384 bytes
Input/Output port	P0-P3, P5, P6	I/O	8-bitX6
	P4	Input	3-bitX1 (8-bitX1 for 80-pin model)
	D-A	Output	2-bitX1
Serial I/O			UART or clock synchronous
Timers			16-bit timerX3, 8-bit timer (Serial I/O baud rate generator)X1
A-D converter			8-bitX3 channels (8 channels for 80-pin model)
D-A converter			8-bitX2 channels
Pulse width modulator			8-bit or 16-bitX1
Data bus buffer			1-byte input and output each
Subroutine nesting			96-levels
Interrupt			6 external interrupts, 8 internal interrupts One software interrupt
Clock generating circuit			Built-in (ceramic or quartz crystal oscillator)
Supply voltage			5V±5%
Power dissipation			30mW (at 10MHz frequency)
Input/Output characters	Input/Output voltage		5V
	Output current		±5mA (max.)
Memory expansion			Possible
Operating temperature range			—10 to 70℃
Device structure			CMOS silicon gate
Package	M37450E8-XXXSP		64-pin shrink plastic molded DIP
	M37450E8-XXXFP		80-pin plastic molded QFP
	M37450E8SS		64-pin shrink ceramic DIP
	M37450E8FS		80-pin ceramic QFN

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

PIN DESCRIPTION (normal mode)

Pin	Name	Input/ Output	Functions
V_{CC} , V_{SS}	Supply voltage		Power supply inputs $5V \pm 5\%$ to V_{CC} , and 0V to V_{SS} .
CNV_{SS}/V_{PP}	CNV_{SS}		Controls the processor mode of the chip. Normally connected to V_{SS} or V_{CC} .
$\overline{RESET}$	Reset input	Input	To enter the reset state, the reset input pin must be kept at a "L" for more than 8 clock cycles (under normal V_{CC} conditions). If more time is needed for the crystal oscillator to stabilize, this "L" condition should be maintained for the required time.
X_{IN}	Clock input	Input	This chip has an internal clock generating circuit. To control generating frequency, an external ceramic or a quartz crystal oscillator is connected between the X_{IN} and X_{OUT} pins. If an external clock is used, the clock source should be connected to the X_{IN} pin and the X_{OUT} pin should be left open.
X_{OUT}	Clock output	Output	
ϕ	Timing output	Output	Outputs signal consisting of oscillating frequency divided by four.
SYNC	Synchronous signal output	Output	This signal is output "H" during operation code fetch and is used to control single stepping of programs.
$R/\overline{W}$	Read/Write status output	Output	This signal determines the direction of the data bus. It is "H" during read and "L" during write.
$P0_0-P0_7$	I/O port P0	I/O	Port P0 is an 8-bit I/O port with directional registers allowing each I/O bit to be individually programmed as input or output. The output structure is CMOS output. The low-order bits of the address are output except in single-chip mode.
$P1_0-P1_7$	I/O port P1	I/O	Port P1 is an 8-bit I/O port and has basically the same functions as port P0. The high-order bits of the address are output except in single-chip mode.
$P2_0-P2_7$	I/O port P2	I/O	Port P2 is an 8-bit I/O port and has basically the same functions as port P0. Used as data bus except in single-chip mode.
$P3_0-P3_7$	I/O port P3	I/O	Port P3 is an 8-bit I/O port and has basically the same functions as port P0. Serial I/O, PWM output, or event I/O function can be selected with a program.
$P4_0-P4_2$ ($P4_0-P4_7$)	Input port P4	Input	Analog input pin for the A-D converter. The 64-pin model has three pins and the 80-pin model has eight pins. They may also be used as digital input pins.
$P5_0-P5_7$	I/O port P5	I/O	Port P5 is an 8-bit I/O port and has basically the same functions as port P0. This port functions as an 8-bit data bus for the master CPU when slave mode is selected with a program.
$P6_0-P6_7$	I/O port P6	I/O	Port P6 is an 8-bit I/O port and has basically the same function as port P0. Pins $P6_3$ to $P6_7$ change to a control bus for the master CPU when slave mode is selected with a program. Pins $P6_0$ to $P6_2$ may be programmed as external interrupt input pins.
$D-A_1, D-A_2$	D-A output	Output	Analog signal from D-A converter is output.
V_{REF}	Reference voltage input	Input	Reference voltage input pin for A-D and D-A converter. This pin is for 64-pin model only.
ADV_{REF}	A-D reference voltage input	Input	Reference voltage input pin for A-D converter. This pin is for 80-pin model only.
DAV_{REF}	D-A reference voltage input	Input	Reference voltage input pin for D-A converter. This pin is for 80-pin model only.
AV_{SS}	Analog power supply		Ground level input pin for A-D and D-A converter. Same voltage as V_{SS} is applied.
AV_{CC}	Analog power supply		Power supply input pin for A-D converter. This pin is for 80-pin model only. Same voltage as V_{CC} is applied. In the case of the 64-pin model, AV_{CC} is connected to V_{CC} internally.
$\overline{RD}$	Read signal output	Output	Control signal output as active "L" when valid data is read from data bus. This pin is for 80-pin model only.
WR	Write signal output	Output	Control signal output as active "L" when writing data from data bus to external component. This pin is for 80-pin model only.
$RESET_{OUT}$	Reset output	Output	Control signal output as active "H" during reset. It is used as a reset output signal for peripheral components. This pin is for 80-pin model only.

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

PIN DESCRIPTION (EPROM mode)

Pin	Name	Input/ Output	Functions
V_{CC}, V_{SS}	Supply voltage		Power supply inputs 5V or 6V to V_{CC} , and 0V to V_{SS} .
CNV_{SS}/V_{PP}	V_{PP}	Input	Connect to V_{PP} when programming or verifying.
$\overline{RESET}$	Reset Input	Input	Connect to V_{SS} .
X_{IN}	Clock input	Input	Connect a ceramic or a quartz crystal oscillator between X_{IN} and X_{OUT} for clock oscillation.
X_{OUT}	Clock output	Output	
ϕ	Timing output	Output	For timing output.
SYNC	Synchronous signal output	Output	Kept to open ("L" signal is output).
$R/\overline{W}$	Read/Write status output	Output	Kept to open ("H" signal is output).
$P0_0-P0_7$	I/O port P0	Input	P0 works as the lower 8-bit address input.
$P1_0-P1_7$	I/O port P1	Input	$P1_0$ to $P1_5$ works as the higher 6-bit address input. $P1_6$ and $P1_7$ connect to V_{CC} or V_{SS} .
$P2_0-P2_7$	I/O port P2	I/O	P2 works as an 8-bit data bus.
$P3_0-P3_7$	I/O port P3	Input	Connect to V_{SS} .
$P4_0-P4_2$ ($P4_0-P4_7$)	Input port P4	Input	Connect to V_{SS} (The 80-pin model has eight pins $P4_0$ to $P4_7$).
$P5_0-P5_7$	I/O port P5	Input	$P5_0$, $P5_1$ and $P5_2$ work as A_{14} , $\overline{OE}$, and $\overline{CE}$ inputs respectively. Connect $P5_3$ and $P5_4$ to V_{CC} and $P5_5$ to $P5_7$ to V_{SS} .
$P6_0-P6_7$	I/O port P6	Input	Connect to V_{SS} .
$D-A_1, D-A_2$	D-A output	Output	Kept to open.
V_{REF}	Reference voltage input	Input	Connect to V_{SS} .
ADV_{REF}	A-D reference voltage input	Input	Connect to V_{SS} .
DAV_{REF}	D-A reference voltage input	Input	Connect to V_{SS} .
AV_{SS}	Analog power	Input	Connect to V_{SS} .
AV_{CC}	Analog power	Input	Connect to V_{CC} or V_{SS} .
$\overline{RD}$	Read signal output	Output	Kept to open ("H" signal is output).
$\overline{WR}$	Write signal output	Output	Kept to open ("H" signal is output).
$RESET_{OUT}$	Reset output	Output	Kept to open ("H" signal is output).

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

EPROM MODE

The M37450E8-XXXSP/FP, M37450E8SS/FS features an EPROM mode in addition to its normal modes. When the $\overline{\text{RESET}}$ signal level is low ("L") and $\text{CNV}_{\text{SS}}/\text{V}_{\text{PP}}$ signal level is high ("H"), the chip automatically enters the EPROM mode. Table 1 list the correspondence between pins and Figure 1 and Figure 2 give the pin connections in the EPROM mode. When in the EPROM mode, ports P0, P1, P2, P5₀ to P5₂ and CNV_{SS} are used for the PROM (equivalent to the M5L27256). When in this mode, the built-in PROM can be written to or read from using these pins in the same way as with the M5L27256. The oscillator should be connected to the X_{IN} and X_{OUT} pins, or external clock should be connected to the X_{IN} pin.

Table 1. Pin function in EPROM mode

	M37450E8-XXXSP/FP, M37450E8SS/FS	M5L27256
V_{CC}	V_{CC}	V_{CC}
V_{PP}	$\text{CNV}_{\text{SS}}/\text{V}_{\text{PP}}$	V_{PP}
V_{SS}	V_{SS}	V_{SS}
Address input	Ports P0, P1 ₀ -P1 ₅ , P5 ₀	A ₀ -A ₁₄
Data I/O	Port P2	D ₀ -D ₇
$\overline{\text{CE}}$	P5 ₂ /DB ₂ / $\overline{\text{CE}}$	$\overline{\text{CE}}$
$\overline{\text{OE}}$	P5 ₁ /DB ₁ / $\overline{\text{OE}}$	$\overline{\text{OE}}$

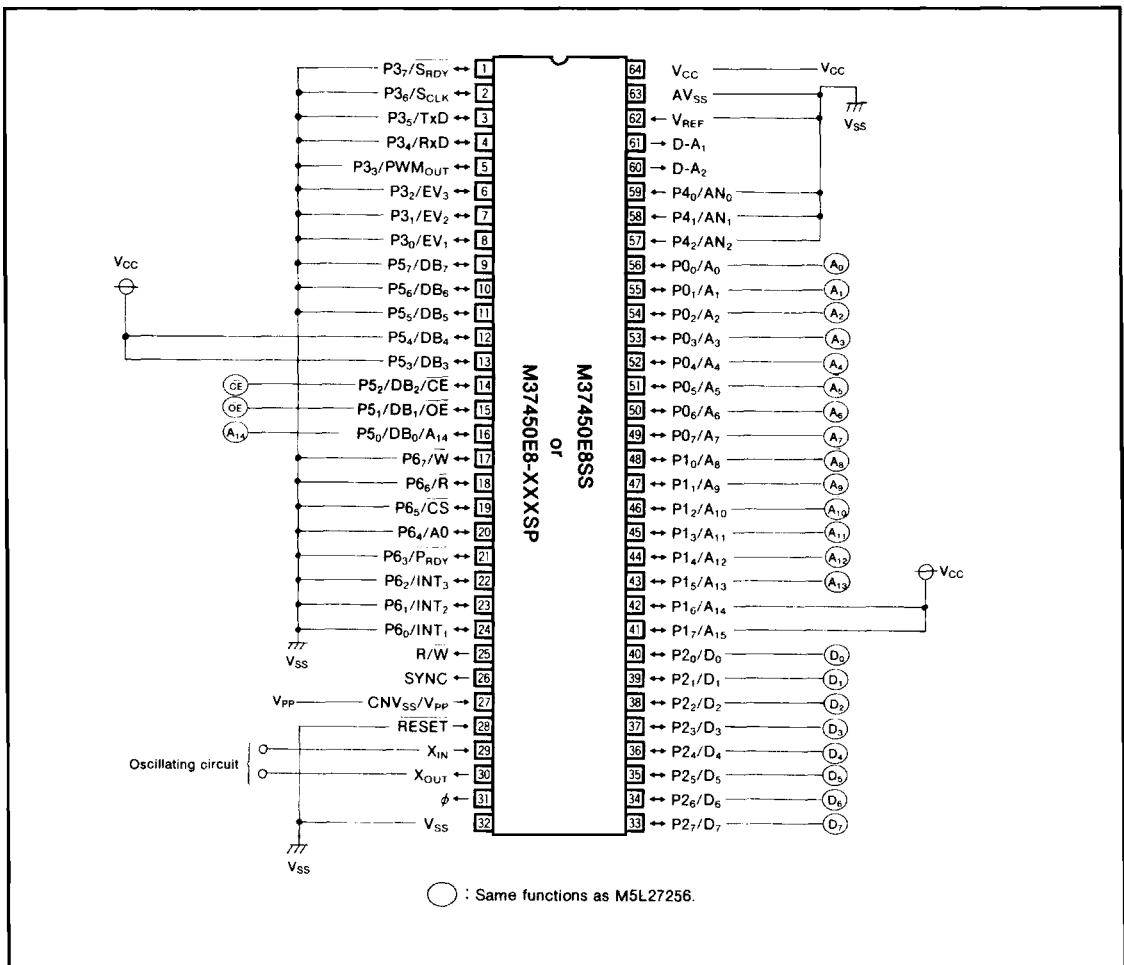


Fig. 1 Pin connection in EPROM mode (64-pin model)

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

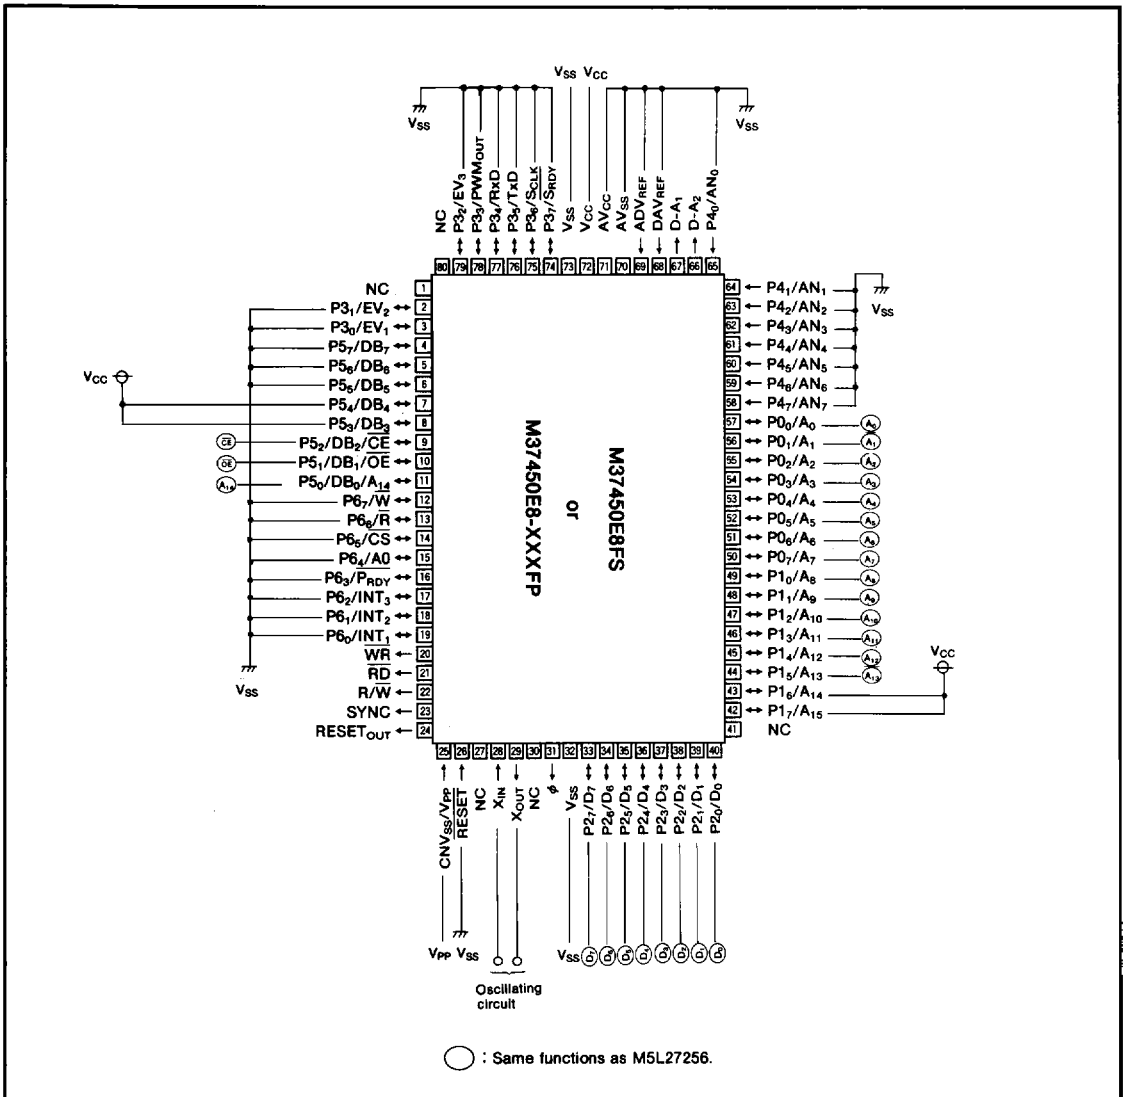


Fig. 2 Pin connection in EPROM mode (80-pin model)

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

PROM READING, WRITING AND ERASING
Reading

To read the PROM, set the $\overline{CE}$ and $\overline{OE}$ pins to a "L" level, and supply 0V to the $\overline{RESET}$ pin, 5V to the V_{CC} pin and the CNV_{SS} (V_{PP}) pin. Input the address of the data (A_0 to A_{14}) to be read and the data will be output to the I/O pins D_0 to D_7 . The data I/O pins will be floating when the $\overline{OE}$ pin is in the "H" state.

Writing


To write to the PROM, set the $\overline{OE}$ pin to a "H" level, and supply 0V to the $\overline{RESET}$ pin, 6V to the V_{CC} pin and 12.5V to the V_{PP} pin. The CPU will enter the program mode when V_{PP} is applied to the V_{PP} pin. The address to be written to is selected with pins A_0 to A_{14} , and the data to be written is input to pins D_0 to D_7 . Set the $\overline{CE}$ pin to a "L" level to begin writing.

Erasing

Data can only be erased on the M37450E8SS/FS ceramic package, which includes a window. To erase data on this chip, use an ultraviolet light source with a 2537 Angstrom wave length. The minimum radiation power necessary for erasing is $15W \cdot s/cm^2$.

NOTES ON HANDLING

- (1) Sunlight and fluorescent light contain wave lengths capable of erasing data. For ceramic package types, cover the transparent window with a seal (provided) when this chip is in use. However, this seal must not contact the lead pins.
- (2) Before erasing, the glass should be cleaned and stains such as finger prints should be removed thoroughly. If these stains are not removed, complete erasure of the data could be prevented.
- (3) Since a high voltage is used to write data, care should be taken when turning on the PROM writer's power.
- (4) For the programmable microcomputer (shipped in blank or OTP type), Mitsubishi does not perform PROM write test and screening in the assembly process and following process. To improve reliability after write, performing write and test according to the flow below before use is recommended.
- (5) In EPROM mode, address A_{15} is set to "H" automatically.

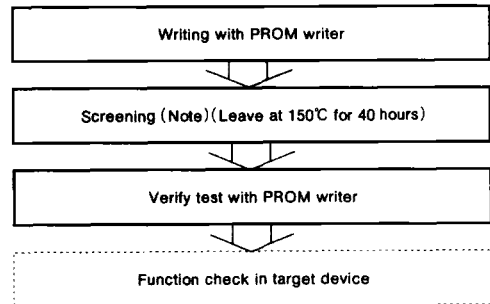

Note : Since the screening temperature is higher than storage temperature, never expose to 150°C exceeding 100 hours.

Table 2. I/O signal in each mode

Mode \ Pin	$\overline{CE}$	$\overline{OE}$	V_{PP}	V_{CC}	Port P2
Read-out	V_{IL}	V_{IL}	5V	5V	Output
Output disable	V_{IL}	V_{IH}	5V	5V	Floating
Programming	V_{IL}	V_{IH}	12.5V	6V	Input
Programming verify	V_{IH}	V_{IL}	12.5V	6V	Output
Program disable	V_{IH}	V_{IH}	12.5V	6V	Floating

Note 1 : V_{IL} and V_{IH} indicate a "L" and "H" input voltage, respectively.
 2 : An X indicates either V_{IL} or V_{IH} .

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Ratings	Unit
V_{CC}	Supply voltage	With respect to V_{SS} Output transistors are at "OFF" state.	-0.3 to 7	V
V_I	Input voltage RESET, X_{IN}		-0.3 to 7	V
V_I	Input voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P4_0$ - $P4_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$, ADV_{REF} , DAV_{REF} , V_{REF} , AV_{CC}		-0.3 to $V_{CC}+0.3$	V
V_I	Input voltage CNV_{SS}		-0.3 to 13 (Note 1)	V
V_O	Output voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$, X_{OUT} , ϕ , $\overline{RD}$, $\overline{WR}$, $R/\overline{W}$, $RESET_{OUT}$, SYNC		-0.3 to $V_{CC}+0.3$	V
P_d	Power dissipation	$T_a = 25^\circ\text{C}$	1000 (Note 2)	mW
T_{opr}	Operating temperature		-10 to 70	$^\circ\text{C}$
T_{stg}	Storage temperature		-40 to 125	$^\circ\text{C}$

Note 1 : In EPROM programming mode, CNV_{SS} is 13.5V.
2 : 500mW for QFP type.

RECOMMENDED OPERATING CONDITIONS

($V_{CC}=5V\pm5\%$, $T_a=-10$ to 70°C unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
V_{CC}	Supply voltage	4.75	5	5.25	V
V_{SS}	Supply voltage		0		V
V_{IH}	"H" Input voltage RESET, X_{IN} , CNV_{SS} (Note 1)	0.8 V_{CC}		V_{CC}	V
V_{IH}	"H" Input voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P4_0$ - $P4_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$ (except Note 1)	2.0		V_{CC}	V
V_{IL}	"L" Input voltage CNV_{SS} (Note 1)	0		0.2 V_{CC}	V
V_{IL}	"L" Input voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P4_0$ - $P4_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$ (except Note 1)	0		0.8	V
V_{IL}	"L" Input voltage RESET	0		0.12 V_{CC}	V
V_{IL}	"L" Input voltage X_{IN}	0		0.16 V_{CC}	V
$I_{OL(peak)}$	"L" peak output current $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$			10	mA
$I_{OL(avg)}$	"L" average output current $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$ (Note 2)			5	mA
$I_{OH(peak)}$	"H" peak output current $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$			-10	mA
$I_{OH(avg)}$	"H" average output current $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$ (Note 2)			-5	mA
$f(X_{IN})$	Clock oscillating frequency	1		10	MHz

Note 1 : Ports operate as INT_1 - INT_3 ($P6_0$ - $P6_7$), EV_1 - EV_3 ($P3_0$ - $P3_7$), RxD ($P3_4$) and S_{CLK} ($P3_6$)
2 : The average output current $I_{OH(avg)}$ and $I_{OL(avg)}$ are the average value during a 100ms.
3 : The total of "L" output current $I_{OL(peak)}$ of port $P0$, $P1$ and $P2$ is less than 40mA.
The total of "H" output current $I_{OH(peak)}$ of port $P0$, $P1$ and $P2$ is less than 40mA.
The total of "L" output current $I_{OL(peak)}$ of port $P3$, $P5$, $P6$, $R/\overline{W}$, SYNC, $RESET_{OUT}$, $\overline{RD}$, $\overline{WR}$ and ϕ is less than 40mA.
The total of "H" output current $I_{OH(peak)}$ of port $P3$, $P5$, $P6$, $R/\overline{W}$, SYNC, $RESET_{OUT}$, $\overline{RD}$, $\overline{WR}$ and ϕ is less than 40mA.

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

ELECTRICAL CHARACTERISTICS ($V_{CC} = 5V \pm 5\%$, $V_{SS} = 0V$, $T_a = -10$ to $70^\circ C$, $f(X_{IN}) = 10MHz$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{OH}	"H" output voltage $\overline{RD}$, $\overline{WR}$, $R/\overline{W}$, $\overline{SYNC}$, $\overline{RESET}_{OUT}$, ϕ	$I_{OH} = -2mA$	$V_{CC} - 1$			V
V_{OH}	"H" output voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$	$I_{OH} = -5mA$	$V_{CC} - 1$			V
V_{OL}	"L" output voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$, $\overline{RD}$, $\overline{WR}$, $R/\overline{W}$, $\overline{SYNC}$, $\overline{RESET}_{OUT}$, ϕ	$I_{OL} = 2mA$			0.45	V
V_{OL}	"L" output voltage $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$	$I_{OL} = 5mA$			1	V
$V_{T+} - V_{T-}$	Hysteresis $\overline{INT}_1$ - $\overline{INT}_3$ ($P6_0$ - $P6_2$), $\overline{EV}_1$ - $\overline{EV}_3$ ($P3_0$ - $P3_2$), $R_X D$ ($P3_4$), S_{CLK} ($P3_6$)	Function input level	0.3		1	V
$V_{T+} - V_{T-}$	Hysteresis $\overline{RESET}$				0.7	V
$V_{T+} - V_{T-}$	Hysteresis X_{IN}		0.1		0.5	V
I_{IL}	"L" input current $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P4_0$ - $P4_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$, $\overline{RESET}$, X_{IN}	$V_I = V_{SS}$	-5		5	μA
I_{IH}	"H" input current $P0_0$ - $P0_7$, $P1_0$ - $P1_7$, $P2_0$ - $P2_7$, $P3_0$ - $P3_7$, $P4_0$ - $P4_7$, $P5_0$ - $P5_7$, $P6_0$ - $P6_7$, $\overline{RESET}$, X_{IN}	$V_I = V_{CC}$	-5		5	μA
V_{RAM}	RAM retention voltage	At stop mode	2			V
I_{CC}	Supply current	At system operation $f(X_{IN}) = 10MHz$		6	10	mA
		At stop mode (Note 1)		1	10	μA

Note 1 : The terminals $\overline{RD}$, $\overline{WR}$, $R/\overline{W}$, $\overline{SYNC}$, $\overline{RESET}_{OUT}$, ϕ , $D-A_1$ and $D-A_2$ are all open. The other ports, which are in the input mode, are connected to V_{SS} . A-D converter is in the A-D completion state. The current through ADV_{REF} and DAV_{REF} is not included(Fig.6).

A-D CONVERTER CHARACTERISTICS

($V_{CC} = AV_{CC} = 5V$, $V_{SS} = AV_{SS} = 0V$, $T_a = 25^\circ C$, $f(X_{IN}) = 10MHz$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
—	Resolution				8	Bits
—	Absolute accuracy	$V_{CC} = AV_{CC} = ADV_{REF} = 5.12V$		± 1.5	± 3	LSB
t_{CONV}	Conversion time				49	$t_C(\phi)$
V_{IA}	Analog input voltage		AV_{SS}		AV_{CC}	V
V_{ADVREF}	Reference input voltage		2		V_{CC}	V
R_{LADDER}	Ladder resistance value	$ADV_{REF} = 5V$	20	35	50	k Ω
$I_{IADVREF}$	Reference input current	$ADV_{REF} = 5V$	0.1	0.14	0.25	mA
V_{AVCC}	Analog power supply input voltage			V_{CC}		V
V_{AVSS}	Analog power supply input voltage			0		V

D-A CONVERTER CHARACTERISTICS ($V_{CC} = 5V$, $V_{SS} = AV_{SS} = 0V$, $T_a = 25^\circ C$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
—	Resolution				8	Bits
—	Absolute accuracy	$V_{CC} = DAV_{REF} = 5.12V$			1.0	%
t_{SU}	Setup time				3	μs
R_O	Output resistance		1	2	4	k Ω
V_{AVSS}	Analog power supply input voltage			0		V
V_{DAVREF}	Reference input voltage		4		V_{CC}	V
I_{DAVREF}	Reference power input current (Each pin)		0	2.5	5	mA

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

TIMING REQUIREMENTS

Port/single-chip mode ($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_a=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{SU}(P0D-\phi)$	Port P0 input setup time	Fig. 3	200			ns
$t_{SU}(P1D-\phi)$	Port P1 input setup time		200			ns
$t_{SU}(P2D-\phi)$	Port P2 input setup time		200			ns
$t_{SU}(P3D-\phi)$	Port P3 input setup time		200			ns
$t_{SU}(P4D-\phi)$	Port P4 input setup time		200			ns
$t_{SU}(P5D-\phi)$	Port P5 input setup time		200			ns
$t_{SU}(P6D-\phi)$	Port P6 input setup time		200			ns
$t_h(\phi-P0D)$	Port P0 input hold time		40			ns
$t_h(\phi-P1D)$	Port P1 input hold time		40			ns
$t_h(\phi-P2D)$	Port P2 input hold time		40			ns
$t_h(\phi-P3D)$	Port P3 input hold time		40			ns
$t_h(\phi-P4D)$	Port P4 input hold time		40			ns
$t_h(\phi-P5D)$	Port P5 input hold time		40			ns
$t_h(\phi-P6D)$	Port P6 input hold time		40			ns
$t_C(X_{IN})$	External clock input cycle time		100		1000	ns
$t_W(X_{INL})$	External clock input "L" pulse width		30			ns
$t_W(X_{INH})$	External clock input "H" pulse width		30			ns
$t_r(X_{IN})$	External clock rising edge time				20	ns
$t_f(X_{IN})$	External clock falling edge time				20	ns

Master CPU bus interface timing ($\overline{R}$ and $\overline{W}$ separation type mode)

($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_a=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{SU}(CS-R)$	CS setup time	Fig. 3	0			ns
$t_{SU}(CS-W)$	CS setup time		0			ns
$t_h(R-CS)$	CS hold time		0			ns
$t_h(W-CS)$	CS hold time		0			ns
$t_{SU}(A-R)$	A0 setup time		40			ns
$t_{SU}(A-W)$	A0 setup time		40			ns
$t_h(R-A)$	A0 hold time		10			ns
$t_h(W-A)$	A0 hold time		10			ns
$t_W(R)$	Read pulse width		160			ns
$t_W(W)$	Write pulse width		160			ns
$t_{SU}(D-W)$	Data input setup time before write		100			ns
$t_h(W-D)$	Data input hold time after write		10			ns

Master CPU bus interface timing ($R/\overline{W}$ type mode)

($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_a=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{SU}(CS-E)$	CS setup time	Fig. 4	0			ns
$t_h(E-CS)$	CS hold time		0			ns
$t_{SU}(A-E)$	A0 setup time		40			ns
$t_h(E-A)$	A0 hold time		10			ns
$t_{SU}(RW-E)$	R/W setup time		40			ns
$t_h(E-RW)$	R/W hold time		10			ns
$t_W(EL)$	Enable clock "L" pulse width		160			ns
$t_W(EH)$	Enable clock "H" pulse width		160			ns
$t_r(E)$	Enable clock rising edge time				25	ns
$t_f(E)$	Enable clock falling edge time				25	ns
$t_{SU}(D-E)$	Data input setup time before write		100			ns
$t_h(E-D)$	Data input hold time after write		10			ns

mitsubishi MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

Local bus/memory expansion mode, microprocessor mode

($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_a=-10$ to $70^{\circ}C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{SU(D-\phi)}$	Data input setup time	Fig. 5	130			ns
$t_{H(\phi-D)}$	Data input hold time		0			ns
$t_{SU(D-RD)}$	Data input setup time		130			ns
$t_{H(RD-D)}$	Data input hold time		0			ns

SWITCHING CHARACTERISTICS

Port/single-chip mode ($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_A=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{d(\phi-P0Q)}$	Port P0 data output delay time	Fig. 3			200	ns
$t_{d(\phi-P1Q)}$	Port P1 data output delay time				200	ns
$t_{d(\phi-P2Q)}$	Port P2 data output delay time				200	ns
$t_{d(\phi-P3Q)}$	Port P3 data output delay time				200	ns
$t_{d(\phi-P5Q)}$	Port P5 data output delay time				200	ns
$t_{d(\phi-P6Q)}$	Port P6 data output delay time				200	ns
$t_{C(\phi)}$	Cycle time		400		4000	ns
$t_{W(\phi H)}$	ϕ clock pulse width ("H" level)		190			ns
$t_{W(\phi L)}$	ϕ clock pulse width ("L" level)		170			ns
$t_{r(\phi)}$	ϕ clock rising edge time				20	ns
$t_{f(\phi)}$	ϕ clock falling edge time				20	ns

Master CPU bus interface (R and W separation type mode)

($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_A=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{a(R-D)}$	Data output enable time after read	Fig. 4			120	ns
$t_{v(R-D)}$	Data output disable time after read		10		85	ns
$t_{PLH(R-PR)}$	$\overline{P_{RDV}}$ output transmission time after read				150	ns
$t_{PLH(W-PR)}$	$\overline{P_{RDV}}$ output transmission time after write				150	ns

Master CPU bus interface (R/W type mode)

($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_A=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{a(E-D)}$	Data output enable time after read	Fig. 4			120	ns
$t_{v(E-D)}$	Data output disable time after read		10		85	ns
$t_{PLH(E-PR)}$	$\overline{P_{RDV}}$ output transmission time after E clock				150	ns

Local bus/memory expansion mode, microprocessor mode

($V_{CC}=5V\pm5\%$, $V_{SS}=0V$, $T_A=-10$ to $70^\circ C$, unless otherwise noted)

Symbol	Parameter	Test condition	Limits			Unit
			Min.	Typ.	Max.	
$t_{d(\phi-A)}$	address delay time after ϕ	Fig. 5			150	ns
$t_{v(\phi-A)}$	address effective time after ϕ		10			ns
$t_{v(RD-A)}$	address effective time after RD		10			ns
$t_{v(WR-A)}$	address effective time after WR		10			ns
$t_{d(\phi-D)}$	data output delay time after ϕ				160	ns
$t_{d(WR-D)}$	data output delay time after WR				160	ns
$t_{v(\phi-D)}$	data output effective time after ϕ		20			ns
$t_{v(WR-D)}$	data output effective time after WR		20			ns
$t_{d(\phi-RW)}$	R/W delay time after ϕ				150	ns
$t_{d(\phi-SYNC)}$	SYNC delay time after ϕ				150	ns
$t_{W(RD)}$	RD pulse width		170			ns
$t_{W(WR)}$	WR pulse width		170			ns

TEST CONDITION

Input voltage level : V_{IH} 2.4V

V_{IL} 0.45V

Output test level : V_{OH} 2.0V

V_{OL} 0.8V




Fig. 3 Test circuit in single-chip mode




Fig. 4 Master CPU bus interface test circuit




Fig. 5 Local bus test circuit

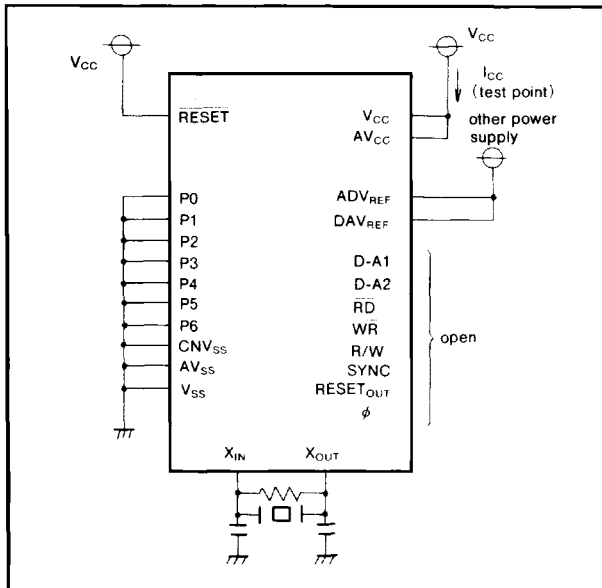



Fig. 6 I_{CC} (at STOP mode) test condition

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

TIMING DIAGRAM


Port/single-chip mode timing diagram

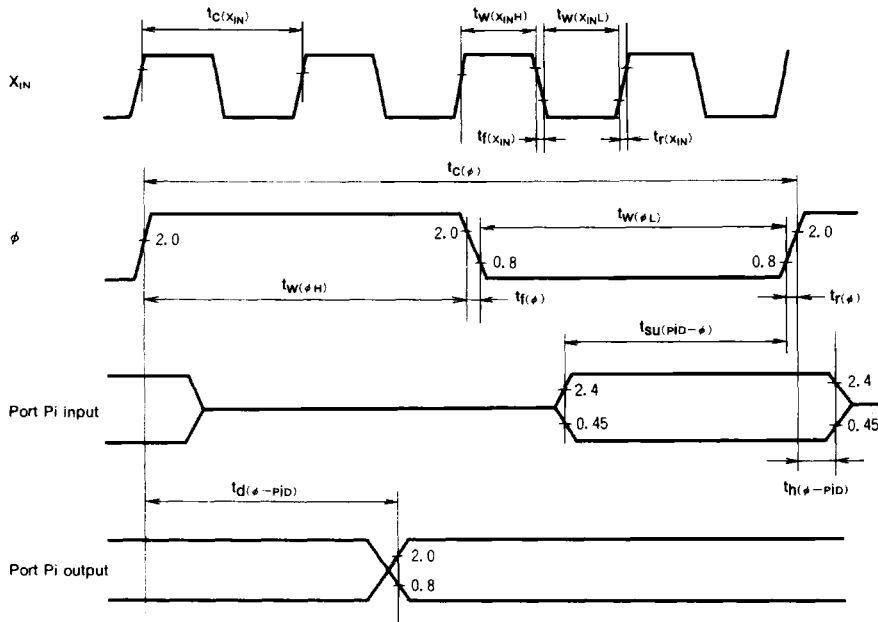

Note : $V_{IH}=0.8V_{CC}$, $V_{IL}=0.16V_{CC}$ of X_{IN}

Master CPU bus interface/ $\bar{R}$ and $\bar{W}$ separation type timing diagram


Read

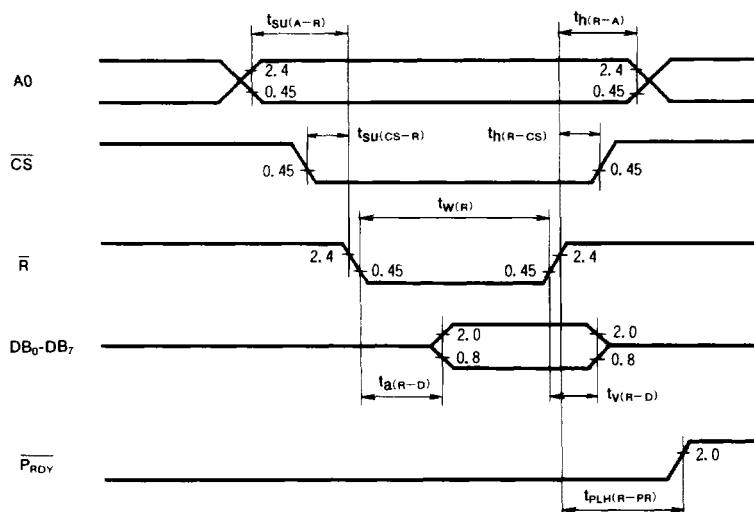


MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

Write

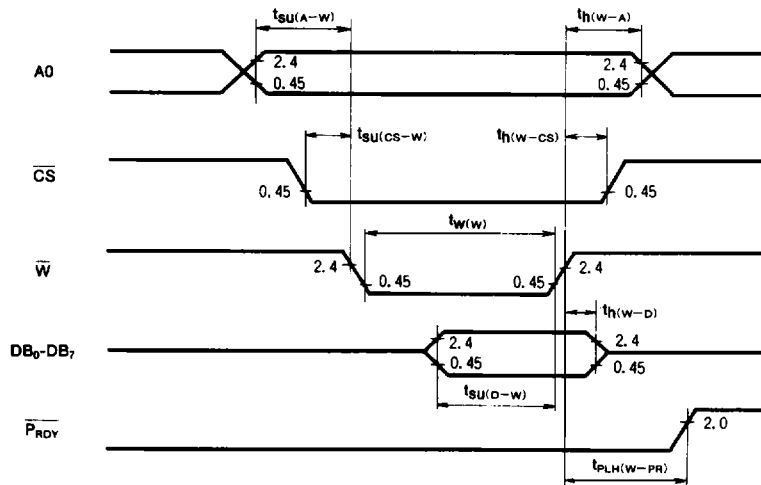

Master CPU interface/ R/W type timing diagram

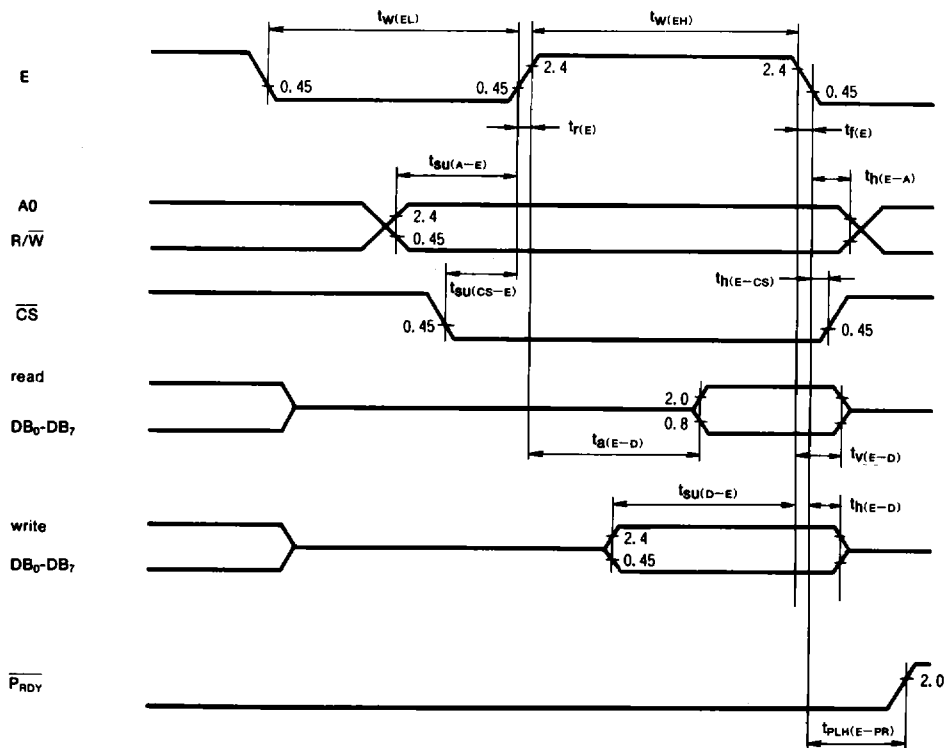

MITSUBISHI MICROCOMPUTERS
M37450E8-XXXSP/FP
M37450E8SS/FS

PROM VERSION of M37450M8-XXXSP/FP

Local bus timing diagram

