



TS4994

1.2W DIFFERENTIAL INPUT AUDIO POWER AMPLIFIER WITH SELECTABLE STANDBY

DATA BRIEF

- **DIFFERENTIAL INPUTS**
- **ZERO POP & CLICK**
- **100dB PSRR @ 217Hz** with grounded inputs
- **OPERATING FROM $V_{CC} = 2.5V$ to $5.5V$**
- **1.2W RAIL TO RAIL OUTPUT POWER @ $V_{CC}=5V$, THD=1%, $F=1kHz$, with 8Ω Load**
- **70dB CMRR @ 217Hz**
- **ULTRA LOW CONSUMPTION IN STANDBY MODE (10nA)**
- **SELECTABLE STANDBY MODE (ACTIVE LOW OR ACTIVE HIGH)**
- **ULTRA FAST STARTUP TIME: 15ms typ.**
- **AVAILABLE IN Flip-Chip 300um/9 bumps, DFN10 3x3, 0.5mm pitch & MiniSO8.**

DESCRIPTION

The TS4994 is an Audio Power Amplifier capable of delivering 1.2W of continuous RMS. output power into 8Ω load @ 5V. Thanks to its differential inputs, it exhibits outstanding noise immunity.

An external standby mode control reduces the supply current to less than 10nA. STBY MODE pin allows the standby pin to be active HIGH or LOW (except on MiniSO8 version).

An internal thermal shutdown protection is also provided and device can sustain short circuits.

The device is equipped with a Common Mode Feedback circuitry allowing outputs to be always biased at $V_{CC}/2$ regardless of the input common mode voltage.

The TS4994 has been designed for high quality audio applications such as mobile phones and requires few external components.

APPLICATIONS

- Mobile Phones (Cellular / Cordless)
- Laptop / Notebook Computers
- PDAs
- Portable Audio Devices

ORDER CODE


Part Number	Temperature Range: I	Package			Marking
		J	Q	S	
TS4994IJT	-40, +85°C	•			A94
TS4994IQT			•		K994
TS4994IST				•	K994

All devices available only in Tape & Reel


March 2004

PIN CONNECTIONS (Top View)


TS4994IJT - Flip Chip 9 bumps

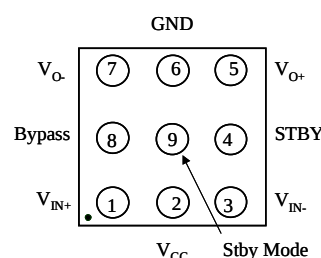

TS4994IQT - DFN10



TS4994IQT - MiniSO8

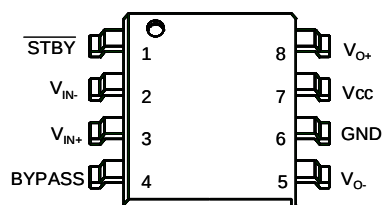

TYPICAL APPLICATION SCHEMATIC

