

# TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

- Qualified for Automotive Applications
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Output Swing Includes Both Supply Rails
- Extended Common-Mode Input Voltage Range . . . 0 V to 4.5 V (Min) with 5-V Single Supply
- No Phase Inversion
- Low Noise . . . 18 nV/√Hz Typ at f = 1 kHz
- Low Input Offset Voltage  
950 μV Max at T<sub>A</sub> = 25°C (TLV243xA)
- Low Input Bias Current . . . 1 pA Typ
- Very Low Supply Current . . . 125 μA Per Channel Max
- 600-Ω Output Drive
- Macromodel Included

#### description

The TLV243x and TLV243xA are low-voltage operational amplifier from Texas Instruments. The common-mode input voltage range for each device is extended over the typical CMOS amplifiers making them suitable for a wide range of applications. In addition, these devices do not phase invert when the common-mode input is driven to the supply rails. This satisfies most design requirements without paying a premium for rail-to-rail input performance. They also exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. This family is fully characterized at 3-V and 5-V supplies and is optimized for low-voltage operation. The TLV243x only requires 100 μA (typ) of supply current per channel, making it ideal for battery-powered applications. The TLV243x also has increased output drive over previous rail-to-rail operational amplifiers and can drive 600-Ω loads for telecom applications.

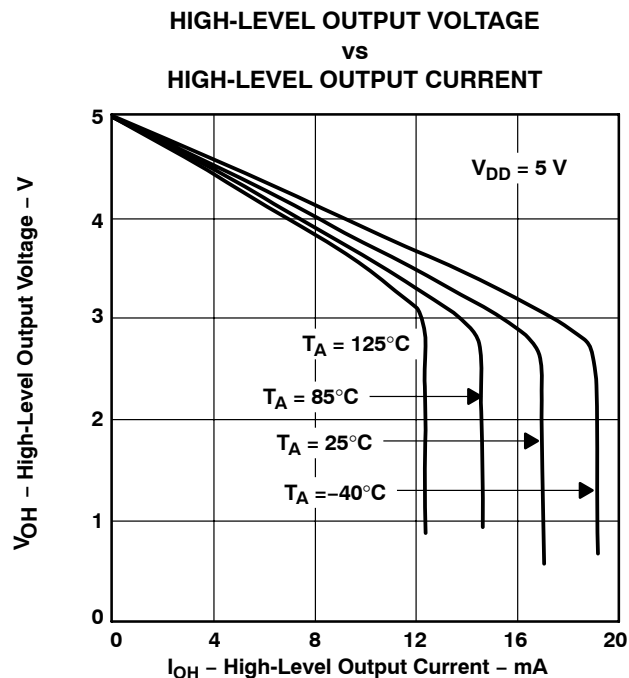


Figure 1

The other members in the TLV243x family are the high-power, TLV244x, and micro-power, TLV2422, versions.

The TLV243x, exhibiting high input impedance and low noise, is excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels and low-voltage operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single- or split-supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLV243xA is available and has a maximum input offset voltage of 950 μV.

If the design requires single operational amplifiers, see the TI TLV2211/21/31. This is a family of rail-to-rail output operational amplifiers in the SOT-23 package. Their small size and low power consumption, make them ideal for high density, battery-powered equipment.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2008 Texas Instruments Incorporated

# TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

## WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

### ORDERING INFORMATION†


| $T_A$          | $V_{IOmax}$<br>AT 25°C | PACKAGE‡   |               | ORDERABLE<br>PART NUMBER | TOP-SIDE<br>MARKING |
|----------------|------------------------|------------|---------------|--------------------------|---------------------|
| –40°C to 125°C | 950 $\mu$ V            | SOIC (D)   | Tape and reel | TLV2432AQDRQ1            | 2432AQ              |
|                |                        | TSSOP (PW) | Tape and reel | TLV2432AQPWRQ1§          |                     |
|                | 2.5 mV                 | SOIC (D)   | Tape and reel | TLV2432QDRQ1             | 2432Q1              |
|                |                        | TSSOP (PW) | Tape and reel | TLV2432QPWRQ1§           |                     |
| –40°C to 125°C | 950 $\mu$ V            | SOIC (D)   | Tape and reel | TLV2434AQDRQ1            | 2434AQ              |
|                |                        | TSSOP (PW) | Tape and reel | TLV2434AQPWRQ1§          |                     |
|                | 2.5 mV                 | SOIC (D)   | Tape and reel | TLV2434QDRQ1§            |                     |
|                |                        | TSSOP (PW) | Tape and reel | TLV2434QPWRQ1§           |                     |

† For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at <http://www.ti.com>.


‡ Package drawings, thermal data, and symbolization are available at <http://www.ti.com/packaging>.

§ Product Preview.


**TLV2432  
D PACKAGE  
(TOP VIEW)**

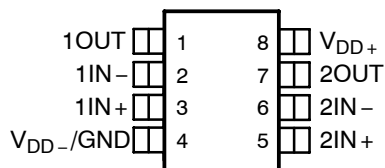


**TLV2432  
PW PACKAGE  
(TOP VIEW)**

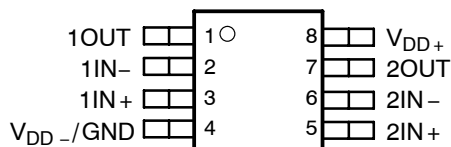

**TLV2434  
D OR PW PACKAGE  
(TOP VIEW)**

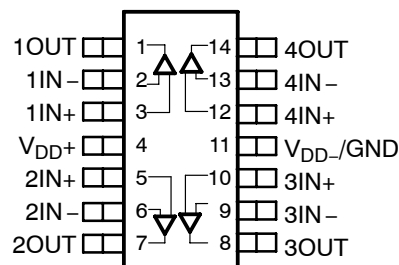

equivalent schematic (each amplifier)

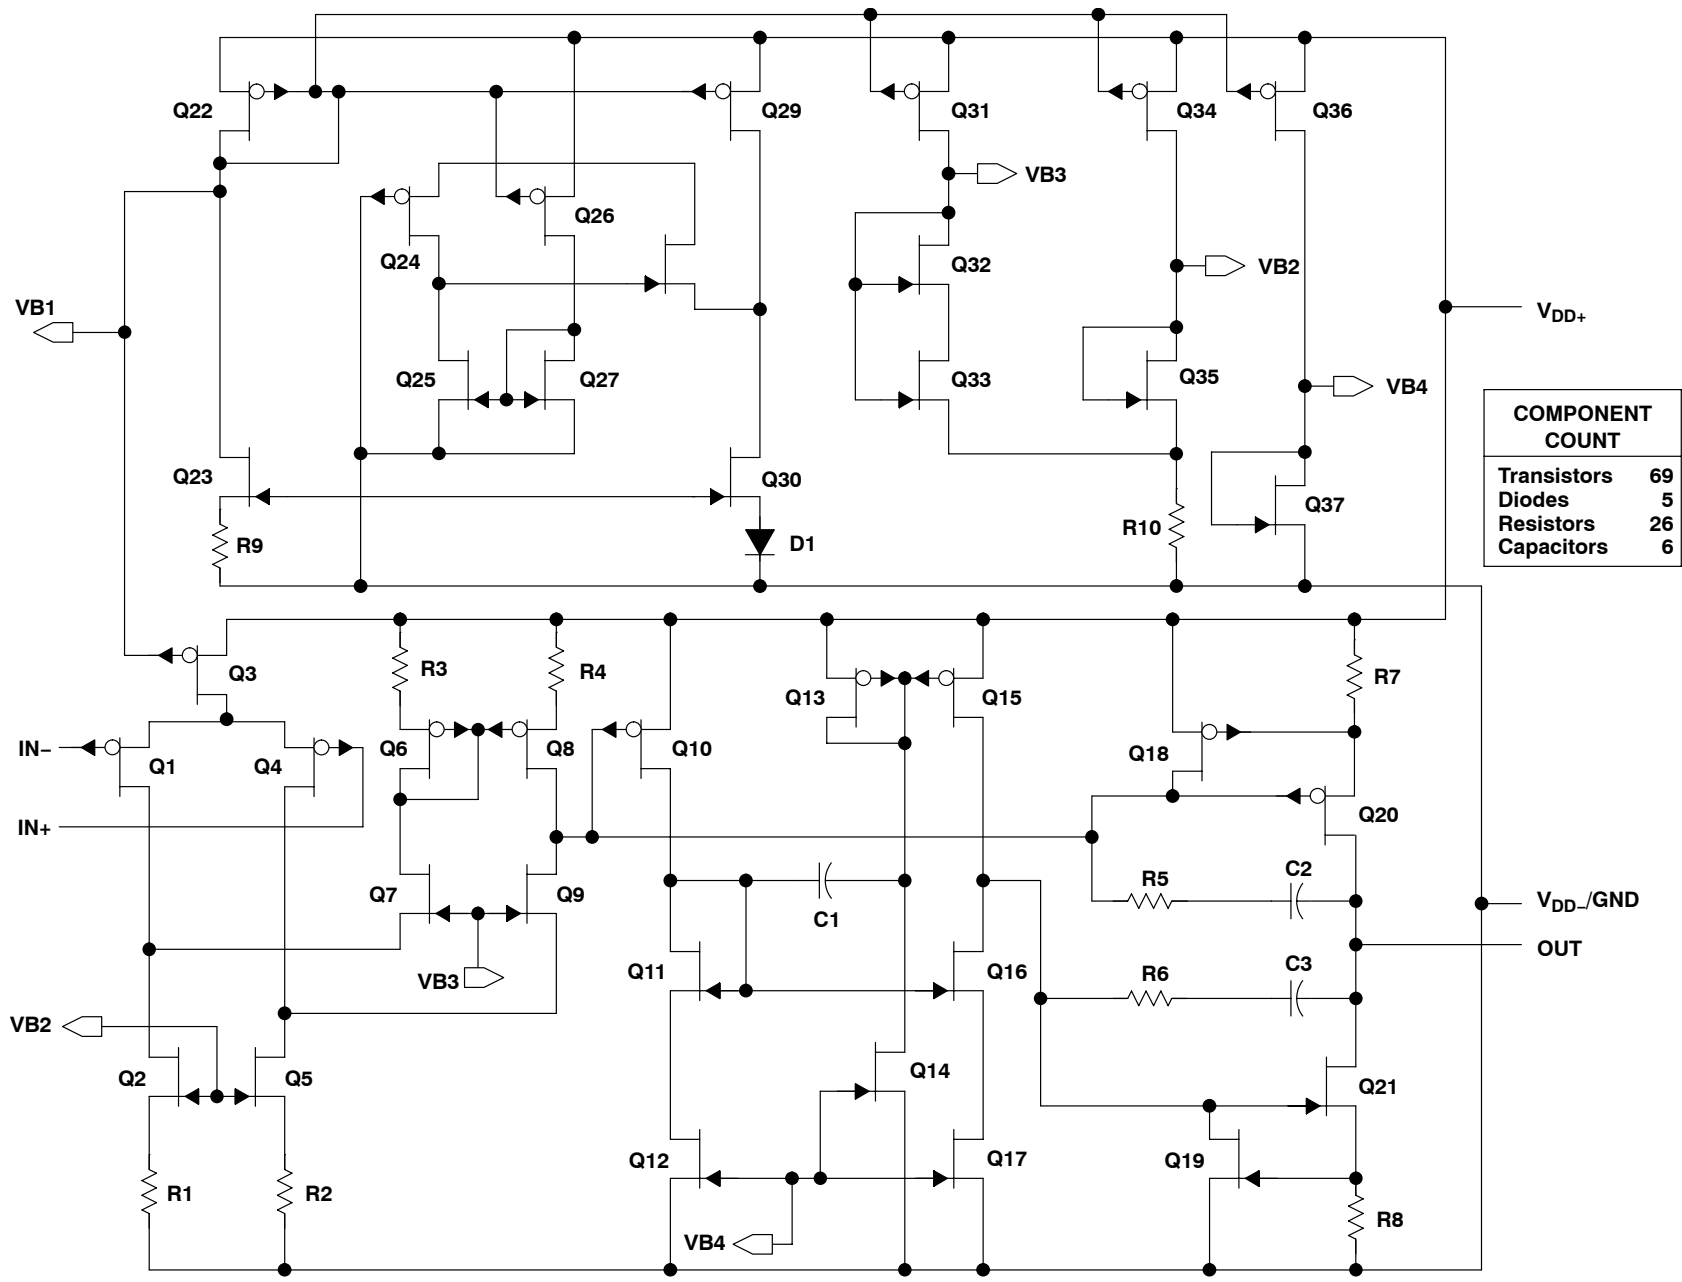

| COMPONENT COUNT |    |
|-----------------|----|
| Transistors     | 69 |
| Diodes          | 5  |
| Resistors       | 26 |
| Capacitors      | 6  |

# TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                   |                              |
|-------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                             | 12 V                         |
| Differential input voltage, $V_{ID}$ (see Note 2)                 | $\pm V_{DD}$                 |
| Input current, $I_I$ (each input)                                 | $\pm 5$ mA                   |
| Output current, $I_O$                                             | $\pm 50$ mA                  |
| Total current into $V_{DD+}$                                      | $\pm 50$ mA                  |
| Total current out of $V_{DD-}$                                    | $\pm 50$ mA                  |
| Duration of short-circuit current at (or below) 25°C (see Note 3) | unlimited                    |
| Continuous total dissipation                                      | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : Q suffix            | –40°C to 125°C               |
| Storage temperature range, $T_{stg}$                              | –65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds      | 260°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{DD+}$  and  $V_{DD-}$ .
2. Differential voltages are at  $IN+$  with respect to  $IN-$ . Excessive current flows if input is brought below  $V_{DD-} - 0.3$  V.
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D (8)   | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| D (14)  | 1022 mW                                     | 7.6 mW/°C                                         | 900 mW                                   | 777 mW                                   | 450 mW                                    |
| PW (8)  | 525 mW                                      | 4.2 mW/°C                                         | 336 mW                                   | 273 mW                                   | 105 mW                                    |
| PW (14) | 720 mW                                      | 5.6 mW/°C                                         | 634 mW                                   | 547 mW                                   | 317 mW                                    |

#### recommended operating conditions

|                                       | MIN       | MAX             | UNIT |
|---------------------------------------|-----------|-----------------|------|
| Supply voltage, $V_{DD}$              | 2.7       | 10              | V    |
| Input voltage range, $V_I$            | $V_{DD-}$ | $V_{DD+} - 0.8$ | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD-}$ | $V_{DD+} - 0.8$ | V    |
| Operating free-air temperature, $T_A$ | –40       | 125             | °C   |



**TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

**electrical characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)**

| PARAMETER                                         |                                                                      | TEST CONDITIONS                                                                                         |                        | T <sub>A</sub> <sup>†</sup>           | TLV243x-Q1  |     |       | UNIT |
|---------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------|---------------------------------------|-------------|-----|-------|------|
|                                                   |                                                                      |                                                                                                         |                        |                                       | MIN         | TYP | MAX   |      |
| V <sub>IO</sub>                                   | Input offset voltage                                                 | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br>V <sub>DD</sub> ± = ±1.5 V,<br>R <sub>S</sub> = 50 Ω     | TLV243x                | 25°C                                  | 300    2000 |     | μV    |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 2500        |     |       |      |
|                                                   |                                                                      | TLV243xA                                                                                                | 25°C                   | 300    950                            |             |     |       |      |
|                                                   |                                                                      |                                                                                                         | Full range             | 2000                                  |             |     |       |      |
| α <sub>VIO</sub>                                  | Temperature coefficient of input offset voltage                      | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br><br>V <sub>DD</sub> ± = ±1.5 V,<br>R <sub>S</sub> = 50 Ω |                        | 25°C to 70°C                          | 2           |     | μV/°C |      |
| Input offset voltage long-term drift (see Note 4) |                                                                      |                                                                                                         |                        | 25°C                                  | 0.003       |     | μV/mo |      |
| I <sub>IO</sub>                                   | Input offset current                                                 |                                                                                                         |                        | 25°C                                  | 0.5         |     | pA    |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 150         |     |       |      |
| I <sub>IB</sub>                                   | Input bias current                                                   |                                                                                                         |                        | 25°C                                  | 1           |     | pA    |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 300         |     |       |      |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                                      | V <sub>IO</sub>   ≤ 5 mV,<br><br>R <sub>S</sub> = 50 Ω                                                  | 25°C                   | 0    -0.25<br>to    to<br>2.5    2.75 |             | V   |       |      |
|                                                   |                                                                      |                                                                                                         | Full range             | 0<br>to<br>2.2                        |             |     |       |      |
| V <sub>OH</sub>                                   | High-level output voltage                                            | I <sub>OH</sub> = - 100 μA                                                                              |                        | 25°C                                  | 2.98        |     | V     |      |
|                                                   |                                                                      | I <sub>OH</sub> = - 3 mA                                                                                |                        | 25°C                                  | 2.5         |     |       |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 2.25        |     |       |      |
| V <sub>OL</sub>                                   | Low-level output voltage                                             | V <sub>IC</sub> = 1.5 V,    I <sub>OL</sub> = 100 μA                                                    |                        | 25°C                                  | 0.02        |     | V     |      |
|                                                   |                                                                      | V <sub>IC</sub> = 1.5 V,    I <sub>OL</sub> = 3 mA                                                      |                        | 25°C                                  | 0.83        |     |       |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 1           |     |       |      |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 2 V                                                 | R <sub>L</sub> = 2 kΩ‡ | 25°C                                  | 1.5         | 2.5 | V/mV  |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 0.5         |     |       |      |
|                                                   |                                                                      |                                                                                                         | R <sub>L</sub> = 1 MΩ‡ | 25°C                                  | 750         |     |       |      |
| r <sub>i(d)</sub>                                 | Differential input resistance                                        |                                                                                                         |                        | 25°C                                  | 1000        |     | GΩ    |      |
| r <sub>i(c)</sub>                                 | Common-mode input resistance                                         |                                                                                                         |                        | 25°C                                  | 1000        |     | GΩ    |      |
| c <sub>i(c)</sub>                                 | Common-mode input capacitance                                        | f = 10 kHz                                                                                              |                        | 25°C                                  | 8           |     | pF    |      |
| z <sub>o</sub>                                    | Closed-loop output impedance                                         | f = 100 kHz,    A <sub>V</sub> = 10                                                                     |                        | 25°C                                  | 130         |     | Ω     |      |
| CMRR                                              | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICR</sub> MIN,    V <sub>O</sub> = 1.5 V,<br>R <sub>S</sub> = 50 Ω             |                        | 25°C                                  | 70          | 83  | dB    |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 70          |     |       |      |
| k <sub>SVR</sub>                                  | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 2.7 V to 8 V,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,    No load                     |                        | 25°C                                  | 80          | 95  | dB    |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 80          |     |       |      |
| I <sub>DD</sub>                                   | Supply current                                                       | V <sub>O</sub> = 1.5 V,    No load                                                                      |                        | 25°C                                  | 195         | 250 | μA    |      |
|                                                   |                                                                      |                                                                                                         |                        | Full range                            | 260         |     |       |      |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q level part.

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

**TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

**operating characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                                                |                                                             | T <sub>A</sub> <sup>†</sup>        | TLV243x-Q1,<br>TLV243xA-Q1 |      |      | UNIT   |
|------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------|----------------------------|------|------|--------|
|                        |                                             |                                                                                                                                |                                                             |                                    | MIN                        | TYP  | MAX  |        |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = 1 V to 2 V,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                           |                                                             | R <sub>L</sub> = 2 kΩ <sup>‡</sup> | 25°C                       | 0.15 | 0.25 | V/μs   |
|                        |                                             |                                                                                                                                |                                                             |                                    | Full range                 | 0.1  |      |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                                                      |                                                             | 25°C                               | 120                        |      |      | nV/√Hz |
|                        |                                             | f = 1 kHz                                                                                                                      |                                                             | 25°C                               | 22                         |      |      |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                                             |                                                             | 25°C                               | 2.7                        |      |      | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                                            |                                                             | 25°C                               | 4                          |      |      |        |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                                                |                                                             | 25°C                               | 0.6                        |      |      | fA/√Hz |
| THD + N                | Total harmonic distortion plus noise        | V <sub>O</sub> = 0.5 V to 2.5 V,<br>f = 1 kHz,<br>R <sub>L</sub> = 2 kΩ <sup>‡</sup>                                           | A <sub>V</sub> = 1                                          | 25°C                               | 0.065%                     |      |      |        |
|                        |                                             |                                                                                                                                | A <sub>V</sub> = 10                                         |                                    | 0.5%                       |      |      |        |
| Gain-bandwidth product |                                             | f = 10 kHz,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                                            | R <sub>L</sub> = 2 kΩ <sup>‡</sup>                          | 25°C                               | 0.5                        |      |      | MHz    |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 1 V,<br>R <sub>L</sub> = 2 kΩ <sup>‡</sup>                                                                | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> | 25°C                               | 220                        |      |      | kHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 2 kΩ <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> | To 0.1%                                                     | 25°C                               | 6.4                        |      |      | μs     |
|                        |                                             |                                                                                                                                | To 0.01%                                                    |                                    | 14.1                       |      |      |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 2 kΩ <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                   |                                                             | 25°C                               | 62°                        |      |      |        |
| Gain margin            |                                             |                                                                                                                                |                                                             | 25°C                               | 11                         |      |      | dB     |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q level part.

$^\ddagger$  Referenced to 2.5 V

**TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                         |                                                                      | TEST CONDITIONS                                                                                         |                        | T <sub>A</sub> <sup>†</sup> | TLV243x-Q1 |          |               | UNIT  |
|---------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------|-----------------------------|------------|----------|---------------|-------|
|                                                   |                                                                      |                                                                                                         |                        |                             | MIN        | TYP      | MAX           |       |
| V <sub>IO</sub>                                   | Input offset voltage                                                 | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br>V <sub>DD</sub> ± = ±2.5 V,<br>R <sub>S</sub> = 50 Ω     | TLV243x                | 25°C                        |            | 300      | 2000          | μV    |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 2500          |       |
|                                                   |                                                                      | TLV243xA                                                                                                | 25°C                   |                             | 300        | 950      |               |       |
|                                                   |                                                                      |                                                                                                         | Full range             |                             |            | 2000     |               |       |
| α <sub>VIO</sub>                                  | Temperature coefficient of input offset voltage                      | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br><br>V <sub>DD</sub> ± = ±2.5 V,<br>R <sub>S</sub> = 50 Ω |                        | 25°C to 70°C                |            | 2        |               | μV/°C |
| Input offset voltage long-term drift (see Note 4) |                                                                      |                                                                                                         |                        | 25°C                        |            | 0.003    |               | μV/mo |
| I <sub>IO</sub>                                   | Input offset current                                                 |                                                                                                         |                        | 25°C                        |            | 0.5      |               | pA    |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 150           |       |
| I <sub>IB</sub>                                   | Input bias current                                                   |                                                                                                         |                        | 25°C                        |            | 1        |               | pA    |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 300           |       |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                                      | V <sub>IO</sub>   ≤ 5 mV,<br><br>R <sub>S</sub> = 50 Ω                                                  |                        | 25°C                        |            | 0 to 4.5 | −0.25 to 4.75 | V     |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            | 0 to 4.2 |               |       |
| V <sub>OH</sub>                                   | High-level output voltage                                            | I <sub>OH</sub> = −100 μA                                                                               |                        | 25°C                        |            | 4.97     |               | V     |
|                                                   |                                                                      | I <sub>OH</sub> = −5 mA                                                                                 |                        | 25°C                        |            | 4        | 4.35          |       |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 4             |       |
| V <sub>OL</sub>                                   | Low-level output voltage                                             | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 100 μA                                                       |                        | 25°C                        |            | 0.01     |               | V     |
|                                                   |                                                                      | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 5 mA                                                         |                        | 25°C                        |            | 0.8      |               |       |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 1.25          |       |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 4 V                                                 | R <sub>L</sub> = 2 kΩ‡ | 25°C                        |            | 2.5      | 3.8           | V/mV  |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 0.5           |       |
|                                                   |                                                                      |                                                                                                         | R <sub>L</sub> = 1 MΩ‡ | 25°C                        |            |          | 950           |       |
| r <sub>i(d)</sub>                                 | Differential input resistance                                        |                                                                                                         |                        | 25°C                        |            | 1000     |               | GΩ    |
| r <sub>i(c)</sub>                                 | Common-mode input resistance                                         |                                                                                                         |                        | 25°C                        |            | 1000     |               | GΩ    |
| c <sub>i(c)</sub>                                 | Common-mode input capacitance                                        | f = 10 kHz                                                                                              |                        | 25°C                        |            | 8        |               | pF    |
| z <sub>o</sub>                                    | Closed-loop output impedance                                         | f = 100 kHz,                                                                                            | A <sub>V</sub> = 10    | 25°C                        |            | 130      |               | Ω     |
| CMRR                                              | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICR</sub> MIN, V <sub>O</sub> = 2.5 V,<br>R <sub>S</sub> = 50 Ω                |                        | 25°C                        |            | 70       | 90            | dB    |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 70            |       |
| k <sub>SVR</sub>                                  | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 4.4 V to 8 V,<br>V <sub>IC</sub> = V <sub>DD</sub> /2, No load                        |                        | 25°C                        |            | 80       | 95            | dB    |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 80            |       |
| I <sub>DD</sub>                                   | Supply current                                                       | V <sub>O</sub> = 2.5 V, No load                                                                         |                        | 25°C                        |            | 200      | 250           | μA    |
|                                                   |                                                                      |                                                                                                         |                        | Full range                  |            |          | 270           |       |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q level part.

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

**TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

**operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                               |                                              | $T_A^\dagger$ | TLV243x-Q1,<br>TLV243xA-Q1 |        |     | UNIT                   |
|-------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------|---------------|----------------------------|--------|-----|------------------------|
|             |                                             |                                                                                                               |                                              |               | MIN                        | TYP    | MAX |                        |
| SR          | Slew rate at unity gain                     | $V_O = 1.5\text{ V to }3.5\text{ V},$<br>$R_L = 2\text{ k}\Omega^\ddagger,$<br>$C_L = 100\text{ pF}^\ddagger$ |                                              | 25°C          | 0.15                       | 0.25   |     | V/ $\mu\text{s}$       |
|             |                                             |                                                                                                               |                                              | Full range    | 0.1                        |        |     |                        |
| $V_n$       | Equivalent input noise voltage              | $f = 10\text{ Hz}$                                                                                            |                                              | 25°C          |                            | 100    |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                            |                                              | 25°C          |                            | 18     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                            |                                              | 25°C          |                            | 1.9    |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                           |                                              | 25°C          |                            | 2.8    |     |                        |
| $I_n$       | Equivalent input noise current              |                                                                                                               |                                              | 25°C          |                            | 0.6    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 1.5\text{ V to }3.5\text{ V},$<br>$f = 1\text{ kHz},$<br>$R_L = 2\text{ k}\Omega^\ddagger$             | $A_V = 1$                                    | 25°C          |                            | 0.045% |     |                        |
|             |                                             |                                                                                                               | $A_V = 10$                                   |               |                            | 0.4%   |     |                        |
|             | Gain-bandwidth product                      | $f = 10\text{ kHz},$<br>$C_L = 100\text{ pF}^\ddagger$                                                        | $R_L = 2\text{ k}\Omega^\ddagger,$           | 25°C          |                            | 0.55   |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V},$<br>$R_L = 2\text{ k}\Omega^\ddagger,$                                               | $A_V = 1,$<br>$C_L = 100\text{ pF}^\ddagger$ | 25°C          |                            | 100    |     | kHz                    |
| $t_s$       | Settling time                               | $A_V = -1,$<br>Step = 1.5 V to 3.5 V,<br>$R_L = 2\text{ k}\Omega^\ddagger,$<br>$C_L = 100\text{ pF}^\ddagger$ | $T_o = 0.1\%$                                | 25°C          |                            | 6.4    |     | $\mu\text{s}$          |
|             |                                             |                                                                                                               | $T_o = 0.01\%$                               |               |                            | 13.1   |     |                        |
| $\phi_m$    | Phase margin at unity gain                  |                                                                                                               |                                              | 25°C          |                            | 66°    |     |                        |
|             | Gain margin                                 | $R_L = 2\text{ k}\Omega^\ddagger,$                                                                            | $C_L = 100\text{ pF}^\ddagger$               | 25°C          |                            | 11     |     | dB                     |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q level part.

$^\ddagger$  Referenced to 2.5 V

**TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

**TYPICAL CHARACTERISTICS**

**Table of Graphs**

|                 |                                                 |                                                | <b>FIGURE</b> |
|-----------------|-------------------------------------------------|------------------------------------------------|---------------|
| $V_{IO}$        | Input offset voltage                            | Distribution<br>vs Common-mode input voltage   | 2,3<br>4,5    |
| $\alpha_{VIO}$  | Temperature coefficient                         | Distribution                                   | 6,7           |
| $I_{IB}/I_{IO}$ | Input bias and input offset currents            | vs Free-air temperature                        | 8             |
| $V_{OH}$        | High-level output voltage                       | vs High-level output current                   | 9,11          |
| $V_{OL}$        | Low-level output voltage                        | vs Low-level output current                    | 10,12         |
| $V_{O(PP)}$     | Maximum peak-to-peak output voltage             | vs Frequency                                   | 13            |
| $I_{OS}$        | Short-circuit output current                    | vs Supply voltage<br>vs Free-air temperature   | 14<br>15      |
| $V_{ID}$        | Differential input voltage                      | vs Output voltage                              | 16,17         |
|                 | Differential gain                               | vs Load resistance                             | 18            |
| $A_{VD}$        | Large-signal differential voltage amplification | vs Frequency                                   | 19,20         |
| $A_{VD}$        | Differential voltage amplification              | vs Free-air temperature                        | 21,22         |
| $z_o$           | Output impedance                                | vs Frequency                                   | 23,24         |
| $CMRR$          | Common-mode rejection ratio                     | vs Frequency<br>vs Free-air temperature        | 25<br>26      |
| $k_{SVR}$       | Supply-voltage rejection ratio                  | vs Frequency<br>vs Free-air temperature        | 27,28<br>29   |
| $I_{DD}$        | Supply current                                  | vs Supply voltage                              | 30            |
| $SR$            | Slew rate                                       | vs Load capacitance<br>vs Free-air temperature | 31<br>32      |
| $V_O$           | Inverting large-signal pulse response           |                                                | 33,34         |
| $V_O$           | Voltage-follower large-signal pulse response    |                                                | 35,36         |
| $V_O$           | Inverting small-signal pulse response           |                                                | 37,38         |
| $V_O$           | Voltage-follower small-signal pulse response    |                                                | 39,40         |
| $V_n$           | Equivalent input noise voltage                  | vs Frequency                                   | 41, 42        |
|                 | Noise voltage (referred to input)               | Over a 10-second period                        | 43            |
| $THD + N$       | Total harmonic distortion plus noise            | vs Frequency                                   | 44,45         |
|                 | Gain-bandwidth product                          | vs Free-air temperature<br>vs Supply voltage   | 46<br>47      |
| $\phi_m$        | Phase margin                                    | vs Frequency<br>vs Load capacitance            | 19,20<br>48   |
|                 | Gain margin                                     | vs Load capacitance                            | 49            |
| $B_1$           | Unity-gain bandwidth                            | vs Load capacitance                            | 50            |



# TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

#### TYPICAL CHARACTERISTICS

DISTRIBUTION OF TLV2432  
INPUT OFFSET VOLTAGE

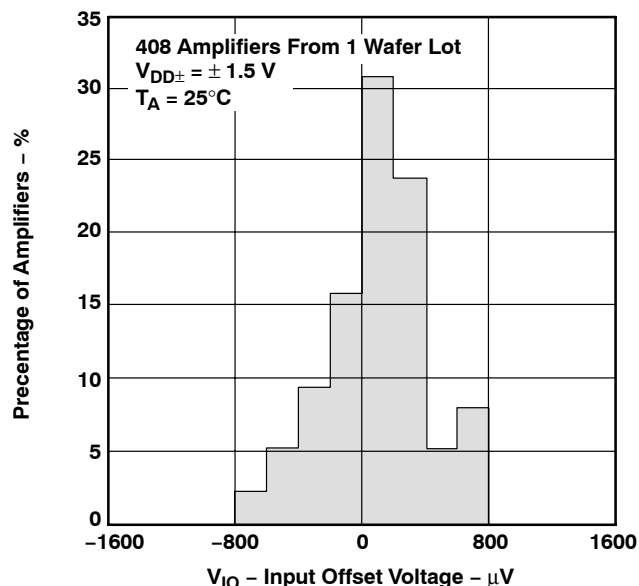


Figure 2

DISTRIBUTION OF TLV2432  
INPUT OFFSET VOLTAGE

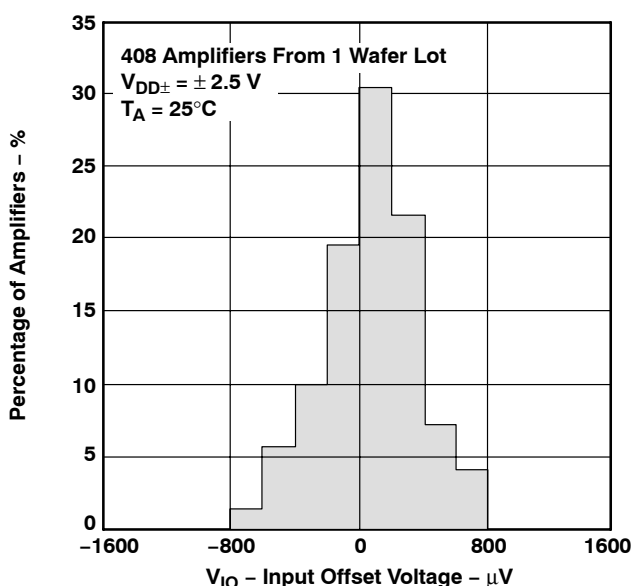


Figure 3

INPUT OFFSET VOLTAGE  
vs  
COMMON-MODE INPUT VOLTAGE

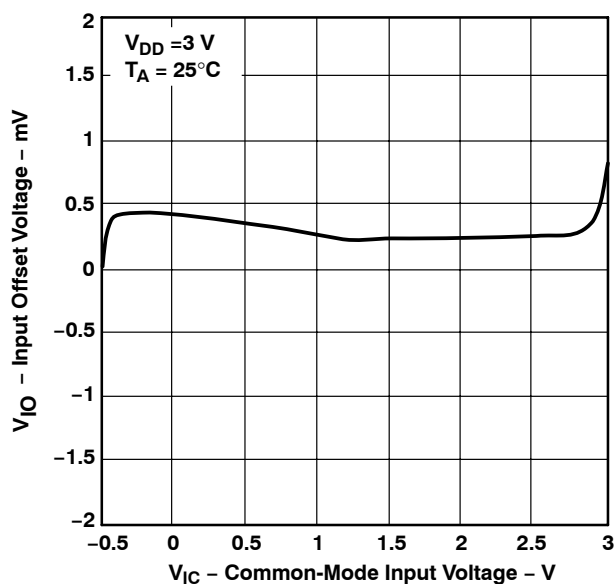


Figure 4

INPUT OFFSET VOLTAGE  
vs  
COMMON-MODE INPUT VOLTAGE

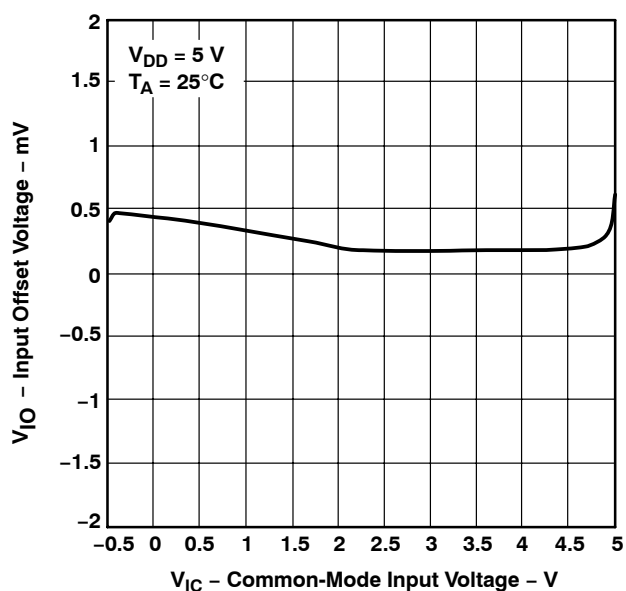


Figure 5

TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1  
Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT  
WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

TYPICAL CHARACTERISTICS

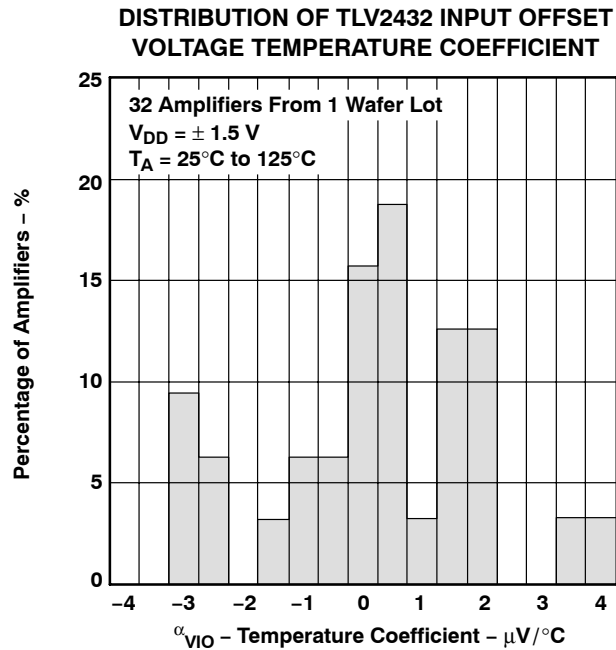


Figure 6

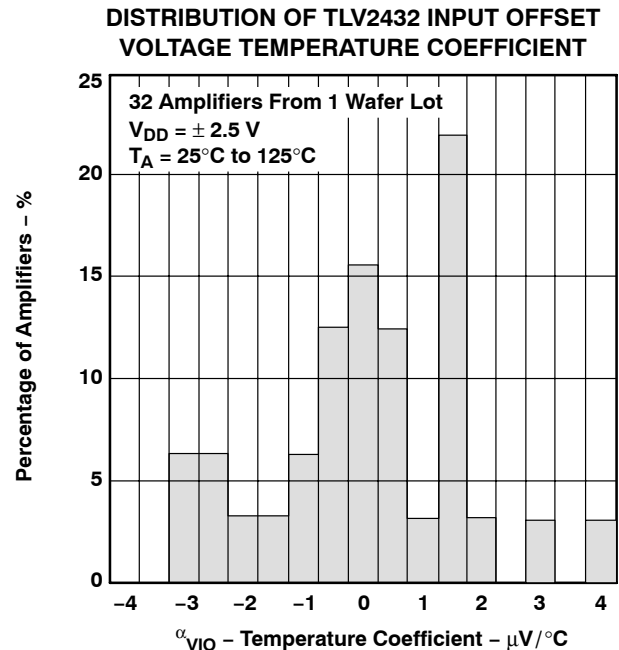


Figure 7

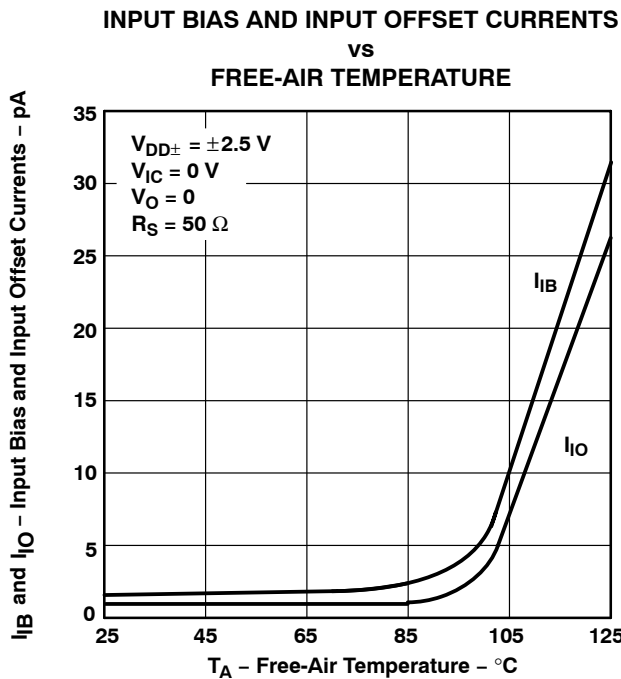


Figure 8

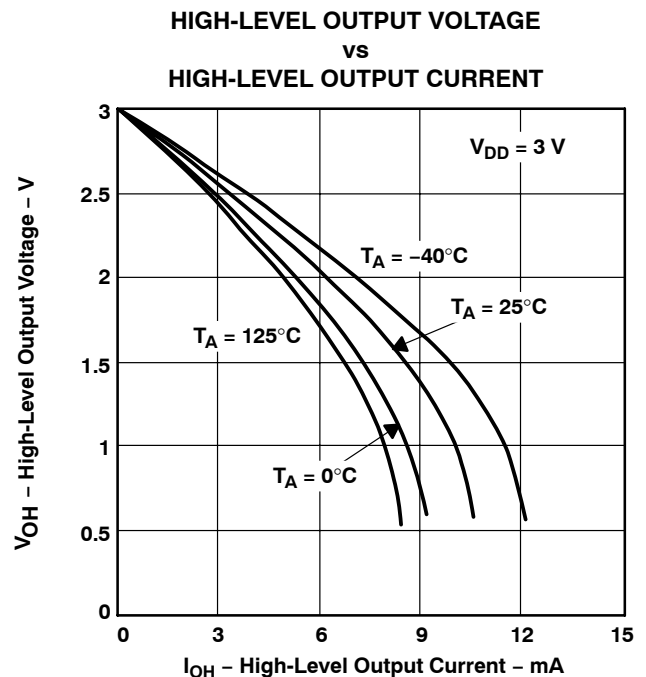


Figure 9

## TYPICAL CHARACTERISTICS

LOW-LEVEL OUTPUT VOLTAGE  
vs  
LOW-LEVEL OUTPUT CURRENT

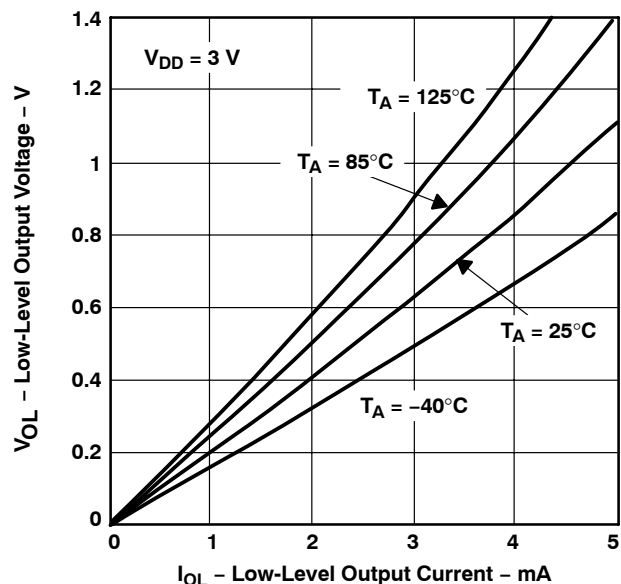


Figure 10

HIGH-LEVEL OUTPUT VOLTAGE  
vs  
HIGH-LEVEL OUTPUT CURRENT

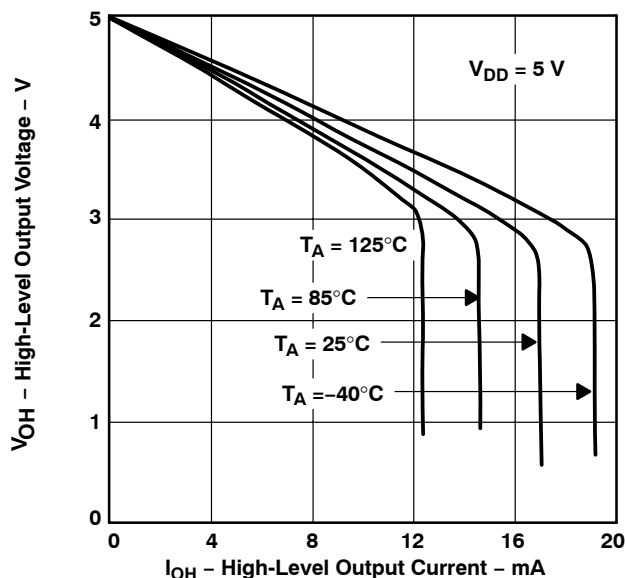


Figure 11

LOW-LEVEL OUTPUT VOLTAGE  
vs  
LOW-LEVEL OUTPUT CURRENT

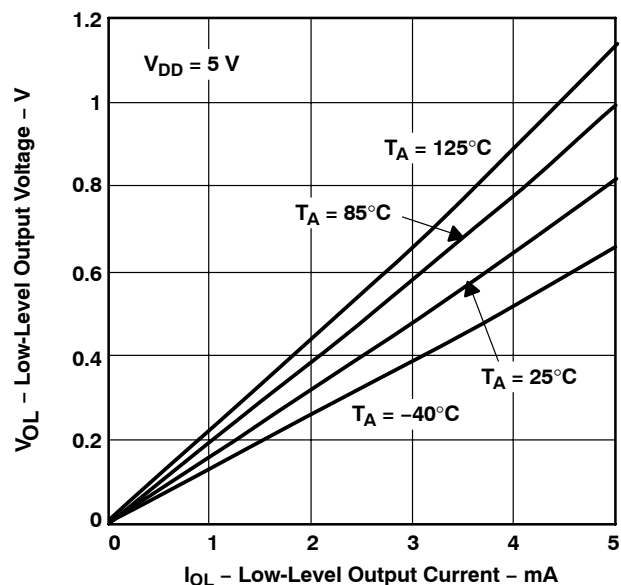


Figure 12

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE  
vs  
FREQUENCY

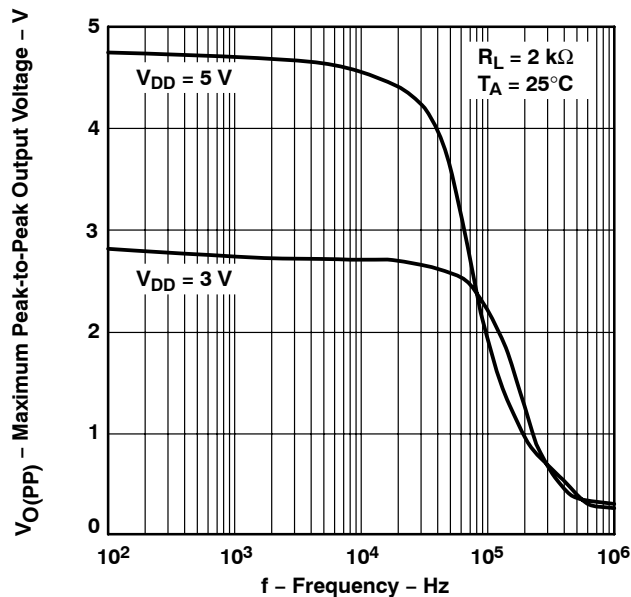


Figure 13

TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1  
Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT  
WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

TYPICAL CHARACTERISTICS

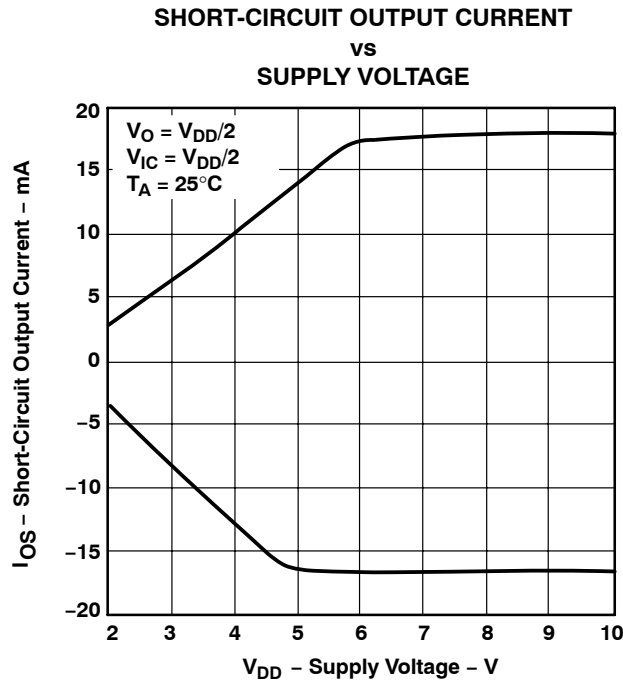


Figure 14

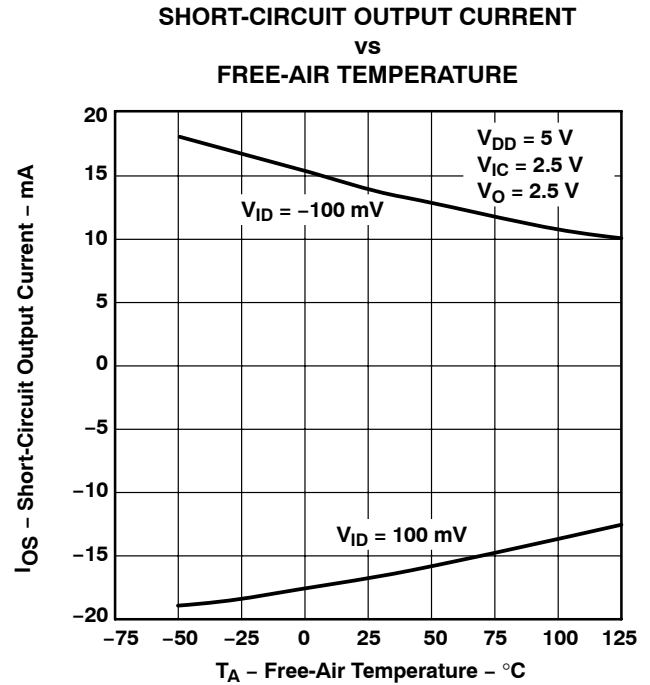


Figure 15

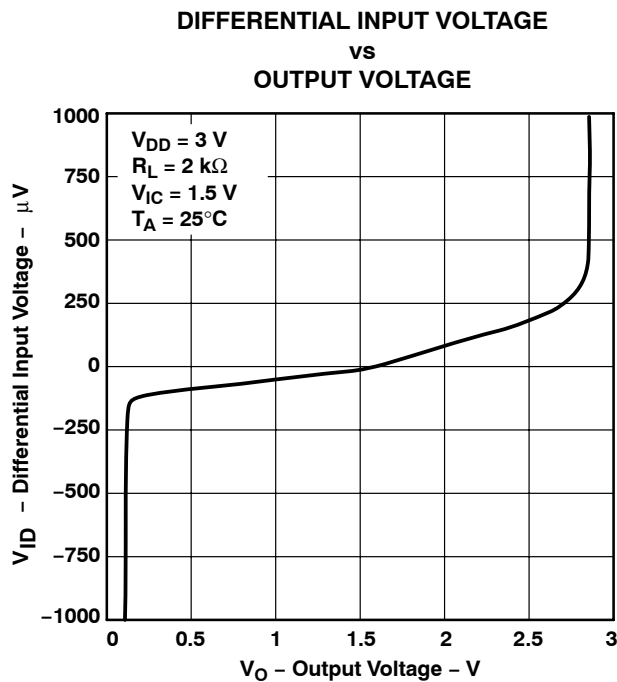


Figure 16


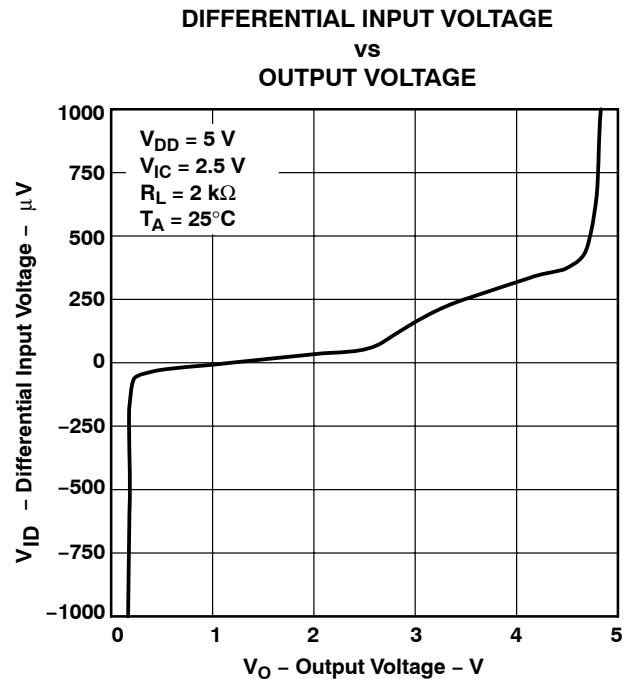


Figure 17


**TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

**TYPICAL CHARACTERISTICS**

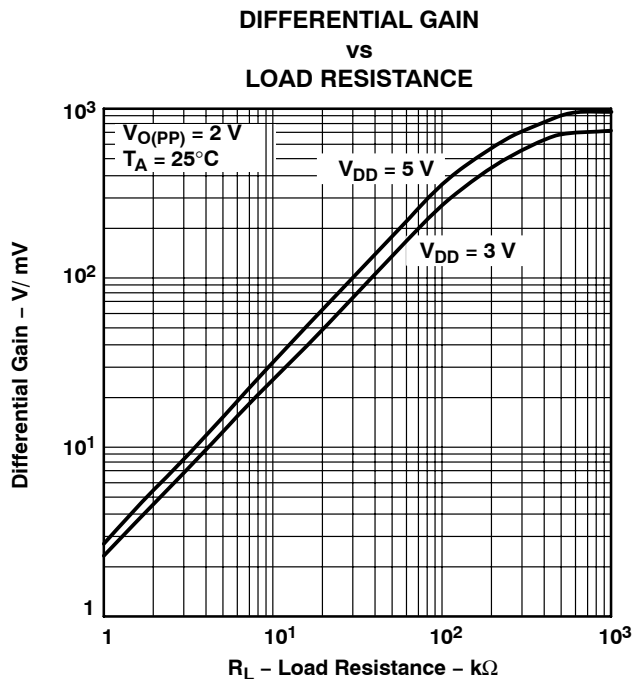

**Figure 18**

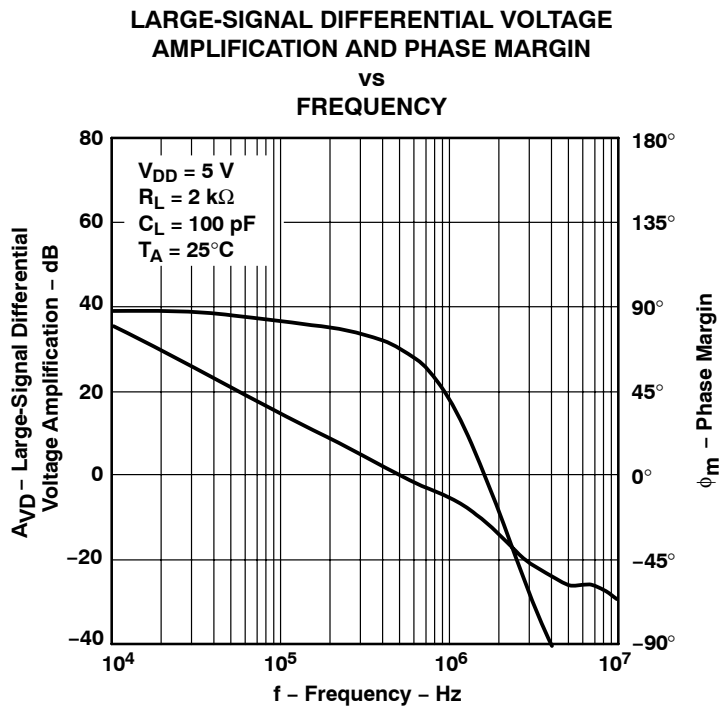

**Figure 19**

TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1  
Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT  
WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

TYPICAL CHARACTERISTICS

LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
AMPLIFICATION AND PHASE MARGIN

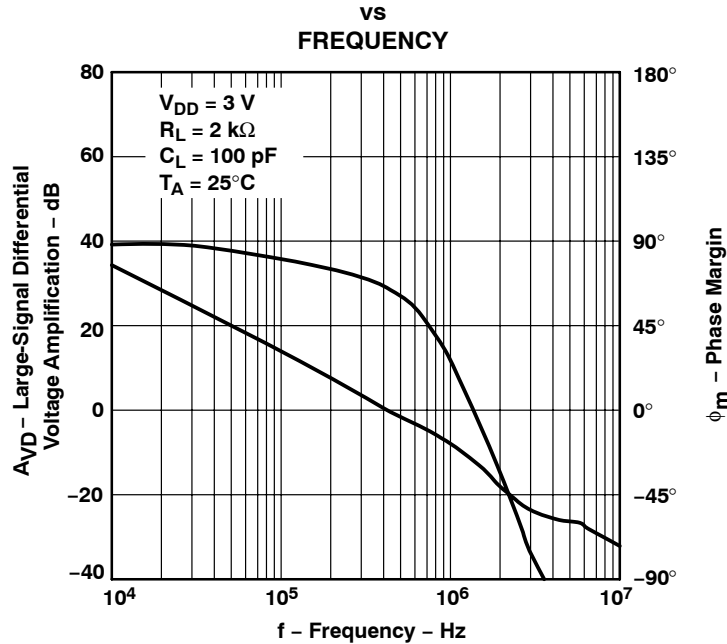


Figure 20

DIFFERENTIAL VOLTAGE AMPLIFICATION  
vs  
FREE-AIR TEMPERATURE

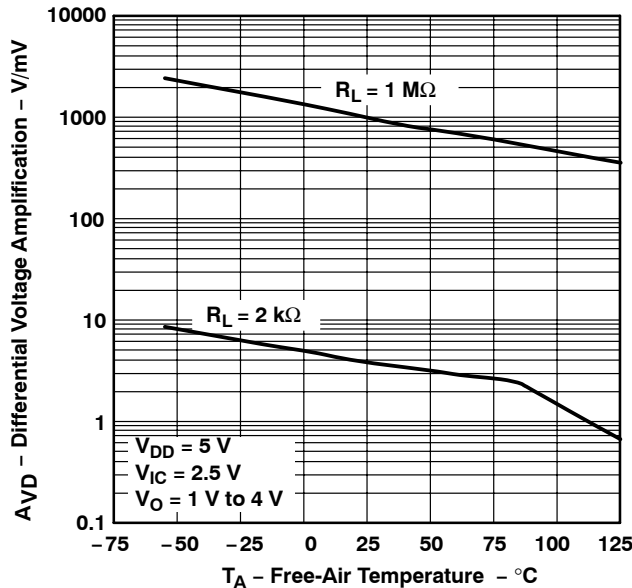


Figure 21

DIFFERENTIAL VOLTAGE AMPLIFICATION  
vs  
FREE-AIR TEMPERATURE

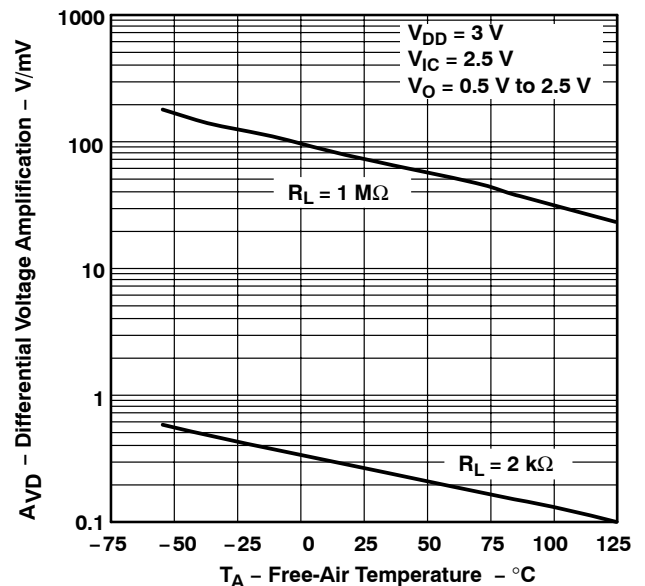


Figure 22

## TYPICAL CHARACTERISTICS

OUTPUT IMPEDANCE  
vs  
FREQUENCY

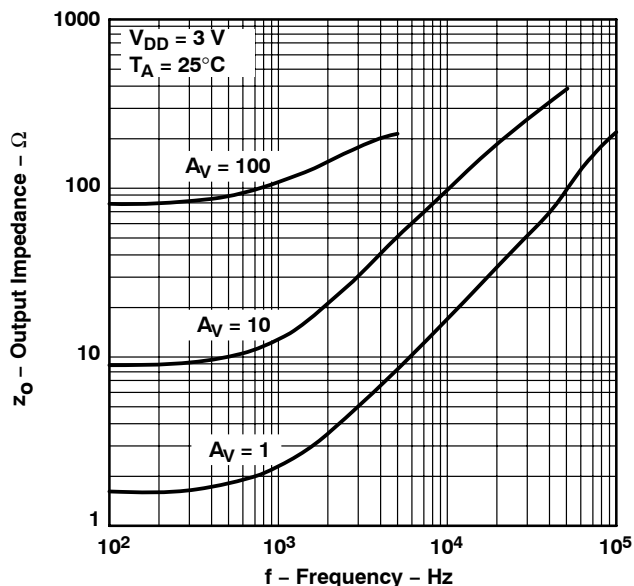


Figure 23

OUTPUT IMPEDANCE  
vs  
FREQUENCY

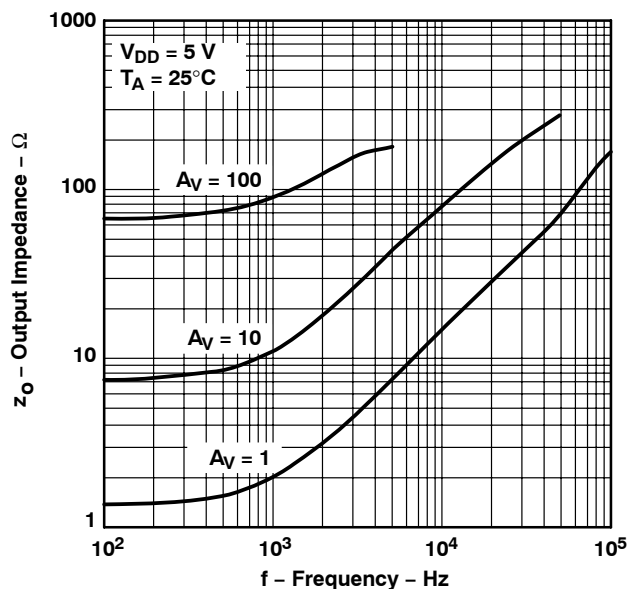


Figure 24

COMMON-MODE REJECTION RATIO  
vs  
FREQUENCY

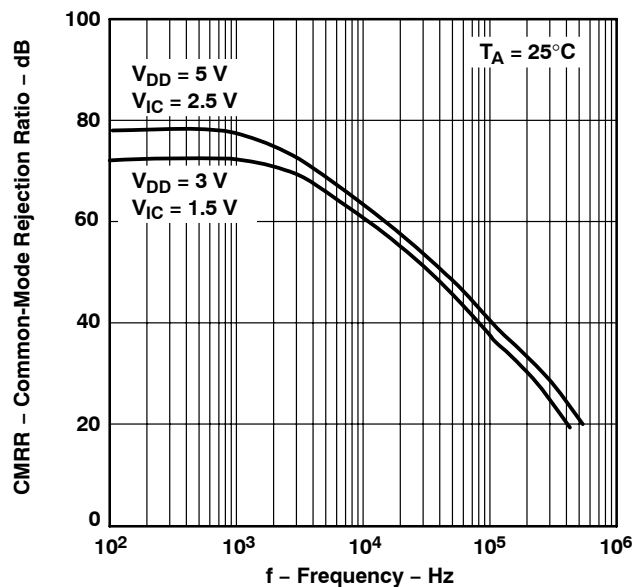


Figure 25

COMMON-MODE REJECTION RATIO  
vs  
FREE-AIR TEMPERATURE

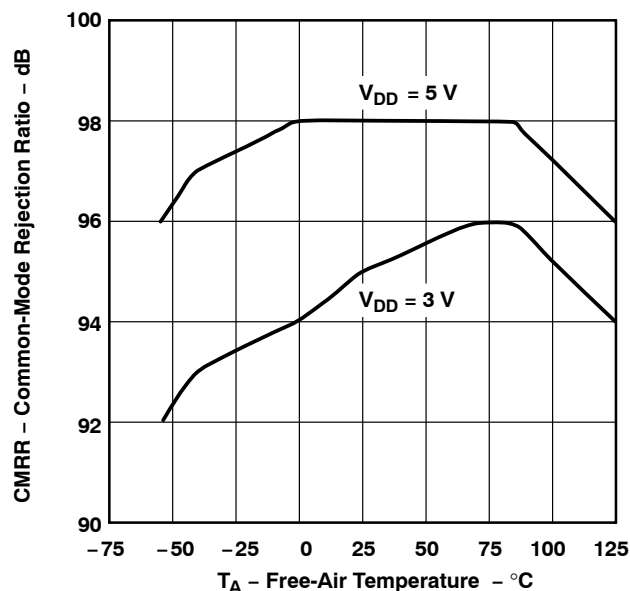


Figure 26

TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1  
Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT  
WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

TYPICAL CHARACTERISTICS

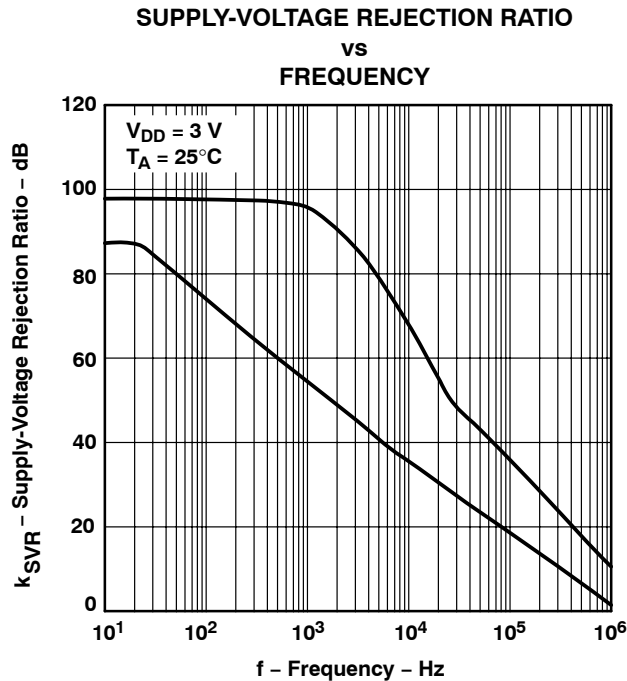


Figure 27

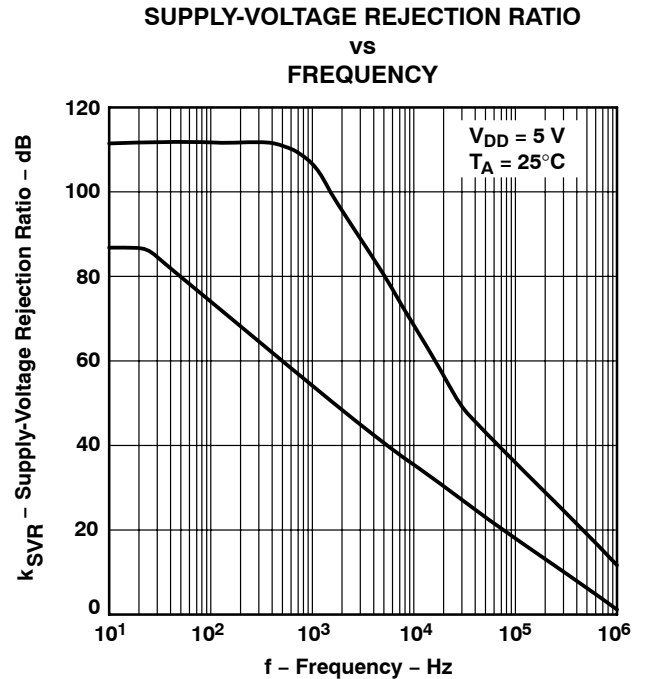


Figure 28

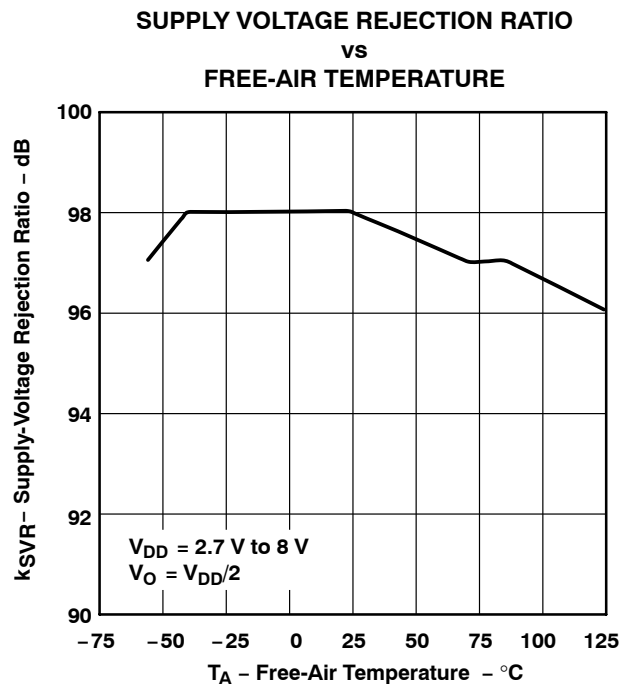


Figure 29

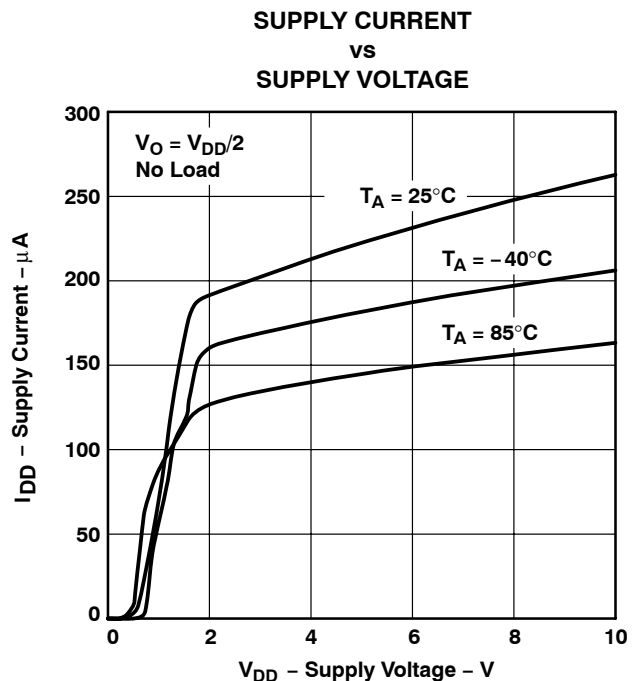


Figure 30

## TYPICAL CHARACTERISTICS

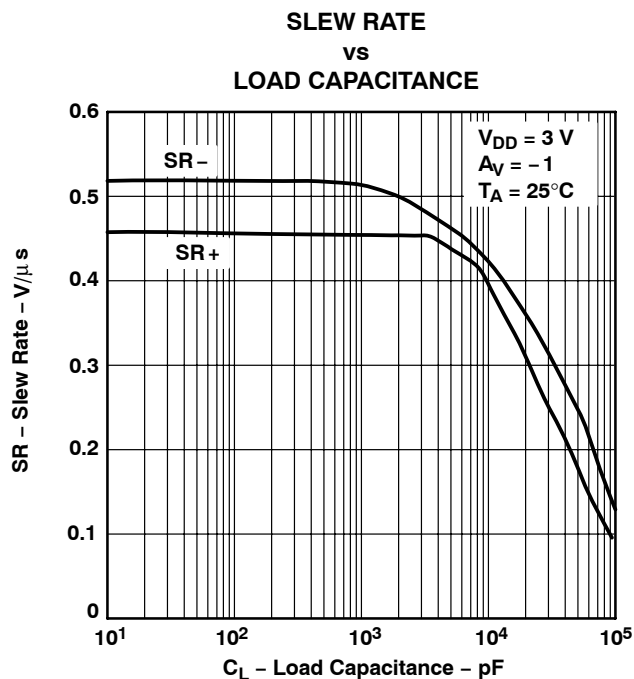


Figure 31

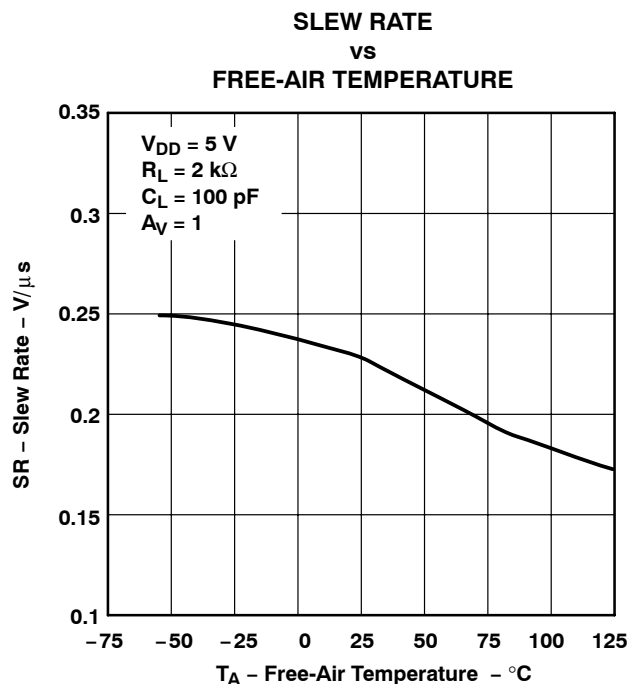


Figure 32

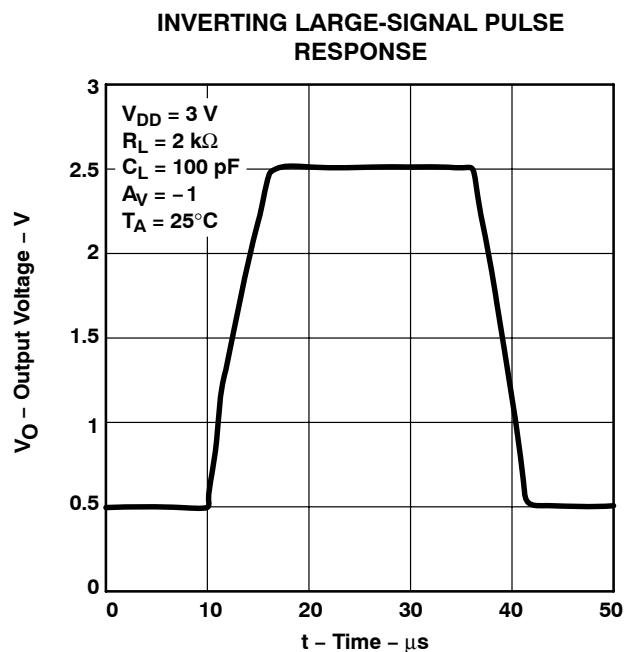


Figure 33

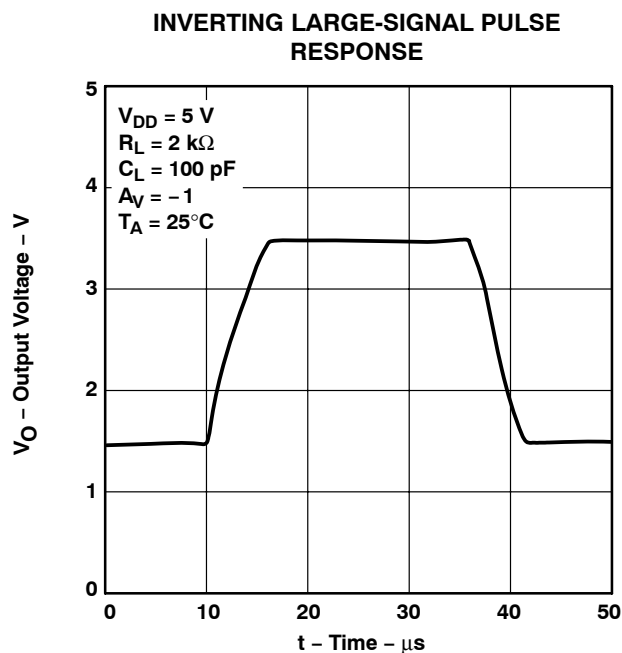


Figure 34

TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1  
Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT  
WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

TYPICAL CHARACTERISTICS

VOLTAGE-FOLLOWER LARGE-SIGNAL  
PULSE RESPONSE

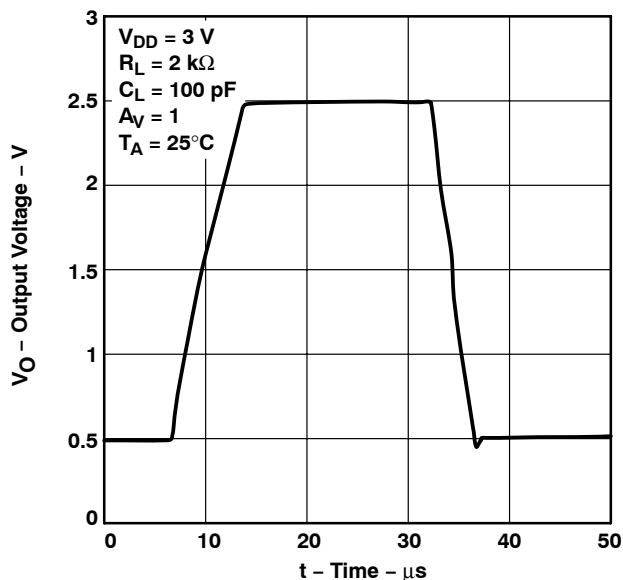


Figure 35

VOLTAGE-FOLLOWER LARGE-SIGNAL  
PULSE RESPONSE

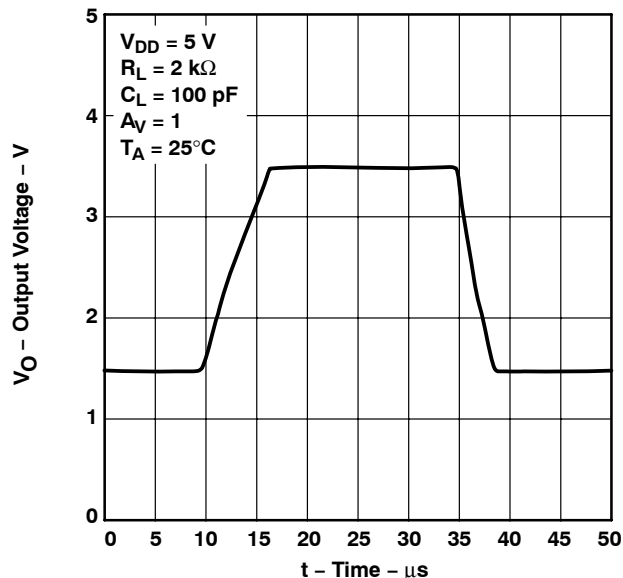


Figure 36

INVERTING SMALL-SIGNAL PULSE  
RESPONSE

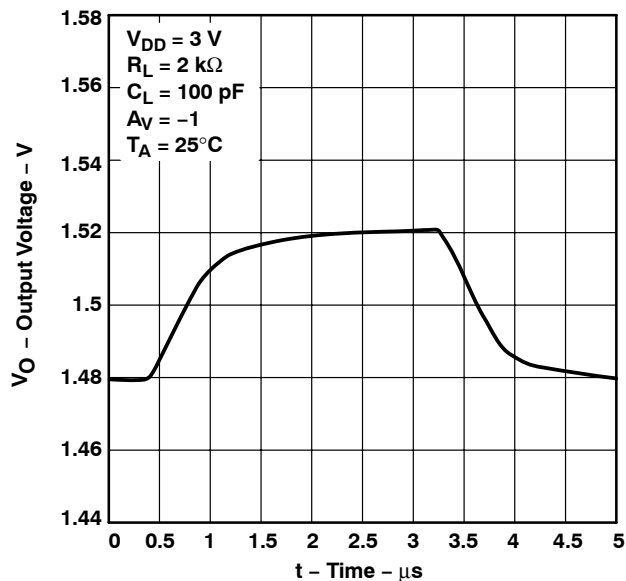


Figure 37

INVERTING SMALL-SIGNAL PULSE  
RESPONSE

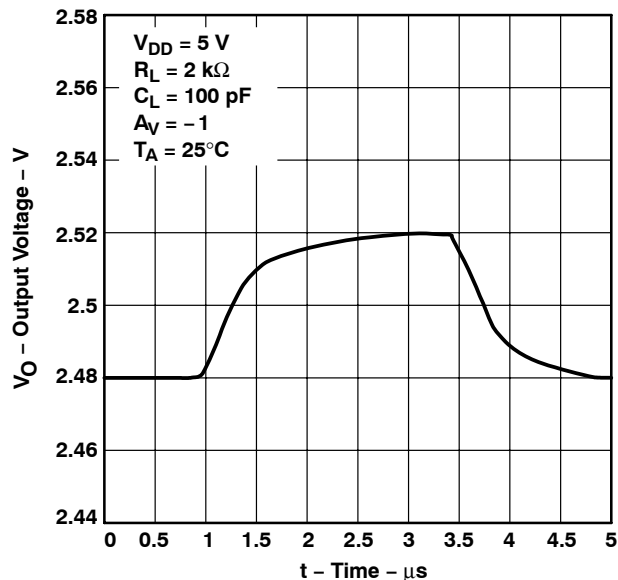


Figure 38

## TYPICAL CHARACTERISTICS

VOLTAGE-FOLLOWER SMALL-SIGNAL  
PULSE RESPONSE

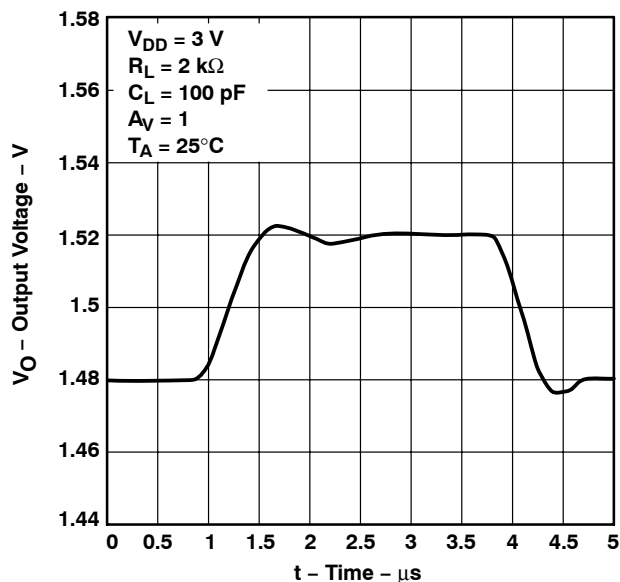


Figure 39

VOLTAGE-FOLLOWER SMALL-SIGNAL  
PULSE RESPONSE

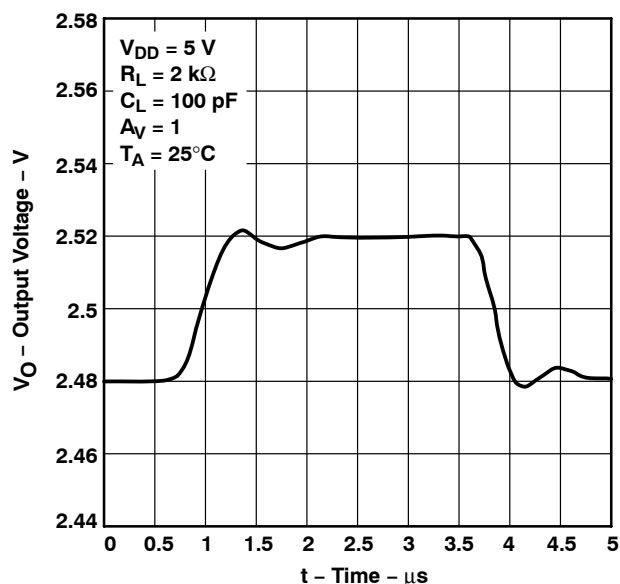


Figure 40

EQUIVALENT INPUT NOISE VOLTAGE  
vs  
FREQUENCY

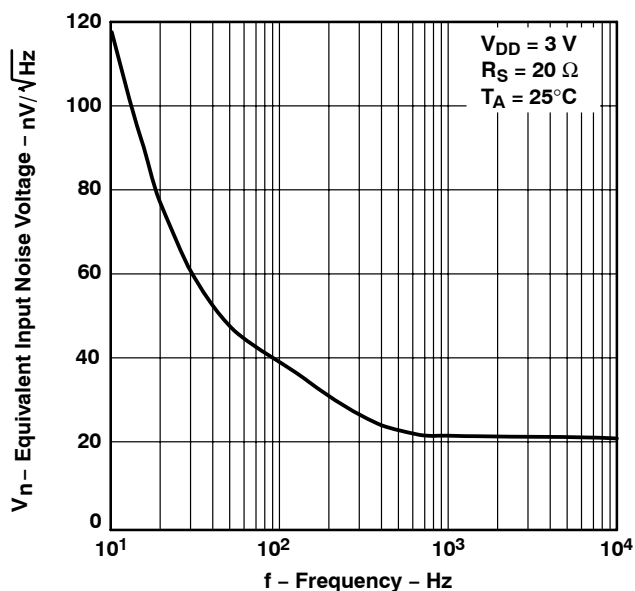


Figure 41

EQUIVALENT INPUT NOISE VOLTAGE  
vs  
FREQUENCY

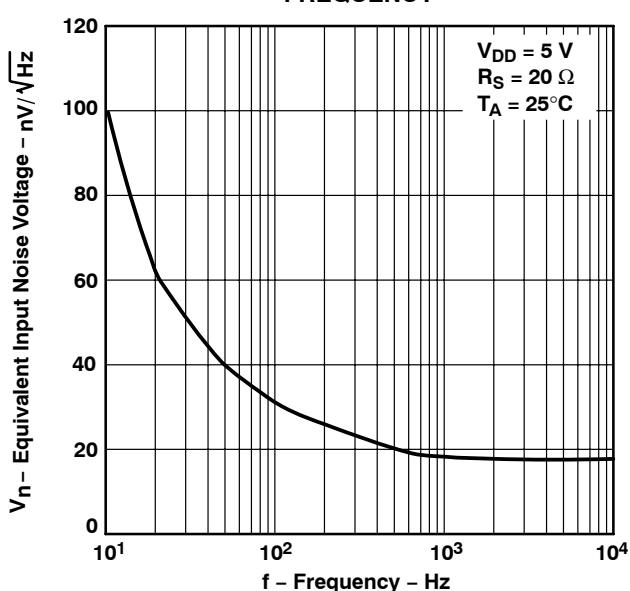


Figure 42

## TYPICAL CHARACTERISTICS

NOISE VOLTAGE OVER A 10-SECOND PERIOD

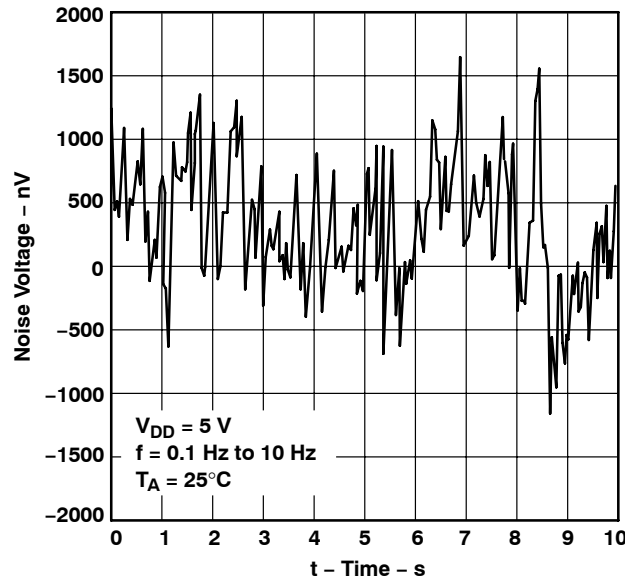


Figure 43

TOTAL HARMONIC DISTORTION PLUS NOISE  
 vs  
 FREQUENCY

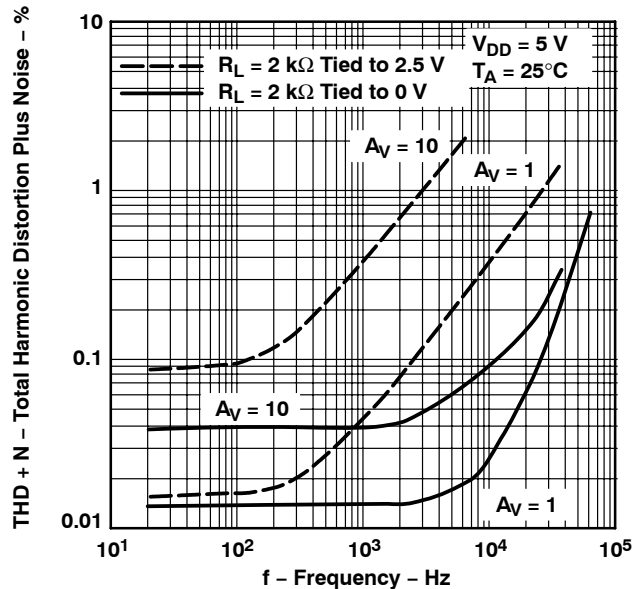


Figure 44

TOTAL HARMONIC DISTORTION PLUS NOISE  
 vs  
 FREQUENCY

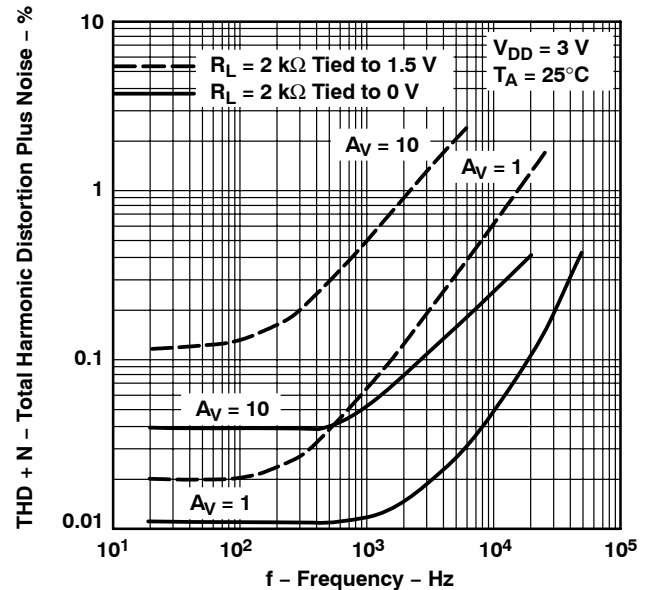


Figure 45

## TYPICAL CHARACTERISTICS

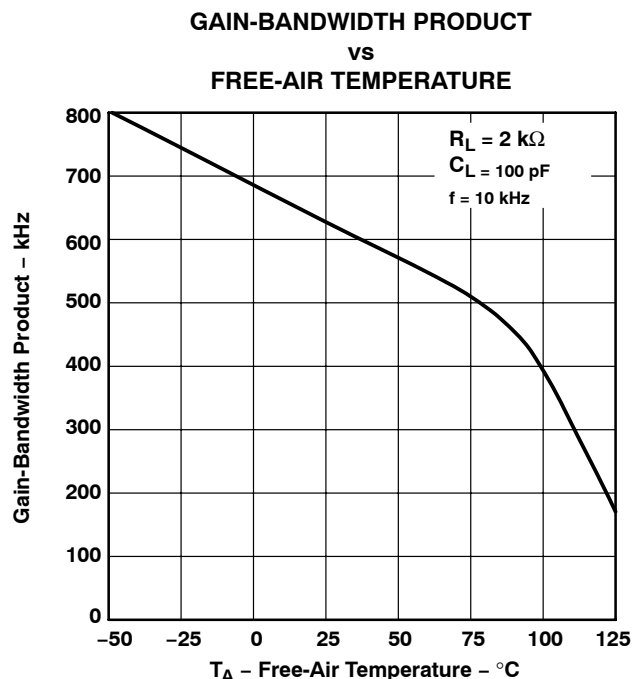


Figure 46

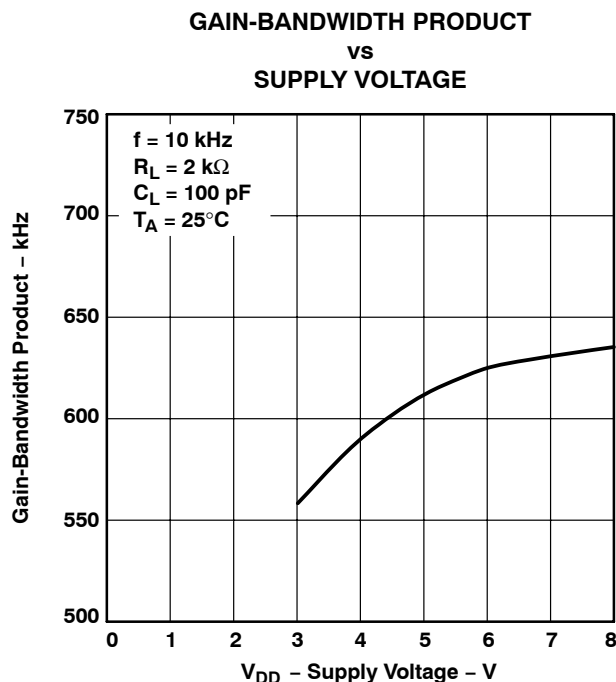


Figure 47

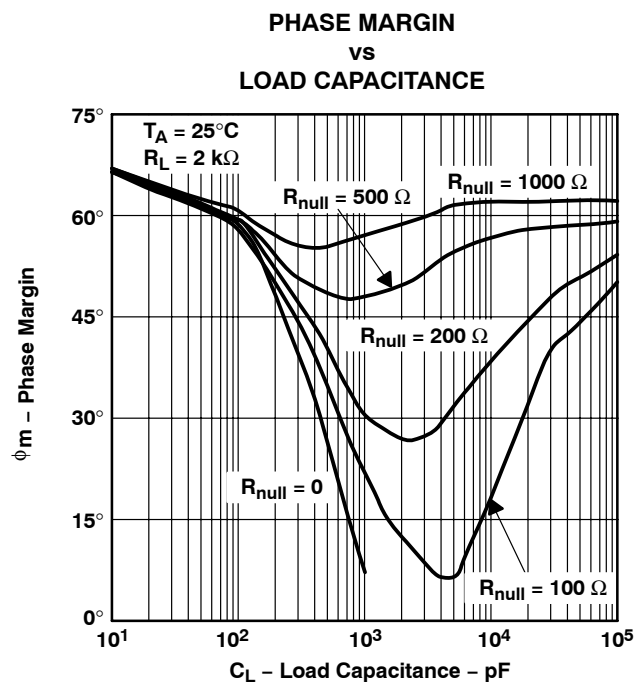


Figure 48

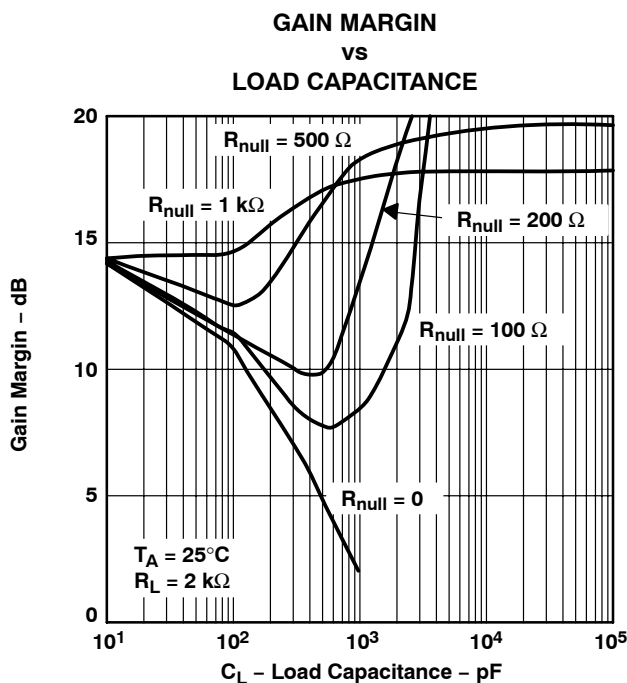


Figure 49

## TYPICAL CHARACTERISTICS

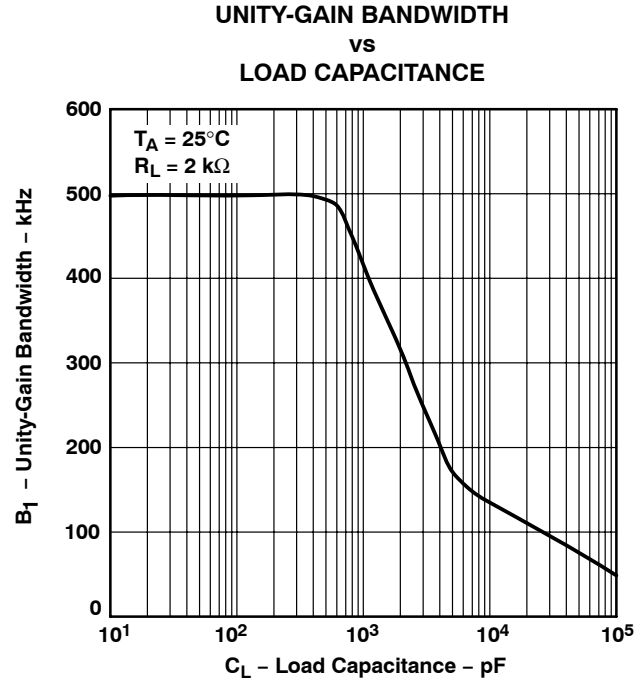


Figure 50

# TLV2432-Q1, TLV2432A-Q1, TLV2434-Q1, TLV2434A-Q1

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SGLS182B – SEPTEMBER 2003 – REVISED NOVEMBER 2010

## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using Microsim *Parts*™, the model generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 5) and subcircuit in Figure 51 are generated using the TLV243x typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 4: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

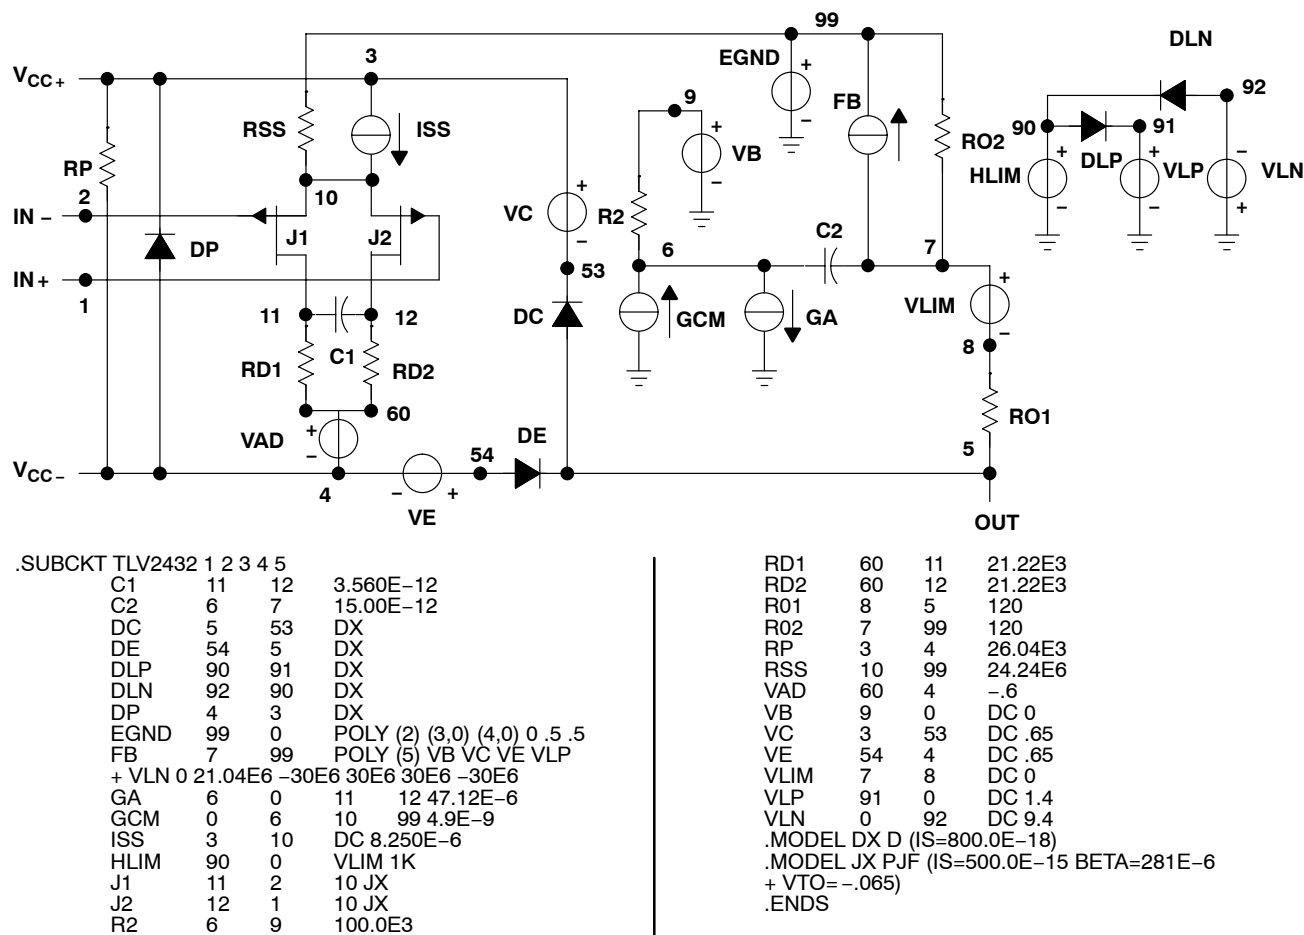


Figure 51. Boyle Macromodel and Subcircuit

*PSpice* and *Parts* are trademarks of MicroSim Corporation.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| TLV2432AQDRG4Q1  | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | 2432AQ                  | <a href="#">Samples</a> |
| TLV2432AQDRQ1    | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | 2432AQ                  | <a href="#">Samples</a> |
| TLV2432QDRG4Q1   | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | 2432Q1                  | <a href="#">Samples</a> |
| TLV2432QDRQ1     | OBSOLETE      | SOIC         | D                  | 8    |                | TBD                        | Call TI                 | Call TI              | -40 to 125   |                         |                         |
| TLV2434AQDRQ1    | ACTIVE        | SOIC         | D                  | 14   | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 125   | 2434AQ                  | <a href="#">Samples</a> |
| TLV2434AQPWRQ1   | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | -40 to 125   | 2434AQ                  | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLV2432-Q1, TLV2432A-Q1, TLV2434A-Q1 :**

- Catalog: [TLV2432](#), [TLV2432A](#), [TLV2434A](#)
- Military: [TLV2432M](#), [TLV2432AM](#)

**NOTE: Qualified Version Definitions:**


- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

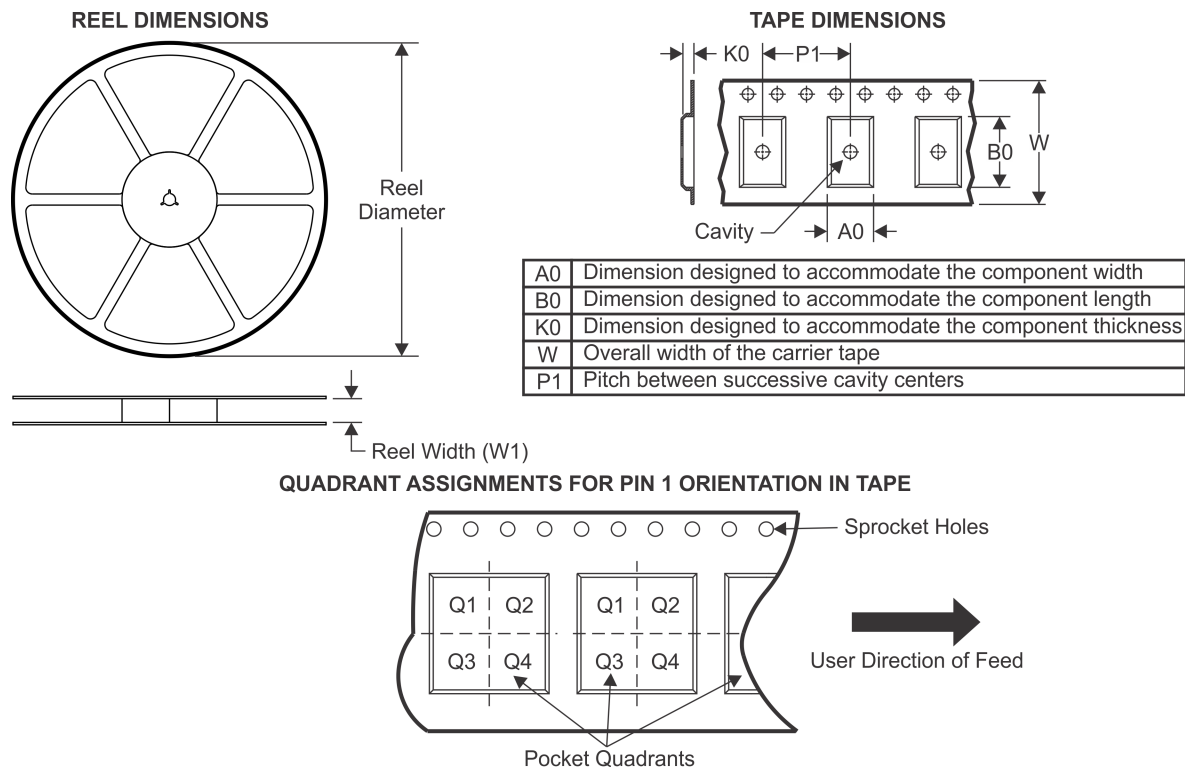**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV2434AQPWRQ1 | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

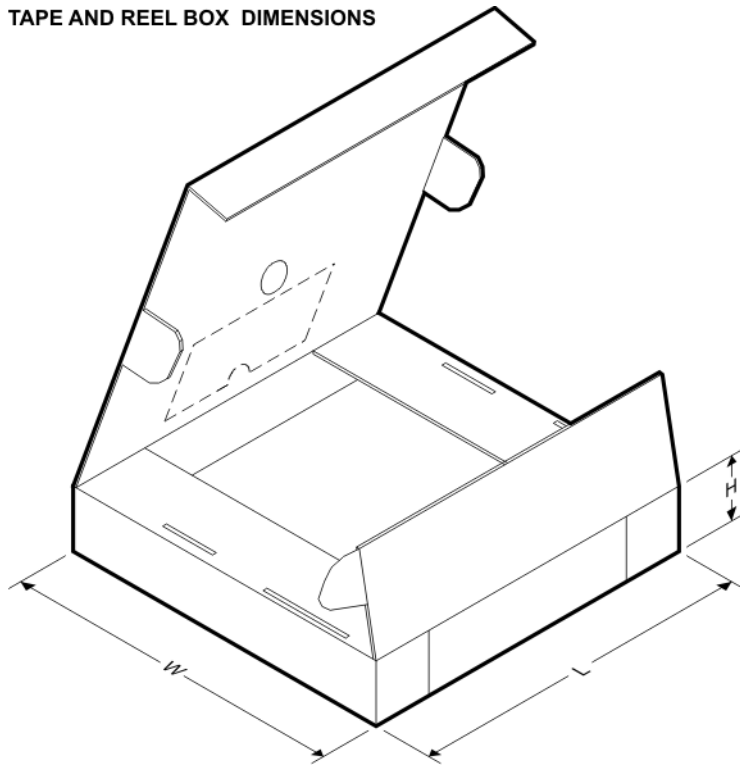


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV2434AQPWRQ1 | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

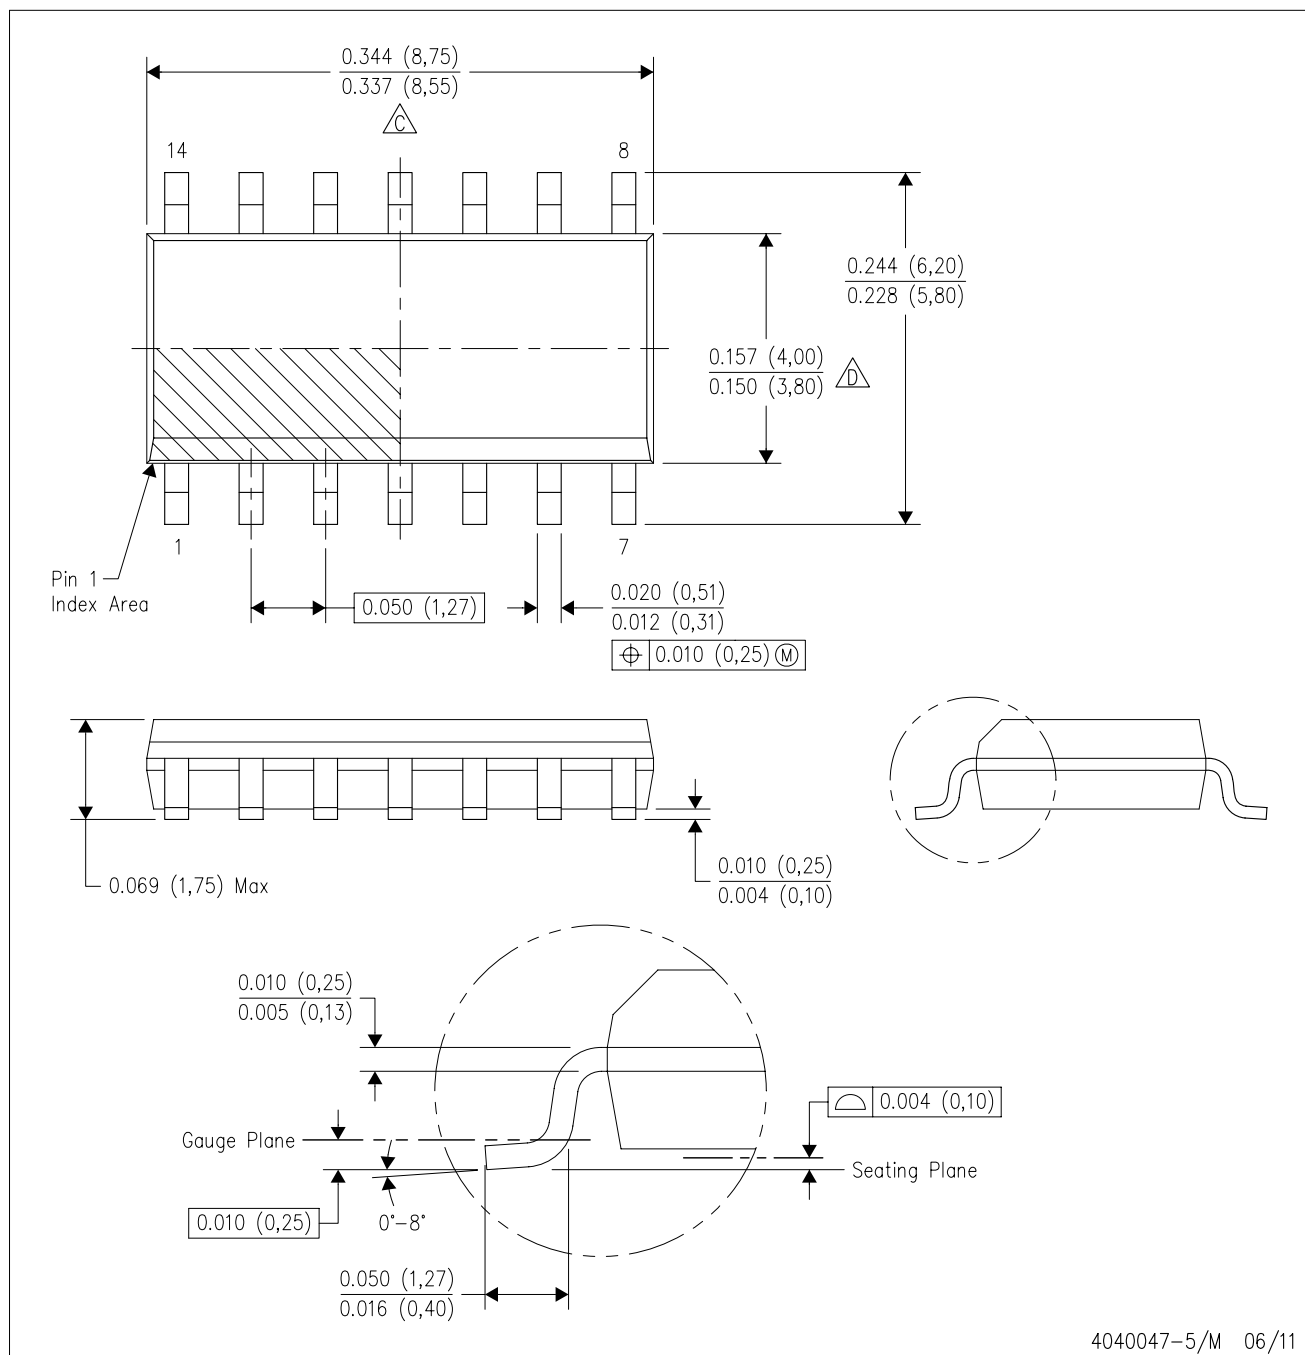

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

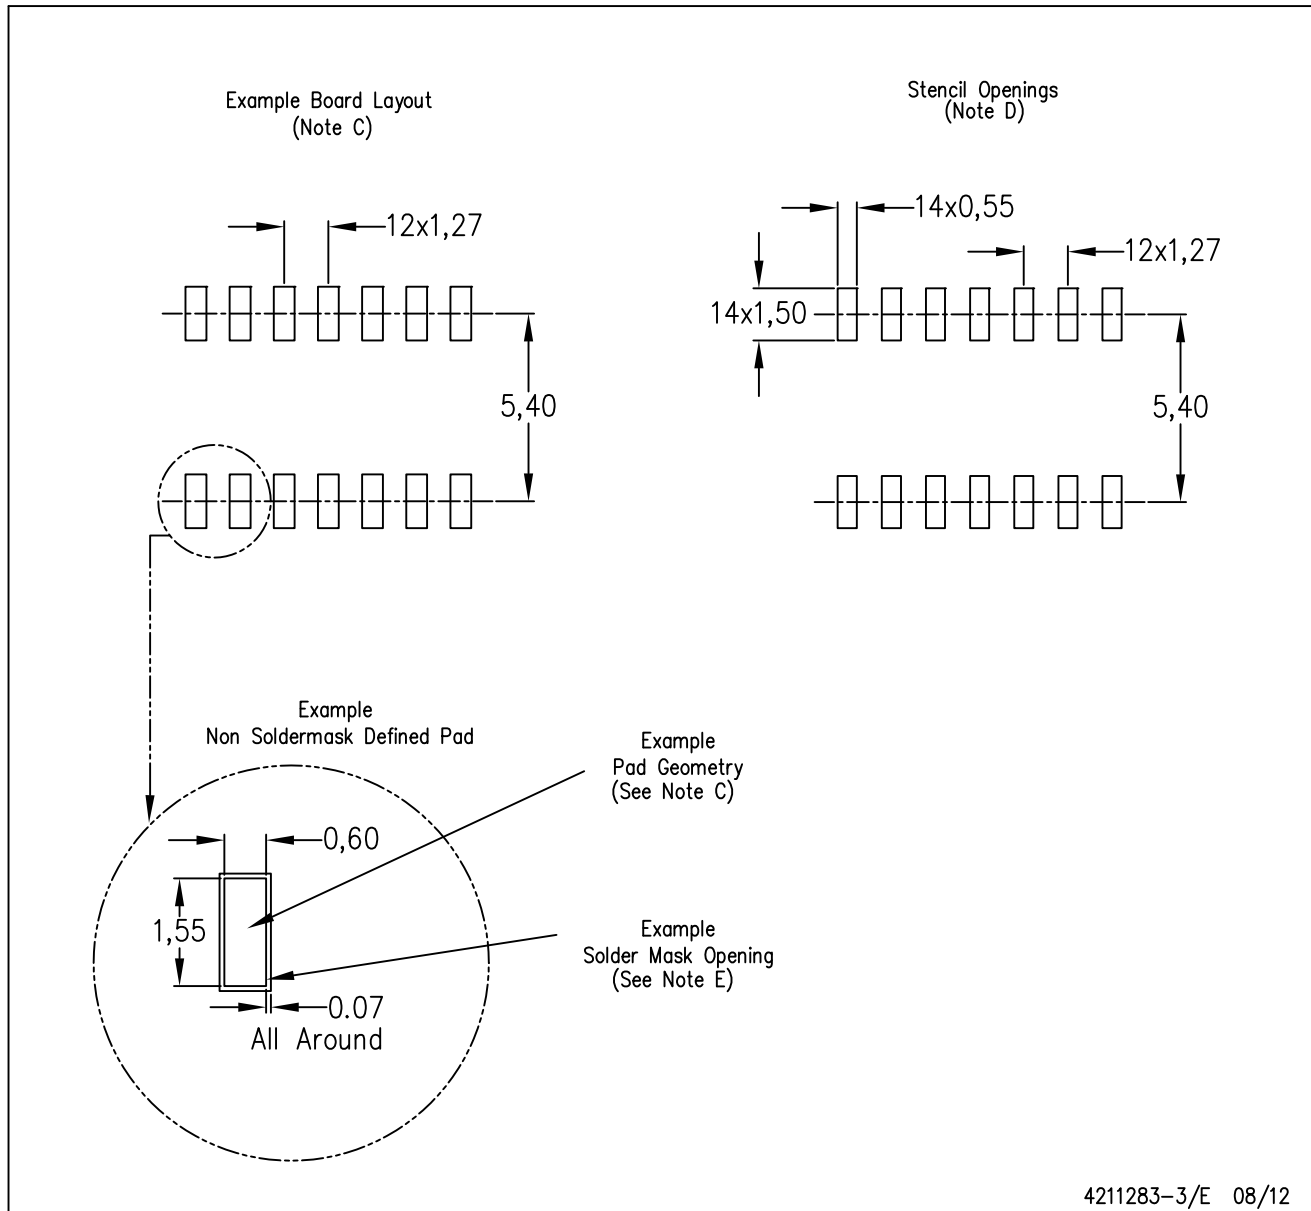

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)


PLASTIC SMALL OUTLINE

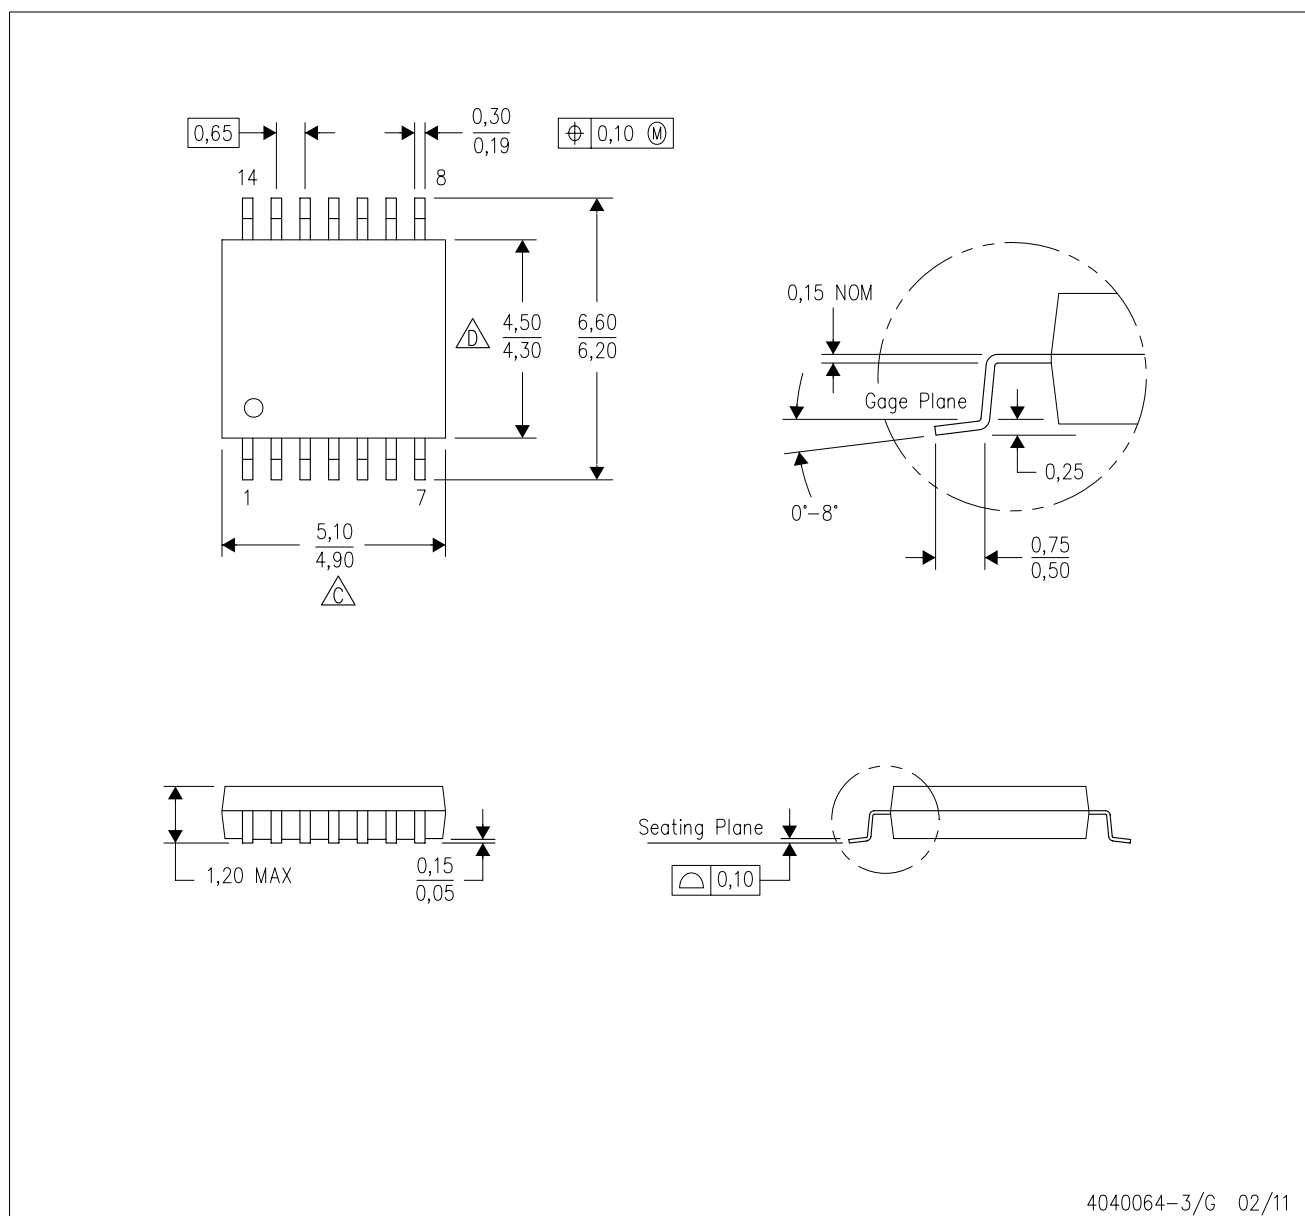

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)


PLASTIC SMALL OUTLINE

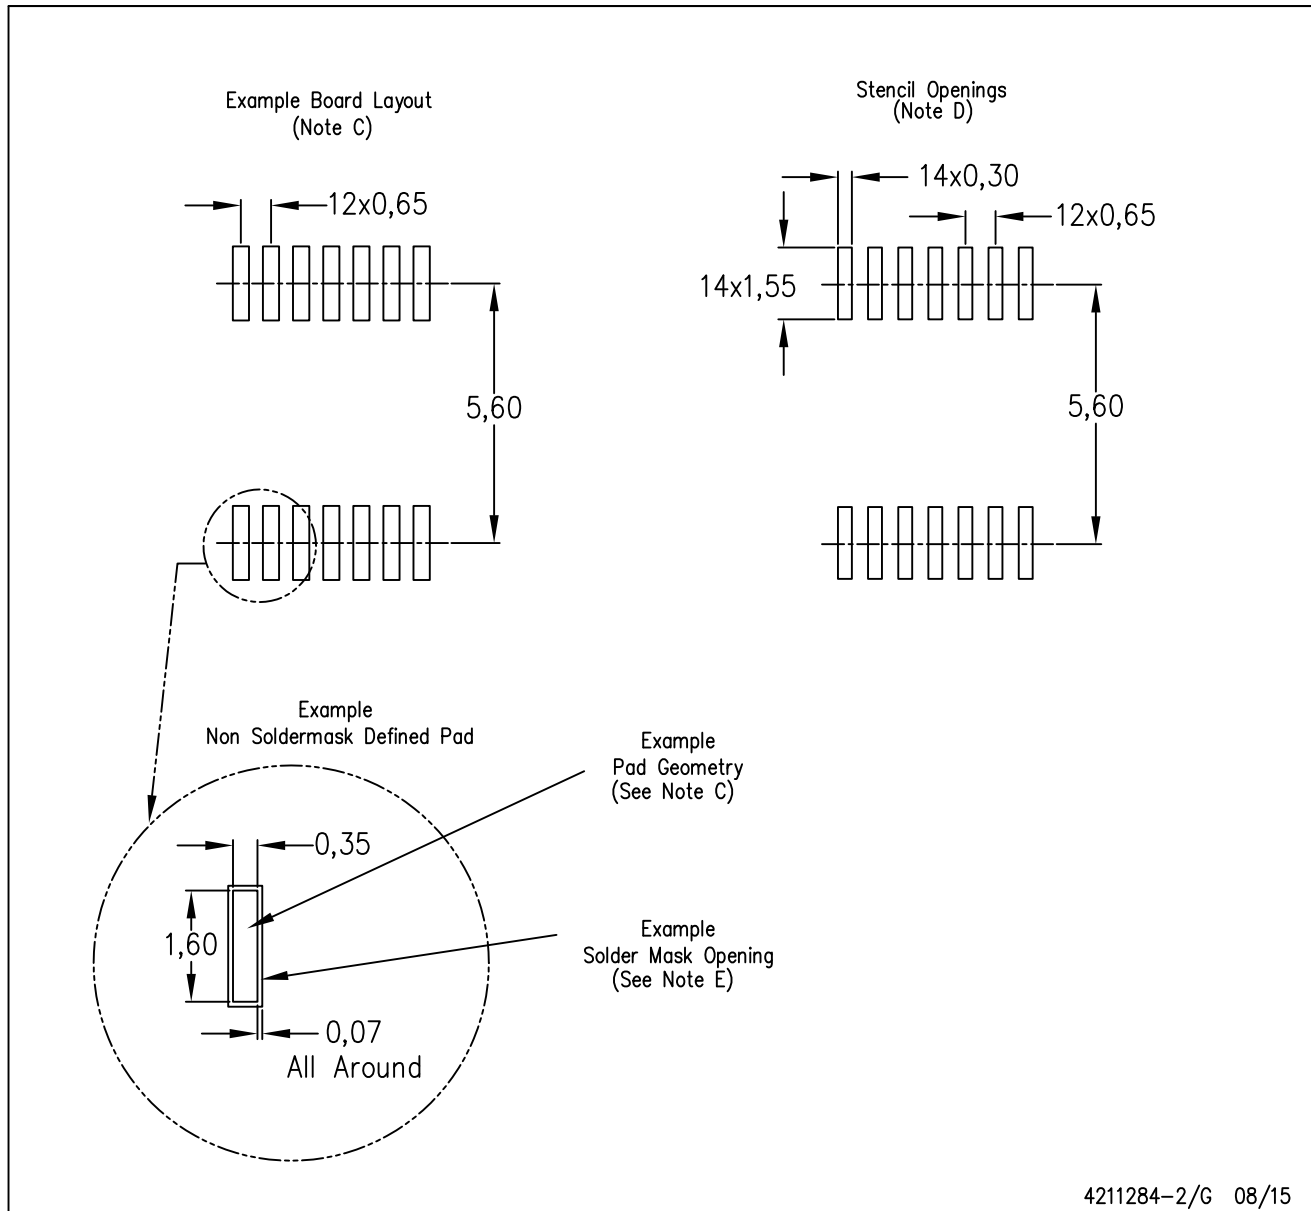

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

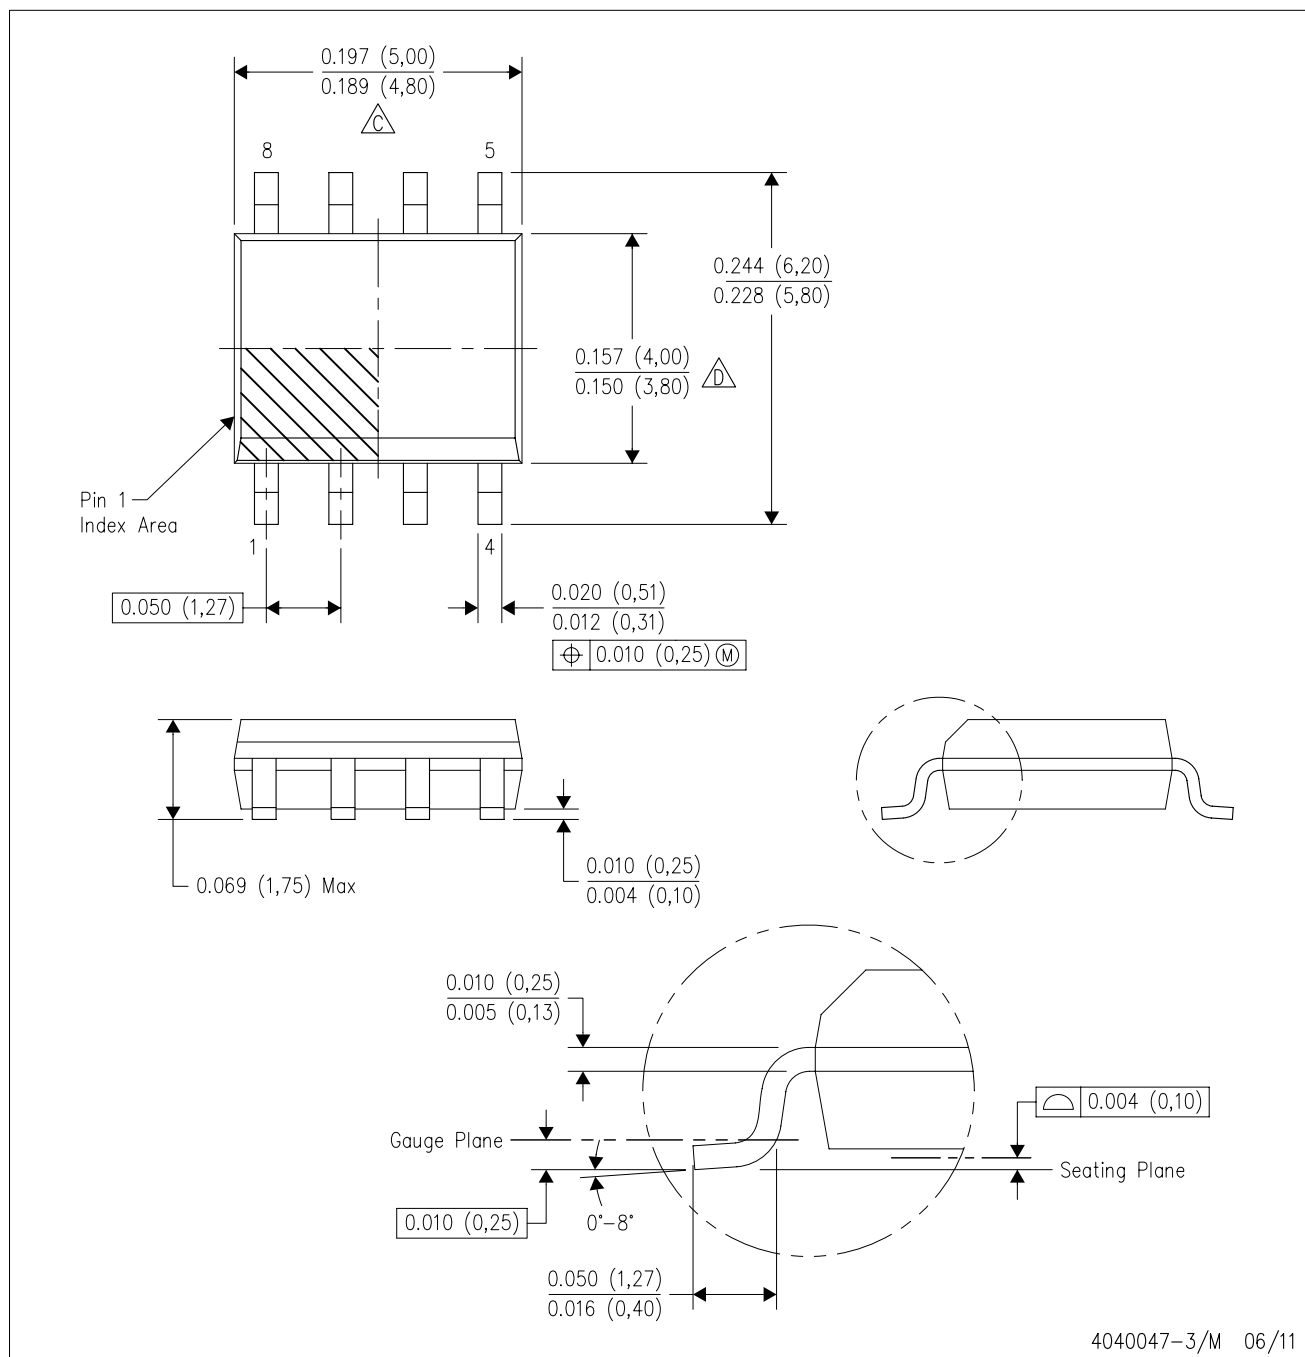


## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

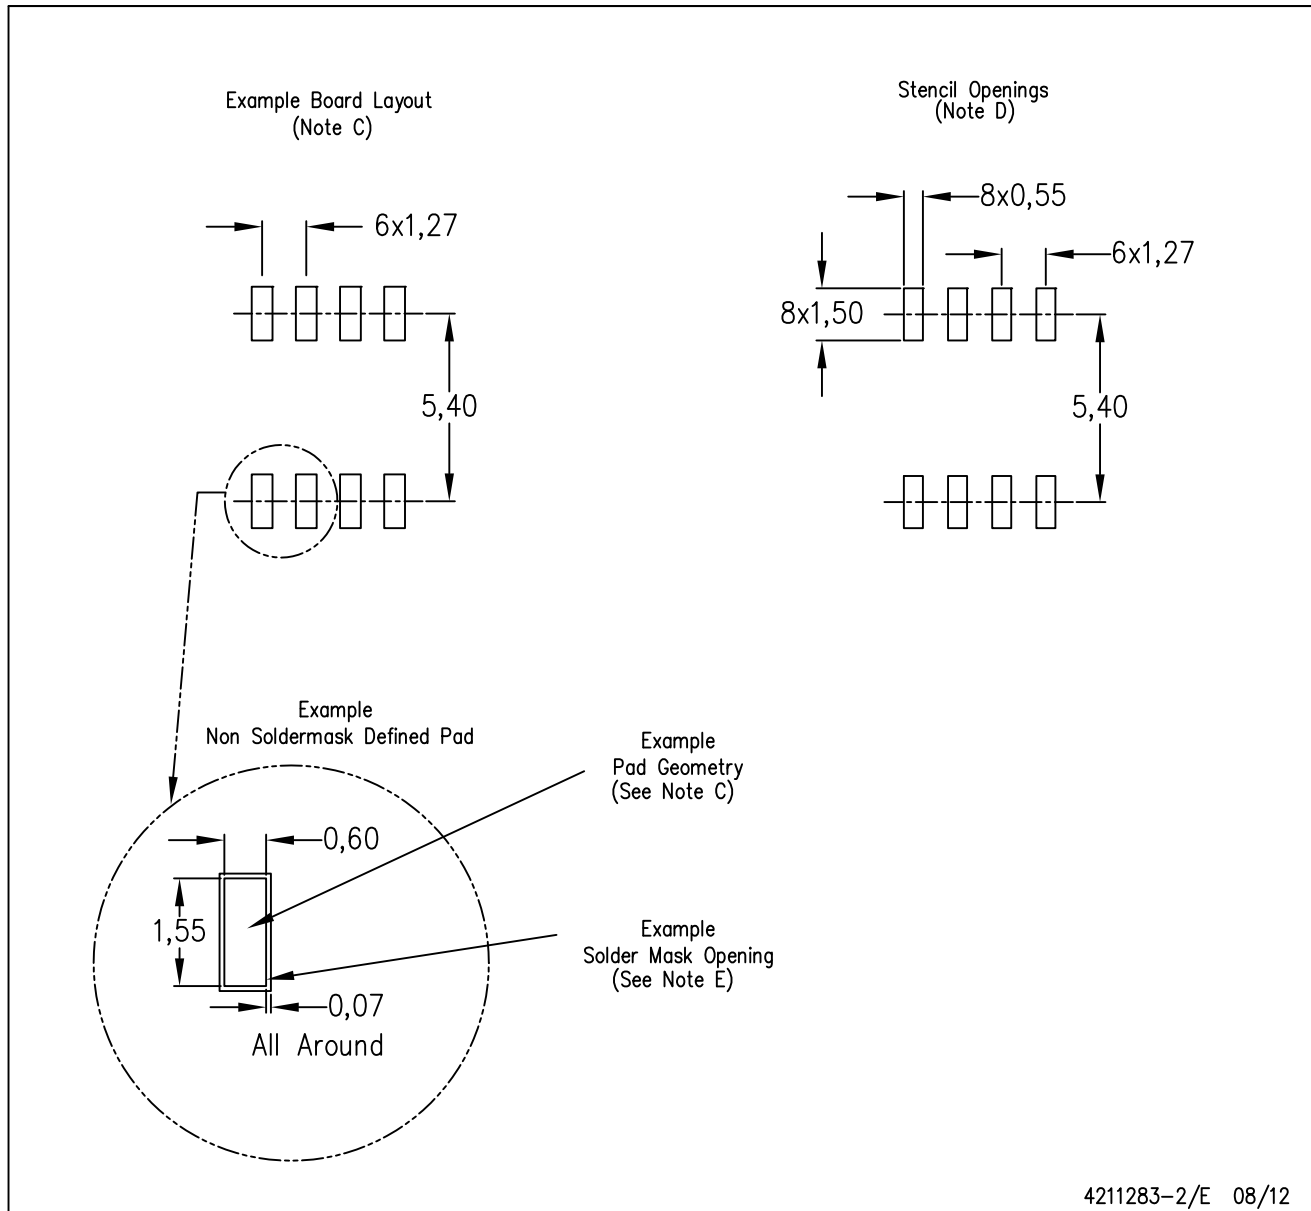

4211283-2/E 08/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)