


# SN54HC257, SN54HC258, SN74HC257, SN74HC258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS


SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003

- Wide Operating Voltage Range of 2 V to 6 V
- High-Current Inverting Outputs Drive Up To 15 LSTTL Loads
- Low Power Consumption, 80- $\mu$ A Max  $I_{CC}$
- 'HC257 . . . Typical  $t_{pd} = 9$  ns
- 'HC258 . . . Typical  $t_{pd} = 12$  ns
- $\pm 6$ -mA Output Drive at 5 V
- Low Input Current of 1  $\mu$ A Max
- Provides Bus Interface from Multiple Sources in High-Performance Systems

SN54HC257, SN54HC258 . . . J PACKAGE  
SN74HC257, SN74HC258 . . . D, N, NS, OR PW PACKAGE  
(TOP VIEW)



SN54HC257, SN54HC258 . . . FK PACKAGE  
(TOP VIEW)

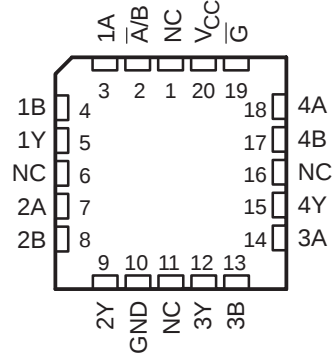

NC – No internal connection

## description/ordering information

### ORDERING INFORMATION

| TA             | PACKAGE†   |              | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|------------|--------------|-----------------------|------------------|
| –40°C to 85°C  | PDIP – N   | Tube of 25   | SN74HC257N            | SN74HC257N       |
|                |            |              | SN74HC258N            | SN74HC258N       |
|                | SOIC – D   | Tube of 40   | SN74HC257D            | HC257            |
|                |            | Reel of 2500 | SN74HC257DR           |                  |
|                |            | Reel of 250  | SN74HC257DT           |                  |
|                |            | Tube of 40   | SN74HC258D            | HC258            |
|                |            | Reel of 2500 | SN74HC258DR           |                  |
|                | SOP – NS   | Reel of 2000 | SN74HC257NSR          | HC257            |
|                |            |              | SN74HC258NSR          | HC258            |
|                | TSSOP – PW | Tube of 90   | SN74HC257PW           | HC257            |
|                |            | Reel of 2000 | SN74HC257PWR          |                  |
|                |            | Reel of 250  | SN74HC257PWT          |                  |
|                |            | Tube of 90   | SN74HC258PW           | HC258            |
|                |            | Reel of 2000 | SN74HC258PWR          |                  |
|                |            | Reel of 250  | SN74HC258PWT          |                  |
| –55°C to 125°C | CDIP – J   | Tube of 25   | SNJ54HC257J           | SNJ54HC257J      |
|                |            |              | SNJ54HC258J           | SNJ54HC258J      |
|                | LCCC – FK  | Tube of 55   | SNJ54HC257FK          | SNJ54HC257FK     |
|                |            |              | SNJ54HC258FK          | SNJ54HC258FK     |

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2003, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

SN54HC257, SN54HC258, SN74HC257, SN74HC258  
QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS  
WITH 3-STATE OUTPUTS

SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003


description/ordering information (continued)

These devices are designed to multiplex signals from 4-bit data sources to 4-output data lines in bus-organized systems. The 3-state outputs do not load the data lines when the output-enable ( $\overline{G}$ ) input is at a high logic level.

To ensure the high-impedance state during power up or power down,  $\overline{G}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

| FUNCTION TABLE |                  |   |   |          |        |
|----------------|------------------|---|---|----------|--------|
| INPUTS         |                  |   |   | OUTPUT Y |        |
| $\overline{G}$ | $\overline{A/B}$ | A | B | 'HC257   | 'HC258 |
| H              | X                | X | X | Z        | Z      |
| L              | L                | L | X | L        | H      |
| L              | L                | H | X | H        | L      |
| L              | H                | X | L | L        | H      |
| L              | H                | X | H | H        | L      |

'HC257 logic diagram (positive logic)

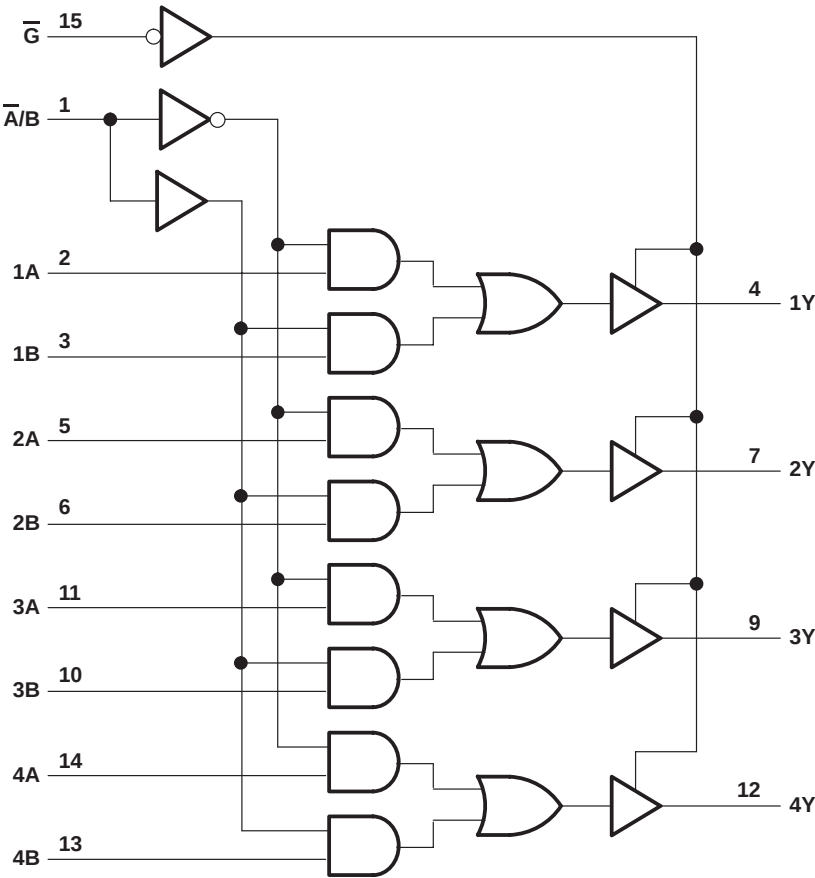


Pin numbers shown are for the D, J, N, NS, and PW packages.



# SN54HC257, SN54HC258, SN74HC257, SN74HC258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003

'HC258 logic diagram (positive logic)

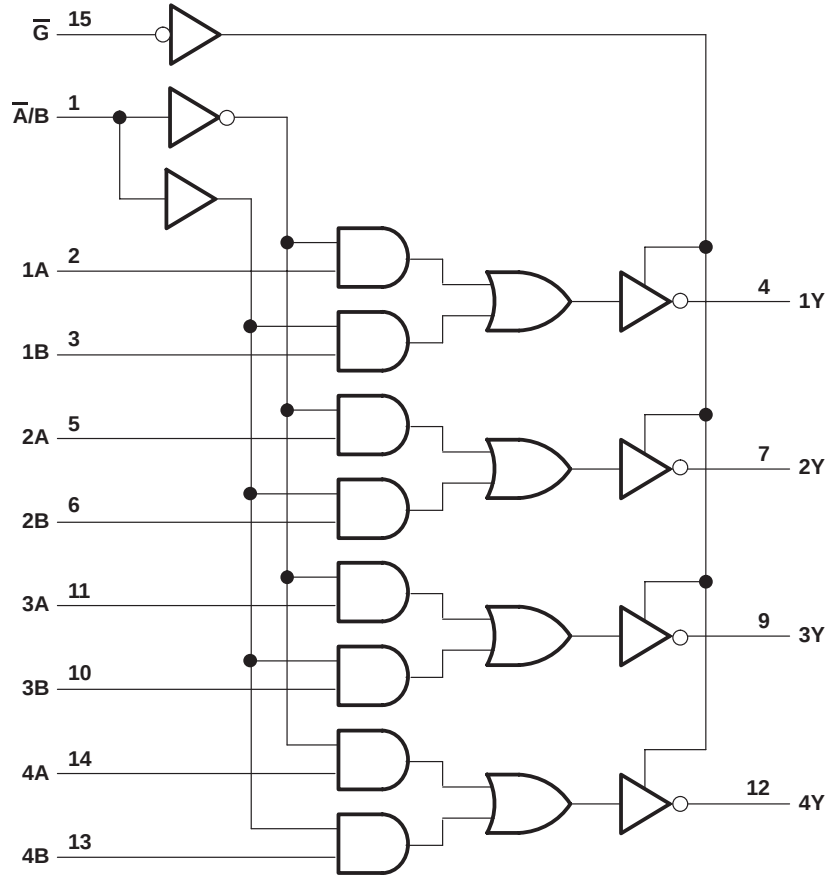

Pin numbers shown are for the D, J, N, NS, and PW packages.

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                  |                |
|------------------------------------------------------------------|----------------|
| Supply voltage range, $V_{CC}$                                   | -0.5 V to 7 V  |
| Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ )    | $\pm 20$ mA    |
| Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{CC}$ )   | $\pm 20$ mA    |
| Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )       | $\pm 35$ mA    |
| Continuous current through $V_{CC}$ or GND                       | $\pm 70$ mA    |
| Package thermal impedance, $\theta_{JA}$ (see Note 1): D package | 73°C/W         |
| N package                                                        | 67°C/W         |
| NS package                                                       | 64°C/W         |
| PW package                                                       | 108°C/W        |
| Storage temperature range, $T_{stg}$                             | -65°C to 150°C |

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.

# SN54HC257, SN54HC258, SN74HC257, SN74HC258

## QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

### WITH 3-STATE OUTPUTS

SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003

#### recommended operating conditions (see Note 2)

|                     |                                 |                         | SN54HC257,<br>SN54HC258 |     |                 | SN74HC257,<br>SN74HC258 |     |                 | UNIT |
|---------------------|---------------------------------|-------------------------|-------------------------|-----|-----------------|-------------------------|-----|-----------------|------|
|                     |                                 |                         | MIN                     | NOM | MAX             | MIN                     | NOM | MAX             |      |
| V <sub>CC</sub>     | Supply voltage                  |                         | 2                       | 5   | 6               | 2                       | 5   | 6               | V    |
| V <sub>IH</sub>     | High-level input voltage        | V <sub>CC</sub> = 2 V   | 1.5                     |     |                 | 1.5                     |     |                 | V    |
|                     |                                 | V <sub>CC</sub> = 4.5 V | 3.15                    |     |                 | 3.15                    |     |                 |      |
|                     |                                 | V <sub>CC</sub> = 6 V   | 4.2                     |     |                 | 4.2                     |     |                 |      |
| V <sub>IL</sub>     | Low-level input voltage         | V <sub>CC</sub> = 2 V   |                         |     | 0.3             |                         |     | 0.5             | V    |
|                     |                                 | V <sub>CC</sub> = 4.5 V |                         |     | 0.9             |                         |     | 1.35            |      |
|                     |                                 | V <sub>CC</sub> = 6 V   |                         |     | 1.2             |                         |     | 1.8             |      |
| V <sub>I</sub>      | Input voltage                   |                         | 0                       |     | V <sub>CC</sub> | 0                       |     | V <sub>CC</sub> | V    |
| V <sub>O</sub>      | Output voltage                  |                         | 0                       |     | V <sub>CC</sub> | 0                       |     | V <sub>CC</sub> | V    |
| $\Delta t/\Delta v$ | Input transition rise/fall time | V <sub>CC</sub> = 2 V   |                         |     | 1000            |                         |     | 1000            | ns   |
|                     |                                 | V <sub>CC</sub> = 4.5 V |                         |     | 500             |                         |     | 500             |      |
|                     |                                 | V <sub>CC</sub> = 6 V   |                         |     | 400             |                         |     | 400             |      |
| T <sub>A</sub>      | Operating free-air temperature  |                         | -55                     |     | 125             | -40                     |     | 85              | °C   |

NOTE 2: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER       | TEST CONDITIONS                                           |                           | V <sub>CC</sub> | T <sub>A</sub> = 25°C |       |      | SN54HC257,<br>SN54HC258 |       | SN74HC257,<br>SN74HC258 |       | UNIT |
|-----------------|-----------------------------------------------------------|---------------------------|-----------------|-----------------------|-------|------|-------------------------|-------|-------------------------|-------|------|
|                 |                                                           |                           |                 | MIN                   | TYP   | MAX  | MIN                     | MAX   | MIN                     | MAX   |      |
| V <sub>OH</sub> | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>       | I <sub>OH</sub> = -20 µA  | 2 V             | 1.9                   | 1.998 |      | 1.9                     |       | 1.9                     |       | V    |
|                 |                                                           |                           | 4.5 V           | 4.4                   | 4.499 |      | 4.4                     |       | 4.4                     |       |      |
|                 |                                                           |                           | 6 V             | 5.9                   | 5.999 |      | 5.9                     |       | 5.9                     |       |      |
|                 |                                                           | I <sub>OH</sub> = -6 mA   | 4.5 V           | 3.98                  | 4.3   |      | 3.7                     |       | 3.84                    |       |      |
|                 |                                                           | I <sub>OH</sub> = -7.8 mA | 6 V             | 5.48                  | 5.8   |      | 5.2                     |       | 5.34                    |       |      |
| V <sub>OL</sub> | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>       | I <sub>OL</sub> = 20 µA   | 2 V             |                       | 0.002 | 0.1  |                         | 0.1   |                         | 0.1   | V    |
|                 |                                                           |                           | 4.5 V           |                       | 0.001 | 0.1  |                         | 0.1   |                         | 0.1   |      |
|                 |                                                           |                           | 6 V             |                       | 0.001 | 0.1  |                         | 0.1   |                         | 0.1   |      |
|                 |                                                           | I <sub>OL</sub> = 6 mA    | 4.5 V           |                       | 0.17  | 0.26 |                         | 0.4   |                         | 0.33  |      |
|                 |                                                           | I <sub>OL</sub> = 7.8 mA  | 6 V             |                       | 0.15  | 0.26 |                         | 0.4   |                         | 0.33  |      |
| I <sub>I</sub>  | V <sub>I</sub> = V <sub>CC</sub> or 0                     |                           | 6 V             |                       | ±0.1  | ±100 |                         | ±1000 |                         | ±1000 | nA   |
| I <sub>OZ</sub> | V <sub>O</sub> = V <sub>CC</sub> or 0                     |                           | 6 V             |                       | ±0.01 | ±0.5 |                         | ±10   |                         | ±5    | µA   |
| I <sub>CC</sub> | V <sub>I</sub> = V <sub>CC</sub> or 0, I <sub>O</sub> = 0 |                           | 6 V             |                       |       | 8    |                         | 160   |                         | 80    | µA   |
| C <sub>i</sub>  |                                                           |                           | 2 V to 6 V      |                       | 3     | 10   |                         | 10    |                         | 10    | pF   |



# SN54HC257, SN54HC258, SN74HC257, SN74HC258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003

switching characteristics over recommended operating free-air temperature range,  $C_L = 50 \text{ pF}$  (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC}$ | $T_A = 25^\circ\text{C}$ |     |     | SN54HC257 |     | SN74HC257 |     | UNIT |
|-----------|-----------------|----------------|----------|--------------------------|-----|-----|-----------|-----|-----------|-----|------|
|           |                 |                |          | MIN                      | TYP | MAX | MIN       | MAX | MIN       | MAX |      |
| $t_{pd}$  | A or B          | Any Y          | 2 V      |                          | 50  | 100 |           | 150 |           | 125 | ns   |
|           |                 |                | 4.5 V    |                          | 10  | 20  |           | 30  |           | 25  |      |
|           |                 |                | 6 V      |                          | 9   | 17  |           | 25  |           | 21  |      |
|           | $\bar{A}/B$     | Any Y          | 2 V      |                          | 50  | 100 |           | 150 |           | 125 |      |
|           |                 |                | 4.5 V    |                          | 10  | 20  |           | 30  |           | 25  |      |
|           |                 |                | 6 V      |                          | 9   | 17  |           | 25  |           | 21  |      |
| $t_{en}$  | $\bar{G}$       | Any Y          | 2 V      |                          | 75  | 150 |           | 225 |           | 190 | ns   |
|           |                 |                | 4.5 V    |                          | 15  | 30  |           | 45  |           | 38  |      |
|           |                 |                | 6 V      |                          | 13  | 26  |           | 38  |           | 32  |      |
| $t_{dis}$ | $\bar{G}$       | Any Y          | 2 V      |                          | 75  | 150 |           | 225 |           | 190 | ns   |
|           |                 |                | 4.5 V    |                          | 15  | 30  |           | 45  |           | 38  |      |
|           |                 |                | 6 V      |                          | 13  | 26  |           | 38  |           | 32  |      |
| $t_t$     |                 | Any Y          | 2 V      |                          | 28  | 60  |           | 90  |           | 75  | ns   |
|           |                 |                | 4.5 V    |                          | 8   | 12  |           | 18  |           | 15  |      |
|           |                 |                | 6 V      |                          | 6   | 10  |           | 15  |           | 13  |      |

switching characteristics over recommended operating free-air temperature range,  $C_L = 150 \text{ pF}$  (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC}$ | $T_A = 25^\circ\text{C}$ |     |     | SN54HC257 |     | SN74HC257 |     | UNIT |
|-----------|-----------------|----------------|----------|--------------------------|-----|-----|-----------|-----|-----------|-----|------|
|           |                 |                |          | MIN                      | TYP | MAX | MIN       | MAX | MIN       | MAX |      |
| $t_{pd}$  | A or B          | Any Y          | 2 V      |                          | 75  | 150 |           | 245 |           | 190 | ns   |
|           |                 |                | 4.5 V    |                          | 15  | 30  |           | 45  |           | 38  |      |
|           |                 |                | 6 V      |                          | 13  | 26  |           | 38  |           | 32  |      |
|           | $\bar{A}/B$     | Any Y          | 2 V      |                          | 75  | 150 |           | 245 |           | 190 |      |
|           |                 |                | 4.5 V    |                          | 15  | 30  |           | 45  |           | 38  |      |
|           |                 |                | 6 V      |                          | 13  | 26  |           | 38  |           | 32  |      |
| $t_{en}$  | $\bar{G}$       | Any Y          | 2 V      |                          | 100 | 200 |           | 300 |           | 250 | ns   |
|           |                 |                | 4.5 V    |                          | 24  | 40  |           | 60  |           | 50  |      |
|           |                 |                | 6 V      |                          | 18  | 34  |           | 51  |           | 43  |      |
| $t_t$     |                 | Any Y          | 2 V      |                          | 45  | 210 |           | 315 |           | 265 | ns   |
|           |                 |                | 4.5 V    |                          | 17  | 42  |           | 63  |           | 53  |      |
|           |                 |                | 6 V      |                          | 13  | 36  |           | 53  |           | 45  |      |



# SN54HC257, SN54HC258, SN74HC257, SN74HC258

## QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

### WITH 3-STATE OUTPUTS

SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003

switching characteristics over recommended operating free-air temperature range,  $C_L = 50$  pF (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM (INPUT)     | TO (OUTPUT) | $V_{CC}$ | $T_A = 25^\circ\text{C}$ |     |     | SN54HC258 |     | SN74HC258 |     | UNIT |
|-----------|------------------|-------------|----------|--------------------------|-----|-----|-----------|-----|-----------|-----|------|
|           |                  |             |          | MIN                      | TYP | MAX | MIN       | MAX | MIN       | MAX |      |
| $t_{pd}$  | A or B           | Any Y       | 2 V      |                          | 60  | 100 |           | 150 |           | 125 | ns   |
|           |                  |             | 4.5 V    |                          | 13  | 20  |           | 30  |           | 25  |      |
|           |                  |             | 6 V      |                          | 12  | 17  |           | 25  |           | 21  |      |
|           | $\overline{A/B}$ | Any Y       | 2 V      |                          | 60  | 115 |           | 175 |           | 145 |      |
|           |                  |             | 4.5 V    |                          | 13  | 23  |           | 35  |           | 29  |      |
|           |                  |             | 6 V      |                          | 12  | 20  |           | 30  |           | 25  |      |
| $t_{en}$  | $\overline{G}$   | Any Y       | 2 V      |                          | 70  | 150 |           | 225 |           | 190 | ns   |
|           |                  |             | 4.5 V    |                          | 15  | 30  |           | 45  |           | 38  |      |
|           |                  |             | 6 V      |                          | 13  | 26  |           | 38  |           | 32  |      |
| $t_{dis}$ | $\overline{G}$   | Any Y       | 2 V      |                          | 75  | 150 |           | 225 |           | 190 | ns   |
|           |                  |             | 4.5 V    |                          | 15  | 30  |           | 45  |           | 38  |      |
|           |                  |             | 6 V      |                          | 13  | 26  |           | 38  |           | 32  |      |
| $t_t$     |                  | Any Y       | 2 V      |                          | 28  | 60  |           | 90  |           | 75  | ns   |
|           |                  |             | 4.5 V    |                          | 8   | 12  |           | 18  |           | 15  |      |
|           |                  |             | 6 V      |                          | 6   | 10  |           | 15  |           | 13  |      |

switching characteristics over recommended operating free-air temperature range,  $C_L = 150$  pF (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM (INPUT)     | TO (OUTPUT) | $V_{CC}$ | $T_A = 25^\circ\text{C}$ |     |     | SN54HC258 |     | SN74HC258 |     | UNIT |
|-----------|------------------|-------------|----------|--------------------------|-----|-----|-----------|-----|-----------|-----|------|
|           |                  |             |          | MIN                      | TYP | MAX | MIN       | MAX | MIN       | MAX |      |
| $t_{pd}$  | A or B           | Any Y       | 2 V      |                          | 95  | 150 |           | 245 |           | 190 | ns   |
|           |                  |             | 4.5 V    |                          | 23  | 30  |           | 45  |           | 38  |      |
|           |                  |             | 6 V      |                          | 21  | 26  |           | 38  |           | 32  |      |
|           | $\overline{A/B}$ | Any Y       | 2 V      |                          | 95  | 165 |           | 240 |           | 210 |      |
|           |                  |             | 4.5 V    |                          | 23  | 33  |           | 48  |           | 42  |      |
|           |                  |             | 6 V      |                          | 21  | 28  |           | 41  |           | 36  |      |
| $t_{en}$  | $\overline{G}$   | Any Y       | 2 V      |                          | 100 | 200 |           | 300 |           | 250 | ns   |
|           |                  |             | 4.5 V    |                          | 24  | 40  |           | 60  |           | 50  |      |
|           |                  |             | 6 V      |                          | 18  | 34  |           | 51  |           | 43  |      |
| $t_t$     |                  | Any Y       | 2 V      |                          | 45  | 210 |           | 315 |           | 265 | ns   |
|           |                  |             | 4.5 V    |                          | 17  | 42  |           | 63  |           | 53  |      |
|           |                  |             | 6 V      |                          | 13  | 36  |           | 53  |           | 45  |      |


operating characteristics,  $T_A = 25^\circ\text{C}$

| PARAMETER |                                               | TEST CONDITIONS | TYP | UNIT |
|-----------|-----------------------------------------------|-----------------|-----|------|
| $C_{pd}$  | Power dissipation capacitance per multiplexer | No load         | 40  | pF   |


# SN54HC257, SN54HC258, SN74HC257, SN74HC258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SCLS224B – DECEMBER 1982 – REVISED SEPTEMBER 2003

## PARAMETER MEASUREMENT INFORMATION

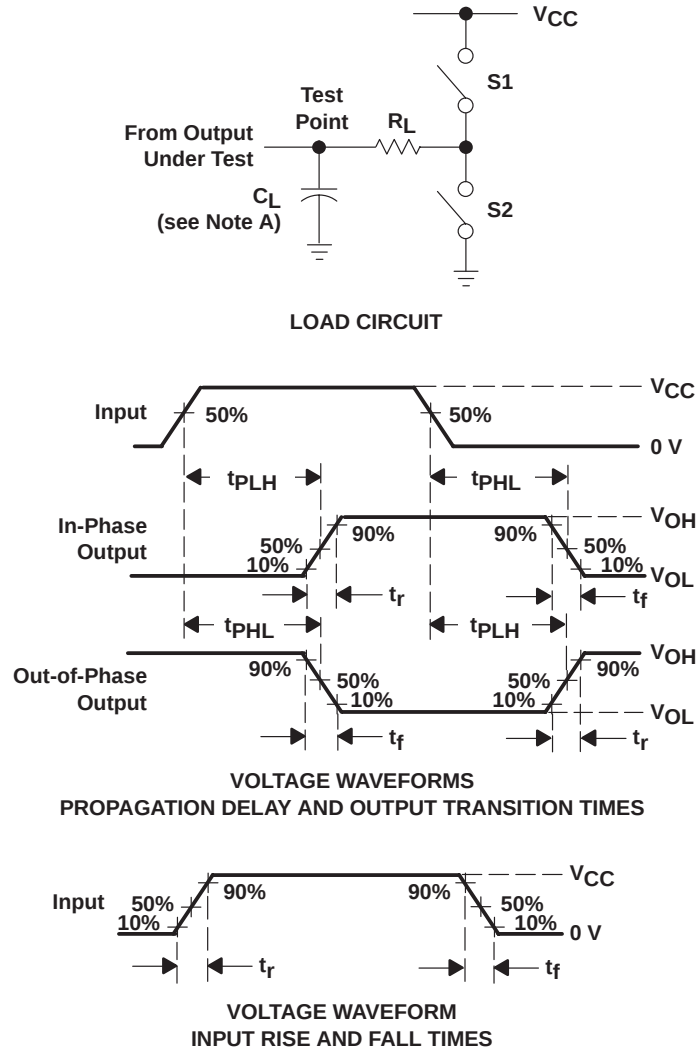

| PARAMETER         | $R_L$              | $C_L$           | S1     | S2     |
|-------------------|--------------------|-----------------|--------|--------|
| $t_{en}$          | $1\text{ k}\Omega$ | 50 pF or 150 pF | Open   | Closed |
|                   |                    |                 | Closed | Open   |
| $t_{dis}$         | $1\text{ k}\Omega$ | 50 pF           | Open   | Closed |
|                   |                    |                 | Closed | Open   |
| $t_{pd}$ or $t_t$ | --                 | 50 pF or 150 pF | Open   | Open   |

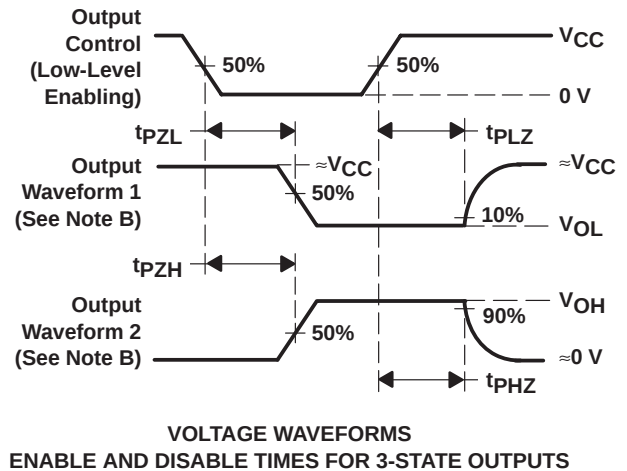

- NOTES:
- A.  $C_L$  includes probe and test-fixture capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - C. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1\text{ MHz}$ ,  $Z_O = 50\ \Omega$ ,  $t_r = 6\text{ ns}$ ,  $t_f = 6\text{ ns}$ .
  - D. The outputs are measured one at a time with one input transition per measurement.
  - E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)     | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)       | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|---------------------|--------------------------------------|----------------------|--------------|-------------------------------|-------------------------|
| 85124012A        | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 85124012A<br>SNJ54HC<br>257FK | <a href="#">Samples</a> |
| 8512401EA        | ACTIVE        | CDIP         | J                  | 16   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 8512401EA<br>SNJ54HC257J      | <a href="#">Samples</a> |
| SN54HC257J       | ACTIVE        | CDIP         | J                  | 16   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | SN54HC257J                    | <a href="#">Samples</a> |
| SN74HC257DR      | ACTIVE        | SOIC         | D                  | 16   | 2500           | RoHS & Green        | NIPDAU   SN                          | Level-1-260C-UNLIM   | -40 to 85    | HC257                         | <a href="#">Samples</a> |
| SN74HC257N       | ACTIVE        | PDIP         | N                  | 16   | 25             | RoHS & Green        | NIPDAU                               | N / A for Pkg Type   | -40 to 85    | SN74HC257N                    | <a href="#">Samples</a> |
| SN74HC257NSR     | ACTIVE        | SO           | NS                 | 16   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | HC257                         | <a href="#">Samples</a> |
| SN74HC257PWR     | ACTIVE        | TSSOP        | PW                 | 16   | 2000           | RoHS & Green        | NIPDAU   SN                          | Level-1-260C-UNLIM   | -40 to 85    | HC257                         | <a href="#">Samples</a> |
| SN74HC258D       | ACTIVE        | SOIC         | D                  | 16   | 40             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | HC258                         | <a href="#">Samples</a> |
| SN74HC258DR      | ACTIVE        | SOIC         | D                  | 16   | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | HC258                         | <a href="#">Samples</a> |
| SN74HC258N       | ACTIVE        | PDIP         | N                  | 16   | 25             | RoHS & Green        | NIPDAU                               | N / A for Pkg Type   | -40 to 85    | SN74HC258N                    | <a href="#">Samples</a> |
| SN74HC258NSR     | ACTIVE        | SO           | NS                 | 16   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | HC258                         | <a href="#">Samples</a> |
| SN74HC258PW      | ACTIVE        | TSSOP        | PW                 | 16   | 90             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | HC258                         | <a href="#">Samples</a> |
| SN74HC258PWR     | ACTIVE        | TSSOP        | PW                 | 16   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | HC258                         | <a href="#">Samples</a> |
| SNJ54HC257FK     | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 85124012A<br>SNJ54HC<br>257FK | <a href="#">Samples</a> |
| SNJ54HC257J      | ACTIVE        | CDIP         | J                  | 16   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 8512401EA<br>SNJ54HC257J      | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN54HC257, SN74HC257 :**

● Catalog : [SN74HC257](#)

● Military : [SN54HC257](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74HC257DR  | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |
| SN74HC257DR  | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.6     | 9.3     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74HC257NSR | SO           | NS              | 16   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |
| SN74HC257NSR | SO           | NS              | 16   | 2000 | 330.0              | 16.4               | 8.45    | 10.55   | 2.5     | 12.0    | 16.2   | Q1            |
| SN74HC257PWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74HC257PWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74HC257PWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.85    | 5.45    | 1.6     | 8.0     | 12.0   | Q1            |
| SN74HC258DR  | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |
| SN74HC258NSR | SO           | NS              | 16   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |
| SN74HC258PWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal


| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74HC257DR  | SOIC         | D               | 16   | 2500 | 356.0       | 356.0      | 35.0        |
| SN74HC257DR  | SOIC         | D               | 16   | 2500 | 366.0       | 364.0      | 50.0        |
| SN74HC257NSR | SO           | NS              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN74HC257NSR | SO           | NS              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN74HC257PWR | TSSOP        | PW              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN74HC257PWR | TSSOP        | PW              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN74HC257PWR | TSSOP        | PW              | 16   | 2000 | 366.0       | 364.0      | 50.0        |
| SN74HC258DR  | SOIC         | D               | 16   | 2500 | 340.5       | 336.1      | 32.0        |
| SN74HC258NSR | SO           | NS              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN74HC258PWR | TSSOP        | PW              | 16   | 2000 | 356.0       | 356.0      | 35.0        |

## TUBE



\*All dimensions are nominal

| Device       | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|--------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 85124012A    | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| SN74HC257N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74HC257N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74HC258D   | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN74HC258N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74HC258N   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74HC258PW  | PW           | TSSOP        | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |
| SNJ54HC257FK | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |




# PACKAGE OUTLINE

NS0016A

SOP - 2.00 mm max height

SOP

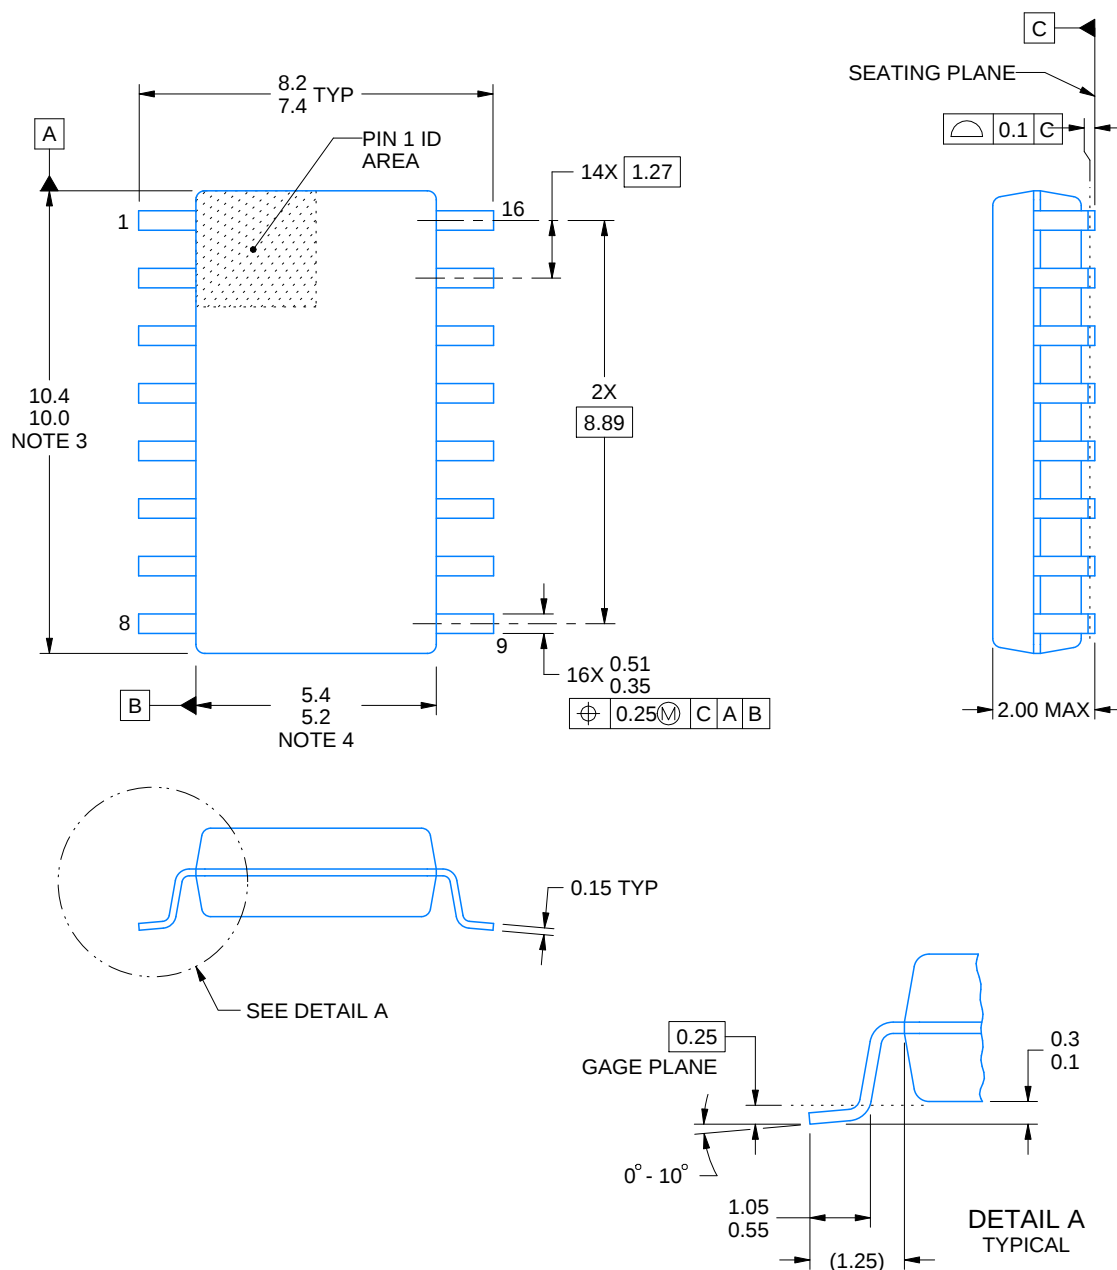

4220735/A 12/2021

## NOTES:



1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.

# EXAMPLE BOARD LAYOUT

NS0016A

SOP - 2.00 mm max height

SOP

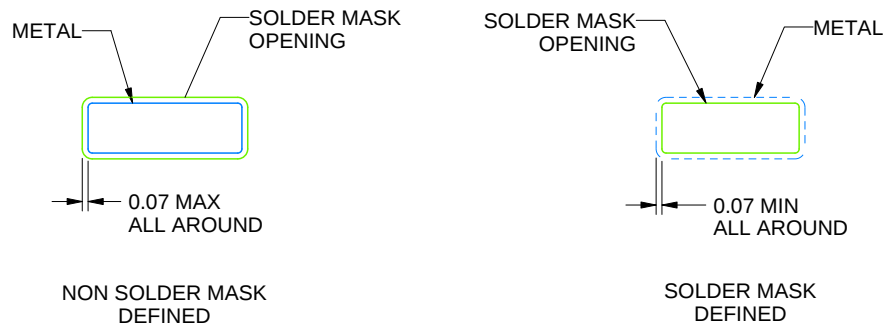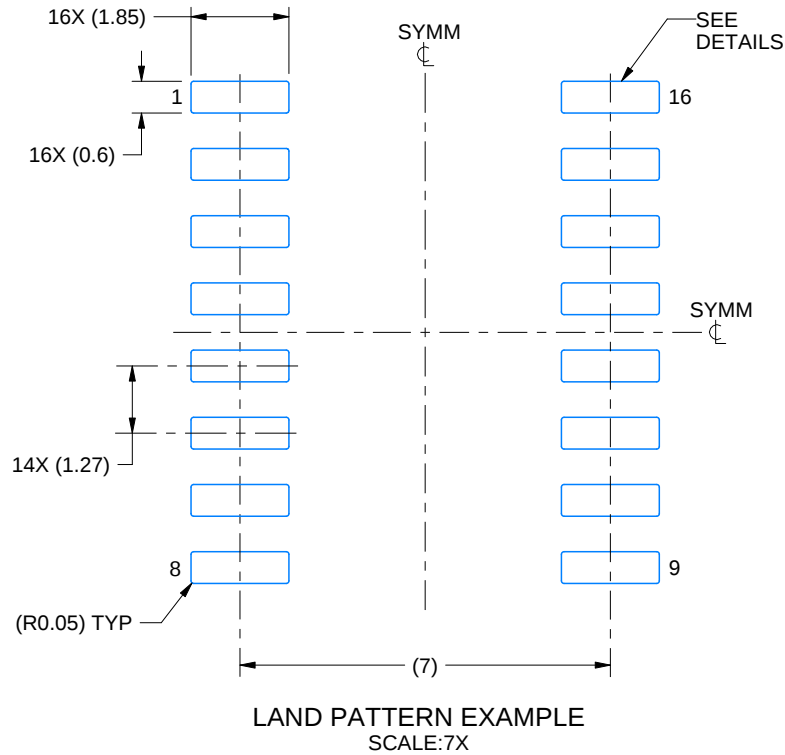


SOLDER MASK DETAILS

4220735/A 12/2021

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

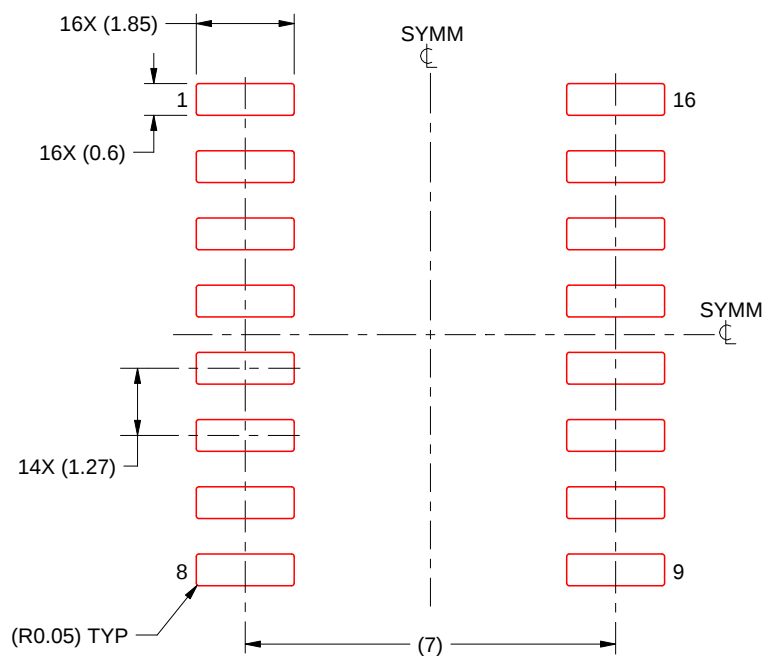

SOLDER PASTE EXAMPLE  
 BASED ON 0.125 mm THICK STENCIL  
 SCALE:7X

4220735/A 12/2021

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AC.



4220204/A 02/2017

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT



PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

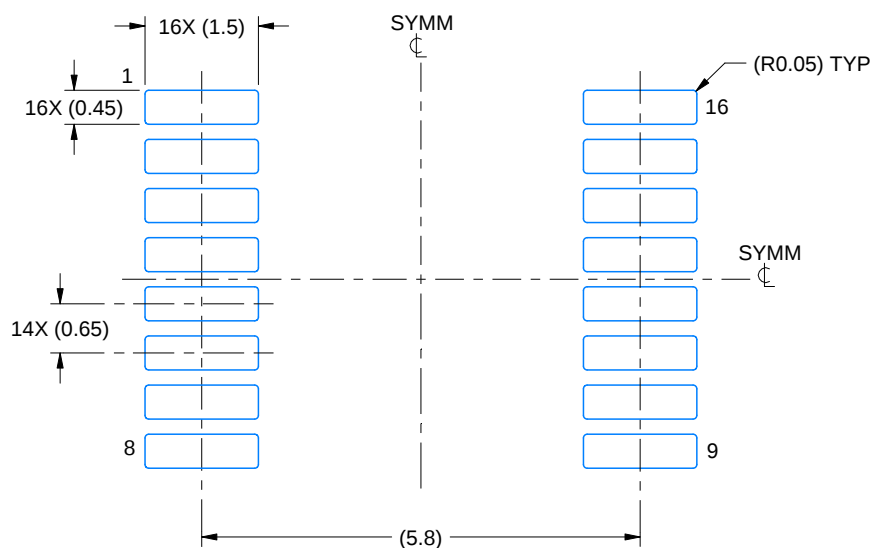

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

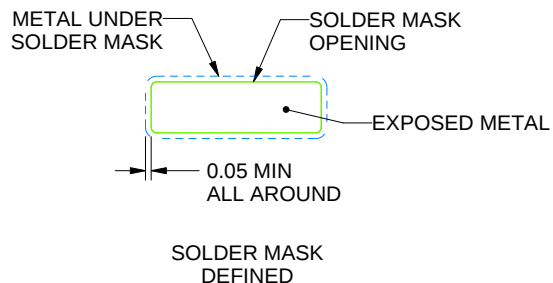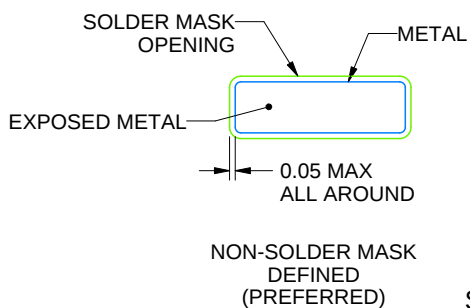

SOLDER MASK DETAILS

4220204/A 02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220204/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## GENERIC PACKAGE VIEW

**FK 20**

**LCCC - 2.03 mm max height**

8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



4229370VA\

J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE



| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |



4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE



| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |



4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2023, Texas Instruments Incorporated