

SN74AS850A, SN74AS851B 1 OF 16 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS


SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

- 4-Line to 1-Line Data Selectors/Multiplexers That Can Select 1 of 16 Data Inputs Typical Applications:

Boolean Function Generators
Parallel-to-Serial Converters
Data Source Selectors

- Cascadable to n-Bits
- 3-State Bus Driver Outputs
- 'AS850A Offers Clocked Selects; 'AS851B Offers Enable-Controlled Selects
- Has a Master Output Control (\overline{G}) for Cascading and individual Output Controls (\overline{GY} , GW) for Each Output
- Package Option Includes 600-mil Standard Plastic DIPs
- Dependable Texas Instruments Quality and Reliability

SN74AS850A, SN74AS851B . . . N PACKAGE
(TOP VIEW)

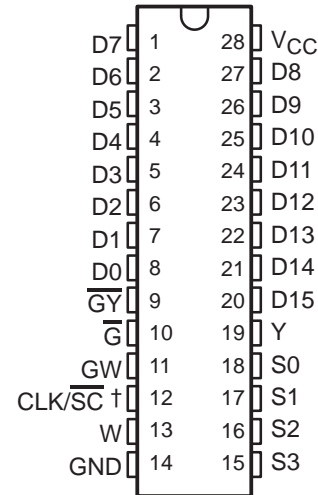

† CLK for 'AS850A or \overline{SC} for 'AS851B

description

These four-line to one-line data selectors/multiplexers provide full binary decoding to select one-of-sixteen data sources with complementary Y and W outputs. The 'AS850A has a clock-controlled select register allowing for a symmetrical presentation of the select inputs to the decoder while the 'AS851B has an enable-controlled select register allowing the user to select and hold one particular data line.

A buffered group of output controls (\overline{G} , \overline{GY} , GW) can be used to place the two outputs in either a normal logic (high or low logic level) or a high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance third state and increased drive provide the capability to drive the bus lines in a bus-organized system without the need for interface or pullup components.

The output controls do not affect the internal operations of the data selector/multiplexer. New data can be setup while the outputs are in the high-impedance state.

The SN74AS850A and SN74AS851B are characterized for operation from 0°C to 70°C.

SN74AS850A, SN74AS851B

1 OF 16 DATA SELECTORS/MULTIPLEXERS

WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

FUNCTION TABLE

INPUT SELECTION TABLE						
SELECT INPUTS				'AS850A	'AS851B	INPUT SELECTED
S3	S2	S1	S0	CLK	<u>SC</u>	
L	L	L	L	↑	L	D0
L	L	L	H	↑	L	D1
L	L	H	L	↑	L	D2
L	L	H	H	↑	L	D3
L	H	L	L	↑	L	D4
L	H	L	H	↑	L	D5
L	H	H	L	↑	L	D6
L	H	H	H	↑	L	D7
H	L	L	L	↑	L	D8
H	L	L	H	↑	L	D9
H	L	H	L	↑	L	D10
H	L	H	H	↑	L	D11
H	H	L	L	↑	L	D12
H	H	L	H	↑	L	D13
H	H	H	L	↑	L	D14
H	H	H	H	↑	L	D15
X	X	X	X	H or L	H	Dn


D = the input selected before the most-recent low-to-high transition of CLK or SC.

OUTPUT FUNCTION TABLE

\overline{G}	\overline{GY}	GW	OUTPUTS	
			Y	W
H	X	X	Z	Z
L	H	L	Z	Z
L	L	L	D	Z
L	H	H	Z	D
L	L	H	D	D

D = level of selected input D0 – D15

logic symbols†

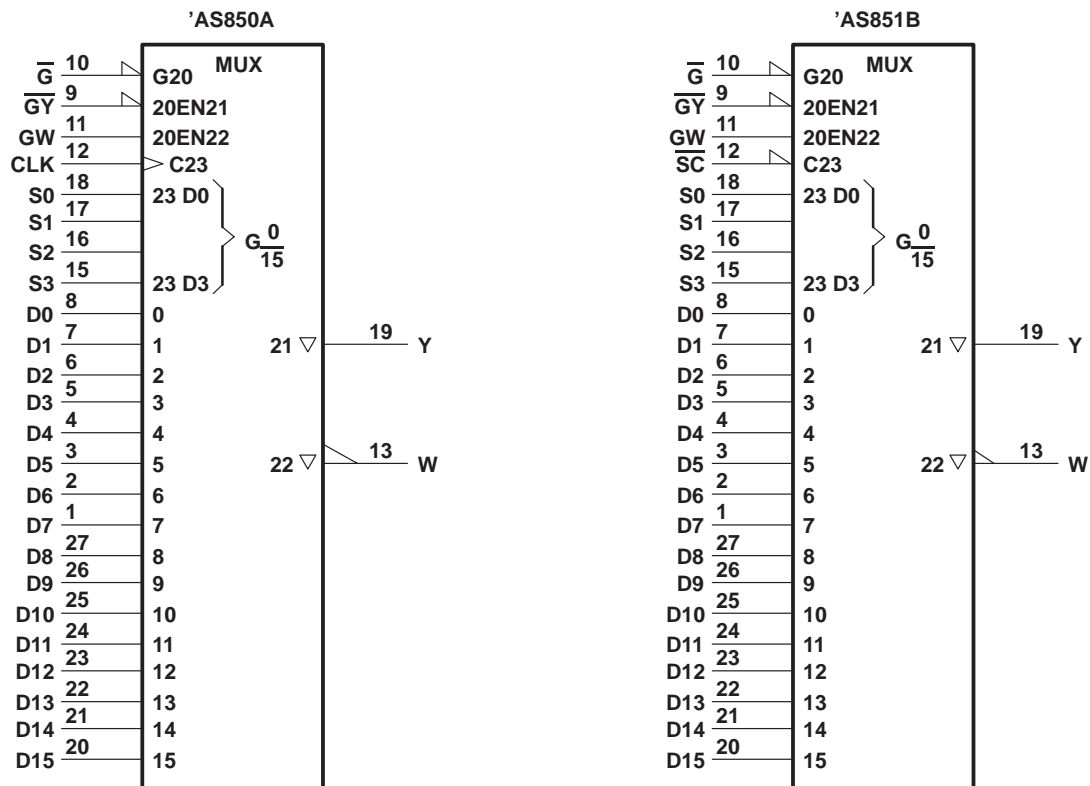


† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

SN74AS850A, SN74AS851B
1 OF 16 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

'AS850A logic diagram (positive logic) (see inset for 'AS851B)

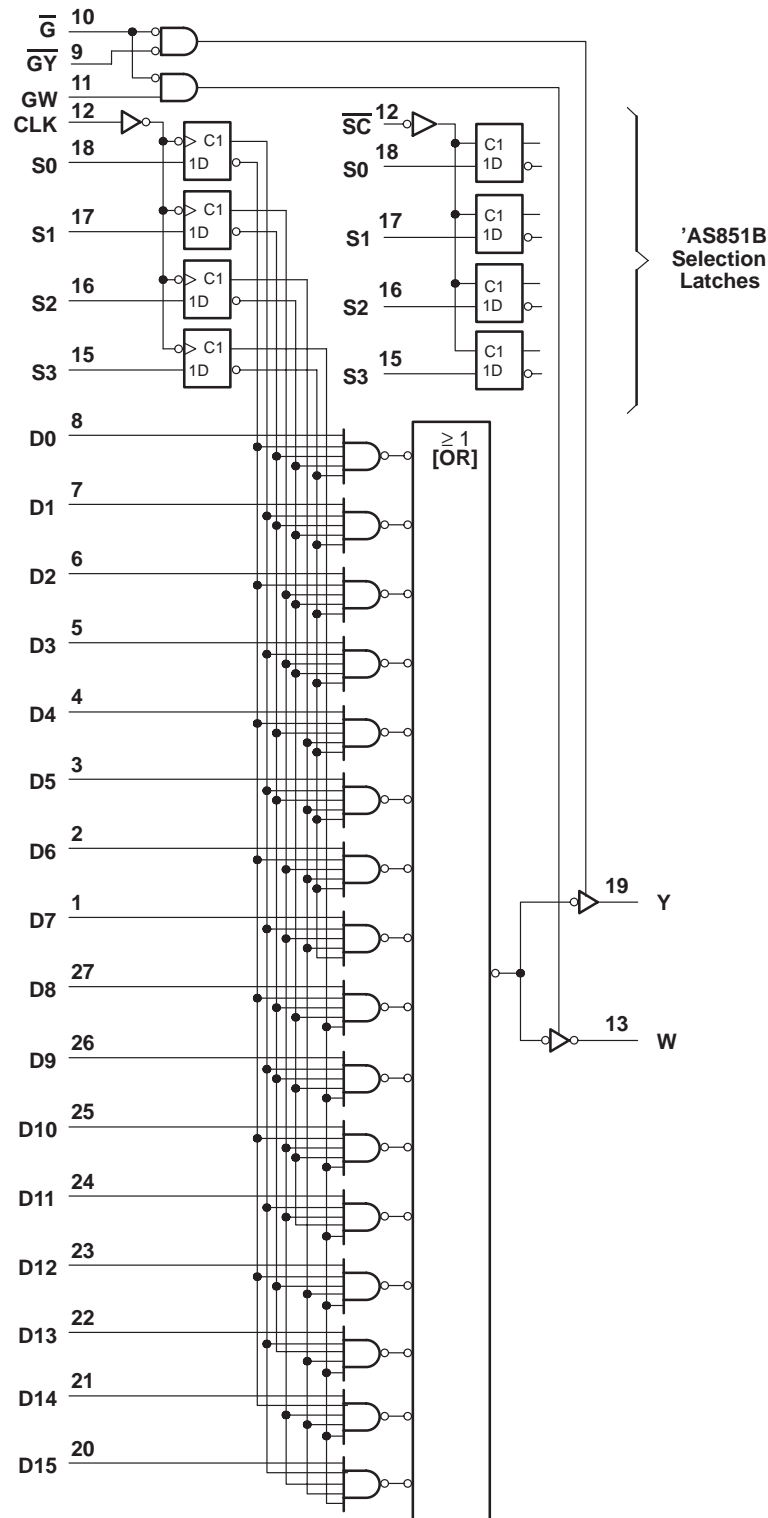

SN74AS850A

1 OF 16 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Operating free-air temperature range:	0°C to 70°C
Storage temperature range	–65°C to 150°C

SN74AS850A recommended operating conditions

			MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage		4.5	5	5.5	V
V _{IH}	High-level input voltage		2			V
V _{IL}	Low-level input voltage				0.8	V
I _{OH}	High-level output current				−15	mA
I _{OL}	Low-level output current				48	mA
f _{clock}	Clock frequency		0		60	MHz
t _w	Pulse duration	CLK high	8			ns
		CLK low	8			
t _{su}	Setup time, select inputs before CLK↑		10			ns
t _h	Hold time, select inputs after CLK↑		0			ns
T _A	Operating free-air temperature		0		70	°C

SN74AS850A electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP \dagger	MAX	UNIT
V_{IK}	$V_{CC} = 4.5$ V, $I_I = -18$ mA			–1.2	V
V_{OH}	$V_{CC} = 4.5$ V, $I_{OH} = -2$ mA	2.5			V
	$V_{CC} = 4.5$ V, $I_{OH} = -15$ mA	2	3.3		
V_{OL}	$V_{CC} = 4.5$ V, $I_{OL} = 48$ mA	0.35	0.5		V
I_{OZH}	$V_{CC} = 5.5$ V, $V_O = 2.7$ V			50	μ A
I_{OZL}	$V_{CC} = 4.5$ V, $V_O = 0.4$ V			–50	μ A
I_I	$V_{CC} = 5.5$ V, $V_I = 7$ V			0.1	mA
I_{IH}	$V_{CC} = 5.5$ V, $V_I = 2.7$ V			20	μ A
I_{IL}	D, G			–1	mA
	All others			–0.5	
$I_{O\ddagger}$	$V_{CC} = 5.5$ V, $V_O = 2.25$ V	–30		–112	mA
I_{CC}	$V_{CC} = 5.5$ V, Outputs active		50	81	mA
	$V_{CC} = 5.5$ V, Outputs disabled		52	85	

\dagger All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

\ddagger The output conditions have been chosen to produce a current that closely approximates one-half of the true short-circuit current, I_{OS} .

SN74AS850A
1 OF 16 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = 0°C to 70°C		UNIT
			MIN	MAX	
f _{max}			60		MHz
t _{PLH}	Any D	Y	3	10.5	ns
t _{PHL}			3	11	
t _{PLH}	Any D	W	3	8.5	ns
t _{PHL}			1	8.5	
t _{PLH}	CLK	Y	3	14.5	ns
t _{PHL}			3	17.5	
t _{PLH}	CLK	W	3	15	ns
t _{PHL}			3.5	13	
t _{PZH}	\overline{G}	Y	2	9.5	ns
t _{PZL}			3	11	
t _{PHZ}	\overline{G}	Y	1	6	ns
t _{PLZ}			2	8	
t _{PZH}	\overline{G}	W	2	9	ns
t _{PZL}			3	10	
t _{PHZ}	\overline{G}	W	1	6	ns
t _{PLZ}			2	9	
t _{PZH}	\overline{GY}	Y	2	9	ns
t _{PZL}			3	11.5	
t _{PHZ}	\overline{GY}	Y	1	6	ns
t _{PLZ}			2	9	
t _{PZH}	GW	W	2	10	ns
t _{PZL}			3	12	
t _{PHZ}	GW	W	1	6	ns
t _{PLZ}			2	11	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1 of *ALS/AS Logic Data Book*, 1986.

SN74AS851B

1 OF 16 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

recommended operating conditions

	MIN	NOM	MAX	UNIT
V_{CC} Supply voltage	4.5	5	5.5	V
V_{IH} High-level input voltage	2			V
V_{IL} Low-level input voltage			0.8	V
I_{OH} High-level output current			–15	mA
I_{OL} Low-level output current			48	mA
t_w Pulse duration, SC low	10			ns
t_{su} Setup time, select inputs before $SC\uparrow$	4.5			ns
t_h Hold time, select inputs after $SC\uparrow$	0			ns
T_A Operating free-air temperature	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP [†]	MAX	UNIT
V_{IK}	$V_{CC} = 4.5\text{ V}$, $I_I = -18\text{ mA}$			–1.2	V
V_{OH}	$V_{CC} = 4.5\text{ V}$, $I_{OH} = -2\text{ mA}$	2.5			V
	$V_{CC} = 4.5\text{ V}$, $I_{OH} = -15\text{ mA}$	2	3.3		
V_{OL}	$V_{CC} = 4.5\text{ V}$, $I_{OL} = 48\text{ mA}$	0.35	0.5		V
I_{OZH}	$V_{CC} = 5.5\text{ V}$, $V_O = 2.7\text{ V}$			50	μA
I_{OZL}	$V_{CC} = 5.5\text{ V}$, $V_O = 0.4\text{ V}$			–50	μA
I_I	$V_{CC} = 5.5\text{ V}$, $V_I = 7\text{ V}$			0.1	mA
I_{IH}	$V_{CC} = 5.5\text{ V}$, $V_I = 2.7\text{ V}$			20	μA
I_{IL}	D, \bar{G}			–1	mA
	All others			–0.5	
I_O^{\ddagger}	$V_{CC} = 5.5\text{ V}$, $V_O = 2.25\text{ V}$	–30		–112	mA
I_{CC}	$V_{CC} = 5.5\text{ V}$	Outputs active		50	mA
		Outputs disabled		52	

[†] All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

[‡] The output conditions have been chosen to produce a current that closely approximates one-half of the true short-circuit current, I_{OS} .

SN74AS851B
1 OF 16 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = MIN to MAX		UNIT
			MIN	MAX	
t _{PLH}	Any D	Y	3	10.5	ns
t _{PHL}			3	11	
t _{PLH}	Any D	W	3	8	ns
t _{PHL}			1	8	
t _{PLH}	S0, S1, S2, S3	Y	3	18	ns
t _{PHL}			3	19	
t _{PLH}	S0, S1, S2, S3	W	3	16	ns
t _{PHL}			3	15	
t _{PLH}	$\overline{\text{SC}}$	Y	3	18	ns
t _{PHL}			3	20	
t _{PLH}	$\overline{\text{SC}}$	W	3	16	ns
t _{PHL}			3	15	
t _{PZH}	$\overline{\text{G}}$	Y	2	8	ns
t _{PZL}			3	11	
t _{PHZ}	$\overline{\text{G}}$	Y	1	6	ns
t _{PLZ}			2	8	
t _{PZH}	$\overline{\text{G}}$	W	2	8	ns
t _{PZL}			3	10	
t _{PHZ}	$\overline{\text{G}}$	W	1	6	ns
t _{PLZ}			2	8	
t _{PZH}	$\overline{\text{GY}}$	Y	2	8	ns
t _{PZL}			3	11	
t _{PHZ}	$\overline{\text{GY}}$	Y	1	6	ns
t _{PLZ}			2	8	
t _{PZH}	GW	W	2	10	ns
t _{PZL}			3	12	
t _{PHZ}	GW	W	1	6.5	ns
t _{PLZ}			2	11	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1 of *ALS/AS Logic Data Book*, 1986.

SDAS154A–D2822, DECEMBER 1983 – REVISED JANUARY 1990

The 'AS850A or 'AS851B can be used as a 1-of-16 Boolean function generator. Figure 1 shows the 'AS850A in one example.



SN74AS850A
1 OF 16 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

TYPICAL APPLICATION DATA

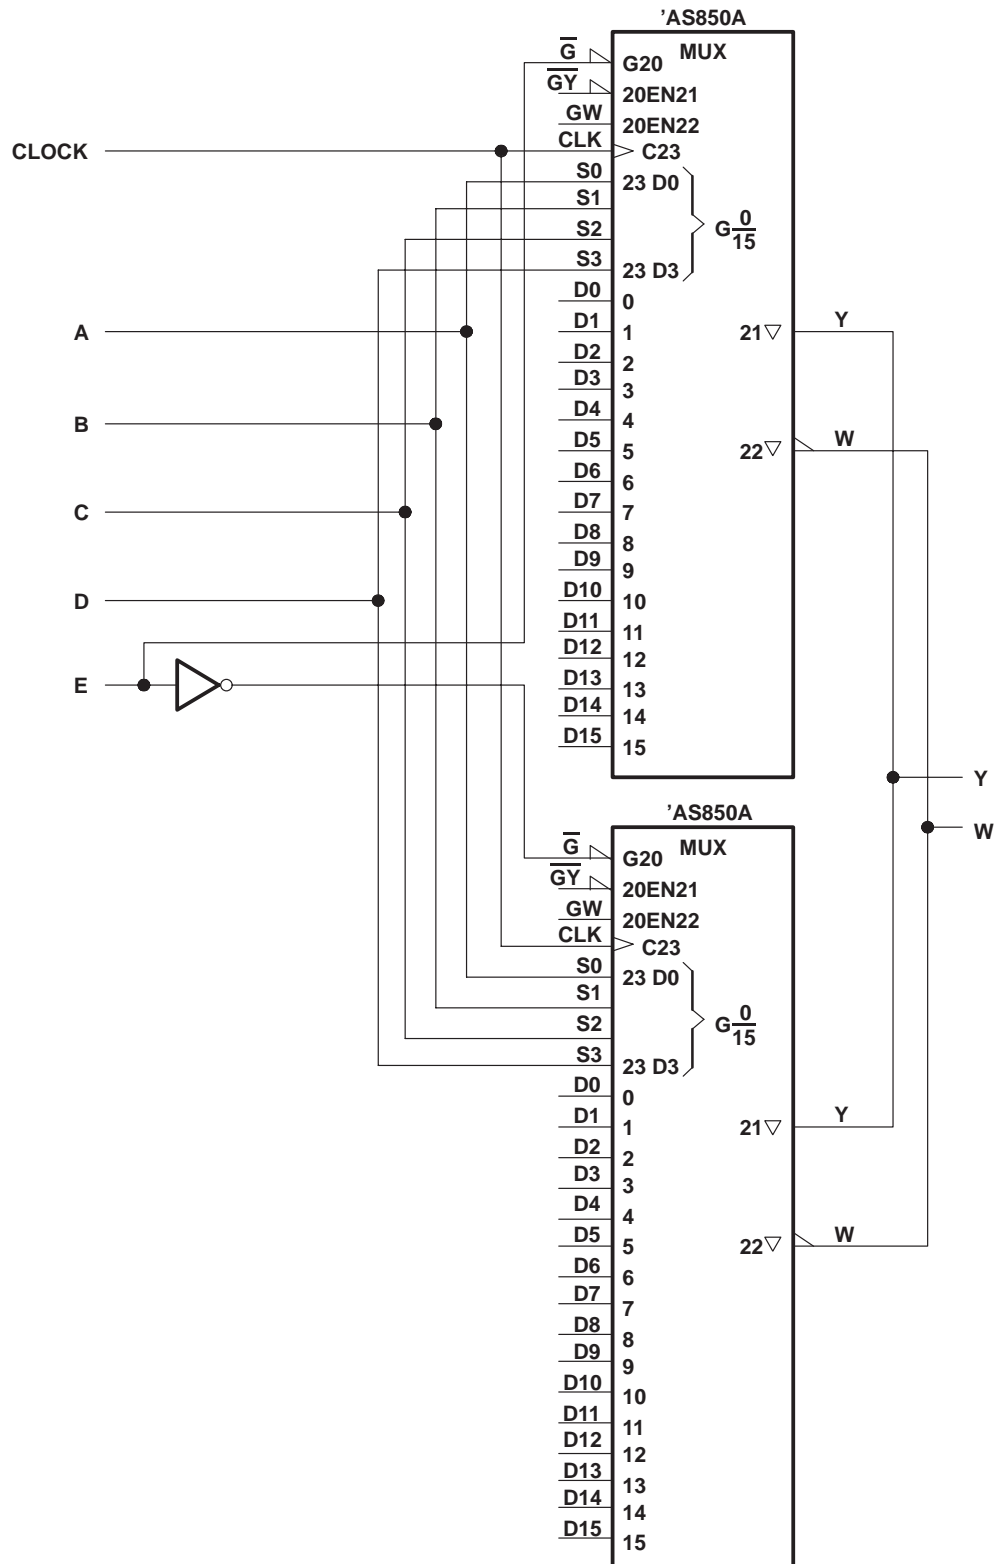


Figure 2. 1 - of - 32 Data/Selector/Multiplexer

SN74AS850A

1 OF 16 DATA SELECTORS/MULTIPLEXERS

WITH 3-STATE OUTPUTS

SDAS154A – D2822, DECEMBER 1983 – REVISED JANUARY 1990

TYPICAL APPLICATION DATA

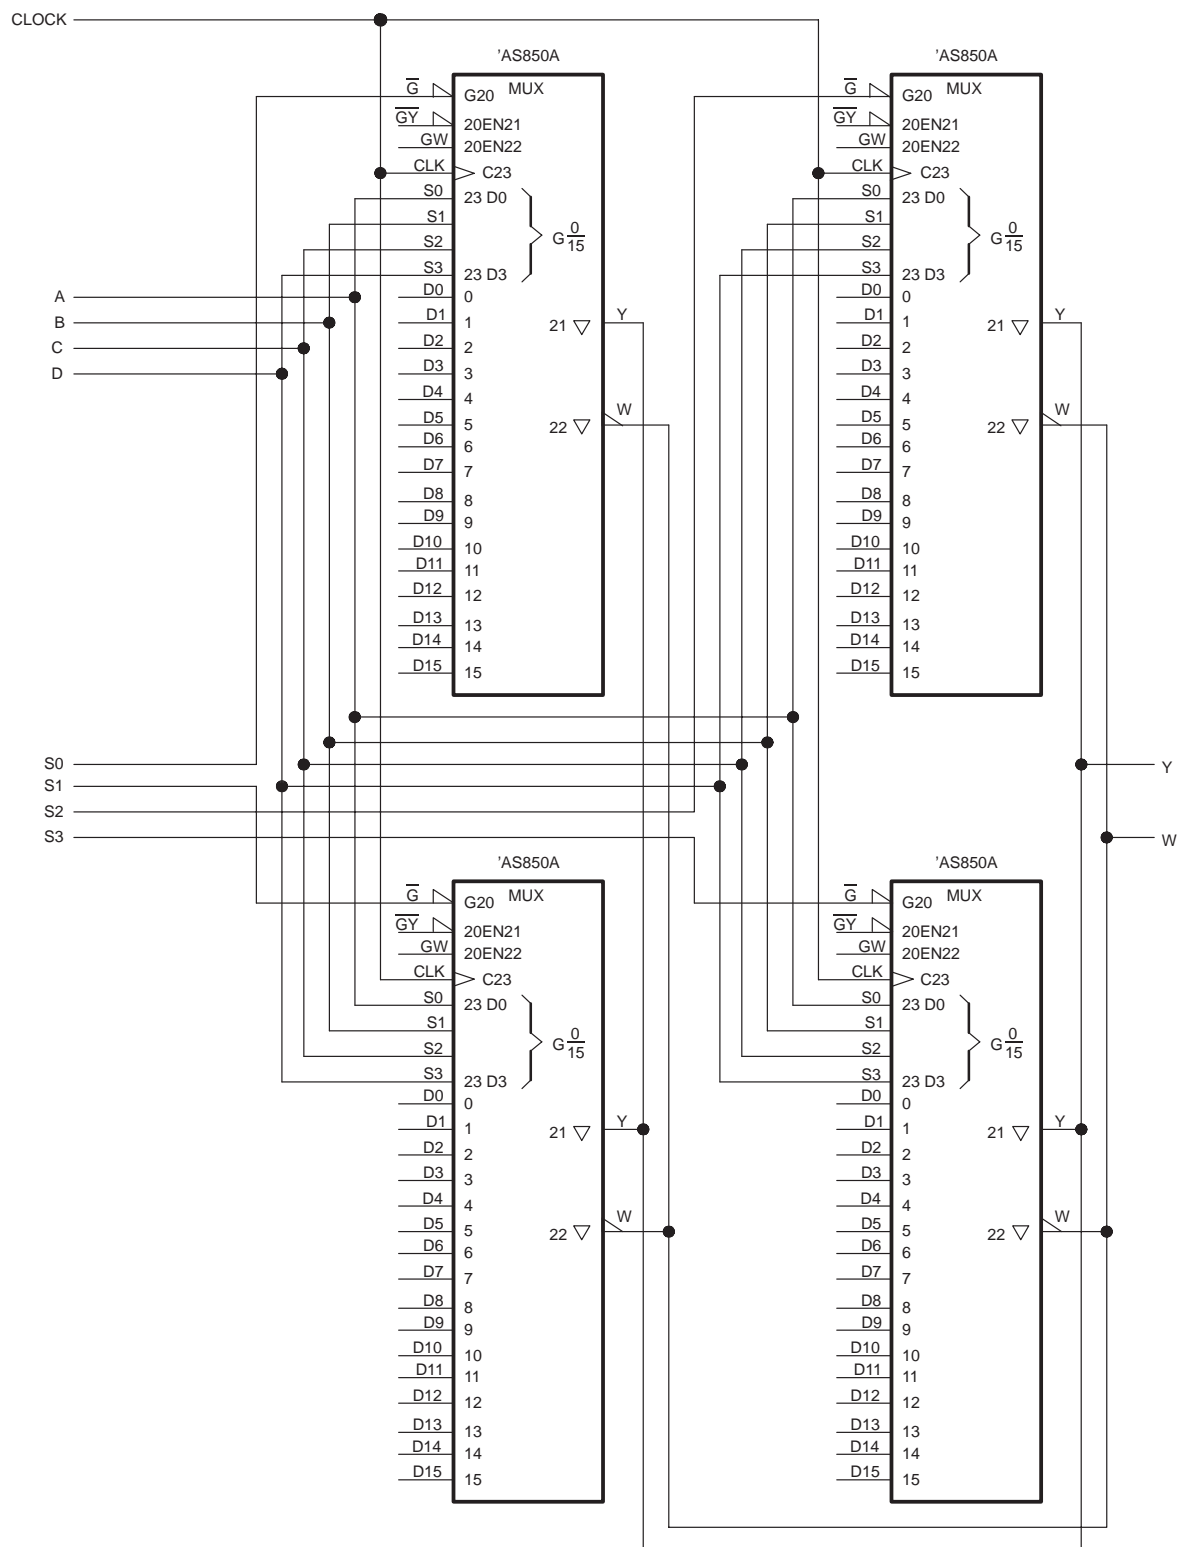


Figure 3. 1 - of - 64 Data Selector/Multiplexer

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
SN74AS850AFN	OBSOLETE	PLCC	FN	28		TBD	Call TI	Call TI
SN74AS850AN	OBSOLETE	PDIP	N	28		TBD	Call TI	Call TI
SN74AS851BN	OBSOLETE	PDIP	N	28		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated