



**Is Now Part of**



**ON Semiconductor®**

**To learn more about ON Semiconductor, please visit our website at**  
**[www.onsemi.com](http://www.onsemi.com)**

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



## FPF1207 / FPF1208

### IntelliMAX™ Advanced Load Switch

#### Features

- 1.2V to 4.0V Input Voltage Operating Range
- Typical  $R_{ON}$ : 50mΩ at  $V_{IN}=3.3V$   
77mΩ at  $V_{IN}=1.8V$   
150mΩ at  $V_{IN}=1.2V$
- Slew Rate Control with  $t_R$ : 110μs
- Output Discharge Function on FPF1208
- Low <1.5μA Quiescent Current
- Extra Low <100nA Off Supply Current
- ESD Protected: Above 7000V HBM, 2000V CDM
- GPIO/CMOS-Compatible Enable Circuitry
- 4-Bump WLCSP 0.76mm x 0.76mm, 0.4mm Pitch

#### Description

The FPF1207/08 is an ultra-small integrated IntelliMAX™ load switch with integrated P-channel switch and analog control features. Integrated slew-rate control prevents inrush current and the resulting excessive voltage drop on power rail. The input voltage range operates from 1.2V to 4.0V to provide power-disconnect capability for post-regulated power rails in portable and consumer products. The low shut-off current of 1μA (maximum) allows power designs to meet standby and off-power drain specifications.

The FPF1207/08 is controlled by an active-HIGH logic input (ON pin) compatible with standard CMOS GPIO circuitry found on Field Programmable Gate Array (FPGA) and embedded processors. The FPF1207/08 is available in 0.76mm x 0.76mm 4-bump WLCSP.

#### Applications

- Mobile Devices and Smart Phones
- Portable Media Devices
- Ultra-Portable / Mobile Computing
- Advanced Notebook, UMPC, MID
- Portable Medical Devices
- GPS and Navigation Equipment

#### Ordering Information

| Part Number | Top Marking | Switch (Typical) at 3.3V <sub>IN</sub> | Output Discharge | ON Pin Activity | $t_R$ | Package                                                                    |
|-------------|-------------|----------------------------------------|------------------|-----------------|-------|----------------------------------------------------------------------------|
| FPF1207UCX  | QG          | 50mΩ                                   | NA               | Active HIGH     | 110μs | 4-Ball, Wafer-Level Chip-Scale Package (WLCSP), 0.76 x 0.76mm, 0.4mm Pitch |
| FPF1208UCX  | QH          | 50mΩ                                   | 65Ω              | Active HIGH     | 110μs |                                                                            |

## Application Diagram

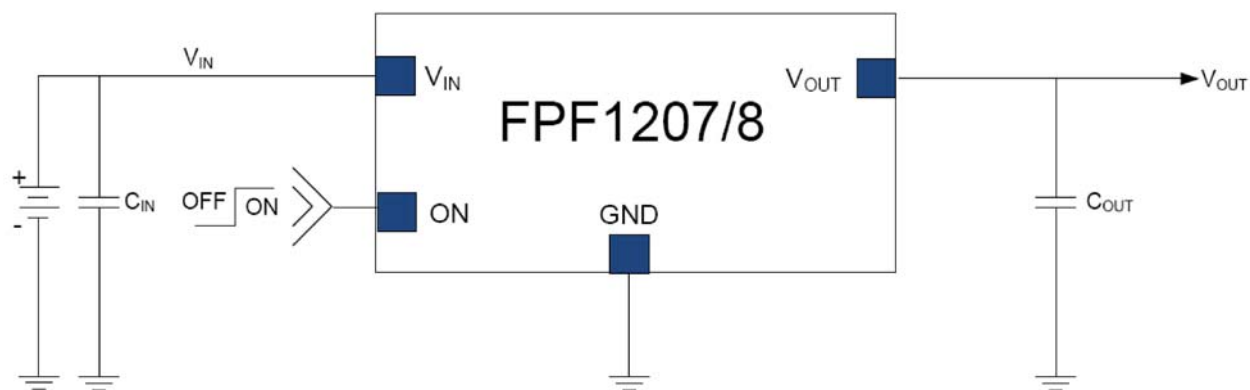


Figure 1. Typical Application

### Notes:

1.  $C_{IN}=1\mu F$ , X5R, 0603 (for example, Murata GRM185R60J105KE26).
2.  $C_{OUT}=1\mu F$ , X5R, 0805 (for example, Murata GRM216R61A105KA01).

## Functional Block Diagram

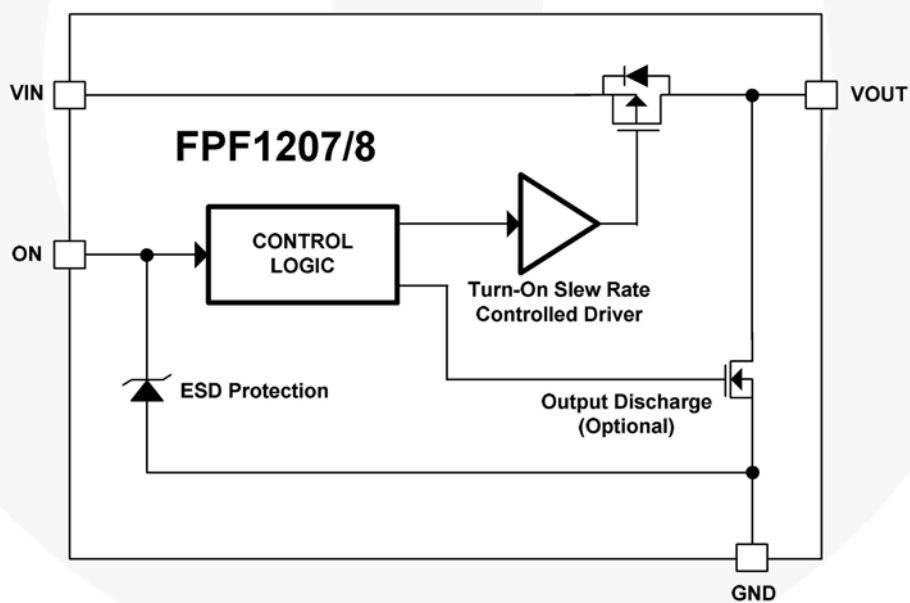


Figure 2. Functional Block Diagram (Output Discharge for FPF1208 Only)

## Pin Configurations




Figure 3. WLCSP Bumps Facing Up (Top View)



Figure 4. WLCSP Bumps Facing Down (Bottom View)

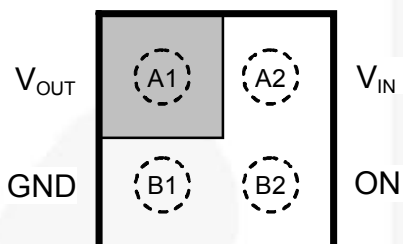


Figure 5. Pin Assignments (Top View)

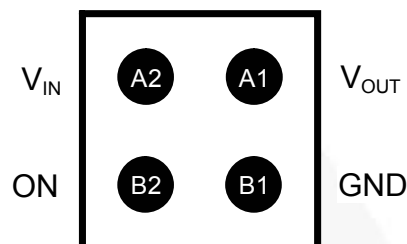


Figure 6. Pin Assignments (Bottom View)

## Pin Definitions

| Pin # | Name      | Description                             |
|-------|-----------|-----------------------------------------|
| A1    | $V_{OUT}$ | Switch Output                           |
| A2    | $V_{IN}$  | Supply Input: Input to the power switch |
| B1    | GND       | Ground                                  |
| B2    | ON        | ON/OFF control, active HIGH             |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol        | Parameter                                           |                                   | Min. | Max. | Unit               |
|---------------|-----------------------------------------------------|-----------------------------------|------|------|--------------------|
| $V_{IN}$      | $V_{IN}$ , $V_{OUT}$ , $V_{ON}$ to GND              |                                   | -0.3 | 4.2  | V                  |
| $I_{SW}$      | Maximum Continuous Switch Current                   |                                   |      | 1.2  | A                  |
| $P_D$         | Power Dissipation at $T_A=25^\circ\text{C}$         |                                   |      | 1.0  | W                  |
| $T_{STG}$     | Storage Junction Temperature                        |                                   | -65  | +150 | $^\circ\text{C}$   |
| $T_A$         | Operating Temperature Range                         |                                   | -40  | +85  | $^\circ\text{C}$   |
| $\Theta_{JA}$ | Thermal Resistance, Junction-to-Ambient             | 1S2P with One Thermal Via         |      | 110  | $^\circ\text{C/W}$ |
|               |                                                     | 1S2P without Thermal Via          |      | 95   |                    |
| ESD           | Electrostatic Discharge Capability <sup>(3,4)</sup> | Human Body Model, JESD22-A114     | 7    |      | kV                 |
|               |                                                     | Charged Device Model, JESD22-C101 | 2    |      |                    |

### Notes:

3. Measured using 2S2P JEDEC std. PCB.
4. Measured using 2S2P JEDEC PCB COLD PLATE Method.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol   | Parameter                     | Min. | Max. | Unit             |
|----------|-------------------------------|------|------|------------------|
| $V_{IN}$ | Supply Voltage                | 1.2  | 4.0  | V                |
| $T_A$    | Ambient Operating Temperature | -40  | +85  | $^\circ\text{C}$ |

## Electrical Characteristics

Unless otherwise noted,  $V_{IN}=1.2$  to  $4.0V$  and  $T_A=-40$  to  $+85^{\circ}C$ . Typical values are at  $V_{IN}=3.3V$  and  $T_A=25^{\circ}C$ .

| Symbol                                       | Parameter                          | Conditions                                                                                    | Min. | Typ. | Max. | Units      |
|----------------------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------|------|------|------|------------|
| <b>Basic Operation</b>                       |                                    |                                                                                               |      |      |      |            |
| $V_{IN}$                                     | Supply Voltage                     |                                                                                               | 1.2  |      | 4.0  | V          |
| $I_{Q(OFF)}$                                 | Off Supply Current                 | $V_{ON}=GND$ , $V_{OUT}=Open$ , $V_{IN}=4V$                                                   |      |      | 100  | nA         |
| $I_{SD(OFF)}$                                | Off Switch Current                 | $V_{ON}=GND$ , $V_{OUT}=GND$                                                                  |      |      | 1    | $\mu A$    |
| $I_Q$                                        | Quiescent Current                  | $I_{OUT}=0mA$                                                                                 |      |      | 1.5  | $\mu A$    |
| $R_{ON}$                                     | On Resistance                      | $V_{IN}=3.3V$ , $I_{OUT}=200mA$ , $T_A=25^{\circ}C$                                           |      | 50   | 66   | m $\Omega$ |
|                                              |                                    | $V_{IN}=1.8V$ , $I_{OUT}=200mA$ , $T_A=25^{\circ}C$                                           |      | 77   | 91   |            |
|                                              |                                    | $V_{IN}=1.2V$ , $I_{OUT}=200mA$ , $T_A=25^{\circ}C$                                           |      | 150  | 160  |            |
|                                              |                                    | $V_{IN}=1.8V$ , $I_{OUT}=200mA$ , $T_A=85^{\circ}C$                                           |      |      | 100  |            |
| $R_{PD}$                                     | Output Discharge $R_{PULL\ DOWN}$  | $V_{IN}=3.3V$ , $V_{ON}=0V$ , $I_{FORCE}=20mA$ , $T_A=25^{\circ}C$ , FPF1208                  |      | 65   | 110  | $\Omega$   |
| $V_{IH}$                                     | On Input Logic HIGH Voltage        | $V_{IN} < 1.5V$                                                                               | 0.9  |      |      | V          |
|                                              |                                    | $V_{IN}=1.5V$ to $4.0V$                                                                       | 1.1  |      |      |            |
| $V_{IL}$                                     | On Input Logic LOW Voltage         | $V_{IN}=1.2V$ to $4.0V$                                                                       |      |      | 0.75 | V          |
| $I_{ON}$                                     | On Input Leakage                   | $V_{ON}=V_{IN}$ or GND                                                                        |      |      | 1    | $\mu A$    |
| <b>Dynamic Characteristics<sup>(5)</sup></b> |                                    |                                                                                               |      |      |      |            |
| $t_{DON}$                                    | Turn-On Delay <sup>(6)</sup>       | $V_{IN}=3.3V$ , $R_L=10\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$                           |      | 110  |      | $\mu s$    |
| $t_R$                                        | $V_{OUT}$ Rise Time <sup>(6)</sup> |                                                                                               |      | 110  |      |            |
| $t_{ON}$                                     | Turn-On Time <sup>(6)</sup>        |                                                                                               |      | 220  |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay <sup>(6)</sup>      | $V_{IN}=3.3V$ , $R_L=10\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1207                 |      | 7    |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time <sup>(6)</sup> |                                                                                               |      | 2    |      |            |
| $t_{OFF}$                                    | Turn-Off Time <sup>(6)</sup>       |                                                                                               |      | 9    |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay                     | $V_{IN}=3.3V$ , $R_L=10\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1208                 |      | 2.0  |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time                |                                                                                               |      | 1.9  |      |            |
| $t_{OFF}$                                    | Turn-Off Time                      |                                                                                               |      | 3.9  |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay                     | $V_{IN}=3.3V$ , $R_L=500\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1207                |      | 10   |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time                |                                                                                               |      | 95   |      |            |
| $t_{OFF}$                                    | Turn-Off Time <sup>(6)</sup>       |                                                                                               |      | 105  |      |            |
| $t_{DOFF}$                                   | Turn-Off Delay                     | $V_{IN}=3.3V$ , $R_L=500\Omega$ , $C_L=0.1\mu F$ , $T_A=25^{\circ}C$ , FPF1208 <sup>(7)</sup> |      | 7.0  |      | $\mu s$    |
| $t_F$                                        | $V_{OUT}$ Fall Time                |                                                                                               |      | 10.5 |      |            |
| $t_{OFF}$                                    | Turn-Off Time <sup>(6)</sup>       |                                                                                               |      | 17.5 |      |            |

### Notes:

- These parameters are guaranteed by design and characterization; not production tested.
- $t_{DON}/t_{DOFF}/t_R/t_F$  are defined in Figure 25.
- Output discharge path is enabled during device off.

## Typical Performance Characteristics

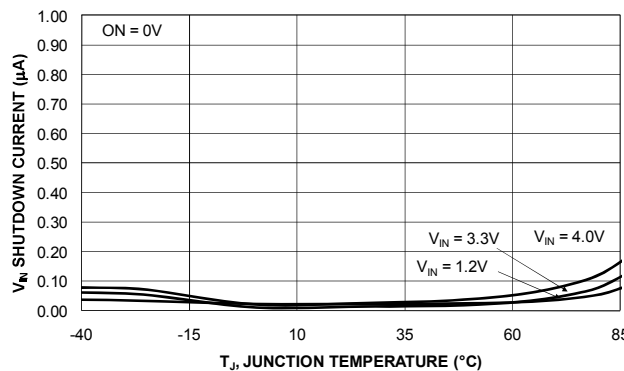


Figure 7. Shutdown Current vs. Temperature

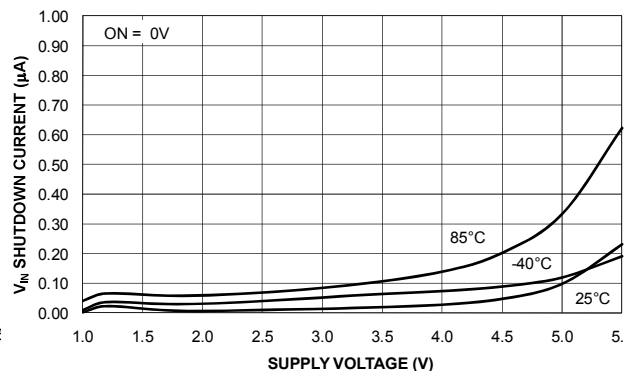


Figure 8. Shutdown Current vs. Supply Voltage

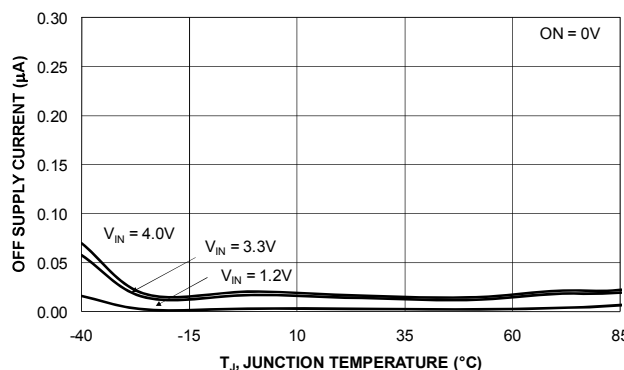


Figure 9. Off Supply Current vs. Temperature  
(FPF1207,  $V_{OUT}$  Floating)

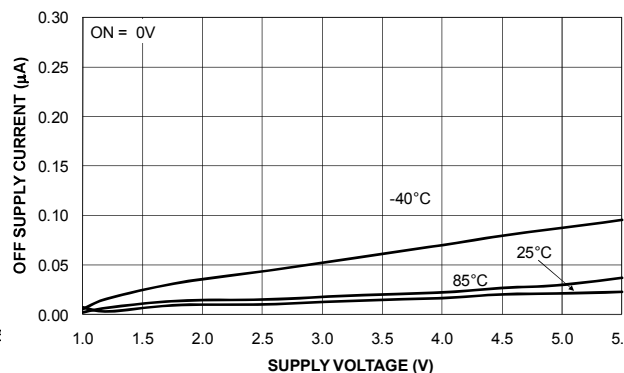


Figure 10. Off Supply Current vs. Supply Voltage  
(FPF1207,  $V_{OUT}$  Floating)

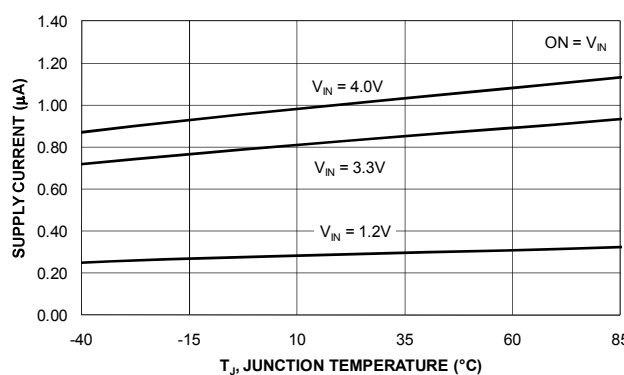


Figure 11. Quiescent Current vs. Temperature

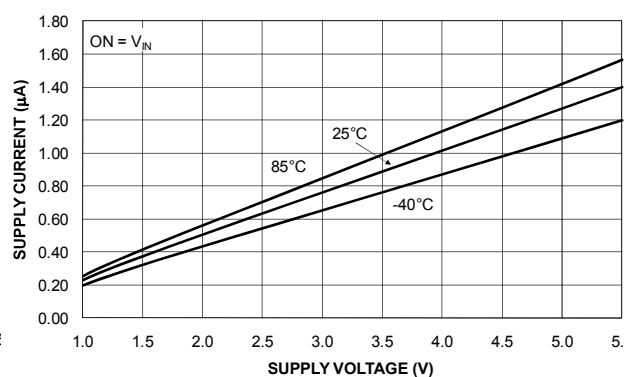


Figure 12. Quiescent Current vs. Supply Voltage

## Typical Performance Characteristics

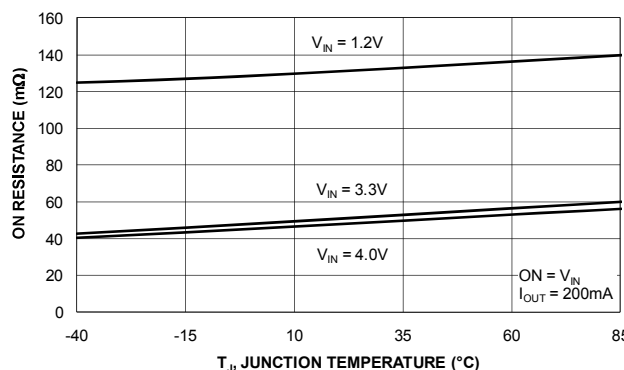


Figure 13.  $R_{ON}$  vs. Temperature

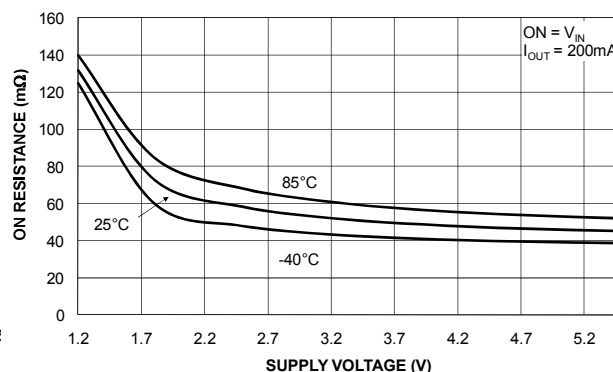


Figure 14.  $R_{ON}$  vs. Supply Voltage

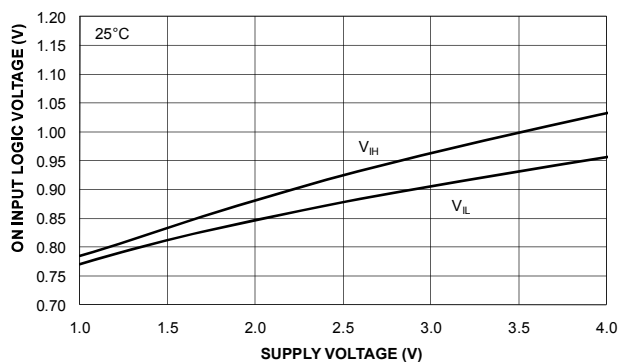


Figure 15. ON-Pin Threshold vs.  $V_{IN}$

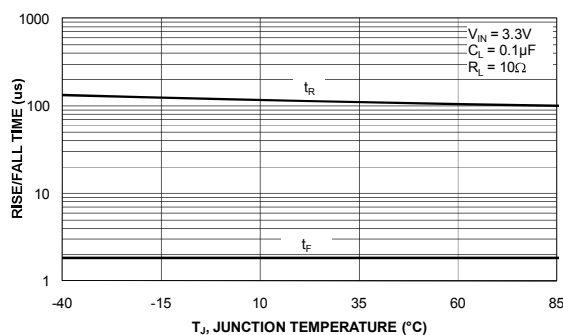


Figure 16.  $V_{OUT}$  Rise and Fall Time vs. Temperature at  $R_L=10\Omega$

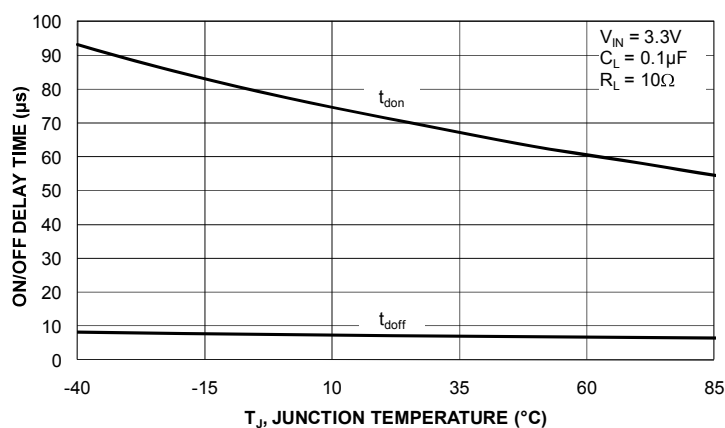


Figure 17.  $V_{OUT}$  Turn-On and Turn-Off Delay vs. Temperature at  $R_L=10\Omega$

## Typical Performance Characteristics

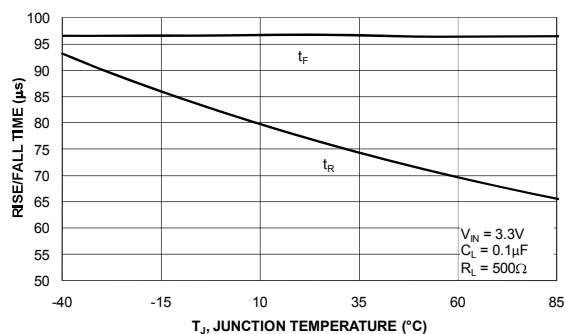


Figure 18.  $V_{OUT}$  Rise and Fall Time vs. Temperature at  $R_L=500\Omega$

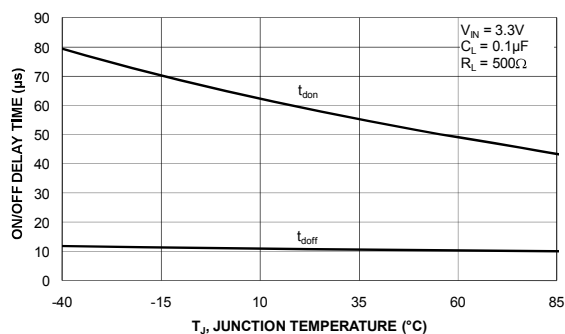


Figure 19.  $V_{OUT}$  Turn-On and Turn-Off Delay vs. Temperature at  $R_L=500\Omega$

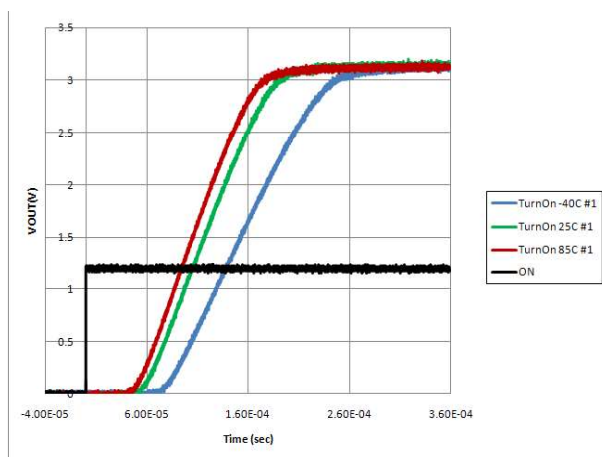


Figure 20. Turn-On Response ( $V_{IN}=3.3V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $R_L=10\Omega$ )

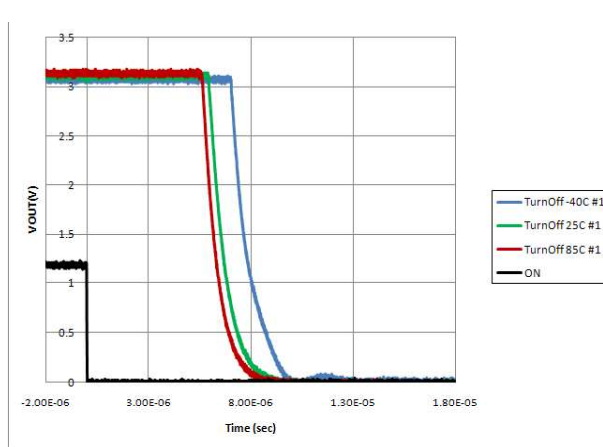


Figure 21. Turn-Off Response ( $V_{IN}=3.3V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $R_L=10\Omega$ )

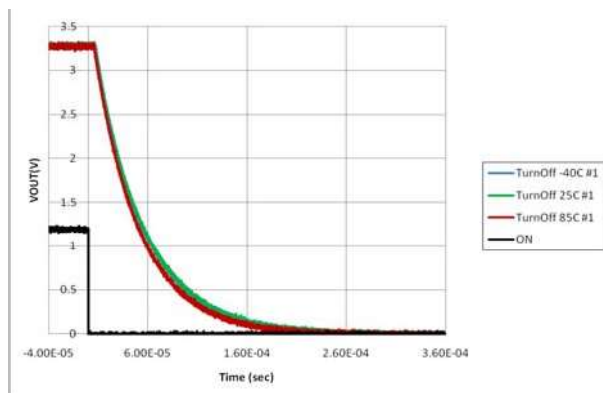


Figure 22. Turn-Off Response (FPF1207 = No Output Pull-Down Resistor) ( $V_{IN}=3.3V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $R_L=500\Omega$ )

## Typical Performance Characteristics

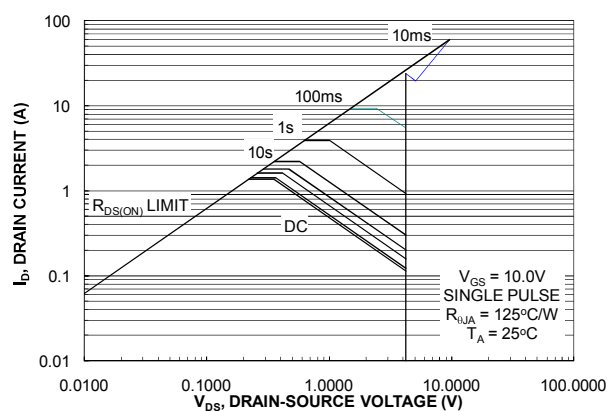


Figure 23.  $I_{SW}$  vs.  $V_{DS}$  -- SOA of FPF1207

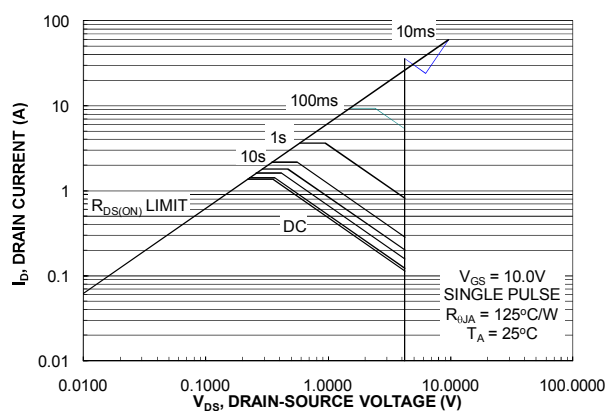


Figure 24.  $I_{SW}$  vs.  $V_{DS}$  -- SOA of FPF1208

## Timing Diagram

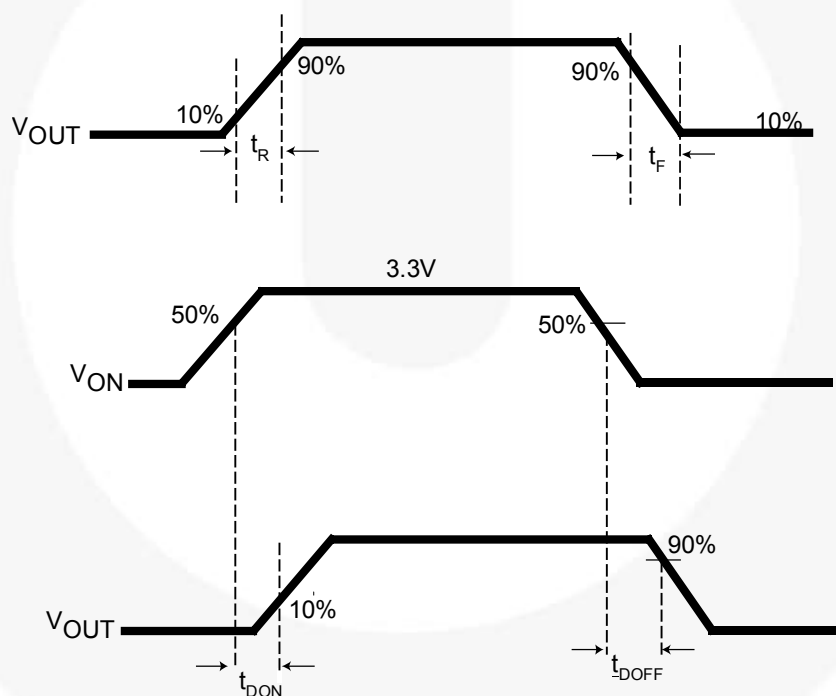


Figure 25. Timing Diagram

### Notes:

8.  $t_{ON} = t_R + t_{DON}$ .
9.  $t_{OFF} = t_F + t_{DOFF}$ .

## Operation and Application Description

The FPF1207 and FPF1208 are low- $R_{ON}$  P-channel load switches with controlled turn-on. The core of each device is a 50m $\Omega$  P-channel MOSFET and controller capable of functioning over a wide input operating range of 1.2-4.0V. The ON pin, an active HIGH GIOP/CMOS-compatible input, controls the state of the switch.

The FPF1208 contains a 65 $\Omega$  on-chip load resistor for quick output discharge when the switch is turned off.

### Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush current when the switch turns on into a discharged load capacitor or short-circuit, a capacitor must be placed between the  $V_{IN}$  and GND pins. A 1 $\mu$ F ceramic capacitor,  $C_{IN}$ , placed close to the pins is usually sufficient. Higher-value  $C_{IN}$  can be used to reduce the voltage drop in higher-current applications.

### Output Capacitor

A 0.1 $\mu$ F capacitor,  $C_{OUT}$ , should be placed between the  $V_{OUT}$  and GND pins. This capacitor prevents parasitic

board inductance from forcing  $V_{OUT}$  below GND when the switch is on.  $C_{IN}$  greater than  $C_{OUT}$  is highly recommended.  $C_{OUT}$  greater than  $C_{IN}$  can cause  $V_{OUT}$  to exceed  $V_{IN}$  when the system supply is removed. This could result in current flow through the body diode from  $V_{OUT}$  to  $V_{IN}$ .

### Board Layout

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effect that parasitic trace inductance may have on normal and short-circuit operation. Using wide traces or large copper planes for all pins ( $V_{IN}$ ,  $V_{OUT}$ , ON, and GND) helps minimize the parasitic electrical effects along with minimizing the case ambient thermal impedance. However, the  $V_{OUT}$  pin of FPF1208 should not connect directly the battery source due to the discharge mechanism of the load switch.

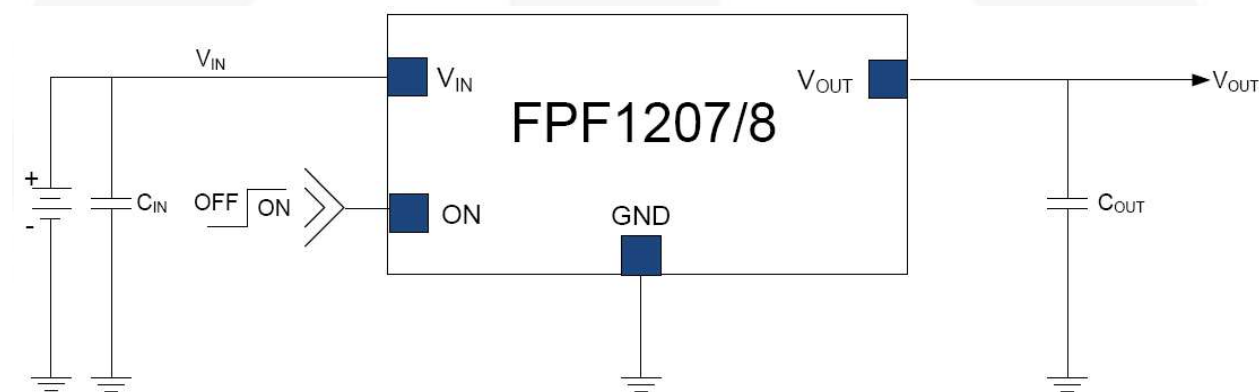


Figure 26. Typical Application



**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
Auto-SPM™  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™  
**F**®  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FETBench™  
FlashWriter®  
FPS™

F-PFST™  
FRFET®  
Global Power Resource™  
Green FPS™  
Green FPS™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
Motion-SPM™  
OptoHiT™  
OPTOLOGIC®  
OPTOPLANAR®  
PDP SPM™

Power-SPM™  
PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QS™  
Quiet Series™  
RapidConfigure™  
™  
Saving our world, 1mW/W/kW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™.3  
SuperSOT™.6  
SuperSOT™.8  
SupreMOS®  
SyncFET™  
Sync-Lock™

**SYSTEM**®  
GENERAL  
The Power Franchise®  
**the power**  
franchise  
TinyBoost™  
TinyBuck™  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TriFault Detect™  
TRUECURRENT™\*  
µSerDes™  
  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
XS™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

**PRODUCT STATUS DEFINITIONS****Definition of Terms**

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I50

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative