

## **Rochester Electronics Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

## **Quality Overview**

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
  - Class Q Military
  - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
  - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

---

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

# SSTV16857 • SSTVN16857

## 14-Bit Register with SSTL-2 Compatible I/O and Reset

### General Description

The SSTV16857 is a 14-bit register designed for use with 184 and 232 pin PC1600, 2100, and 2700 DDR DIMM applications. The SSTVN16857 is a 14-bit register designed for use with 184 and 232 pin PC3200 DDR DIMM applications. These devices have a differential input clock, SSTL-2 compatible data inputs and a LVCMOS compatible RESET input. These devices have been designed for compliance with the JEDEC DDR module and register specifications.

The devices are fabricated on an advanced submicron CMOS process and are designed to operate at power supplies of less than 3.6V's.

### Features


- Compliant with DDR-I registered module specifications
- Operates at  $2.5V \pm 0.2V V_{DD}$
- SSTL-2 compatible input and output structure
- Differential SSTL-2 compatible clock inputs
- Low power mode when device is reset
- Industry standard 48 pin TSSOP package

### Ordering Code:

Order Number	Package Number	Package Description
SSTV16857MTD	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide
SSTVN16857MTD (Preliminary)	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

### Connection Diagram

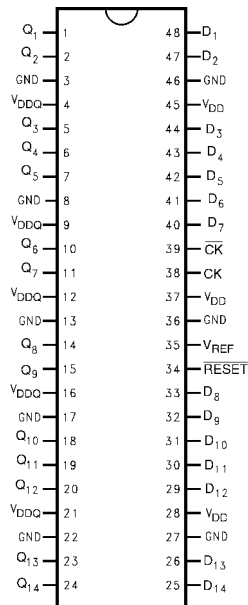

### Pin Descriptions

Pin Name	Description
Q <sub>1</sub> -Q <sub>14</sub>	SSTL-2 Compatible Output
D <sub>1</sub> -D <sub>14</sub>	SSTL-2 Compatible Inputs
RESET	Asynchronous LVCMOS Reset Input
CK	Positive Master Clock Input
CK	Negative Master Clock Input
V <sub>REF</sub>	Voltage Reference Pin for SSTL Level Inputs
V <sub>DDQ</sub>	Power Supply Voltage for Output Signals
V <sub>DD</sub>	Power Supply Voltage for Inputs

### Truth Table

RESET	D <sub>n</sub>	CK	CK	Q <sub>n</sub>
L	X or Floating	X or Floating	X or Floating	L
H	L	↑	↓	L
H	H	↑	↓	H
H	X	L	H	Q <sub>n</sub>
H	X	H	L	Q <sub>n</sub>

L = Logic LOW  
H = Logic HIGH  
X = Don't Care, but not floating unless noted  
↑ = LOW-to-HIGH Clock Transition  
↓ = HIGH-to-LOW Clock Transition

SSTV16857 • SSTVN16857 14-Bit Register with SSTL-2 Compatible I/O and Reset

## Functional Description

The SSTV16857 and SSTVN16587 are 14-bit registers with SSTL-2 compatible inputs and outputs. Input data is captured by the register on the positive edge crossing of the differential clock pair.


When the LV-CMOS  $\overline{\text{RESET}}$  signal is asserted LOW, all outputs and internal registers are asynchronously placed into the LOW logic state. In addition, the clock and data differential comparators are disabled for power savings. Output glitches are prevented by disabling the internal registers more quickly than the input comparators. When

$\overline{\text{RESET}}$  is removed, the system designer must insure the clock and data inputs to the device are stable during the rising transition of the  $\overline{\text{RESET}}$  signal.

The SSTL-2 data inputs transition based on the value of  $V_{\text{REF}}$ .  $V_{\text{REF}}$  is a stable system reference used for setting the trip point of the input buffers of the SSTV16857/ SSTVN16857 and other SSTL-2 compatible devices.

The  $\overline{\text{RESET}}$  signal is a standard CMOS compatible input and is not referenced to the  $V_{\text{REF}}$  signal.

## Logic Diagram

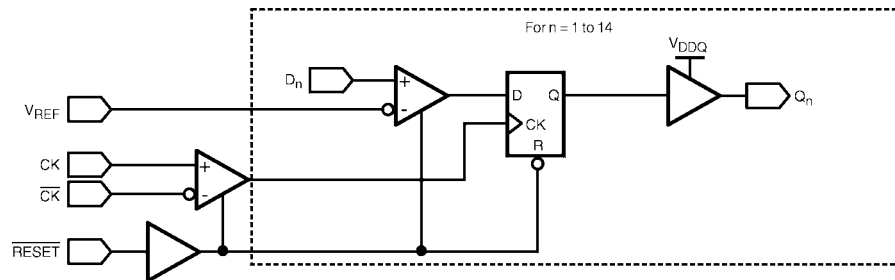

**Absolute Maximum Ratings**(Note 1)

Supply Voltage ( $V_{DDQ}$ )	–0.5V to +3.6V
Supply Voltage ( $V_{DD}$ )	–0.5V to +3.6V
Reference Voltage ( $V_{REF}$ )	–0.5V to +3.6V
Input Voltage ( $V_I$ )	–0.5V to $V_{DD} + 0.5V$
Output Voltage ( $V_O$ )	
Outputs Active (Note 2)	–0.5V to $V_{DDQ} + 0.5V$
DC Input Diode Current ( $I_{IK}$ )	
$V_I < 0V$	–50 mA
$V_I > V_{DD}$	+50 mA
DC Output Diode Current ( $I_{OK}$ )	
$V_O < 0V$	–50 mA
$V_O > V_{DD}$	+50 mA
DC Output Source/Sink Current ( $I_{OH}/I_{OL}$ )	±50 mA
DC $V_{DD}$ or Ground Current per Supply Pin ( $I_{DD}$ or Ground)	±100 mA
Storage Temperature Range ( $T_{stg}$ )	–65°C to +150°C

**Recommended Operating Conditions** (Note 3)

Power Supply ( $V_{DDQ}$ )	
SSTV16857	2.3V to 2.7V
SSTVN16857	2.5V to 2.7V
Power Supply ( $V_{DD}$ )	
Operating Range	$V_{DDQ}$ to 2.7V
Reference Supply ( $V_{REF} = V_{DDQ}/2$ )	
SSTV16857	1.15 to 1.35
SSTVN16857	1.25 to 1.35
Termination Voltage ( $V_{TT}$ )	$V_{REF} \pm 40\text{ mV}$
Input Voltage	0V to $V_{DD}$
Output Voltage ( $V_O$ )	
Output in Active States	0V to $V_{DDQ}$
Output Current $I_{OH}/I_{OL}$	
$V_{DD} = 2.3V$ to 2.7V	SSTV16857      ±20 mA
$V_{DD} = 2.5V$ to 2.7V	SSTVN16857    ±20 mA
Free Air Operating Temperature ( $T_A$ )	0°C to +70°C

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** IO Absolute Maximum Rating must be observed.

**Note 3:** The  $\overline{\text{RESET}}$  input of the device must be held at  $V_{DD}$  or GND to ensure proper device operation. The differential inputs must not be floating, unless  $\overline{\text{RESET}}$  is asserted LOW.

**DC Electrical Characteristics (SSTV16857) ( $2.3V \leq V_{DD} \leq 2.7V$ )**

Symbol	Parameter	Conditions	$V_{DD}$ (V)	Min	Max	Units
$V_{IKL}$	Input LOW Clamp Voltage	$I_I = -18\text{ mA}$	2.3		–1.2	V
$V_{IKH}$	Input HIGH Clamp Voltage	$I_I = +18\text{ mA}$	2.3		3.5	V
$V_{IH-AC}$	AC HIGH Level Input Voltage	Data Inputs		$V_{REF}+310\text{mV}$		V
$V_{IL-AC}$	AC LOW Level Input Voltage	Data Inputs			$V_{REF}-310\text{mV}$	V
$V_{IH-DC}$	DC HIGH Level Input Voltage	Data Inputs		$V_{REF}+150\text{mV}$		V
$V_{IL-DC}$	DC LOW Level Input Voltage	Data Inputs			$V_{REF}-150\text{mV}$	V
$V_{IH}$	HIGH Level Input Voltage	$\overline{\text{RESET}}$		1.7		V
$V_{IL}$	LOW Level Input Voltage	$\overline{\text{RESET}}$			0.7	V
$V_{ICR}$	Common Mode Input Voltage Range	CLK, $\overline{\text{CLK}}$		0.97	1.53	V
$V_{I(PP)}$	Peak to Peak Input Voltage	CLK, $\overline{\text{CLK}}$		360		mV
$V_{OH}$	HIGH Level Output Voltage	$I_{OH} = -100\text{ }\mu\text{A}$ $I_{OH} = -16\text{ mA}$	2.3 to 2.7 2.3	$V_{DD} - 0.2$ 1.95		V
$V_{OL}$	LOW Level Output Voltage	$I_{OL} = 100\text{ }\mu\text{A}$ $I_{OL} = 16\text{ mA}$	2.3 to 2.7 2.3		0.2 0.35	V
$I_I$	Input Leakage Current	$V_I = V_{DD}$ or GND	2.7		±5.0	μA
$I_{DD}$	Static Standby	$\overline{\text{RESET}} = \text{GND}$ , $I_O = 0$	2.7		10	μA
	Static Operating	$\overline{\text{RESET}} = V_{DD}$ , $I_O = 0$ $V_I = V_{IH(AC)}$ or $V_{IL(AC)}$			25	mA

**DC Electrical Characteristics (SSTV16857)** (Continued)

Symbol	Parameter	Conditions	V <sub>DD</sub> (V)	Min	Max	Units
I <sub>DD</sub>	Dynamic Operating Current Clock Only	$\overline{\text{RESET}} = V_{DD}$ , I <sub>O</sub> = 0 V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub> CK, $\overline{\text{CK}}$ Duty Cycle 50%	2.7		90	μA/MHz
	Dynamic Operating Current per Data Input	$\overline{\text{RESET}} = V_{DD}$ , I <sub>O</sub> = 0 V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub> CK, $\overline{\text{CK}}$ Duty Cycle 50% Data Input = ½ Clock Rate 50% Duty Cycle			15	μA/MHz
R <sub>OH</sub>	Output HIGH On Resistance	I <sub>OH</sub> = -20 mA	2.3 to 2.7	7	20	Ω
R <sub>OL</sub>	Output LOW On Resistance	I <sub>OL</sub> = 20 mA	2.3 to 2.7	7	20	Ω
R <sub>OLΔ</sub>	R <sub>OH</sub> - R <sub>OL</sub>	I <sub>O</sub> = 20 mA, T <sub>A</sub> = 25°C	2.5		4	Ω

**DC Electrical Characteristics (SSTVN16857)** (2.5V ≤ V<sub>DD</sub> ≤ 2.7V)

Symbol	Parameter	Conditions	V <sub>DD</sub> (V)	Min	Max	Units
V <sub>IKL</sub>	Input LOW Clamp Voltage	I <sub>I</sub> = -18 mA	2.5		-1.2	V
V <sub>IKH</sub>	Input HIGH Clamp Voltage	I <sub>I</sub> = +18 mA	2.5		3.5	V
V <sub>IH-AC</sub>	AC HIGH Level Input Voltage	Data Inputs		V <sub>REF</sub> +310mV		V
V <sub>IL-AC</sub>	AC LOW Level Input Voltage	Data Inputs			V <sub>REF</sub> -310mV	V
V <sub>IH-DC</sub>	DC HIGH Level Input Voltage	Data Inputs		V <sub>REF</sub> +150mV		V
V <sub>IL-DC</sub>	DC LOW Level Input Voltage	Data Inputs			V <sub>REF</sub> -150mV	V
V <sub>IH</sub>	HIGH Level Input Voltage	$\overline{\text{RESET}}$		1.7		V
V <sub>IL</sub>	LOW Level Input Voltage	$\overline{\text{RESET}}$			0.7	V
V <sub>ICR</sub>	Common Mode Input Voltage Range	CLK, $\overline{\text{CLK}}$		0.97	1.53	V
V <sub>I(PP)</sub>	Peak to Peak Input Voltage	CLK, $\overline{\text{CLK}}$		360		mV
V <sub>OH</sub>	HIGH Level Output Voltage	I <sub>OH</sub> = -100 μA I <sub>OH</sub> = -16 mA	2.5 to 2.7 2.5	V <sub>DD</sub> - 0.2 1.95		V
V <sub>OL</sub>	LOW Level Output Voltage	I <sub>OL</sub> = 100 μA I <sub>OL</sub> = 16 mA	2.5 to 2.7 2.5		0.2 0.35	V
I <sub>I</sub>	Input Leakage Current	V <sub>I</sub> = V <sub>DD</sub> or GND	2.7		±5.0	μA
I <sub>DD</sub>	Static Standby	$\overline{\text{RESET}} = \text{GND}$ , I <sub>O</sub> = 0	2.7		10	μA
	Static Operating	$\overline{\text{RESET}} = V_{DD}$ , I <sub>O</sub> = 0 V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub>			25	mA
I <sub>DD</sub>	Dynamic Operating Current Clock Only	$\overline{\text{RESET}} = V_{DD}$ , I <sub>O</sub> = 0 V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub> CK, $\overline{\text{CK}}$ Duty Cycle 50%	2.7		90	μA/MHz
	Dynamic Operating Current per Data Input	$\overline{\text{RESET}} = V_{DD}$ , I <sub>O</sub> = 0 V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub> CK, $\overline{\text{CK}}$ Duty Cycle 50% Data Input = ½ Clock Rate 50% Duty Cycle			15	μA/MHz
R <sub>OH</sub>	Output HIGH On Resistance	I <sub>OH</sub> = -20 mA	2.5 to 2.7	7	20	Ω
R <sub>OL</sub>	Output LOW On Resistance	I <sub>OL</sub> = 20 mA	2.5 to 2.7	7	20	Ω
R <sub>OLΔ</sub>	R <sub>OH</sub> - R <sub>OL</sub>	I <sub>O</sub> = 20 mA, T <sub>A</sub> = 25°C	2.5		4	Ω

**AC Electrical Characteristics (SSTV16857) (Note 4)**

Symbol	Parameter	T <sub>A</sub> = 0°C to +70°C, C <sub>L</sub> = 30 pF, R <sub>L</sub> = 50Ω		Units
		V <sub>DD</sub> = 2.5V ± 0.2V; V <sub>DDQ</sub> = 2.5V ± 0.2V		
		Min	Max	
t <sub>MAX</sub>	Maximum Clock Frequency	200		MHz
t <sub>W</sub>	Pulse Duration, CK, $\overline{\text{CK}}$ HIGH or LOW (Figure 2)	2.5		ns
t <sub>ACT</sub> (Note 5)	Differential Inputs Activation Time, data inputs must be LOW after $\overline{\text{RESET}}$ HIGH (Figure 3)	22		ns
t <sub>INACT</sub> (Note 5)	Differential Inputs De-activation Time, data and clock inputs must be held at valid levels (not floating) after $\overline{\text{RESET}}$ LOW	22		ns
t <sub>S</sub>	Setup Time, Fast Slew Rate (Note 6)(Note 7) (Figure 5)	0.65		ns
	Setup Time, Slow Slew Rate (Note 7)(Note 8) (Figure 5)	0.9		
t <sub>H</sub>	Hold Time, Fast Slew Rate (Note 6)(Note 8) (Figure 5)	0.75		ns
	Hold Time, Slow Slew Rate (Note 7)(Note 8) (Figure 5)	0.9		
t <sub>REM</sub>	Reset Removal Time (Figure 7)	10		ns
t <sub>PHL</sub> , t <sub>PLH</sub>	Propagation Delay CLK, CLK to Q <sub>n</sub> (Figure 4)	1.1	2.8	ns
t <sub>PHL</sub>	Propagation Delay $\overline{\text{RESET}}$ to Q <sub>n</sub> (Figure 6)		5.0	ns
t <sub>SK(Pn-Pn)</sub>	Output to Output Skew		200	ps

**Note 4:** Refer to Figure 1 through Figure 7.**Note 5:** This parameter is not production tested.**Note 6:** For data signal input slew rate  $\geq 1$  V/ns.**Note 7:** For data signal input slew rate  $\geq 0.5$  V/ns and  $< 1$  V/ns.**Note 8:** For CK,  $\overline{\text{CK}}$  signals input slew rates are  $\geq 1$  V/ns.**AC Electrical Characteristics (SSTVN16857) (Note 9)**

Symbol	Parameter	T <sub>A</sub> = 0°C to +70°C, C <sub>L</sub> = 30 pF, R <sub>L</sub> = 50Ω		Units
		V <sub>DD</sub> = 2.5V ± 0.2V; V <sub>DDQ</sub> = 2.5V ± 0.2V		
		Min	Max	
t <sub>MAX</sub>	Maximum Clock Frequency	220		MHz
t <sub>W</sub>	Pulse Duration, CK, $\overline{\text{CK}}$ HIGH or LOW (Figure 2)	2.5		ns
t <sub>ACT</sub> (Note 5)	Differential Inputs Activation Time, data inputs must be LOW after $\overline{\text{RESET}}$ HIGH (Figure 3)	22		ns
t <sub>INACT</sub> (Note 5)	Differential Inputs De-activation Time, Data and Clock Inputs must be held at valid levels (not floating) after RESET LOW	22		ns
t <sub>S</sub>	Setup Time, Fast Slew Rate (Note 9)(Note 12) (Figure 5)	0.65		ns
	Setup Time, Slow Slew Rate (Note 12)(Note 13) (Figure 5)	0.75		
t <sub>H</sub>	Hold Time, Fast Slew Rate (Note 11)(Note 13) (Figure 5)	0.75		ns
	Hold Time, Slow Slew Rate (Note 12)(Note 13) (Figure 5)	0.9		
t <sub>REM</sub>	Reset Removal Time (Figure 7)	10		ns
t <sub>PHL</sub> , t <sub>PLH</sub>	Propagation Delay CLK, CLK to Q <sub>n</sub> (Figure 4)	1.1	2.4	ns
t <sub>PSS</sub>	Propagation Delay Simultaneous Switching CLK, CLK to Q <sub>n</sub> (Note 14)		2.7	ns
t <sub>PHL</sub>	Propagation Delay $\overline{\text{RESET}}$ to Q <sub>n</sub> (Figure 6)		5.0	ns
t <sub>SK(Pn-Pn)</sub>	Output to Output Skew		200	ps


**Note 9:** Refer to Figure 1 through Figure 7.**Note 10:** This parameter is not production tested.**Note 11:** For data signal input slew rate  $\geq 1$  V/ns.**Note 12:** For data signal input slew rate  $\geq 0.5$  V/ns and  $< 1$  V/ns.**Note 13:** For CK,  $\overline{\text{CK}}$  signals input slew rates are  $\geq 1$  V/ns.**Note 14:** Simultaneous Switching is guaranteed by characterization.

## Capacitance (Note 15)

Symbol	Parameter	Min	Typ	Max	Units	Conditions
$C_{IN}$	Data Pin Input Capacitance	2.0		3.0	pF	$V_{DD} = 2.5V$ , $V_I = V_{REF} \pm 350\text{ mV}$
	CK, $\overline{\text{CK}}$ - Input Capacitance	2.5		3.5	pF	$V_{DD} = 2.5V$ , $V_{ICR} = 1.25V$ , $V_{I(PP)} = 360\text{ mV}$
	$\overline{\text{RESET}}$	2.5		3.5	pF	$V_{DD} = 2.5V$ , $V_I = V_{DD}$ to GND


Note 15:  $T_A = +25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ , Capacitance is characterized but not tested.

## AC Loading and Waveforms (See Notes A through F below)



Note:  $C_L$  includes probe and jog capacitance

FIGURE 1. AC Test Circuit

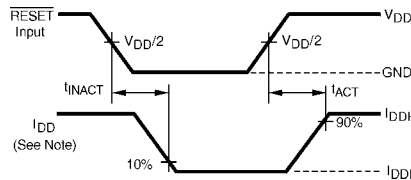

Note:  $I_{DD}$  tested with clock and data inputs held at  $V_{DD}$  or GND, and  $I_O = 0\text{ mA}$ .

FIGURE 3. Voltage and Current Waveforms Inputs Active and Inactive Times

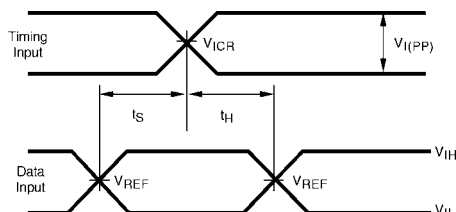


FIGURE 5. Voltage Waveforms - Setup and Hold Times

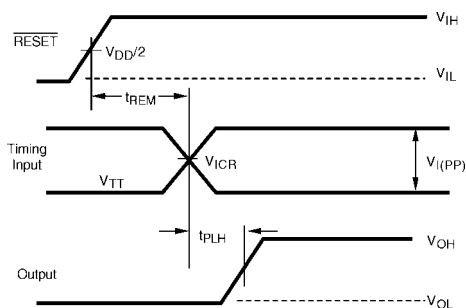


FIGURE 7. Voltage Waveforms - RESET Removal Delay Times

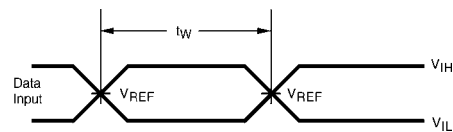


FIGURE 2. Voltage Waveforms - Pulse Duration

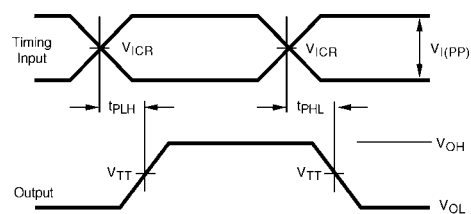


FIGURE 4. Voltage Waveforms - Propagation Delay Times

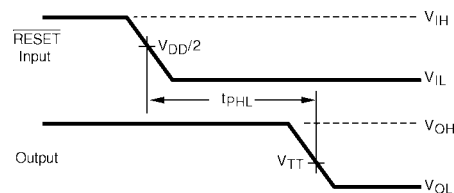


FIGURE 6. Voltage Waveforms - RESET Propagation Delay Times

**Note A:** All input pulses are supplied by generators having the following characteristics:

PRR  $\leq 10\text{ MHz}$ ,  $Z_0 = 50\Omega$ , input slew rate =  $1V/ns \pm 20\%$  (unless otherwise specified).


**Note B:** The outputs are measured one at a time with one transition per measurement.

**Note C:**  $V_{TT} = V_{REF} = V_{DD}/2$ .

**Note D:**  $V_{IH} = V_{REF} + 310\text{ mV}$  (AC voltage levels) for differential inputs.  $V_{IH} = V_{DD}$  for LVCMOS input.

**Note E:**  $V_{IL} = V_{REF} - 310\text{ mV}$  (AC voltage levels) for differential inputs.  $V_{IL} = \text{GND}$  for LVCMOS input.

**Note F:** Removal time ( $t_{REM}$ ) is tested with one data input held active HIGH. The propagation time from CK to the corresponding output must meet valid timing specifications for the measurement to be accurate.

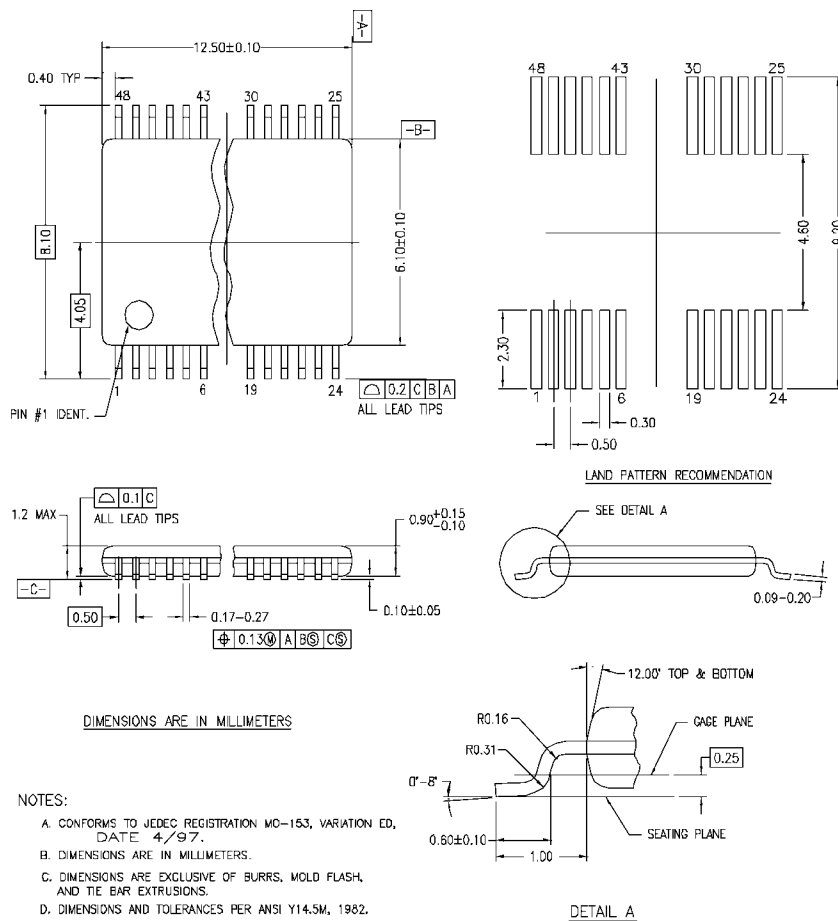

MTD48REVC

**48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide  
Package Number MTD48**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
  2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.
- www.fairchildsemi.com**

www.fairchildsemi.com