


SN75154 QUADRUPLE LINE RECEIVER

SLLS083B – NOVEMBER 1970 – REVISED MAY 1995

- Meets or Exceeds the Requirements of ANSI Standard EIA/TIA-232-E and ITU Recommendation V.28
- Input Resistance . . . 3 k Ω to 7 k Ω Over Full EIA/TIA-232-E Voltage Range
- Input Threshold Adjustable to Meet Fail-Safe Requirements Without Using External Components
- Built-In Hysteresis for Increased Noise Immunity
- Inverting Output Compatible With TTL
- Output With Active Pullup for Symmetrical Switching Speeds
- Standard Supply Voltages . . . 5 V or 12 V

D OR N PACKAGE
(TOP VIEW)



† For function of R1, see schematic

description


The SN75154 is a monolithic low-power Schottky line receiver designed to satisfy the requirements of the standard interface between data terminal equipment and data communication equipment as defined by ANSI Standard EIA/TIA-232-E. Other applications are for relatively short, single-line, point-to-point data transmission and for level translators. Operation is normally from a single 5-V supply; however, a built-in option allows operation from a 12-V supply without the use of additional components. The output is compatible with most TTL circuits when either supply voltage is used.

In normal operation, the threshold-control terminals are connected to the V_{CC1} terminal, even if power is being supplied via the alternate V_{CC2} terminal. This provides a wide hysteresis loop, which is the difference between the positive-going and negative-going threshold voltages. See typical characteristics. In this mode of operation, if the input voltage goes to zero, the output voltage will remain at the low or high level as determined by the previous input.


For fail-safe operation, the threshold-control terminals are open. This reduces the hysteresis loop by causing the negative-going threshold voltage to be above zero. The positive-going threshold voltage remains above zero as it is unaffected by the disposition of the threshold terminals. In the fail-safe mode, if the input voltage goes to zero or an open-circuit condition, the output will go to the high level regardless of the previous input condition.

The SN75154 is characterized for operation from 0°C to 70°C.

logic symbol†

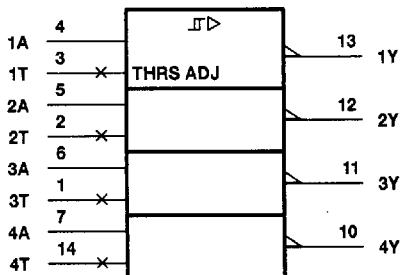

logic diagram



† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1995, Texas Instruments Incorporated


2-303

8961724 0098533 139

SN75154 QUADRUPLER LINE RECEIVER

SLLS083B – NOVEMBER 1970 – REVISED MAY 1995

schematic

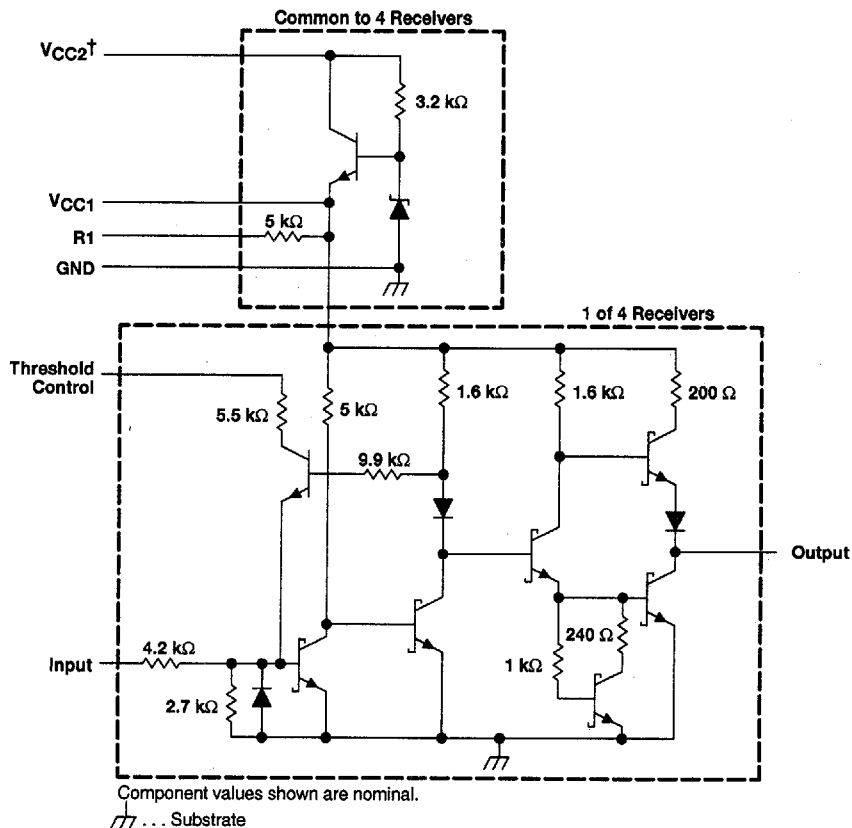

† When VCC1 is used, VCC2 may be left open or shorted to VCC1. When VCC2 is used, VCC1 must be left open or connected to the threshold control pins.

8961724 0098534 075

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN75154 QUADRUPLE LINE RECEIVER

SLLS083B – NOVEMBER 1970 – REVISED MAY 1995

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Normal supply voltage, V_{CC1} (see Note 1)	7 V
Alternate supply voltage, V_{CC2}	14 V
Input voltage, V_I	± 25 V
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Voltage values are with respect to network GND terminal.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
D	950 mW	7.6 mW/°C	608 mW
N	1150 mW	9.2 mW/°C	736 mW
NS	625 mW	5.0 mW/°C	400 mW

recommended operating conditions

	MIN	NOM	MAX	UNIT
Normal supply voltage, V_{CC1}	4.5	5	5.5	V
Alternate supply voltage, V_{CC2}	10.8	12	13.2	V
High-level input voltage, V_{IH} (see Note 2)	3		15	V
Low-level input voltage, V_{IL} (see Note 2)	-15		-3	V
High-level output current, I_{OH}			-400	μA
Low-level output current, I_{OL}			16	mA
Operating free-air temperature, T_A	0		70	°C

NOTE 2: The algebraic convention, where the less positive (more negative) limit is designated as minimum, is used in this data sheet for logic and threshold levels only, e.g., when 0 V is the maximum, the minimum limit is a more negative voltage.

SN75154

QUADRUPLE LINE RECEIVER

SLLS083B – NOVEMBER 1970 – REVISED MAY 1995

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER			TEST FIGURE	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V _{IT+}	Positive-going input threshold voltage	Normal operation	1		0.8	2.2	3	V
		Fail-safe operation			0.8	2.2	3	
V _{IT-}	Negative-going input threshold voltage	Normal operation	1		-3	-1.1	0	V
		Fail-safe operation			0.8	1.4	3	
V _{hys}	Hysteresis voltage (V _{IT+} - V _{IT-})	Normal operation	1		0.8	3.3	6	V
		Fail-safe operation			0	0.8	2.2	
V _{OH}	High-level output voltage		1	I _{OH} = -400 μA	2.4	3.5		V
V _{OL}	Low-level output voltage		1	I _{OL} = 16 mA		0.29	0.4	V
r _i	Input resistance		2	ΔV _I = -25 V to -14 V	3	5	7	kΩ
				ΔV _I = -14 V to -3 V	3	5	7	
				ΔV _I = -3 V to 3 V	3	6	8	
				ΔV _I = 3 V to 14 V	3	5	7	
				ΔV _I = 14 V to 25 V	3	5	7	
V _{I(open)}	Open-circuit input voltage		3	I _I = 0	0	0.2	2	V
I _{OS}	Short-circuit output current‡		4	V _{CC1} = 5.5 V, V _I = -5 V	-10	-20	-40	mA
I _{CC1}	Supply current from V _{CC1}		5	V _{CC1} = 5.5 V, T _A = 25°C		20	35	mA
I _{CC2}	Supply current from V _{CC2}			V _{CC2} = 13.2 V, T _A = 25°C		23	40	

† All typical values are at $V_{CC1} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

‡ Not more than one output should be shorted at a time.

switching characteristics, $V_{CC1} = 5 \text{ V}, T_A = 25^\circ\text{C}, N = 10$

PARAMETER		TEST FIGURE	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low- to high-level output	6	$C_L = 50 \text{ pF}, R_L = 390 \Omega$		11		ns
t_{PHL}	Propagation delay time, high- to low-level output				8		ns
t_{TLH}	Transition time, low- to high-level output				7		ns
t_{THL}	Transition time, high- to low-level output				2.2		ns

8961724 0098536 948




TEXAS
INSTRUMENTS

SN75154
QUADRUPLE LINE RECEIVER

SLLS083B – NOVEMBER 1970 – REVISED MAY 1995

TYPICAL CHARACTERISTICS

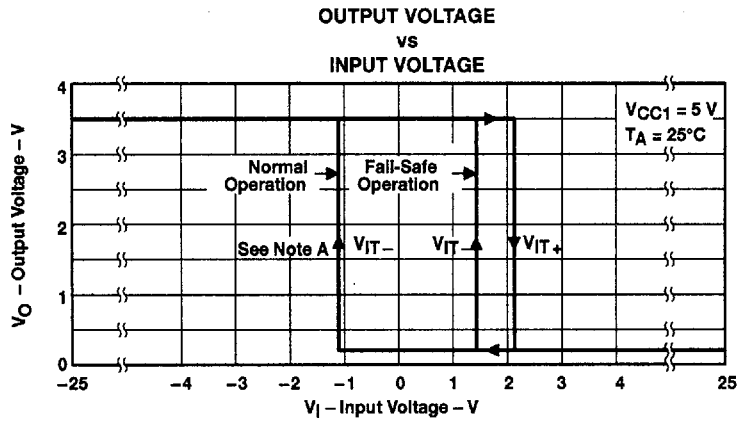

NOTE A: For normal operation, the threshold controls are connected to V_{CC1} . For fail-safe operation, the threshold controls are open.

Figure 1

SN75154 QUADRUPLE LINE RECEIVER

SLLS083B – NOVEMBER 1970 – REVISED MAY 1995

PARAMETER MEASUREMENT INFORMATION

dc test circuits†

TEST TABLE

TEST	MEASURE	A	T	Y	VCC1	VCC2
Open-circuit input (fail safe)	VOH	Open	Open	IOH	4.5 V	Open
	VOH	Open	Open	IOH	Open	10.8 V
VIT+ min, VIT- min (fail safe)	VOH	0.8 V	Open	IOH	5.5 V	Open
	VOH	0.8 V	Open	IOH	Open	13.2 V
VIT+ min (normal)	VOH	Note A	VCC1	IOH	5.5 V and T	Open
	VOH	Note A	VCC1	IOH	T	13.2 V
VIL max, VIT+ min (normal)	VOH	-3 V	VCC1	IOH	5.5 V and T	Open
	VOH	-3 V	VCC1	IOH	T	13.2 V
VIH min, VIT+ max, VIT- max (fail safe)	VOL	3 V	Open	IOL	4.5 V	Open
	VOL	3 V	Open	IOL	Open	10.8 V
VIH min, VIT+ max (normal)	VOL	3 V	VCC1	IOL	4.5 V and T	Open
	VOL	3 V	VCC1	IOL	T	10.8 V
VIT- max (normal)	VOL	Note B	VCC1	IOL	5.5 V and T	Open
	VOL	Note B	VCC1	IOL	T	13.2 V

NOTES: A. Momentarily apply -5 V, then 0.8 V.
B. Momentarily apply 5 V, then GND.

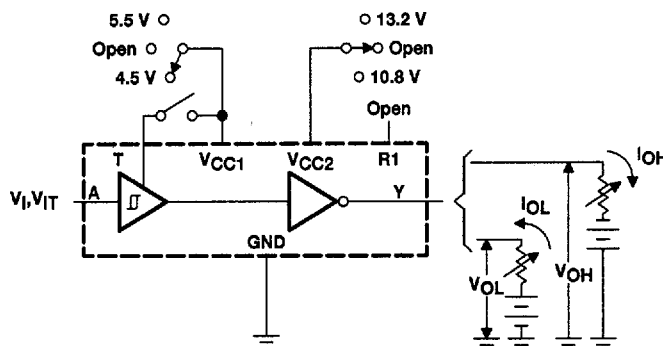


Figure 2. VIH, VIL, VIT+, VIT- → VOH, VOL

† Arrows indicate actual direction of current flow. Current into a terminal is a positive value.

8961724 0098538 710

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

PARAMETER MEASUREMENT INFORMATION

dc test circuits† (continued)

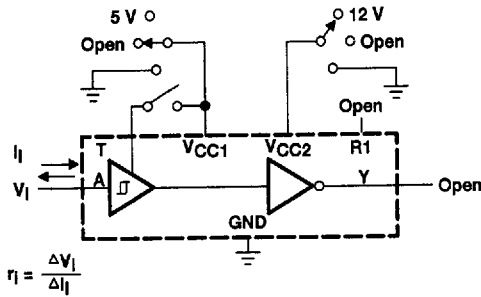


Figure 3. Input Resistance

TEST TABLE

T	VCC1	VCC2
Open	5 V	Open
Open	GND	Open
Open	Open	Open
VCC1	T and 5 V	Open
GND	GND	Open
Open	Open	12 V
Open	Open	GND
VCC1	T	12 V
VCC1	T	GND
VCC1	T	Open


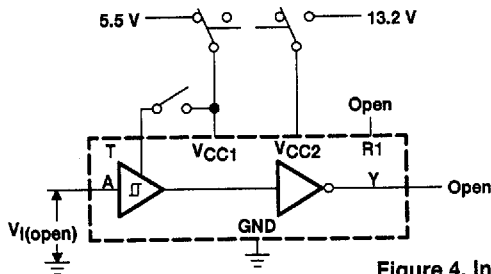


Figure 4. Input Voltage (Open)


TEST TABLE

T	VCC1	VCC2
Open	5.5 V	Open
VCC1	5.5 V	Open
Open	Open	13.2 V
VCC1	T	13.2 V

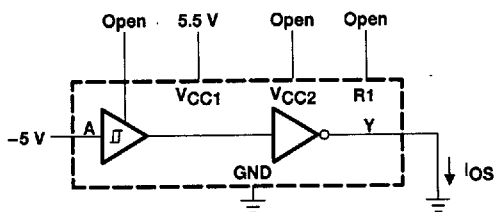

Each output is tested separately.

Figure 5. Output Short-Circuit Current

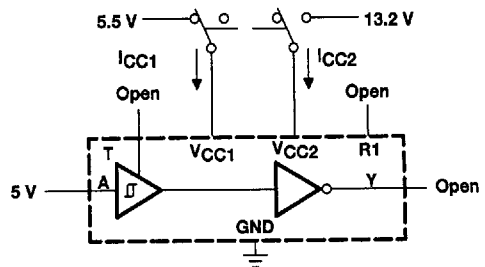

All four line receivers are tested simultaneously.


Figure 6. Supply Current

† Arrows indicate actual direction of current flow. Current into a terminal is a positive value.


SN75154 QUADRUPLE LINE RECEIVER

SLLS083B - NOVEMBER 1970 - REVISED MAY 1995

PARAMETER MEASUREMENT INFORMATION

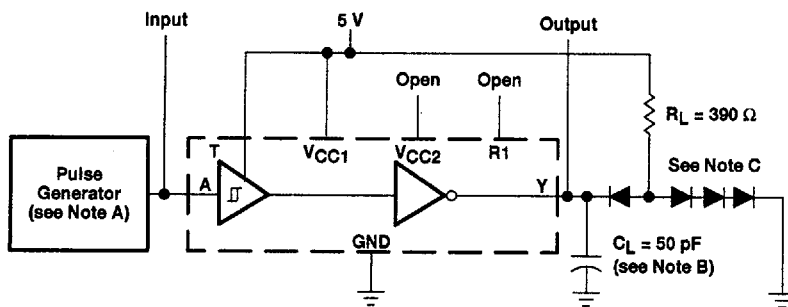

TEST CIRCUIT

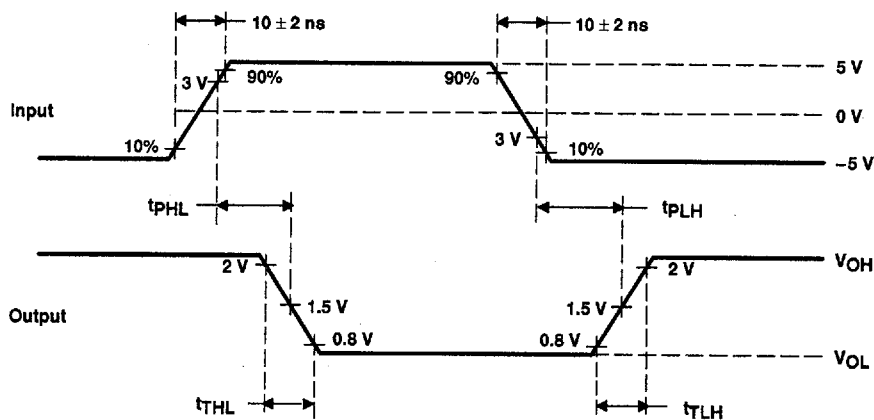

VOLTAGE WAVEFORMS

- NOTES: A. The pulse generator has the following characteristics: $Z_O = 50 \Omega$, $t_W \leq 200 \text{ ns}$, duty cycle $\leq 20\%$.
B. C_L includes probe and jig capacitance.
C. All diodes are 1N3064.

Figure 6. Test Circuit and Voltage Waveforms

8961724 0098540 379

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265