# 74ABT16240A

## 16-bit inverting buffer/line driver; 3-state

Rev. 7 — 7 July 2021

**Product data sheet** 

### 1. General description

The 74ABT16240A is a 16-bit inverting buffer/line driver with 3-state outputs. The device can be used as four 4-bit buffers, two 8-bit buffers or one 16-bit buffer. The device features four output enables ( $1\overline{OE}$ ,  $2\overline{OE}$ ,  $3\overline{OE}$  and  $4\overline{OE}$ ), each controlling four of the 3-state outputs. A HIGH on  $n\overline{OE}$  causes the outputs to assume a high-impedance OFF-state. This device is fully specified for partial power down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the potentially damaging backflow current through the device when it is powered down.

### 2. Features and benefits

- Supply voltage range from 4.5 V to 5.5 V
- · BiCMOS high speed and output drive
- · Direct interface with TTL levels
- Power-up 3-state
- I<sub>OFF</sub> circuitry provides partial Power-down mode operation
- Latch-up protection exceeds 500 mA per JESD78B class II level A
- 16-bit bus interface
- Multiple V<sub>CC</sub> and GND pins minimize switching noise
- 3-state buffers
- · TTL input and output switching levels
- Input and output interface capability to systems at 5 V supply
- · Output capability: +64 mA and -32 mA
- · Live insertion and extraction permitted
- ESD protection:
  - HBM JESD-A114E exceeds 2000 V
  - CDM JESD22-C101-C exceeds 1000 V

# 3. Ordering information


#### Table 1. Ordering information

Type number	Package					
	Temperature range	Name	Description	Version		
74ABT16240ADGG	-40 °C to +85 °C	TSSOP48	plastic thin shrink small outline package; 48 leads; body width 6.1 mm	SOT362-1		



16-bit inverting buffer/line driver; 3-state


# 4. Functional diagram

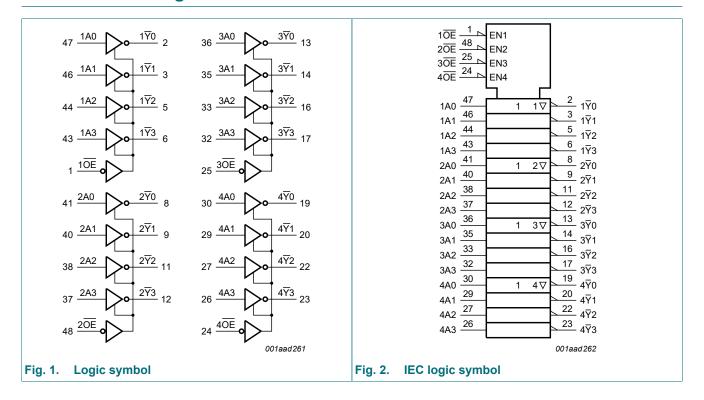

16-bit inverting buffer/line driver; 3-state

# 5. Pinning information

### 5.1. Pinning

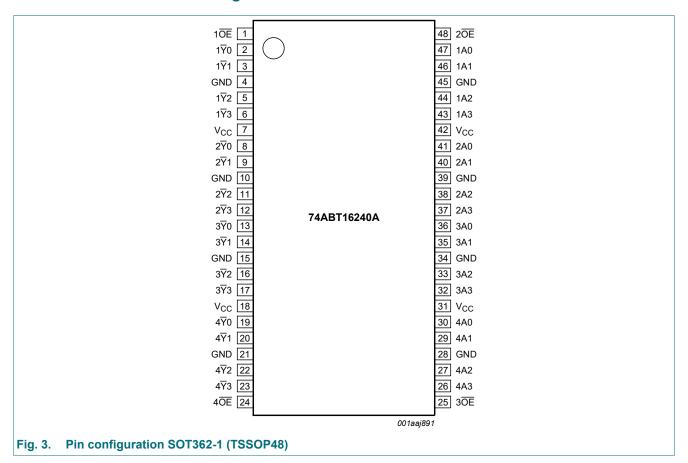

### 5.2. Pin description

**Table 2. Pin description** 

Symbol	Pin	Description
10E, 20E, 30E, 40E	1, 48, 25, 24	1 to 4 output enable (LOW active)
1 <del>\overline{\text{Y}}</del> 0, 1 <del>\overline{\text{Y}}</del> 1, 1 <del>\overline{\text{Y}}</del> 2, 1 <del>\overline{\text{Y}}</del> 3	2, 3, 5, 6	1 data output
GND	4, 10, 15, 21, 28, 34, 39, 45	ground (0 V)
V <sub>CC</sub>	7, 18, 31, 42	supply voltage
2\overline{\Pi}0, 2\overline{\Pi}1, 2\overline{\Pi}2, 2\overline{\Pi}3	8, 9, 11, 12	2 data output
3₹0, 3₹1, 3₹2, 3₹3	13, 14, 16, 17	3 data output
4 <del>\text{0}}}}}}} \end{ensighter}}}}}}}}}                            </del>	19, 20, 22, 23	4 data output
4A0, 4A1, 4A2, 4A3	30, 29, 27, 26	4 data input
3A0, 3A1, 3A2, 3A3	36, 35, 33, 32	3 data input
2A0, 2A1, 2A2, 2A3	41, 40, 38, 37	2 data input
1A0, 1A1, 1A2, 1A3	47, 46, 44, 43	1 data input

16-bit inverting buffer/line driver; 3-state

### 6. Functional description

#### Table 3. Function table

 $H = HIGH \text{ voltage level}; L = LOW \text{ voltage level}; X = don't care; Z = high-impedance OFF-state.}$ 

	Input	Output
nŌE	nAn	nΥn
L	L	Н
L	Н	L
Н	X	Z

# 7. Limiting values

#### **Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7.0	V
VI	input voltage		[1]	-1.2	+7.0	V
Vo	output voltage	output in OFF-state or HIGH-state	[1]	-0.5	+5.5	V
I <sub>IK</sub>	input clamping current	V <sub>I</sub> < 0 V		-18	-	mA
I <sub>OK</sub>	output clamping current	V <sub>O</sub> < 0 V		-50	-	mA
Io	output current	output in LOW-state		-	128	mA
		output in HIGH-state		-	-64	mA
Tj	junction temperature		[2]	-	150	°C
T <sub>stg</sub>	storage temperature			-65	+150	°C

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

# 8. Recommended operating conditions

#### **Table 5. Operating conditions**

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>CC</sub>	supply voltage		4.5	-	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	V
V <sub>IH</sub>	HIGH-level input voltage		2.0	-	-	V
V <sub>IL</sub>	LOW-level Input voltage		-	-	0.8	V
I <sub>OH</sub>	HIGH-level output current		-32	-	-	mA
I <sub>OL</sub>	LOW-level output current		-	-	32	mA
		duty cycle ≤ 50 %; f <sub>i</sub> ≥ 1 kHz	-	-	64	mA
Δt/ΔV	input transition rise and fall rate		-	-	10	ns/V
T <sub>amb</sub>	ambient temperature	in free air	-40	-	+85	°C

<sup>[2]</sup> The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.

16-bit inverting buffer/line driver; 3-state

### 9. Static characteristics

**Table 6. Static characteristics** 

Symbol	Parameter	Conditions			25 °C		-40 °C t	Unit	
				Min	Тур	Max	Min	Max	
V <sub>IK</sub>	input clamping voltage	V <sub>CC</sub> = 4.5 V; I <sub>IK</sub> = -18 mA		-1.2	-0.9	-	-1.2	-	V
V <sub>OH</sub>	HIGH-level output	V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>							
	voltage $V_{CC} = 4.5 \text{ V}; I_{OH} = -3 \text{ mA}$		2.5	2.9	-	2.5	-	V	
		V <sub>CC</sub> = 5.0 V; I <sub>OH</sub> = -3 mA		3.0	3.4	-	3.0	-	V
		V <sub>CC</sub> = 4.5 V; I <sub>OH</sub> = -32 mA		2.0	2.4	-	2.0	-	V
V <sub>OL</sub>	LOW-level output voltage	$V_{CC}$ = 4.5 V; $I_{OL}$ = 64 mA; $V_{I}$ = $V_{IL}$ or $V_{IH}$		-	0.42	0.55	-	0.55	V
l <sub>l</sub>	input leakage current	$V_{CC}$ = 5.5 V; $V_I$ = $V_{CC}$ or GND		-	±0.01	±1.0	-	±1.0	μΑ
I <sub>OFF</sub>	power-off leakage current	$V_{CC} = 0 \text{ V}; V_{I} \text{ or } V_{O} \le 4.5 \text{ V}$		-	±5.0	±100	-	±100	μΑ
I <sub>O(pu/pd)</sub>	power-up/power- down output current	$V_{CC}$ = 2.0 V; $V_O$ = 0.5 V; $V_I$ = GND or $V_{CC}$ ; $n\overline{OE}$ = HIGH	[1]	-	±5.0	±50	-	±50	μΑ
l <sub>OZ</sub>	OFF-state output	$V_{CC}$ = 5.5 V; $V_I$ = $V_{IL}$ or $V_{IH}$							
	current	output HIGH-state at V <sub>O</sub> = 5.5 V		-	1.0	10	-	10	μΑ
		output LOW-state at V <sub>O</sub> = 0.5 V		-	-1.0	-10	-	-10	μΑ
I <sub>CEX</sub>	output high leakage current	HIGH-state; $V_O = 5.5 \text{ V}$ ; $V_{CC} = 5.5 \text{ V}$ ; $V_I = \text{GND or } V_{CC}$		-	1.0	50	-	50	μA
Io	output current	V <sub>CC</sub> = 5.5 V; V <sub>O</sub> = 2.5 V	[2]	-180	-70	-50	-180	-50	mA
I <sub>CC</sub>	supply current	$V_{CC}$ = 5.5 V; $V_I$ = GND or $V_{CC}$							
		outputs HIGH-state		-	0.5	1.0	-	1.0	mA
		outputs LOW-state		-	8	19	-	19	mA
		outputs 3-state		-	0.5	1.0	-	1.0	mA
ΔI <sub>CC</sub>	additional supply current	per input pin; V <sub>CC</sub> = 5.5 V; one input at 3.4 V and other inputs at V <sub>CC</sub> or GND	[3] [4]	-	10	200	-	200	μA
Cı	input capacitance	V <sub>I</sub> = 0 V or V <sub>CC</sub>		-	4	-	-	-	pF
C <sub>I/O</sub>	input/output capacitance	outputs disabled; $V_O = 0 \text{ V or } V_{CC}$		-	6	-	-	-	pF

<sup>[1]</sup> This parameter is valid for any  $V_{CC}$  between 0 V and 2.1 V, with a transition time of up to 10 ms. From  $V_{CC}$  = 2.1 V to  $V_{CC}$  = 5 V ± 10 %, a transition time of up to 100  $\mu$ s is permitted.

<sup>[2]</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

<sup>[3]</sup> This is the increase in supply current for each input at 3.4 V.

<sup>[4]</sup> This data sheet limit may vary among suppliers.

16-bit inverting buffer/line driver; 3-state


# 10. Dynamic characteristics


**Table 7. Dynamic characteristics** 

GND = 0 V. For test circuit, see Fig. 6.


Symbol	Parameter	Conditions	25 °C	; <b>V</b> <sub>CC</sub> =	5.0 V		-40 °C to +85 °C; V <sub>CC</sub> = 5.0 V ± 0.5 V	
			Min	Тур	Max	Min	Max	
t <sub>PLH</sub>	LOW to HIGH propagation delay	nAn to n\( \overline{Y} \)n, see \( \overline{Fig. 4} \)	1.0	2.0	3.0	1.0	3.7	ns
t <sub>PHL</sub>	HIGH to LOW propagation delay	nAn to n∀n, see <u>Fig. 4</u>	1.0	1.5	3.0	1.0	3.5	ns
t <sub>PZH</sub>	OFF-state to HIGH propagation delay	nŌĒ to nŸn; see <u>Fig. 5</u>	1.2	2.4	3.3	1.2	4.2	ns
t <sub>PZL</sub>	OFF-state to LOW propagation delay	n <del>OE</del> to n <del>V</del> n; see <u>Fig. 5</u>	1.2	2.3	3.2	1.0	4.2	ns
t <sub>PHZ</sub>	HIGH to OFF-state propagation delay	nOE to n∀n; see <u>Fig. 5</u>	1.3	2.7	4.1	1.6	4.7	ns
t <sub>PLZ</sub>	LOW to OFF-state propagation delay	nOE to n∀n; see Fig. 5	1.3	2.5	3.6	1.4	4.1	ns

### 10.1. Waveforms and test circuit

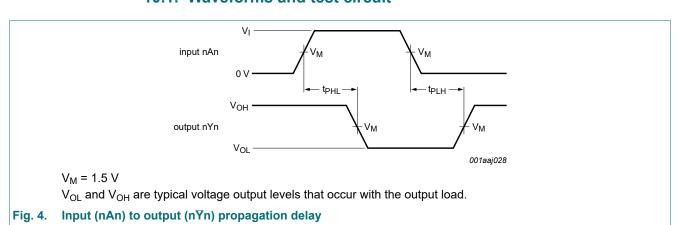

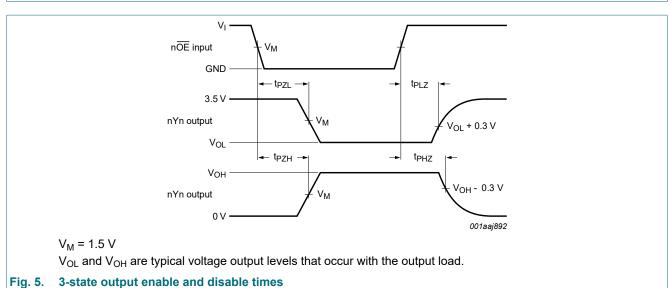

#### 16-bit inverting buffer/line driver; 3-state

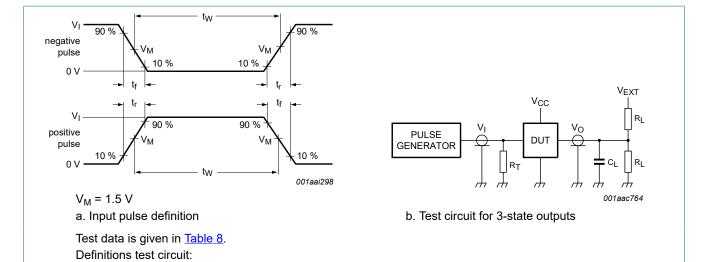

. 6. Test circuit for measuring switching times

C<sub>L</sub> = Load capacitance including jig and probe capacitance.

 $R_L$  = Load resistance.

#### Table 8. Test data

Input			Load V <sub>EXT</sub>			V <sub>EXT</sub>		
V <sub>I</sub>	fi	t <sub>W</sub>	t <sub>r</sub> , t <sub>f</sub>	CL	R <sub>L</sub>	t <sub>PHZ</sub> , t <sub>PZH</sub>	t <sub>PLZ</sub> , t <sub>PZL</sub>	t <sub>PLH</sub> , t <sub>PHL</sub>
3.0 V	1 MHz	500 ns	2.5 ns	50 pF	500 Ω	open	7.0 V	open

 $R_T$  = Termination resistance should be equal to output impedance  $Z_o$  of the pulse generator.

16-bit inverting buffer/line driver; 3-state

# 11. Package outline

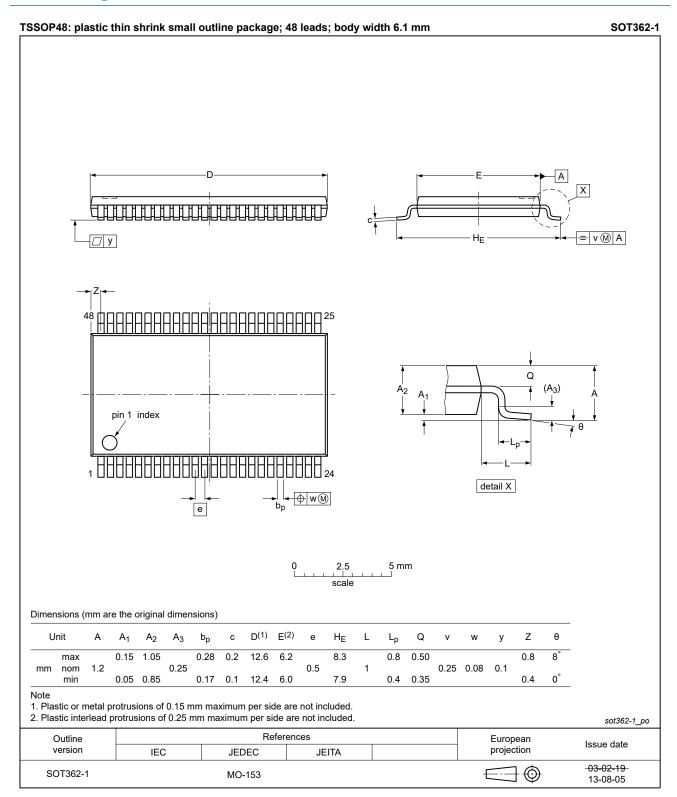


Fig. 7. Package outline SOT362-1 (TSSOP48)

16-bit inverting buffer/line driver; 3-state

### 12. Abbreviations

#### **Table 9. Abbreviations**

Acronym	Description
BiCMOS	Bipolar CMOS
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
CDM	Charged Device Model
TTL	Transistor-Transistor Logic

# 13. Revision history

### Table 10. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74ABT16240A v.7	20210707	Product data sheet	-	74ABT16240A v.6
Modifications:	Nexperia. Legal texts have Fig. 7: Packag Type number 7	we been adapted to the new compare outline drawing SOT362-1 (TSSOT4ABT16240ADL (SOT370-1/SSOSection 2 updated.	any name where app OP48) updated.	, ,
74ABT16240A v.6	20111103	Product data sheet	-	74ABT16240A v.5
Modifications:	<ul> <li>Legal pages u</li> </ul>	pdated		
74ABT16240A v.5	20100525	Product data sheet	-	74ABT16240A v.4
74ABT16240A v.4	20090325	Product data sheet	-	74ABT16240A v.3
74ABT16240A v.3	20040212	Product specification	01-A15420	74ABT_H16240A v.2
74ABT_H16240A v.2	19980225	Product specification	853-1880 19019	74ABT_H16240A
74ABT_H16240A	19961001	Product specification	-	-

#### 16-bit inverting buffer/line driver; 3-state

### 14. Legal information

#### **Data sheet status**

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

74ABT16240A

All information provided in this document is subject to legal disclaimers.

### 16-bit inverting buffer/line driver; 3-state

### **Contents**

١.	General description	1
2.	Features and benefits	1
3.	Ordering information	1
4.	Functional diagram	2
5.	Pinning information	3
5.1	. Pinning	3
5.2	. Pin description	3
6.	Functional description	4
7.	Limiting values	4
8.	Recommended operating conditions	,
	Necommended operating conditions	4
	Static characteristics	
9.		5
9. 10.	Static characteristics	5
<b>9.</b> <b>10.</b> 10.	Static characteristics  Dynamic characteristics	<b>6</b>
9. 10. 10. 11.	Static characteristics  Dynamic characteristics  1. Waveforms and test circuit	5 6 8
9. 10. 10. 11. 12.	Static characteristics	5 6 8
9. 10. 10. 11. 12.	Dynamic characteristics	5 6 8 9

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 7 July 2021

<sup>©</sup> Nexperia B.V. 2021. All rights reserved