



SANYO Semiconductors

DATA SHEET

STK412-150C-E — Thick-Film Hybrid IC Two-Channel Power Switching System Audio Power IC, 150W+150W

Overview

The STK412-150C-E is a class H audio power amplifier hybrid IC that features a built-in power supply switching circuit. This IC provides high efficiency audio power amplification by controlling (switching) the supply voltage supplied to the power devices according to the detected level of the input audio signal.

Applications

- Audio power amplifiers.

Features

- High output power by using power MOSFETs.
- Output load impedance: $R_L = 8\Omega$ to 6Ω supported
- Using insulated metal substrate that features superlative heat dissipation characteristics that are among the highest in the industry.

Series Models

	STK412-150C-E	STK412-170C-E
Output (0.7%/20Hz to 20kHz)	150W×2 channels ($R_L=6\Omega$)	180W×2 channels ($R_L=4\Omega$)
Max. rated V_H (quiescent)	±95V	±95V
Max. rated V_L (quiescent)	±61V	±60V
Recommended operating V_H	±57V	±54V
Recommended operating V_L	±38V	±37V
Dimensions (excluding pin height)	78.0mm×44.0mm×9.0mm	

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

STK412-150C-E

Specifications

Absolute maximum ratings at $T_a = 25^\circ\text{C}$ (excluding rated temperature items), $T_c = 25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Conditions	Ratings	Unit
V_H maximum quiescent supply voltage 1	V_H max (1)	When no signal	± 95	V
V_H maximum supply voltage 2	V_H max (2)	$R_L \geq 6\Omega$, 150W, 50ms	± 85	V
V_L maximum quiescent supply voltage 1	V_L max (1)	When no signal	± 61	V
V_L maximum supply voltage 2	V_L max (2)	$R_L \geq 6\Omega$, 150W, 50ms	± 55	V
Maximum voltage between V_H and V_L *4	$V_H - V_L$ max	No load	60	V
Thermal resistance	θ_{j-c}	Per power transistor	1.3	$^\circ\text{C/W}$
Junction temperature	T_j max	Both the T_j max and T_c max conditions must be met.	150	$^\circ\text{C}$
IC substrate operating temperature	T_c max		125	$^\circ\text{C}$
Storage temperature	T_{stg}		-30 to +125	$^\circ\text{C}$
Allowable load shorted time *3	t_s	$V_H = \pm 57\text{V}$, $V_L = \pm 38\text{V}$, $R_L = 6\Omega$, $f = 50\text{Hz}$, $P_O = 150\text{W}$, 1-channel active	0.3	s

Electrical Characteristics at $T_c = 25^\circ\text{C}$, $R_L = 6\Omega$, $R_g = 600\Omega$, $V_G = 30\text{dB}$, $V_Z = 18\text{V}$, non-inductive load R_L


Parameter	Symbol	Conditions *1						Ratings			unit
		V_{CC} (V)		f (Hz)	P_O (W)	THD (%)		min	typ	max	
Output power	P_O (1)	V_H V_L	± 57 ± 38	20 to 20k		0.7		150			W
Total harmonic distortion	THD (1)	V_H V_L	± 57 ± 38	20 to 20k	150				0.4		%
Frequency characteristics	f_L, f_H	V_H V_L	± 57 ± 38		1.0		+0 -3dB	20 to 50k			Hz
Input impedance	r_i	V_H V_L	± 57 ± 38	1k	1.0				55		k Ω
Output noise voltage *2	V_{NO}	V_H V_L	± 68 ± 46				$R_g = 2.2\text{k}\Omega$			1.0	mVrms
Quiescent current	I_{CCO}	V_H	± 68				$R_L = \infty$			70	mA
		V_L	± 46							100	
Output neutral voltage	V_N	V_H V_L	± 68 ± 46					-70	0	+70	mV

[Remarks]

- *1: Unless otherwise specified, use a constant-voltage power supply to supply power when inspections are carried out.
- *2: The output noise voltage values shown are peak values read with a VTVM. However, an AC stabilized (50Hz) power supply should be used to minimize the influence of AC primary side flicker noise on the reading.
- *3: Use the designated transformer power supply circuit shown in the figure below for the measurements of allowable load shorted time and output noise voltage.
- *4: Design circuits so that $(|V_H| - |V_L|)$ is always less than 40V when switching the power supply with the load connected.
- *5: Set up the V_L power supply with an offset voltage at power supply switching ($V_L - V_O$) of about 8V as an initial target.
- *6: Weight of independent IC: 38.6g
Package dimensions (length×width×height): 429mm×245mm×275mm

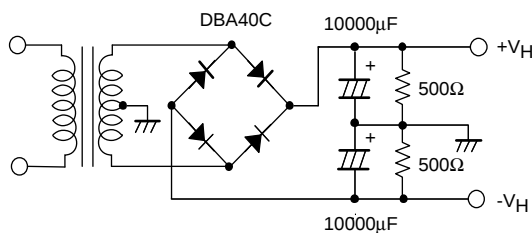

Designated transformer power supply
(MG-250 equivalent)

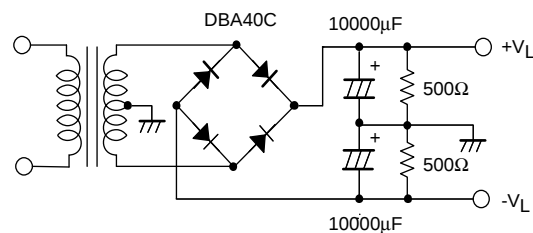


Designated transformer power supply
(MG-200 equivalent)


STK412-150C-E

Package Dimensions

unit:mm (typ)

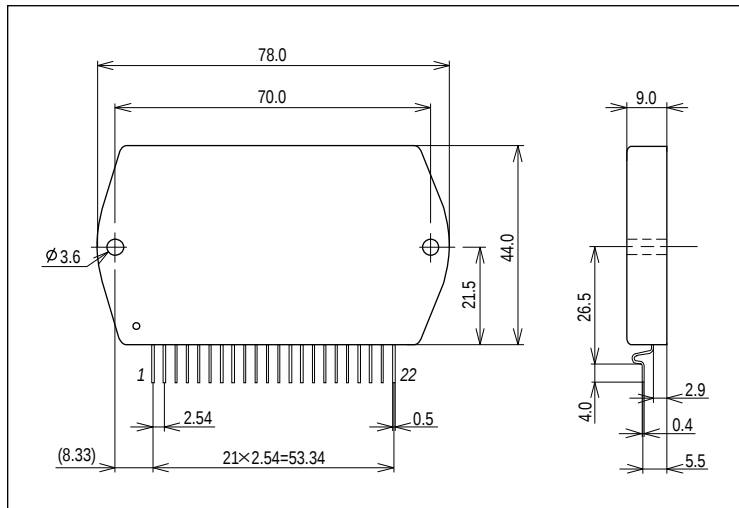


Internal Equivalent Circuit

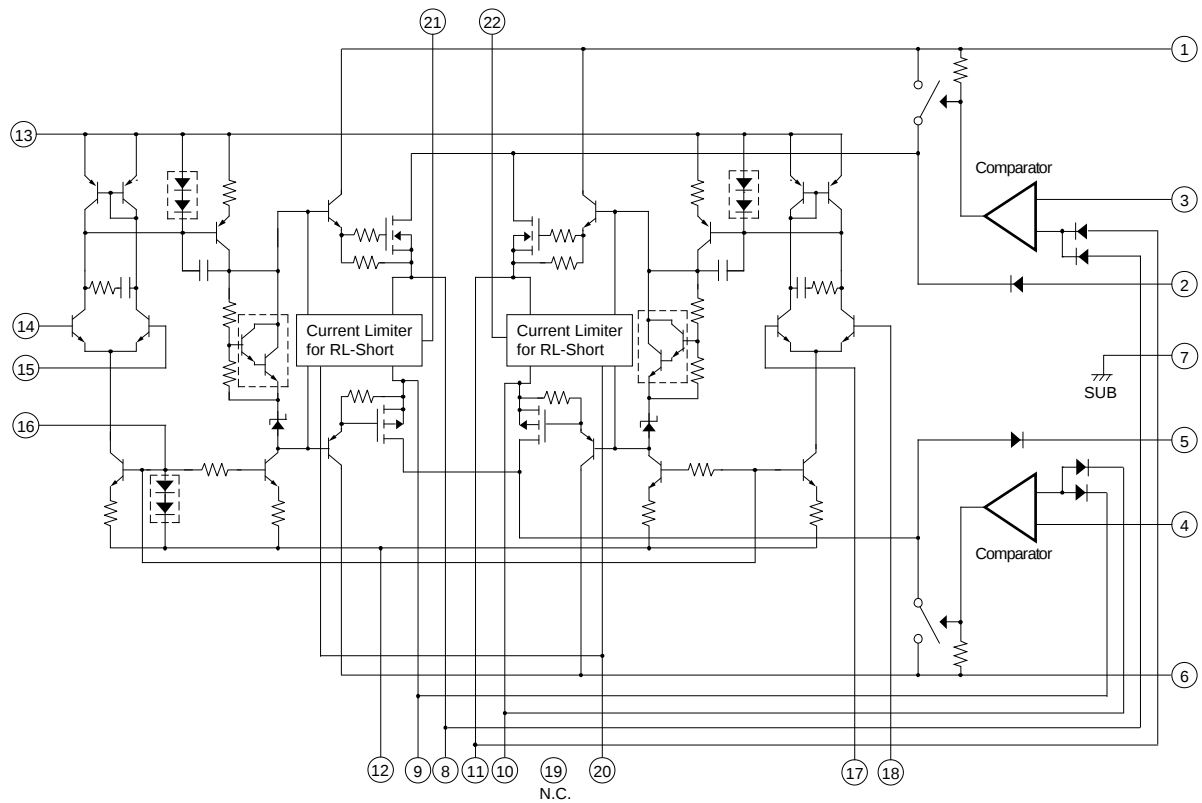

STK412-150C-E

Application Circuit Example

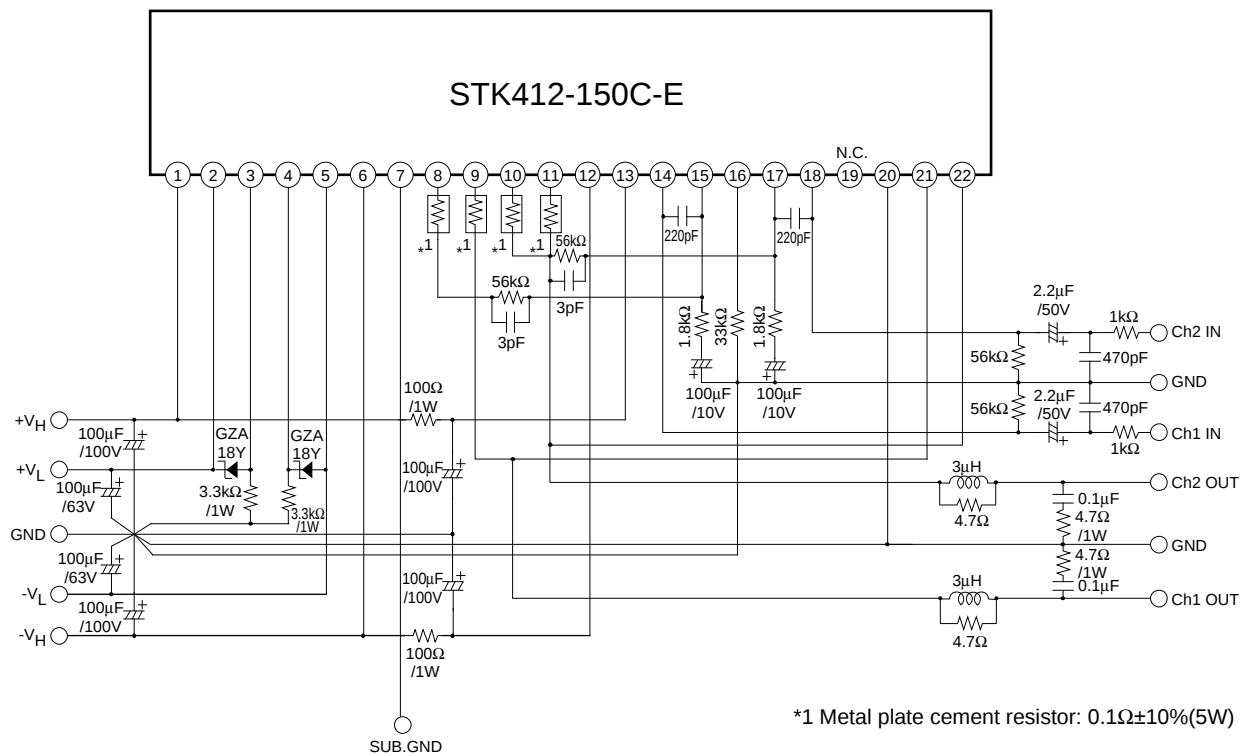


Pin Assignments

STK412-150C-E PIN Assignment

PIN No.	PIN Symbol	PIN Assignment
1	+V _H	+V _H Power Supply Voltage
2	+V _L	+V _L Power Supply Voltage
3	+V _{ref}	+Side Shift Voltage Reference
4	-V _{ref}	-Side Shift Voltage Reference
5	-V _L	-V _L Power Supply Voltage
6	-V _H	-V _H Power Supply Voltage
7	SUB GND	H-IC Sub GND
8	Ch1 +RE	Ch1 +Side Emitter Output
9	Ch1 -RE	Ch1 -Side Emitter Output
10	Ch2 -RE	Ch2 -Side Emitter Output
11	Ch1 +RE	Ch1 +Side Emitter Output
12	-Pre V _H	-Side Pre. Supply Voltage
13	+Pre V _H	+Side Pre. Supply Voltage
14	Ch1 IN	Ch1 Input
15	Ch1 NF	Ch1 Negative Feedback
16	Bias	Bias
17	Ch2 NF	Ch2 Negative Feedback
18	Ch2 IN	Ch2 Input
19	N.C.	No. Component
20	GND	GND
21	Ch2 FB	Ch2 Feedback for Protection
22	Ch1 FB	Ch1 Feedback for Protection

STK412-150C-E

Sample PCB Trace Pattern





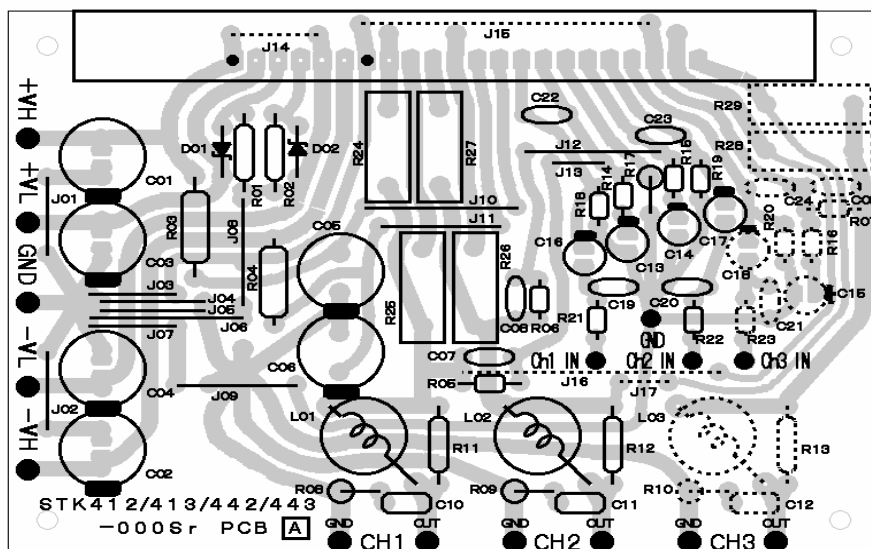


Parts List

P.C.B. No.	STK412-150C-E/STK412-170C-E
R 01, 02	3.3k Ω 1W
R 03, 04	100 Ω 1W
R 05, 06, 18, 19, (07, 20)	56k Ω 1/6W
R 08, 09, (10)	4.7 Ω 1W
R 11, 12, (13)	4.7 Ω 1/4W
R 14, 15, (16)	1.8k Ω 1/6W
R 17	33k Ω 1/4W
R 21, 22, (23)	1k Ω 1/6W
R 24, 25, 26, 27, (28, 29)	0.1 Ω $\pm$ 10% 5W
C 01, 02, 05, 06	100 μ F/100V
C 03, 04	100 μ F/63V
C 07, 08, (09)	3pF
C 10, 11, (12)	0.1 μ F/100V
C 13, 14, (15)	100 μ F/10V
C 16, 17, (18)	2.2 μ F/50V
C 19, 20, (21)	470pF
C 22, 23, (24)	220pF
L 01, 02, (03)	3 μ H
D 01, 02	GZA18Y (SANYO)
J 01, 02, 03, 07	10mm
J 04, 05	12mm
J 06, 10	17mm
J 08, 09, 11, 12	14mm
J 13	5mm
J 14	N.C
J 15	33mm
J 16	30mm
J 17	5mm

STK412-150C-E

Evaluation Board Characteristics

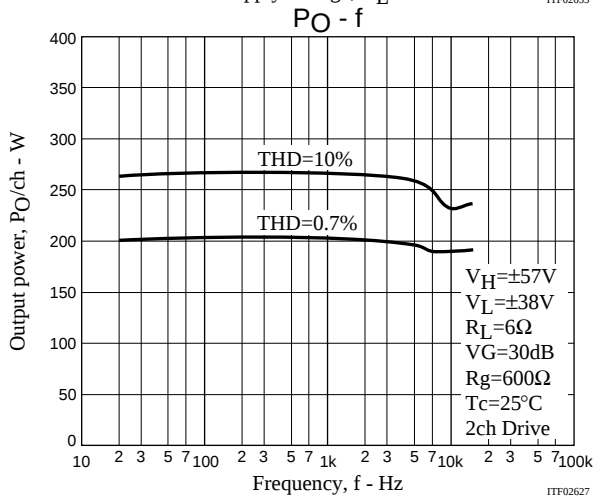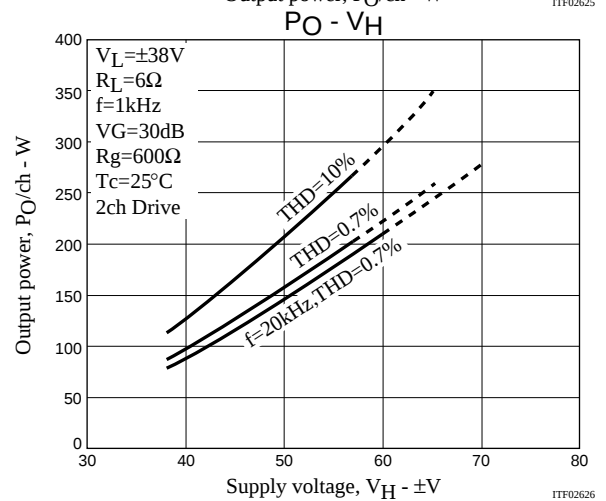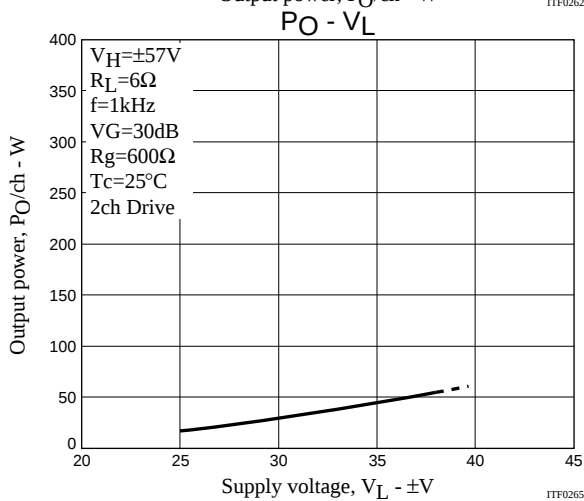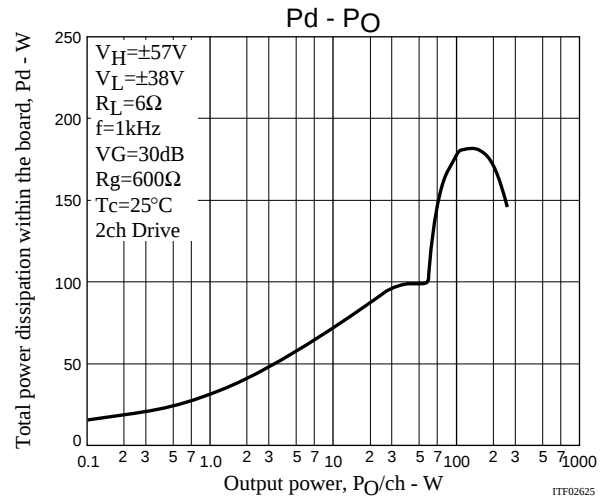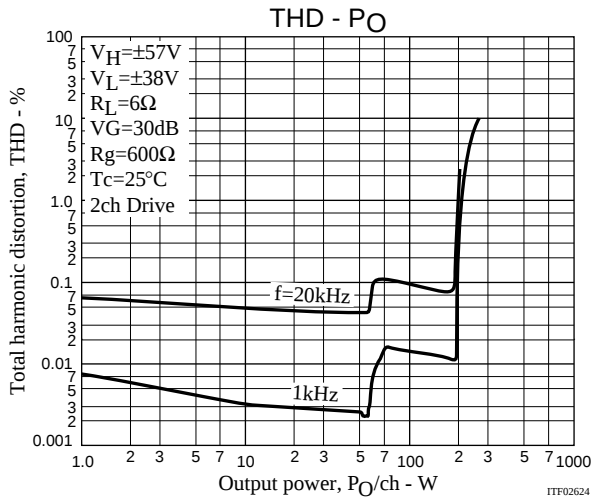

STK412-150C-E

[Thermal Design Example for STK412-150C-E]

The thermal resistance, θ_{c-a} , of the heat sink for total power dissipation, P_d , within the hybrid IC is determined as follows.

Condition 1: The hybrid IC substrate temperature, T_c , must not exceed 125°C.

$$P_d \times \theta_{c-a} + T_a < 125^\circ\text{C} \dots\dots\dots (1)$$

T_a : Guaranteed ambient temperature for the end product

Condition 2: The junction temperature, T_j , of each power transistor must not exceed 150°C.

$$P_d \times \theta_{c-a} + P_d/N \times \theta_{j-c} + T_a < 150^\circ\text{C} \dots\dots\dots (2)$$

N : Number of power transistors

θ_{j-c} : Thermal resistance per power transistor

However, the power dissipation, P_d , for the power transistors shall be allocated equally among the number of power transistors.

The following inequalities result from solving equations (1) and (2) for θ_{c-a} .

$$\theta_{c-a} < (125 - T_a)/P_d \dots\dots\dots (1)'$$

$$\theta_{c-a} < (150 - T_a)/P_d - \theta_{j-c}/N \dots\dots\dots (2)'$$

Values that satisfy these two inequalities at the same time represent the required heat sink thermal resistance.

When the following specifications have been stipulated, the required heat sink thermal resistance can be determined from formulas (1)' and (2)'.

- Supply voltage V_H, V_L
- Load resistance R_L
- Guaranteed ambient temperature T_a

[Example]

When the IC supply voltage, $V_H=\pm 57\text{V}$, $V_L=\pm 38\text{V}$ and R_L is 6Ω , the total power dissipation, P_d , within the hybrid IC, will be a maximum of 180W at 1kHz for a continuous sine wave signal according to the P_d - P_o characteristics. For the music signals normally handled by audio amplifiers, a value of $1/8P_{O \text{ max}}$ is generally used for P_d as an estimate of the power dissipation based on the type of continuous signal. (Note that the factor used may differ depending on the safety standard used.)

This is:

$$P_d \approx 85\text{W} \quad (\text{when } 1/8P_{O \text{ max}} = 19\text{W}).$$

The number of power transistors in audio amplifier block of these hybrid ICs, N , is 4, and the thermal resistance per transistor, θ_{j-c} , is 2.1°C/W . Therefore, the required heat sink thermal resistance for a guaranteed ambient temperature, T_a , of 50°C will be as follows.

$$\begin{aligned} \text{From formula (1)'} \quad \theta_{c-a} &< (125 - 50)/85 \\ &< 0.88 \end{aligned}$$


$$\begin{aligned} \text{From formula (2)'} \quad \theta_{c-a} &< (150 - 50)/85 - 1.4/4 \\ &< 0.82 \end{aligned}$$

Therefore, the value of 0.82°C/W , which satisfies both of these formulae, is the required thermal resistance of the heat sink.

Note that this thermal design example assumes the use of a constant-voltage power supply, and is therefore not a verified design for any particular user's end product.


STK412-150C-E

STK412-100 Series Stand-by Control & Mute Control Application

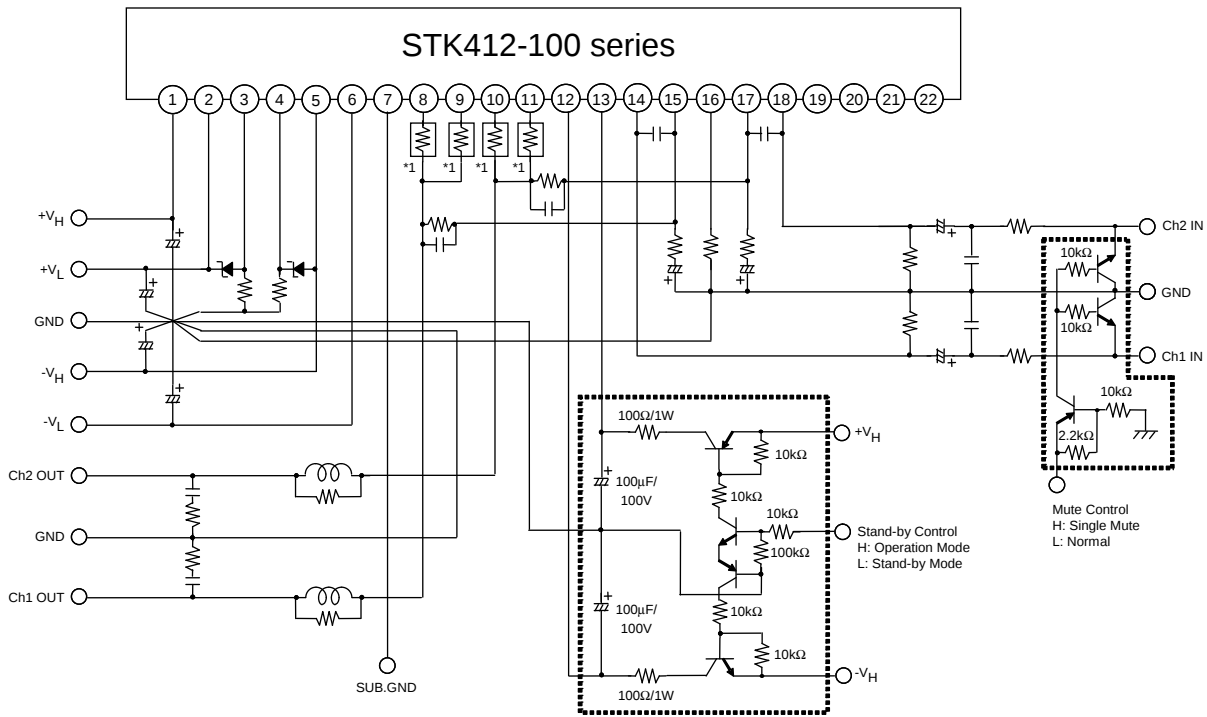


*1 Metal Plate Cement Resistor 0.1Ω ±10% (5W)

STK412-100 Series Load-Short & DC Voltage Protect Application

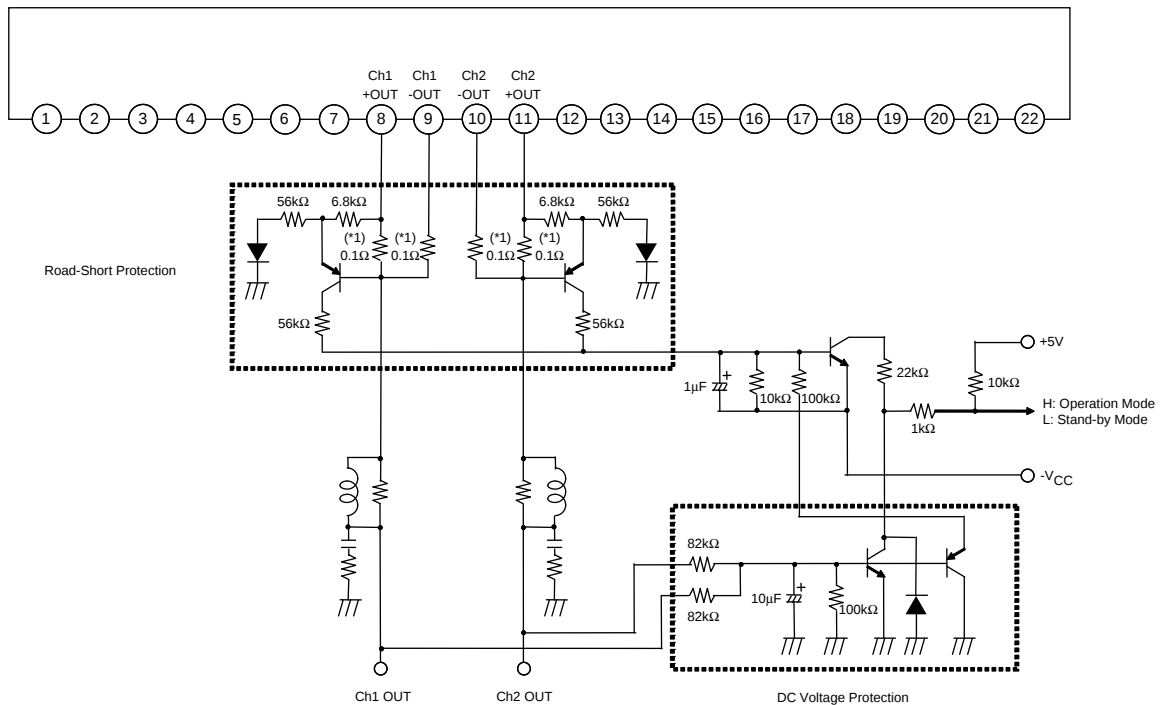

*1 Metal Plate Cement Resistor 0.1Ω ±10% (5W)

STK412-150C-E/STK412-170C-E BTL Application

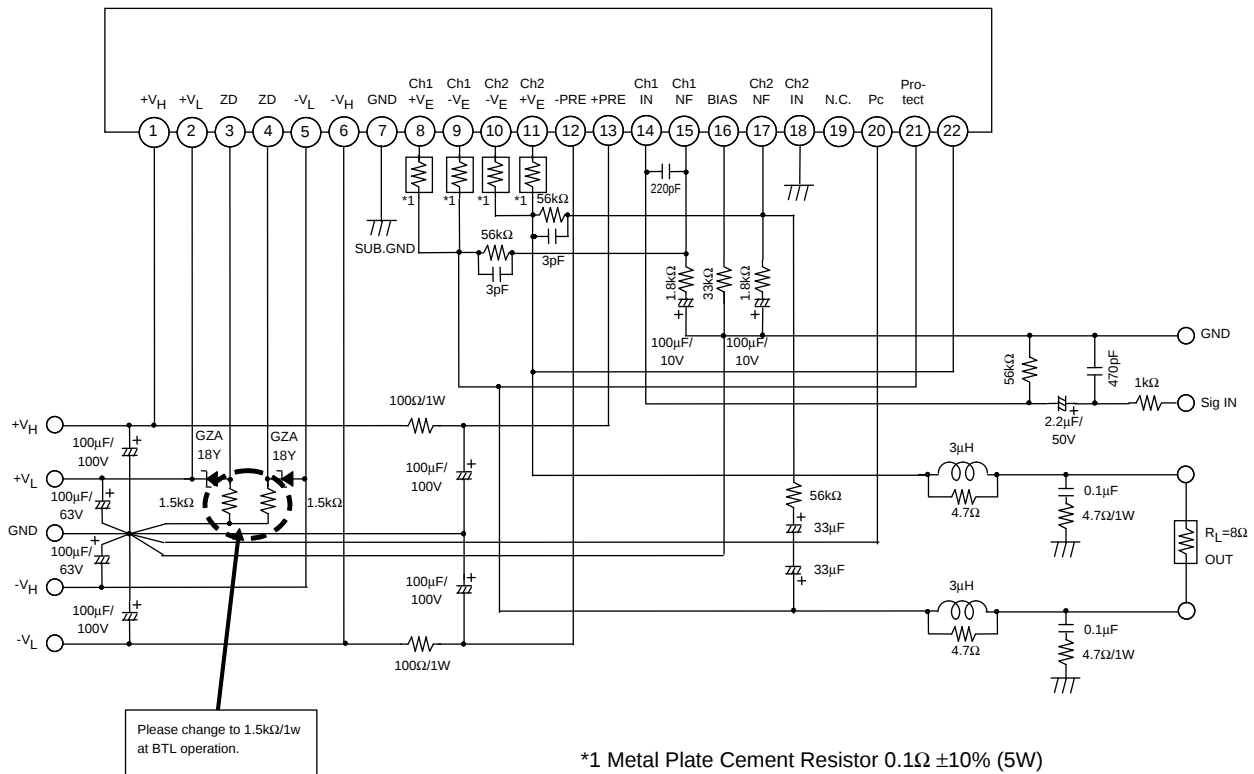

*1 Metal Plate Cement Resistor $0.1\Omega \pm 10\%$ (5W)

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of March, 2009. Specifications and information herein are subject to change without notice.