OBSOLETE PRODUCT
POSSIBLE SUBSTITUTE PRODUCT
HA-2525, HA-2842

May 2003 FN2905.5

10MHz, Low Noise, Operational Amplifiers

The HA-5101 is a dielectrically isolated operational amplifier featuring low noise, (3.0nV/$\sqrt{Hz}$ at 1kHz).

DC characteristics of the HA-5101 assure accurate performance. The 0.5mV offset voltage is externally adjustable and offset voltage drift is just 3μV/^{o}C. An offset current of only 30nA reduces input current errors and an open loop voltage gain of 1 x 10^{6}V/V increases loop gain for low distortion amplification.

The HA-5101 is ideal for audio applications, especially low-level signal amplifiers such as microphone, tape head and phono cartridge preamplifiers. Additionally, it is well suited for low distortion oscillators, low noise function generators and high Q filters.

Pinout

HA-5101(SOIC)
TOP VIEW

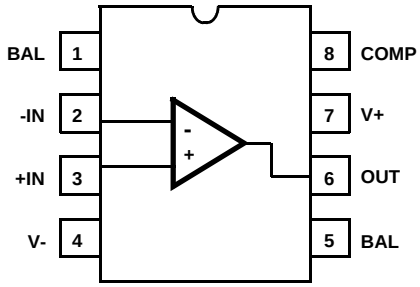

Features

- Low Noise . . . . . 3.0nV/$\sqrt{Hz}$ at 1kHz
- Bandwidth 10MHz
- Slew Rate 10V/μs
- Low Offset Voltage Drift . . . . . 3μV/^{o}C
- High Gain . . . . . 1 x 10^{6}V/V
- High CMRR/PSRR 100dB
- High Output Drive Capability 30mA

Applications

- High Quality Audio Preamplifiers
- High Q Active Filters
- Low Noise Function Generators
- Low Distortion Oscillators
- Low Noise Comparators
- For Further Design Ideas, See Application Note AN554

Part Number Information

PART NUMBER (BRAND)	TEMP. RANGE (^{o}C)	PACKAGE	PKG. NO.
HA9P5101-9 (H51019)	-40 to 85	8 Ld SOIC	M8.15

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
1-888-INTERSIL or 321-724-7143 | Intersil (and design) is a registered trademark of Intersil Americas Inc.
Copyright © Intersil Americas Inc. 2003. All Rights Reserved
All other trademarks mentioned are the property of their respective owners.

Schematic

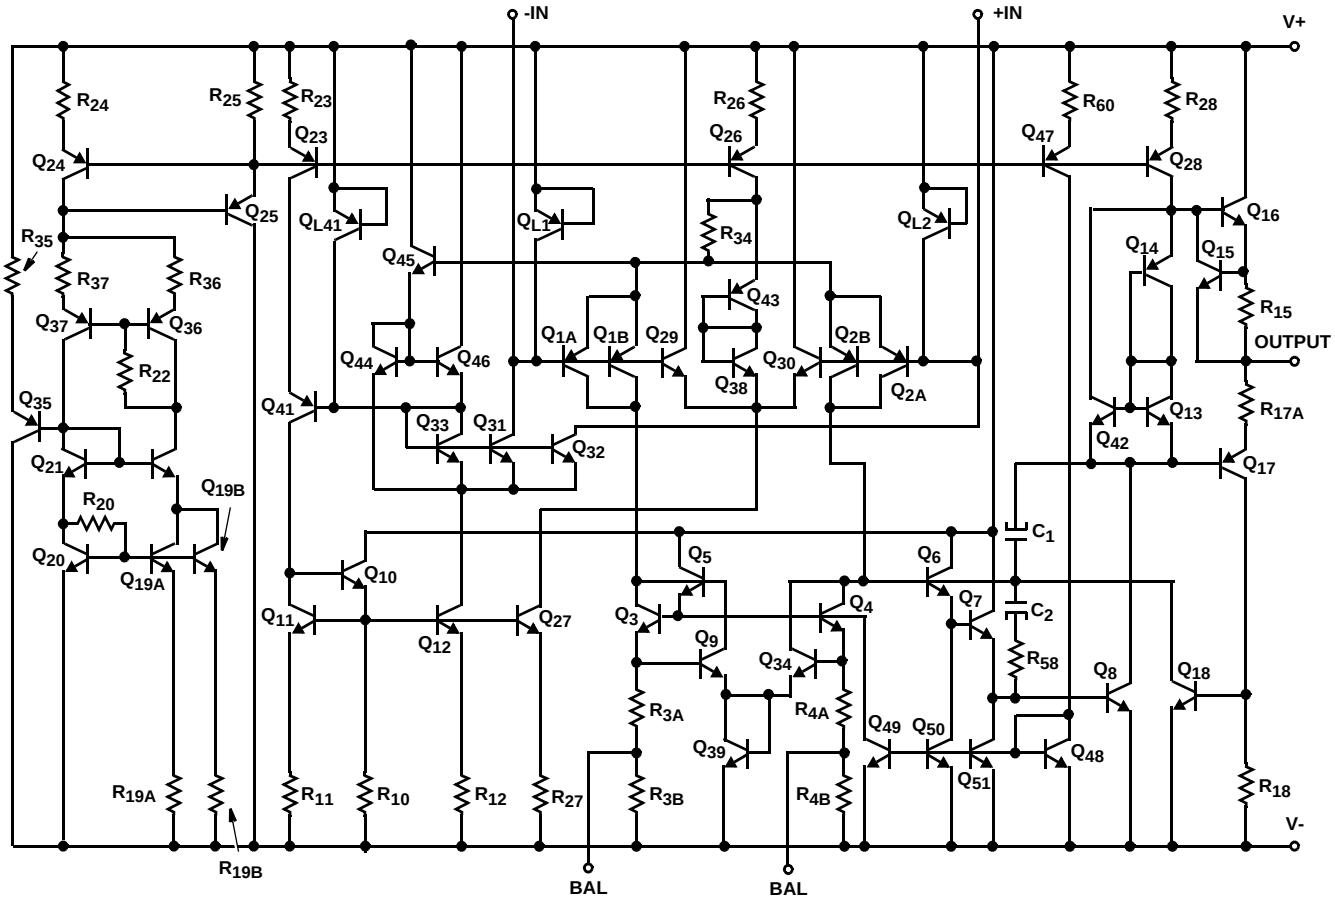
-IN
+IN
V+
V-
OUTPUT
BAL
BAL
R24
R25
R23
Q23
Q24
Q25
QL41
QL1
R26
Q26
QL2
R60
Q47
R28
Q28
Q16
Q14
Q15
R15
R35
R37
R36
Q37
Q36
R22
Q45
R34
Q43
Q1A
Q1B
Q29
Q2B
Q30
Q38
Q2A
Q44
Q46
Q41
Q33
Q31
Q32
Q35
Q21
R20
Q19B
Q20
Q19A
Q10
Q11
Q12
Q27
Q5
Q3
Q9
Q4
Q34
Q6
Q7
C1
C2
R58
Q8
Q18
R3A
R4A
Q39
Q49
Q50
Q51
Q48
R19A
R11
R10
R12
R27
R3B
R4B
R18
R19B
Q13
R17A
Q42
Q17

Absolute Maximum Ratings

Voltage Between V+ and V- Terminals 40V
Differential Input Voltage 7V
Input Voltage . . . . . $\pm V_{SUPPLY}$
Output Current . . . . . Full Short Circuit Protection

Operating Conditions

Temperature Range
HA-5101-9 . . . . . -40^oC to 85^oC

Thermal Information

Thermal Resistance (Typical, Note 2)	θ_{JA} ($^oC/W$)	θ_{JC} ($^oC/W$)
SOIC Package	160	N/A

Maximum Junction Temperature (Note 1) . . . . . 150^oC
Maximum Storage Temperature Range . . . . . -65^oC to 150^oC
Maximum Lead Temperature (Soldering 10s) . . . . . 300^oC
(Lead Tips Only)

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

1. Maximum power dissipation, including output load, must be designed to maintain the maximum junction temperature below 150^oC for the plastic packages.
2. θ_{JA} is measured with the component mounted on a low effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Electrical Specifications

$V_{SUPPLY} = \pm 15V$, $R_S = 100\Omega$, $R_L = 2k\Omega$, $C_L = 50pF$, Unless Otherwise Specified

PARAMETER	TEST CONDITIONS	TEMP (^oC)	MIN	TYP	MAX	UNITS
INPUT CHARACTERISTICS						
Offset Voltage		25	-	0.5	3	mV
		Full	-	-	4	mV
Offset Voltage Drift		Full	-	3	-	$\mu V/^oC$
Bias Current		25	-	100	200	nA
		Full	-	-	325	nA
Offset Current		25	-	30	75	nA
		Full	-	-	125	nA
Input Resistance		25	-	500	-	$k\Omega$
Common Mode Range		Full	± 12	-	-	V
TRANSFER CHARACTERISTICS						
Large Signal Voltage Gain	$V_{OUT} = \pm 10V$	25	-	1000	-	kV/V
		Full	100	250	-	kV/V
Common Mode Rejection Ratio	$V_{CM} = \pm 10V$	Full	80	100	-	dB
Small Signal Bandwidth	$A_V = 1$	25	-	10	-	MHz
Minimum Stable Gain		Full	1	-	-	V/V
OUTPUT CHARACTERISTICS						
Output Voltage Swing	$R_L = 10k\Omega$	Full	± 12	± 13	-	V
	$R_L = 2k\Omega$	Full	± 12	± 13	-	V
	$V_S = \pm 18V$, $R_L = 600\Omega$	25	± 15	-	-	V
Output Current (Note 3)		25	25	30	-	mA
Full Power Bandwidth (Note 4)		25	95	160	-	kHz
Output Resistance		25	-	110	-	Ω
Maximum Load Capacitance		25	-	800	-	pF
TRANSIENT RESPONSE (Note 5)						
Rise Time		25	-	50	100	ns
Overshoot		25	-	20	35	%

Electrical Specifications $V_{SUPPLY} = \pm15V$, $R_S = 100\Omega$, $R_L = 2k\Omega$, $C_L = 50pF$, Unless Otherwise Specified **(Continued)**

PARAMETER	TEST CONDITIONS	TEMP (^oC)	MIN	TYP	MAX	UNITS
Slew Rate		25	6	10	-	$V/\mu s$
Settling Time (Note 6)	0.01%	-	-	2.6	-	μs
NOISE CHARACTERISTICS (Note 7)						
Input Noise Voltage	f = 10Hz	25	-	5	7	$nV/\sqrt{Hz}$
	f = 1kHz	25	-	3.0	4.0	$nV/\sqrt{Hz}$
Input Noise Current	f = 10Hz	25	-	4.0	9	$pA/\sqrt{Hz}$
	f = 1kHz		-	0.6	2.5	$pA/\sqrt{Hz}$
Broadband Noise Voltage	f = DC To 30kHz	25	-	0.870	-	μV_{RMS}
POWER SUPPLY CHARACTERISTICS						
Supply Current		Full	-	4	7	mA
Power Supply Rejection Ratio	$\Delta V_S = \pm5V$	Full	80	100	-	dB

NOTES:

3. Output current is measured with $V_{OUT} = \pm15V$ with $V_{SUPPLY} = \pm18V$.
4. Full power bandwidth is guaranteed by equation: Full power bandwidth $= \frac{\text{Slew Rate}}{2\pi V_{PEAK}}$, $V_{PEAK} = 10V$.
5. Refer to Test Circuits section of the data sheet.
6. Settling time is measured to 0.01% of final value for a 10V output step, and $A_V = -1$.
7. The limits for these parameters are guaranteed based on lab characterization, and reflect lot-to-lot variation.

Test Circuits and Waveforms

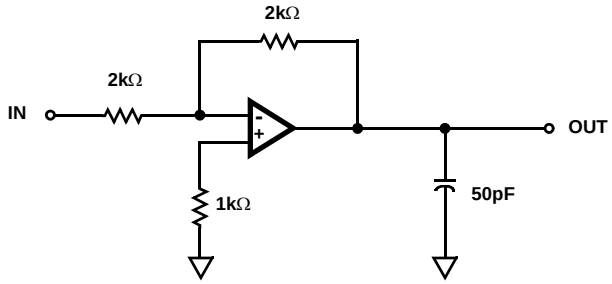

FIGURE 1. LARGE SIGNAL RESPONSE CIRCUIT

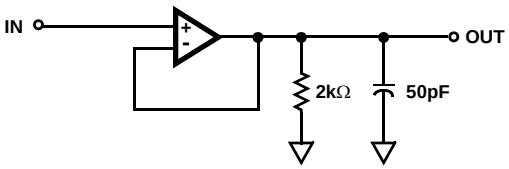

FIGURE 2. SMALL SIGNAL RESPONSE CIRCUIT

Test Circuits and Waveforms (Continued)

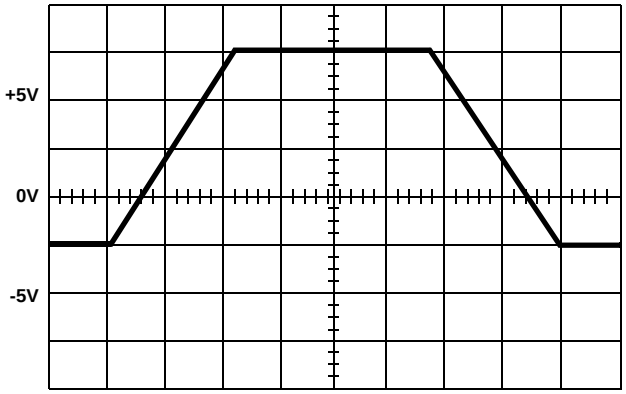

Ch. 1 = 2.5V/Div.
Timebase = 1.00μs/Div.

FIGURE 3. LARGE SIGNAL TRANSIENT RESPONSE

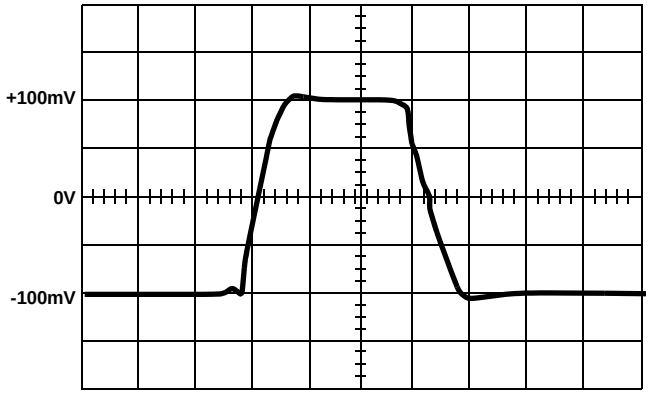

Ch. 1 = 50mV/Div.
Timebase = 100ns/Div.

FIGURE 4. SMALL SIGNAL TRANSIENT RESPONSE

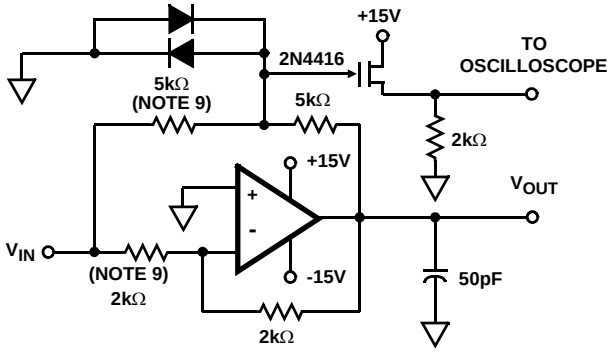

NOTES:

8. A_V = -1.
9. Feedback and summing resistors should be 0.1% matched.
10. Clipping diodes are optional, HP5082-2810 recommended.

FIGURE 5. SETTLING TIME CIRCUIT

Application Information

Operation At ±5V Supply

The HA-5101 performs well at V_S = ±5V exhibiting typical characteristics as listed below:

I_{CC}	3.7mA
V_{IO}	0.5mV
I_{BIAS}	56nA
A_{VOL} (V_O = ±3V)	106kV/V
V_{OUT}	3.7V
I_{OUT}	13mA
CMRR (ΔV_{CM} = ±2.5V)	90dB
PSRR (ΔV_S = 0.5V)	90dB
Unity Gain Bandwidth	10MHz
Slew Rate	7V/μs

Offset Adjustment

The following is the recommended V_{IO} adjust configuration:



NOTE: Proper decoupling is always recommended, 0.1μF high quality capacitor should be at or very near the device's supply pins.

Input Protection

The HA-5101 has built-in back-to-back protection diodes which will limit the differential input voltage to approximately

7V. If the 5101 will be used in conditions where that voltage may be exceeded, then current limiting resistors must be used. No more than 25mA should be allowed to flow in the HA-5101's input.

Comparator Circuit

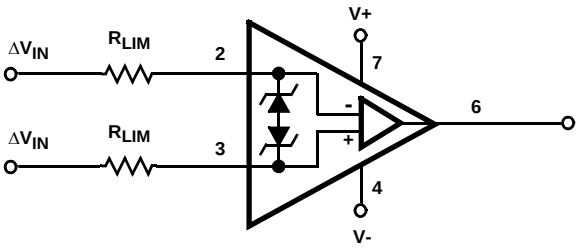

Choose R_{LIM} Such That: $\frac{(\Delta V_{INMAX} - 7V)}{25mA} \leq 2R_{LIM}$

Output Saturation

When an op amp is overdriven, output devices can saturate and sometimes take a long time to recover. Saturation can be avoided (sometimes) by using circuits such as:

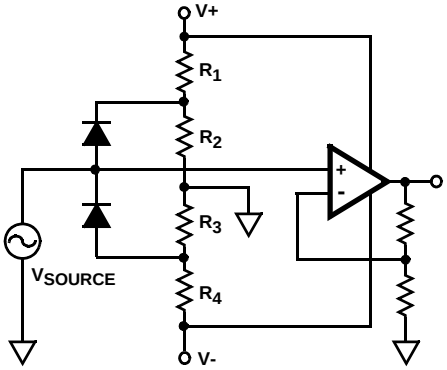

If saturation cannot be avoided the HA-5101 recovers from a 25% overdrive in about 6.5μs (see photos).

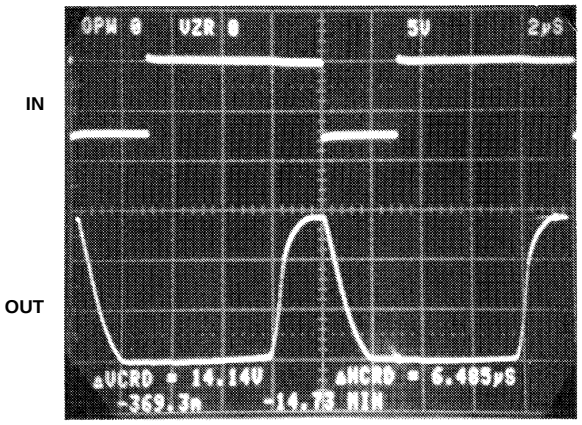

Top: Input
Bottom: Output, 5V/Div., 2μs/Div.
Output is overdriven negative and recovers in 6μs.

Typical Performance Curves

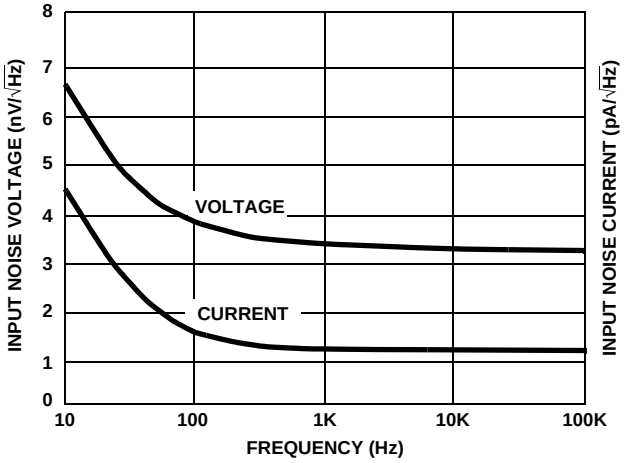

FIGURE 6. NOISE SPECTRUM

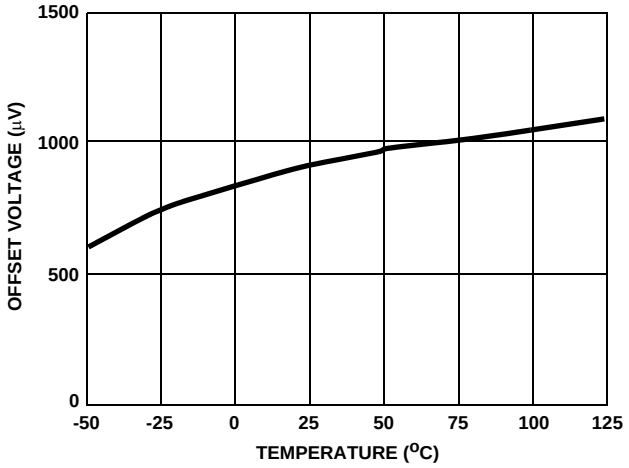

FIGURE 7. OFFSET VOLTAGE vs TEMPERATURE

Typical Performance Curves (Continued)

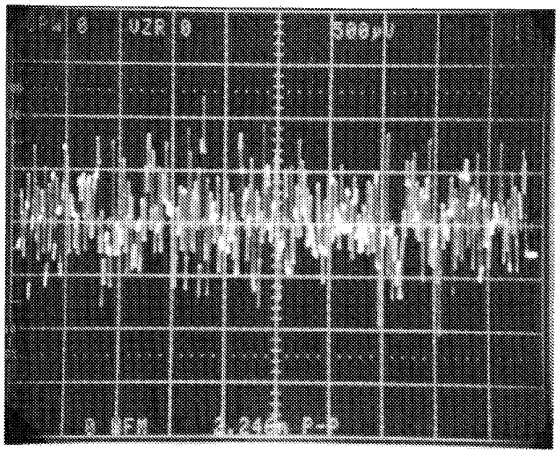

A_V = 25000 V_S = ±15V (2.25μV_{P-P} RTO)

PEAK-TO-PEAK NOISE 0.1Hz TO 10Hz

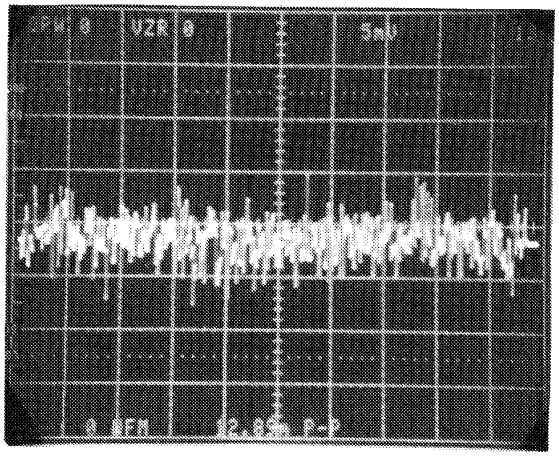

A_V = 25000, V_S = ±15V (12.89mV_{P-P} RTO)

PEAK-TO-PEAK TOTAL NOISE 0.1Hz TO 1MHz

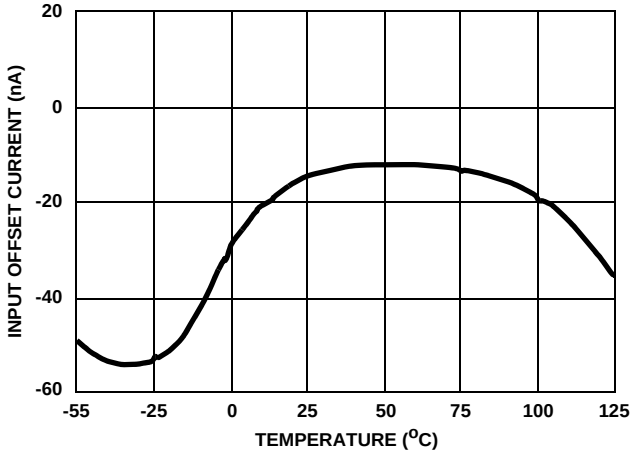

FIGURE 8. INPUT OFFSET CURRENT vs TEMPERATURE

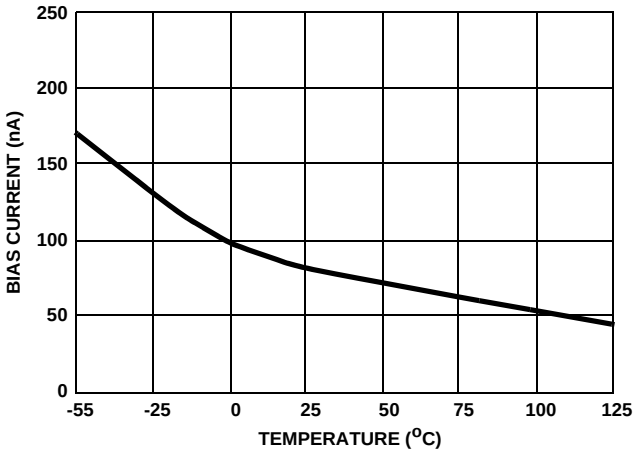

FIGURE 9. INPUT BIAS CURRENT vs TEMPERATURE

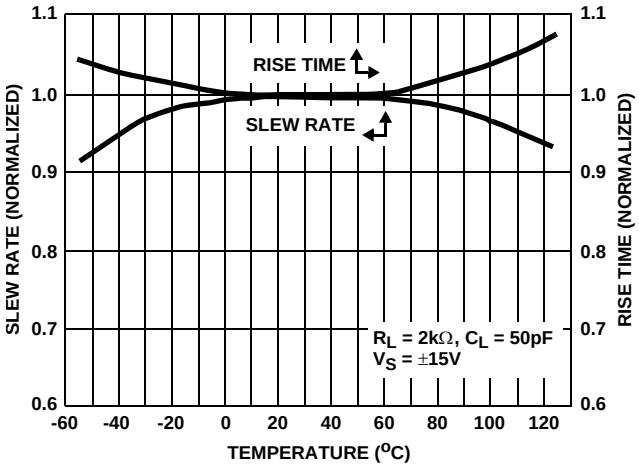

FIGURE 10. SLEW RATE/RISE TIME vs TEMPERATURE

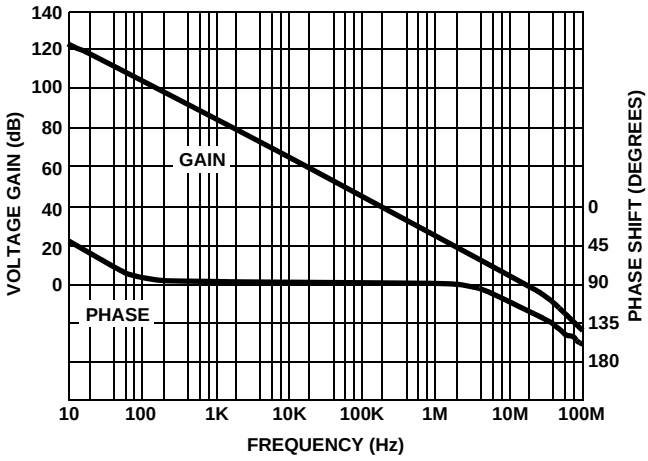

FIGURE 11. OPEN-LOOP GAIN/PHASE vs FREQUENCY

Typical Performance Curves (Continued)

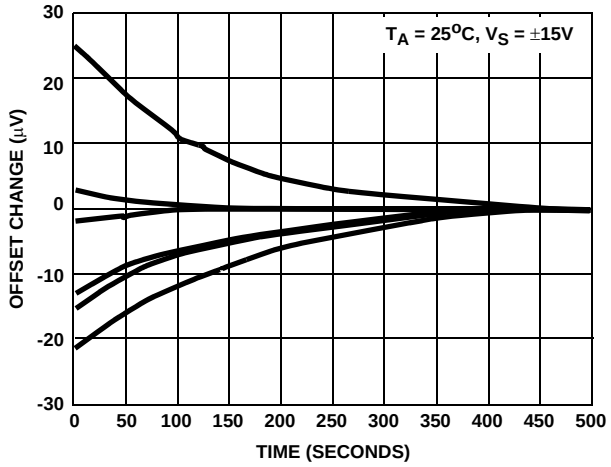

FIGURE 12. INPUT OFFSET WARMUP DRIFT vs TIME (NORMALIZED TO ZERO FINAL VALUE) (SIX REPRESENTATIVE UNITS)

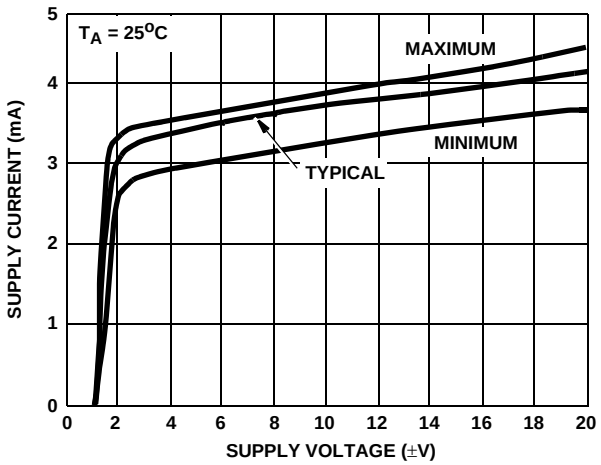

FIGURE 13. SUPPLY CURRENT vs SUPPLY VOLTAGE

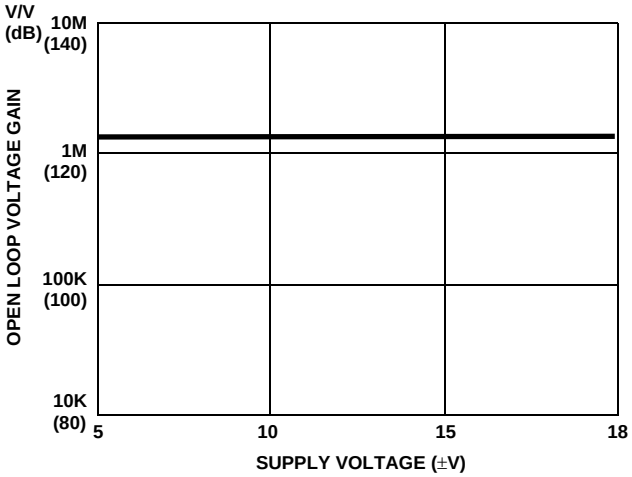

FIGURE 14. DC OPEN-LOOP VOLTAGE GAIN vs SUPPLY VOLTAGE

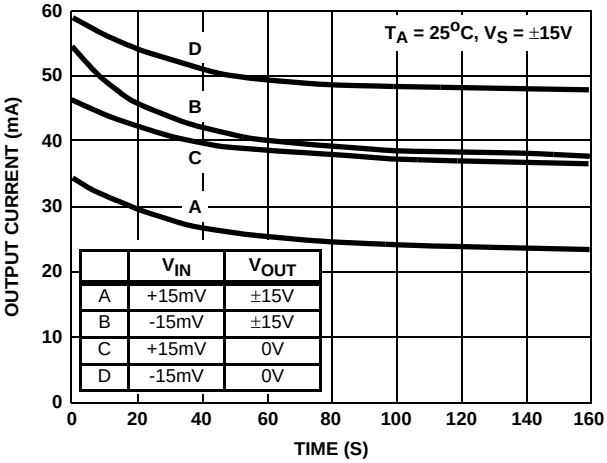

	V_{IN}	V_{OUT}
A	+15mV	±15V
B	-15mV	±15V
C	+15mV	0V
D	-15mV	0V

FIGURE 15. SHORT CIRCUIT CURRENT vs TIME

Typical Performance Curves (Continued)

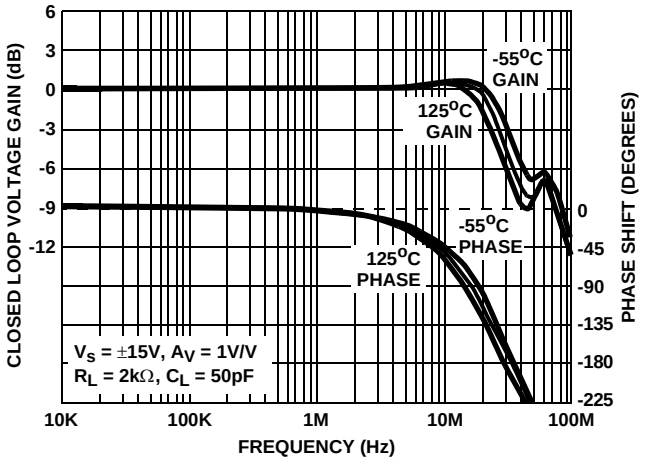

FIGURE 16. FREQUENCY RESPONSE

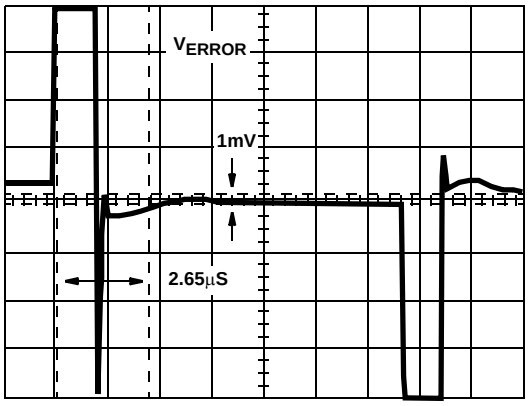

FIGURE 17. SETTLING WAVEFORM 1.5µs/DIV.

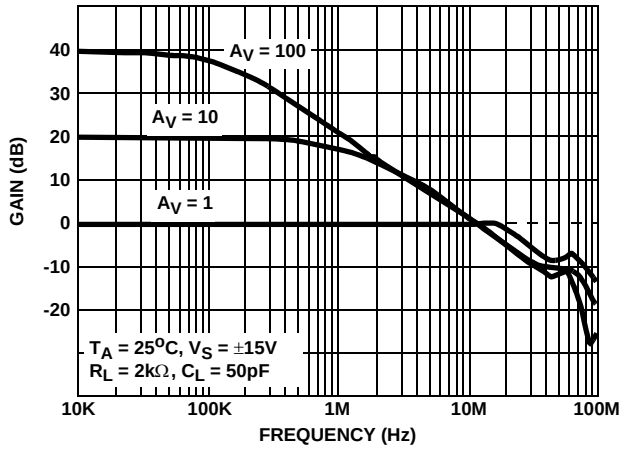

FIGURE 18. CLOSED-LOOP GAIN vs FREQUENCY

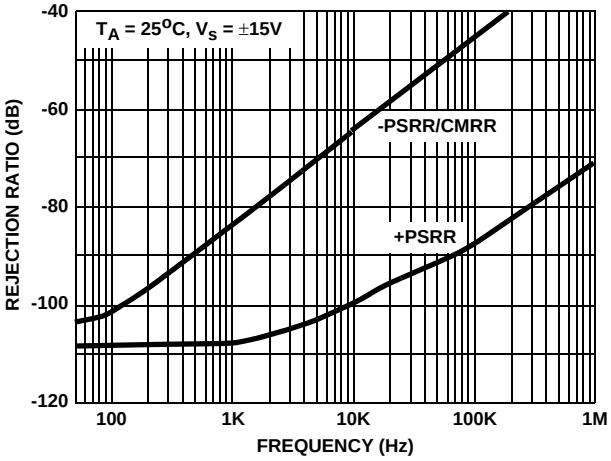

FIGURE 19. REJECTION RATIOS vs FREQUENCY

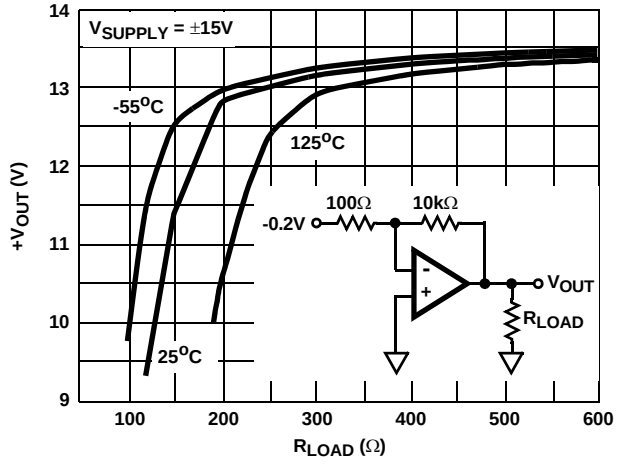

FIGURE 20. $+V_{OUT}$ vs R_L

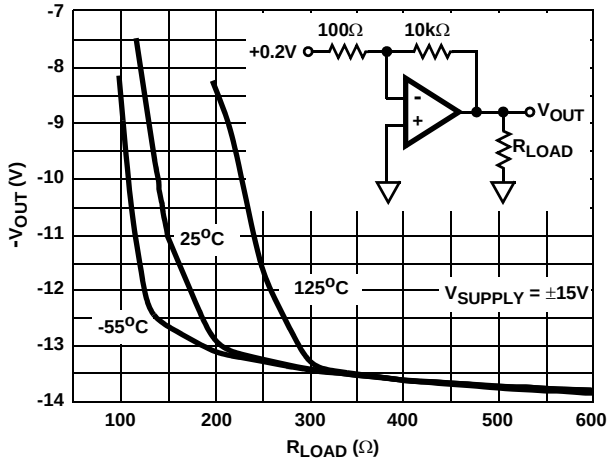

FIGURE 21. $-V_{OUT}$ vs R_L

Die Characteristics

SUBSTRATE POTENTIAL (Powered Up): V-

TRANSISTOR COUNT: 54

PROCESS: Bipolar Dielectric Isolation

Metallization Mask Layout

HA-5101

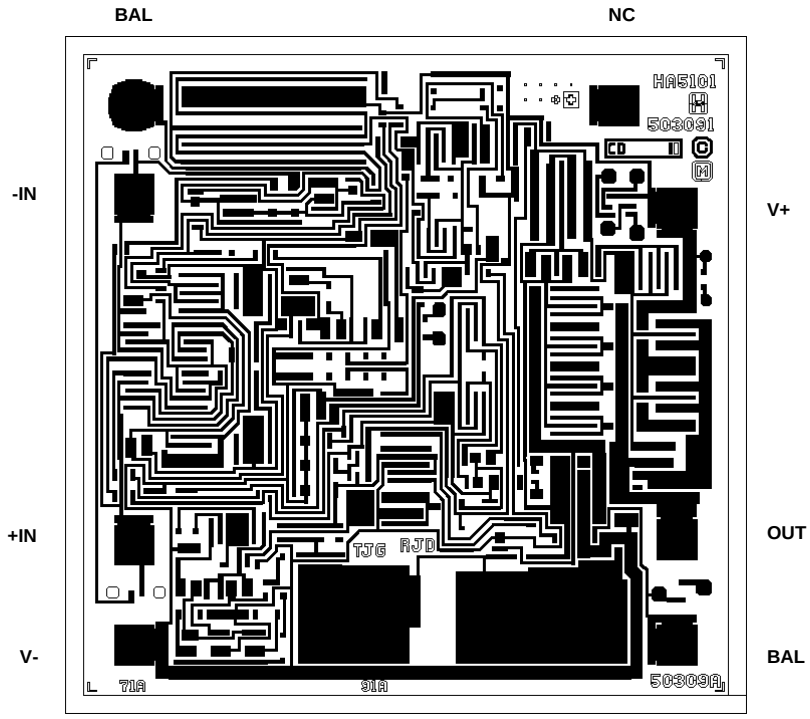

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com