

MC74AC245, MC74ACT245

Octal Bidirectional Transceiver with 3-State Inputs/Outputs

The MC74AC245/74ACT245 contains eight non-inverting bidirectional buffers with 3-state outputs and is intended for bus-oriented applications. Current sinking capability is 24 mA at both the A and B ports. The Transmit/Receive (T/R) input determines the direction of data flow through the bidirectional transceiver. Transmit (active-HIGH) enables data from A ports to B ports; Receive (active-LOW) enables data from B ports to A ports. The Output Enable input, when HIGH, disables both A and B ports by placing them in a High Z condition.

- Noninverting Buffers
- Bidirectional Data Path
- A and B Outputs Source/Sink 24 mA
- 'ACT245 Has TTL Compatible Inputs

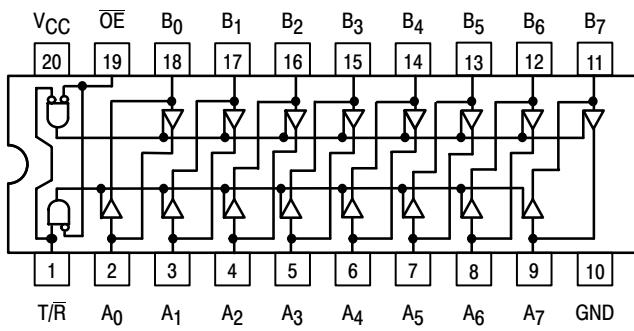


Figure 1.

PIN ASSIGNMENT

PIN	FUNCTION
OE	Output Enable Input
T/R	Transmit/Receive Input
A ₀ -A ₇	Side A 3-State Inputs or 3-State Outputs
B ₀ -B ₇	Side B 3-State Inputs or 3-State Outputs

TRUTH TABLES

Inputs		Outputs
OE	T/R	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	High Z State

H = HIGH Voltage Level


L = LOW Voltage Level

X = Immaterial




ON Semiconductor™

<http://onsemi.com>

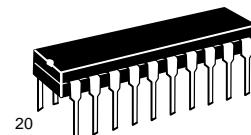


PDIP-20
N SUFFIX
CASE 738



SO-20
DW SUFFIX
CASE 751



TSSOP-20
DT SUFFIX
CASE 948E



EIAJ-20
M SUFFIX
CASE 967

ORDERING INFORMATION

Device	Package	Shipping
MC74AC245N	PDIP-20	18 Units/Rail
MC74ACT245N	PDIP-20	18 Units/Rail
MC74AC245DW	SOIC-20	38 Units/Rail
MC74AC245DWR2	SOIC-20	1000 Tape & Reel
MC74ACT245DW	SOIC-20	38 Units/Rail
MC74ACT245DWR2	SOIC-20	1000 Tape & Reel
MC74AC245DT	TSSOP-20	75 Units/Rail
MC74AC245DTR2	TSSOP-20	2500 Tape & Reel
MC74ACT245DT	TSSOP-20	75 Units/Rail
MC74ACT245DTR2	TSSOP-20	2500 Tape & Reel
MC74AC245M	EIAJ-20	40 Units/Rail
MC74AC245MEL	EIAJ-20	2000 Tape & Reel
MC74ACT245M	EIAJ-20	40 Units/Rail
MC74ACT245MEL	EIAJ-20	2000 Tape & Reel

DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 192 of this data sheet.

MC74AC245, MC74ACT245

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
V _{CC}	DC Supply Voltage (Referenced to GND)	−0.5 to +7.0	V
V _{IN}	DC Input Voltage (Referenced to GND)	−0.5 to V _{CC} +0.5	V
V _{OUT}	DC Output Voltage (Referenced to GND)	−0.5 to V _{CC} +0.5	V
I _{IN}	DC Input Current, per Pin	±20	mA
I _{OUT}	DC Output Sink/Source Current, per Pin	±50	mA
I _{CC}	DC V _{CC} or GND Current per Output Pin	±50	mA
T _{stg}	Storage Temperature	−65 to +150	°C

*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Typ	Max	Unit
V _{CC}	Supply Voltage	'AC	2.0	5.0	6.0
		'ACT	4.5	5.0	5.5
V _{IN} ; V _{OUT}	DC Input Voltage, Output Voltage (Ref. to GND)	0	—	V _{CC}	V
t _r , t _f	Input Rise and Fall Time (Note 1) 'AC Devices except Schmitt Inputs	V _{CC} @ 3.0 V	—	150	—
		V _{CC} @ 4.5 V	—	40	—
		V _{CC} @ 5.5 V	—	25	—
t _r , t _f	Input Rise and Fall Time (Note 2) 'ACT Devices except Schmitt Inputs	V _{CC} @ 4.5 V	—	10	—
		V _{CC} @ 5.5 V	—	8.0	—
T _J	Junction Temperature (PDIP)	—	—	140	°C
T _A	Operating Ambient Temperature Range	−40	25	85	°C
I _{OH}	Output Current – High	—	—	−24	mA
I _{OL}	Output Current – Low	—	—	24	mA

1. V_{IN} from 30% to 70% V_{CC}; see individual Data Sheets for devices that differ from the typical input rise and fall times.
2. V_{IN} from 0.8 V to 2.0 V; see individual Data Sheets for devices that differ from the typical input rise and fall times.

MC74AC245, MC74ACT245

DC CHARACTERISTICS

Symbol	Parameter	V_{CC} (V)	74AC		$T_A = -40^\circ C$ to $+85^\circ C$	Unit	Conditions			
			$T_A = +25^\circ C$							
			Typ	Guaranteed Limits						
V_{IH}	Minimum High Level Input Voltage	3.0 4.5 5.5	1.5 2.25 2.75	2.1 3.15 3.85	2.1 3.15 3.85	V	$V_{OUT} = 0.1 V$ or $V_{CC} - 0.1 V$			
V_{IL}	Maximum Low Level Input Voltage	3.0 4.5 5.5	1.5 2.25 2.75	0.9 1.35 1.65	0.9 1.35 1.65	V	$V_{OUT} = 0.1 V$ or $V_{CC} - 0.1 V$			
V_{OH}	Minimum High Level Output Voltage	3.0 4.5 5.5	2.99 4.49 5.49	2.9 4.4 5.4	2.9 4.4 5.4	V	$I_{OUT} = -50 \mu A$			
		3.0 4.5 5.5	— — —	2.56 3.86 4.86	2.46 3.76 4.76	V	* $V_{IN} = V_{IL}$ or V_{IH} —12 mA I_{OH} —24 mA —24 mA			
V_{OL}	Maximum Low Level Output Voltage	3.0 4.5 5.5	0.002 0.001 0.001	0.1 0.1 0.1	0.1 0.1 0.1	V	$I_{OUT} = 50 \mu A$			
		3.0 4.5 5.5	— — —	0.36 0.36 0.36	0.44 0.44 0.44	V	* $V_{IN} = V_{IL}$ or V_{IH} 12 mA I_{OL} 24 mA 24 mA			
I_{IN}	Maximum Input Leakage Current	5.5	—	± 0.1	± 1.0	μA	$V_I = V_{CC}, GND$			
I_{OZT}	Maximum 3-State Current	5.5	—	± 0.6	± 6.0	μA	$V_I (OE) = V_{IL}, V_{IH}$ $V_I = V_{CC}, GND$ $V_O = V_{CC}, GND$			
I_{OLD}	†Minimum Dynamic Output Current	5.5	—	—	75	mA	$V_{OLD} = 1.65 V$ Max			
I_{OHD}		5.5	—	—	-75	mA	$V_{OHD} = 3.85 V$ Min			
I_{CC}	Maximum Quiescent Supply Current	5.5	—	8.0	80.0	μA	$V_{IN} = V_{CC}$ or GND			

*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

NOTE: I_{IN} and I_{CC} @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V V_{CC} .

MC74AC245, MC74ACT245

AC CHARACTERISTICS (For Figures and Waveforms – See Section 3)

Symbol	Parameter	V_{CC}^* (V)	74AC			74AC		Unit	Fig. No.		
			$T_A = +25^\circ C$ $C_L = 50 \text{ pF}$			$T_A = -40^\circ C$ to $+85^\circ C$ $C_L = 50 \text{ pF}$					
			Min	Typ	Max	Min	Max				
t_{PLH}	Propagation Delay A_N to B_N or B_N to A_N	3.3 5.0	1.5 1.5	5.0 3.5	8.5 6.5	1.0 1.0	9.0 7.0	ns	3-5		
t_{PHL}	Propagation Delay A_N to B_N or B_N to A_N	3.3 5.0	1.5 1.5	5.0 3.5	8.5 6.0	1.0 1.0	9.0 7.0	ns	3-5		
t_{PZH}	Output Enable Time	3.3 5.0	2.5 1.5	7.0 5.0	11.5 8.5	2.0 1.0	12.5 9.0	ns	3-7		
t_{PZL}	Output Enable Time	3.3 5.0	2.5 1.5	7.5 5.5	12.0 9.0	2.0 1.0	13.5 9.5	ns	3-8		
t_{PHZ}	Output Disable Time	3.3 5.0	2.0 1.5	6.5 5.5	12.0 9.0	1.0 1.0	12.5 10.0	ns	3-7		
t_{PLZ}	Output Disable Time	3.3 5.0	2.0 1.5	7.0 5.5	11.5 9.0	1.5 1.0	13.0 10.0	ns	3-8		

*Voltage Range 3.3 V is $3.3 \text{ V} \pm 0.3 \text{ V}$.

Voltage Range 5.0 V is $5.0 \text{ V} \pm 0.5 \text{ V}$.

DC CHARACTERISTICS

Symbol	Parameter	V_{CC} (V)	74ACT		74ACT		Unit	Conditions		
			$T_A = +25^\circ C$		$T_A = -40^\circ C$ to $+85^\circ C$					
			Typ	Guaranteed Limits	Typ	Guaranteed Limits				
V_{IH}	Minimum High Level Input Voltage	4.5 5.5	1.5 1.5	2.0 2.0	2.0 2.0		V	$V_{OUT} = 0.1 \text{ V}$ or $V_{CC} - 0.1 \text{ V}$		
V_{IL}	Maximum Low Level Input Voltage	4.5 5.5	1.5 1.5	0.8 0.8	0.8 0.8		V	$V_{OUT} = 0.1 \text{ V}$ or $V_{CC} - 0.1 \text{ V}$		
V_{OH}	Minimum High Level Output Voltage	4.5 5.5	4.49 5.49	4.4 5.4	4.4 5.4		V	$I_{OUT} = -50 \mu\text{A}$		
		4.5 5.5	– –	3.86 4.86	3.76 4.76		V	$*V_{IN} = V_{IL}$ or V_{IH} –24 mA I_{OH} –24 mA		
V_{OL}	Maximum Low Level Output Voltage	4.5 5.5	0.001 0.001	0.1 0.1	0.1 0.1		V	$I_{OUT} = 50 \mu\text{A}$		
		4.5 5.5	– –	0.36 0.36	0.44 0.44		V	$*V_{IN} = V_{IL}$ or V_{IH} 24 mA I_{OL} 24 mA		
I_{IN}	Maximum Input Leakage Current	5.5	–	± 0.1	± 1.0		μA	$V_I = V_{CC}, \text{GND}$		
ΔI_{CCT}	Additional Max. I_{CC} /Input	5.5	0.6	–	1.5		mA	$V_I = V_{CC} - 2.1 \text{ V}$		
I_{OZT}	Maximum 3-State Current	5.5	–	± 0.6	± 6.0		μA	$V_I (\text{OE}) = V_{IL}, V_{IH}$ $V_I = V_{CC}, \text{GND}$ $V_O = V_{CC}, \text{GND}$		
I_{OLD}	†Minimum Dynamic Output Current	5.5	–	–	75		mA	$V_{OLD} = 1.65 \text{ V Max}$		
		5.5	–	–	–75		mA	$V_{OHD} = 3.85 \text{ V Min}$		
I_{CC}	Maximum Quiescent Supply Current	5.5	–	8.0	80.0		μA	$V_{IN} = V_{CC}$ or GND		

*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

MC74AC245, MC74ACT245

AC CHARACTERISTICS (For Figures and Waveforms – See Section 3)

Symbol	Parameter	V _{CC} * (V)	74ACT			74ACT		Unit	Fig. No.		
			T _A = +25°C C _L = 50 pF			T _A = -40°C to +85°C C _L = 50 pF					
			Min	Typ	Max	Min	Max				
t _{PLH}	Propagation Delay A _H to B _H or B _H to A _H	5.0	1.5	4.0	7.5	1.5	8.0	ns	3-5		
t _{PHL}	Propagation Delay A _H to B _L or B _L to A _H	5.0	1.5	4.0	8.0	1.0	9.0	ns	3-5		
t _{PZH}	Output Enable Time	5.0	1.5	5.0	10	1.5	11.0	ns	3-7		
t _{PZL}	Output Enable Time	5.0	1.5	5.5	10	1.5	12.0	ns	3-8		
t _{PHZ}	Output Disable Time	5.0	1.5	5.5	10	1.0	11.0	ns	3-7		
t _{PLZ}	Output Disable Time	5.0	2.0	5.0	10	1.5	11.0	ns	3-8		


*Voltage Range 5.0 V is 5.0 V ±0.5 V.

CAPACITANCE

Symbol	Parameter	Value Typ	Unit	Test Conditions
C _{IN}	Input Capacitance	4.5	pF	V _{CC} = 5.0 V
C _{I/O}	Input/Output Capacitance	15	pF	V _{CC} = 5.0 V
C _{PD}	Power Dissipation Capacitance	45	pF	V _{CC} = 5.0 V

MC74AC245, MC74ACT245

MARKING DIAGRAMS

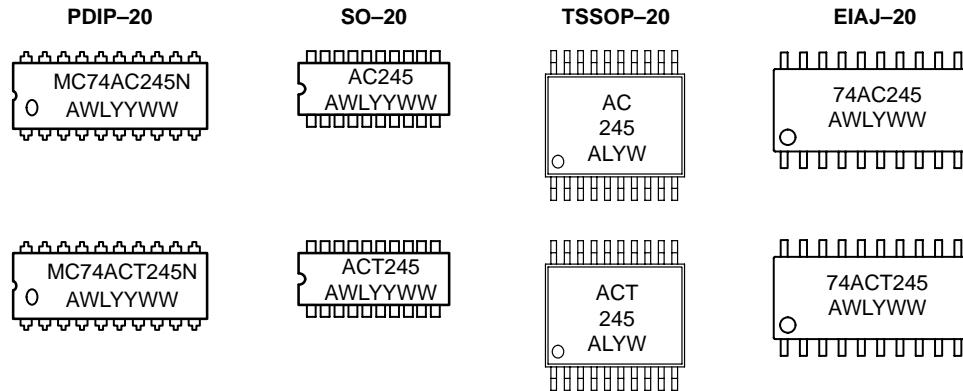

A = Assembly Location

WL, L = Wafer Lot

YY, Y = Year

WW, W = Work Week