

DM74ALS174/DM74ALS175 Hex/Quad D Flip-Flops with Clear

General Description


These positive-edge-triggered flip-flops utilize TTL circuitry to implement D-type flip-flop logic. Both have an asynchronous clear input, and the quad (175) version features complementary outputs from each flip-flop.

Information at the D inputs meeting the setup time requirements is transferred to the Q outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock input is at either the high or low level, the D input signal has no effect at the output.


Features

- Advanced oxide-isolated ion-implanted Schottky TTL process
- Pin and functional compatible with LS family counterpart
- Typical clock frequency maximum is 80 MHz
- Switching performance guaranteed over full temperature and V_{CC} supply range

Connection Diagrams

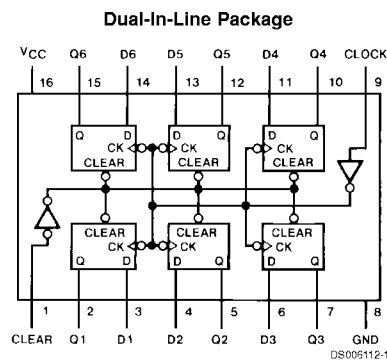

Order Number DM74ALS174M, DM74ALS174N or DM74ALS174SJ
See Package Number M16A, M16D or N16A

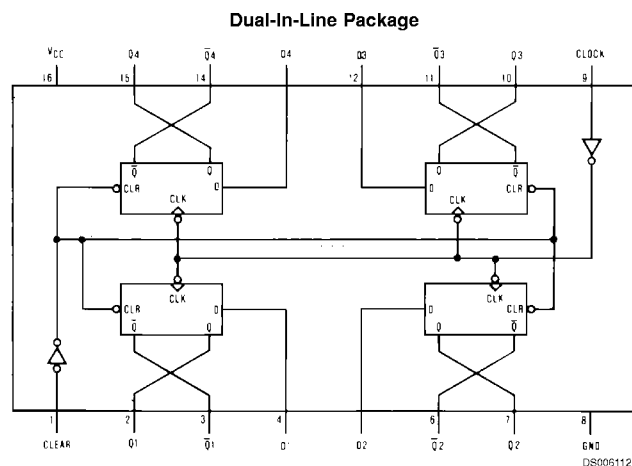

Function Table

Inputs			Outputs	
Clear	Clock	D	Q	$\overline{Q}^*$
L	X	X	L	H
H	↑	H	H	L
H	↑	L	L	H
H	L	X	Q_0	$\overline{Q}_0$

H = High Level (steady state)

L = Low Level (steady state)

X = Don't Care

↑ = Transition from Low to High Level

Q_0 = the level of Q before the indicated steady-state input conditions were established

*applies to 74ALS175 only

Order Number **DM74ALS175M, DM74ALS175N or DM74ALS175SJ**

See Package Number **M16A, M16D or N16A**

Absolute Maximum Ratings (Note 1)

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	0°C to +70°C
DM74ALS	

Storage Temperature Range

–65°C to +150°C

Typical θ_{JA}

N Package

77.9°C/W

M Package

107.3°C/W

Recommended Operating Conditions

Symbol	Parameter		DM74ALS174,175			Units
			Min	Nom	Max	
V_{CC}	Supply Voltage		4.5	5	5.5	V
V_{IH}	High Level Input Voltage		2			V
V_{IL}	Low Level Input Voltage				0.8	V
I_{OH}	High Level Output Current				–0.4	mA
I_{OL}	Low Level Output Current				8	mA
t_w	Pulse Width	Clock	10			ns
		High or Low				
		Clear Low	10			
t_{SETUP}	Setup Time (Note 2)	Data Input	10↑			ns
		Clear	6↑			
		Inactive State				
t_{HOLD}	Data Hold Time (Note 2)		0↑			ns
f_{CLOCK}	Clock Frequency		0		50	MHz
T_A	Free Air Operating Temperature		0		70	°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The symbol ↑ indicates that the rising edge of the clock is used as reference.

Electrical Characteristics

over recommended operating free air temperature range. All typical values are measured at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IK}	Input Clamp Voltage	$V_{CC} = 4.5V$, $I_{IN} = -18\text{ mA}$			–1.5	V
V_{OH}	High Level Output Voltage	$I_{OH} = -400\text{ }\mu A$ $V_{CC} = 4.5V\text{ to }5.5V$	$V_{CC} - 2$	$V_{CC} - 1.6$		V
V_{OL}	Low Level Output Voltage	$V_{CC} = 4.5V$ DM74 $I_{OL} = 8\text{ mA}$		0.35	0.5	V
I_i	Input Current at Max Input Voltage	$V_{CC} = 5.5V$, $V_{IN} = 7V$			0.1	mA
I_{IH}	High Level Input Current	$V_{CC} = 5.5V$, $V_{IH} = 2.7V$			20	μA
I_{IL}	Low Level Input Current	$V_{CC} = 5.5V$, $V_{IN} = 0.4V$			–0.1	mA
I_o	Output Drive Current	$V_{CC} = 5.5V$, $V_o = 2.25V$	–30		–112	mA
I_{CC}	Supply Current	$V_{CC} = 5.5V$ Clock = 4.5V Clear = GND D Input = GND	ALS174	11	19	mA
			ALS175	8	14	



Switching Characteristics (Note 3)


over recommended operating free air temperature range

Symbol	Parameter	Conditions	DM74ALS174, 175		Units
			Min	Max	
f_{MAX}	Maximum Clock Frequency	$R_L = 500\Omega$ $C_L = 50 \text{ pF}$ $V_{CC} = 4.5V \text{ to } 5.5V$	50		MHz
t_{PLH}	Propagation Delay Time Low to High Level Output From Clear (175 Only)		5	18	ns
t_{PHL}	Propagation Delay Time High to Low Level Output From Clear		8	23	ns
t_{PLH}	Propagation Delay Time Low to High Level Output From Clock		3	15	ns
t_{PHL}	Propagation Delay Time High to Low Level Output From Clock		5	17	ns


Note 3: See Section 1 for test waveforms and output load.

Logic Diagrams

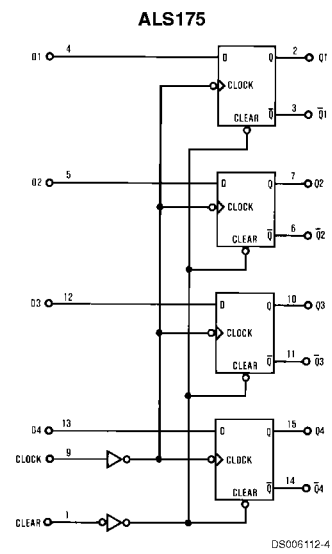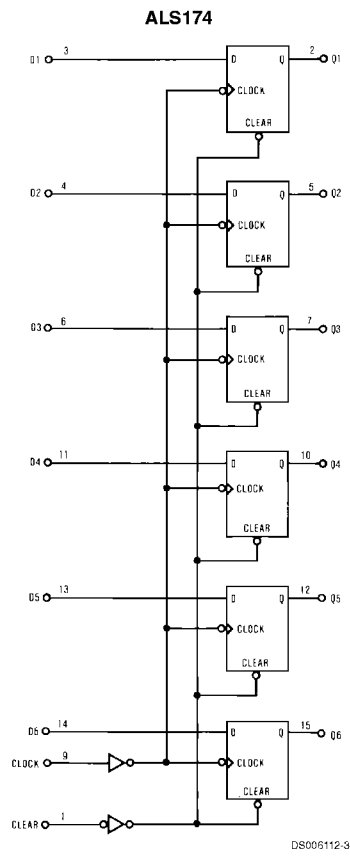




Physical Dimensions inches (millimeters) unless otherwise noted

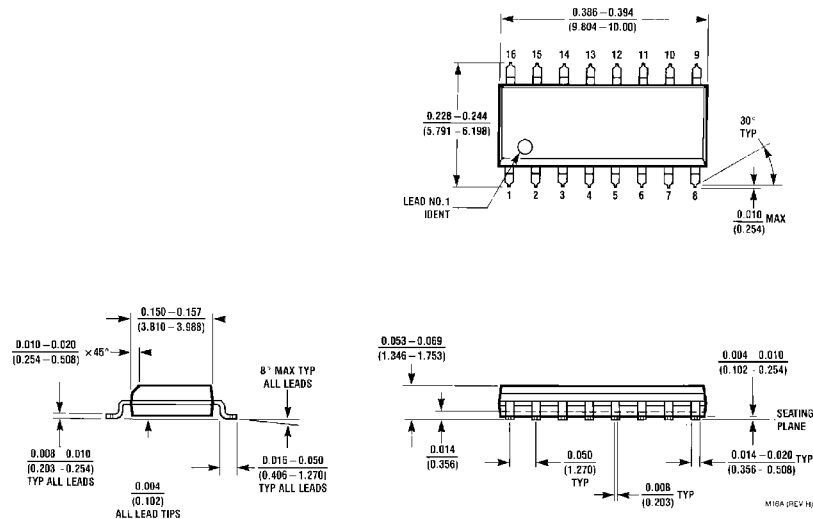


S.O. Package (M)
Order Number DM74ALS174M or DM74ALS175M
Package Number M16A

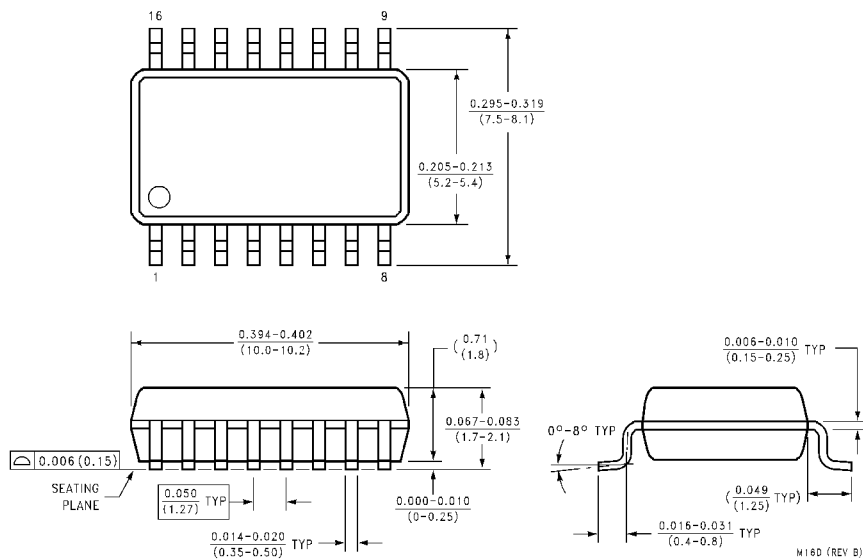

Small Outline Package (SJ)
Order Number DM74ALS174SJ or DM74ALS175SJ
Package Number M16D

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

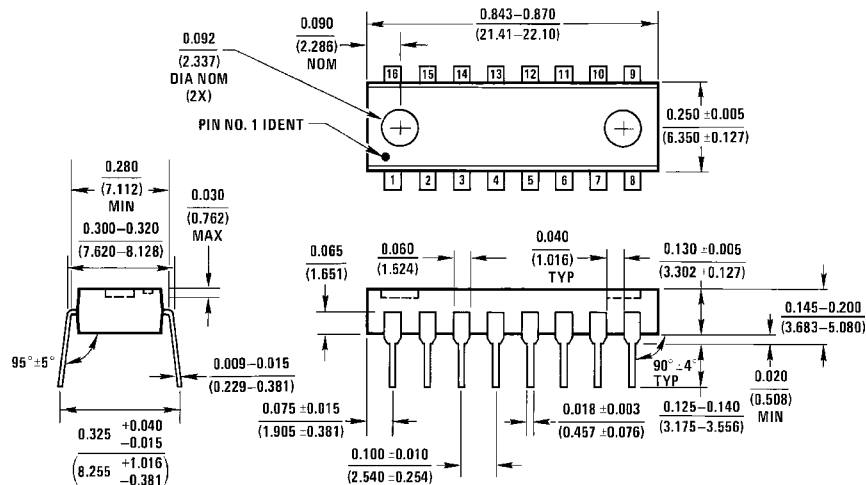

N16A (REV B)

Molded Dual-In-Line Package (N)
Order Number DM74ALS174N or DM74ALS175N
Package Number N16A

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor
 Corporation
 Americas
 Customer Response Center
 Tel: 1-888-522-5372

Fairchild Semiconductor
 Europe
 Fax: +49 (0) 1 80-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 8 141-35-0
 English Tel: +44 (0) 1 793-85-68-56
 Italy Tel: +39 (0) 2 57 5631

Fairchild Semiconductor
 Hong Kong Ltd.
 13th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: +852 2737-7200
 Fax: +852 2314-0061

National Semiconductor
 Japan Ltd.
 Tel: 81-3-5620-6175
 Fax: 81-3-5620-6179

www.fairchildsemi.com