


- Meets or Exceeds the Requirements of ANSI Standard EIA/TIA-422-B and ITU Recommendation V.11
- Designed to Operate at 20 Mbaud or Higher
- TTL-and CMOS-Input Compatibility
- Single 5-V Supply Operation
- Output Short-Circuit Protection
- Improved Replacement for the  $\mu$ A9638

**D OR P PACKAGE  
(TOP VIEW)**



## description

The SN75ALS191 is a dual, high-speed, differential line driver designed to meet ANSI Standard EIA/TIA-422-B and ITU Recommendation V.11. The inputs are TTL- and CMOS-compatible and have input clamp diodes. Schottky-diode-clamped transistors minimize propagation delay time. This device operates from a single 5-V power supply and is supplied in eight-pin packages.

The SN75ALS191 is characterized for operation from 0°C to 70°C.

**FUNCTION TABLE  
(each driver)**


| INPUTS<br>A | OUTPUTS |   |
|-------------|---------|---|
|             | Y       | Z |
| H           | H       | L |
| L           | L       | H |

H = high level, L = low level,  
Z = high impedance

## logic symbol†



## logic diagram (positive logic)

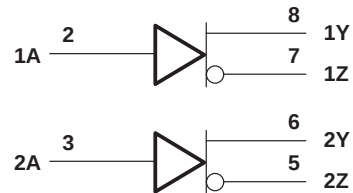

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SN75ALS191  
DUAL DIFFERENTIAL LINE DRIVER

SLLS032B – DECEMBER 1987 – REVISED MAY 1995

schematics of inputs and outputs

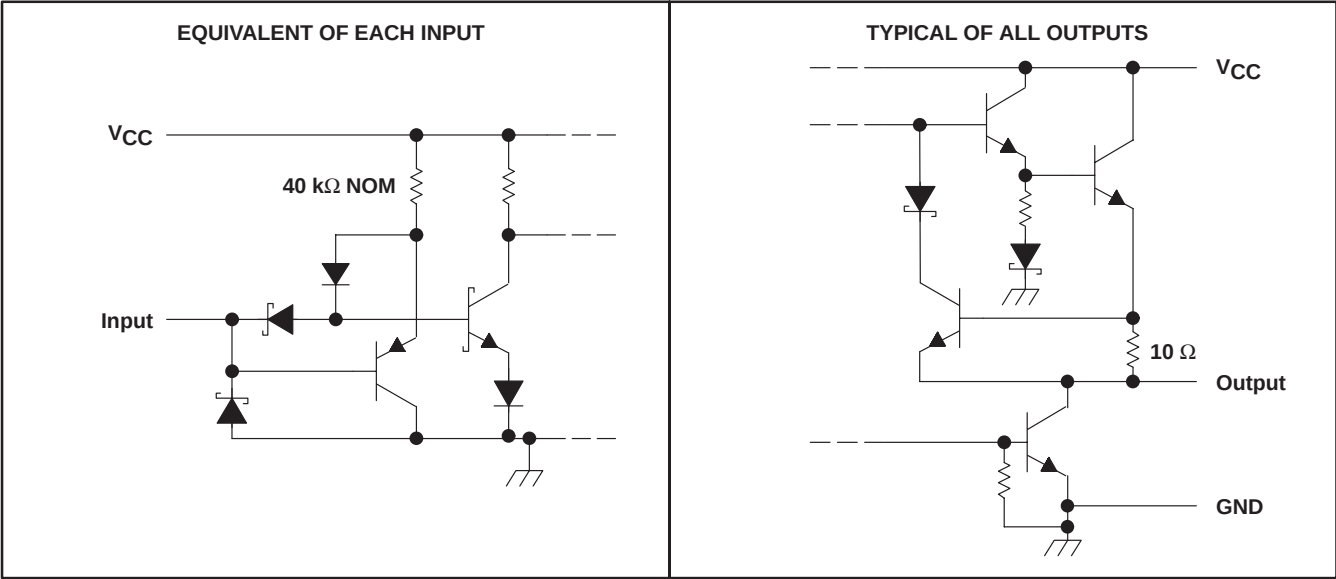

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                              |                              |
|--------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{CC}$ (see Note 1)                        | 7 V                          |
| Input voltage, $V_I$                                         | 7 V                          |
| Continuous total dissipation                                 | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$                  | 0°C to 70°C                  |
| Storage temperature range, $T_{stg}$                         | – 65°C to 150°C              |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values except differential output voltage ( $V_{OD}$ ) are with respect to network ground terminal.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|
| D       | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   |
| P       | 1000 mW                                     | 8.0 mW/°C                                         | 640 mW                                   |

recommended operating conditions

|                                       | MIN  | NOM | MAX  | UNIT |
|---------------------------------------|------|-----|------|------|
| Supply voltage, $V_{CC}$              | 4.75 | 5   | 5.25 | V    |
| High-level input voltage, $V_{IH}$    | 2    |     |      | V    |
| Low-level input voltage, $V_{IL}$     |      |     | 0.8  | V    |
| High-level output current, $I_{OH}$   |      |     | – 50 | mA   |
| Low-level output current, $I_{OL}$    |      |     | 50   | mA   |
| Operating free-air temperature, $T_A$ | 0    |     | 70   | °C   |

**electrical characteristics over operating free-air temperature range (unless otherwise noted)**

| PARAMETER                                                                         | TEST CONDITIONS                                                                                         | MIN                                                                                   | TYP <sup>†</sup>         | MAX         | UNIT          |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------|-------------|---------------|
| $V_{IK}$ Input clamp voltage                                                      | $V_{CC} = 4.75\text{ V}$ , $I_I = -18\text{ mA}$                                                        | -1                                                                                    | -1.2                     |             | V             |
| $V_{OH}$ High-level output voltage                                                | $V_{CC} = 4.75\text{ V}$ , $V_{IH} = 2\text{ V}$ ,<br>$V_{IL} = 0.8\text{ V}$                           | $I_{OH} = -10\text{ mA}$<br>$I_{OH} = -40\text{ mA}$                                  | 2.5<br>3.3               |             | V             |
| $V_{OL}$ Low-level output voltage                                                 | $V_{CC} = 4.75\text{ V}$ , $V_{IH} = 2\text{ V}$ ,<br>$I_{OL} = 40\text{ mA}$ , $V_{IL} = 0.8\text{ V}$ |                                                                                       |                          | 0.5         | V             |
| $ V_{OD1} $ Differential output voltage                                           | $V_{CC} = 5.25\text{ V}$ , $I_O = 0$                                                                    |                                                                                       | $2 V_{OD2}$              |             | V             |
| $ V_{OD2} $ Differential output voltage                                           |                                                                                                         | 2                                                                                     |                          |             | V             |
| $\Delta  V_{OD} $ Change in magnitude of differential output voltage <sup>‡</sup> | $V_{CC} = 4.75\text{ V to } 5.25\text{ V}$ ,<br>See Figure 1<br>$R_L = 100\ \Omega$                     |                                                                                       |                          | $\pm 0.4$   | V             |
| $V_{OC}$ Common-mode output voltage <sup>§</sup>                                  |                                                                                                         |                                                                                       |                          | 3           | V             |
| $\Delta  V_{OC} $ Change in magnitude of common-mode output voltage <sup>‡</sup>  |                                                                                                         |                                                                                       |                          | $\pm 0.4$   | V             |
| $I_O$ Output current with power off                                               | $V_{CC} = 0$                                                                                            | $V_O = 6\text{ V}$<br>$V_O = -0.25\text{ V}$<br>$V_O = -0.25\text{ V to } 6\text{ V}$ | 0.1<br>-0.1<br>$\pm 100$ | 100<br>-100 | $\mu\text{A}$ |
| $I_I$ Input current                                                               | $V_{CC} = 5.25\text{ V}$ , $V_I = 5.5\text{ V}$                                                         |                                                                                       |                          | 50          | $\mu\text{A}$ |
| $I_{IH}$ High-level input current                                                 | $V_{CC} = 5.25\text{ V}$ , $V_I = 2.7\text{ V}$                                                         |                                                                                       |                          | 25          | $\mu\text{A}$ |
| $I_{IL}$ Low-level input current                                                  | $V_{CC} = 5.25\text{ V}$ , $V_I = 0.5\text{ V}$                                                         |                                                                                       |                          | 200         | $\mu\text{A}$ |
| $I_{OS}$ Short-circuit output current <sup>¶</sup>                                | $V_{CC} = 5.25\text{ V}$ , $V_O = 0$                                                                    | -50                                                                                   |                          | -150        | mA            |
| $I_{CC}$ Supply current (all drivers)                                             | $V_{CC} = 5.25\text{ V}$ , No load, All inputs at 0 V                                                   |                                                                                       | 32                       | 40          | mA            |

<sup>†</sup> All typical values are at  $V_{CC} = 5\text{ V}$  and  $T_A = 25^\circ\text{C}$ .

<sup>‡</sup>  $|V_{OD}|$  and  $|V_{OC}|$  are the changes in magnitude of  $V_{OD}$  and  $V_{OC}$ , respectively, that occur when the input is changed from a high level to a low level.

<sup>§</sup> In ANSI Standard EIA/TIA-422-B,  $V_{OC}$ , which is the average of the two output voltages with respect to ground, is called output offset voltage,  $V_{OS}$ .

<sup>¶</sup> Only one output at a time should be shorted, and duration of the short circuit should not exceed one second.

**switching characteristics over recommended operating free-air temperature range,  $V_{CC} = 5\text{ V}$**

| PARAMETER                                            | TEST CONDITIONS                                           | MIN | TYP <sup>#</sup> | MAX | UNIT |
|------------------------------------------------------|-----------------------------------------------------------|-----|------------------|-----|------|
| $t_d(\text{OD})$ Differential-output delay time      | $C_L = 15\text{ pF}$ , $R_L = 100\ \Omega$ , See Figure 2 |     | 3.5              | 7   | ns   |
| $t_t(\text{OD})$ Differential-output transition time |                                                           |     | 3.5              | 7   | ns   |
| Skew                                                 |                                                           |     | 1.5              | 4   | ns   |

<sup>#</sup> Typical values are at  $T_A = 25^\circ\text{C}$ .

# SN75ALS191 DUAL DIFFERENTIAL LINE DRIVER

SLLS032B – DECEMBER 1987 – REVISED MAY 1995

## PARAMETER MEASUREMENT INFORMATION


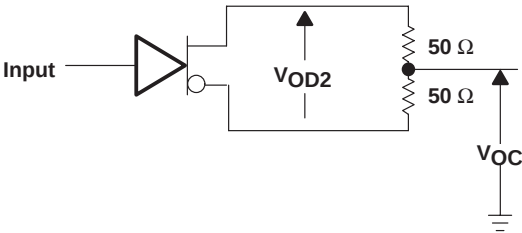


Figure 1. Differential and Common-Mode Output Voltages

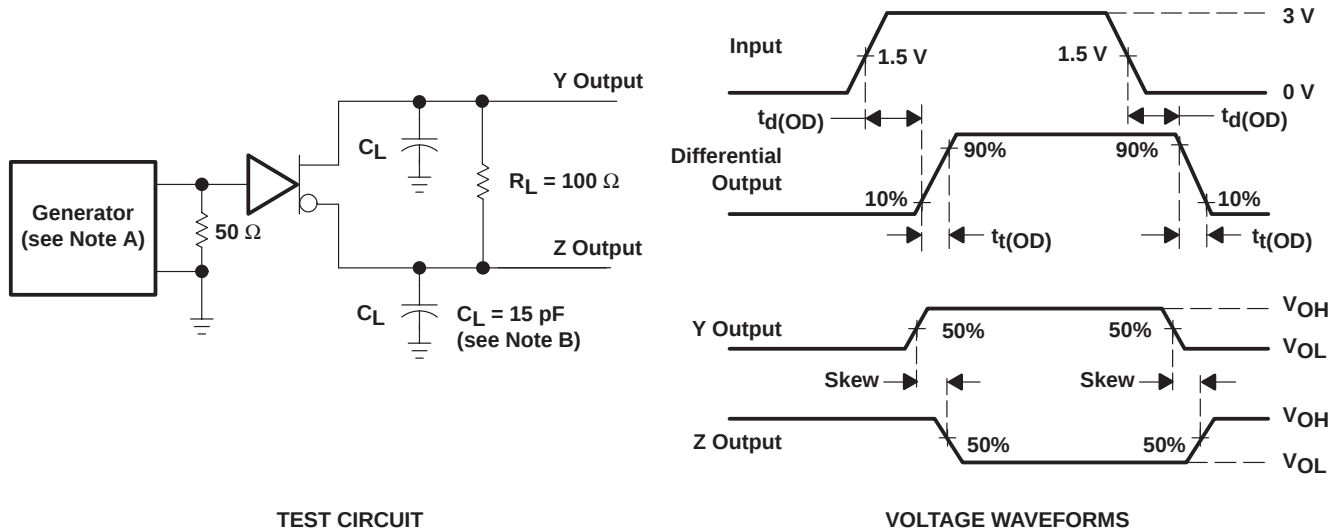

NOTES: A. The input pulse generator has the following characteristics:  $Z_O = 50\ \Omega$ ,  $PRR \leq 500\ \text{kHz}$ ,  $t_W = 100\ \text{ns}$ ,  $t_r = \leq 5\ \text{ns}$ .  
 B.  $C_L$  includes probe and jig capacitance.

Figure 2. Test Circuit and Voltage Waveforms

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

 **TEXAS INSTRUMENTS**

THE WORLD LEADER IN DSP AND ANALOG

Products

Development Tools

Applications

GO

GO

GO

Search

GO

Advanced Search

TI Home

TI&ME

Employment

Tech Support

Comments

Site Map

TI Global

**PRODUCT FOLDER** | PRODUCT INFO: [FEATURES](#) | [DESCRIPTION](#) | [DATASHEETS](#) | [PRICING/AVAILABILITY](#) | [APPLICATION NOTES](#)

PRODUCT SUPPORT: [APPLICATIONS](#)

**SN75ALS191, Dual Differential Line Driver**

DEVICE STATUS: **ACTIVE**

|                       |            |
|-----------------------|------------|
| PARAMETER NAME        | SN75ALS191 |
| Drivers Per Package   | 2          |
| Driver tpd (ns)       | 7          |
| Supply Voltage(s) (V) | 5          |
| ICC (max) (mA)        | 40         |
| Footprint             | uA9638     |

**FEATURES** [▲ Back to Top](#)

- Meets or Exceeds the Requirements of ANSI Standard EIA/TIA-422-B and ITU Recommendation V.11
- Designed to Operate at 20 Mbaud or Higher
- TTL-and CMOS-Input Compatibility
- Single 5-V Supply Operation
- Output Short-Circuit Protection
- Improved Replacement for the uA9638

**DESCRIPTION** [▲ Back to Top](#)

The SN75ALS191 is a dual, high-speed, differential line driver designed to meet ANSI Standard EIA/TIA-422-B and ITU Recommendation V.11. The inputs are TTL - and CMOS-compatible and have input clamp diodes. Schottky-diode-clamped transistors minimizes propagation delay time. This device operates from a single 5-V power supply and is supplied in 8-pin packages.

The SN75ALS191 is characterized for operation from 0°C to 70°C.

**TECHNICAL DOCUMENTS** [▲ Back to Top](#)

To view the following documents, [Acrobat Reader 3.x](#) is required.  
To download a document to your hard drive, right-click on the link and choose 'Save'.

**DATASHEET** [▲ Back to Top](#)

Full datasheet in Acrobat PDF: [slls032b.pdf](#) (76 KB) (Updated: 05/01/1995)

Full datasheet in Zipped PostScript: [slls032b.psz](#) (71 KB)

## APPLICATION NOTES

[▲ Back to Top](#)

- [422 and 485 Standards Overview and System Configurations](#) (SLLA070A - Updated: 05/25/2000)
- [A Statistical Survey of Common-Mode Noise](#) (SLLA057 - Updated: 12/22/1999)
- [Comparing Bus Solutions](#) (SLLA067 - Updated: 03/02/2000)
- [Jitter Analysis](#) (SLLA075 - Updated: 03/30/2000)
- [Skew Definitions](#) (SLLA060 - Updated: 08/03/1999)

## PRICING/AVAILABILITY

[▲ Back to Top](#)

| <u>ORDERABLE<br/>DEVICE</u> | <u>PACKAGE</u> | <u>PINS</u> | <u>TEMP<br/>(°C)</u> | <u>STATUS</u> | <u>BUDGETARY<br/>PRICE<br/>US\$/UNIT<br/>QTY=1000+</u> | <u>PACK<br/>QTY</u> | <u>PRICING/AVAILABILITY</u>          |
|-----------------------------|----------------|-------------|----------------------|---------------|--------------------------------------------------------|---------------------|--------------------------------------|
| SN75ALS191D                 | <u>D</u>       | 8           | 0 TO 70              | ACTIVE        | 1.84                                                   | 75                  | <a href="#">Check stock or order</a> |
| SN75ALS191DR                | <u>D</u>       | 8           | 0 TO 70              | ACTIVE        | 1.87                                                   | 2500                | <a href="#">Check stock or order</a> |
| SN75ALS191P                 | <u>P</u>       | 8           | 0 TO 70              | ACTIVE        | 1.50                                                   | 50                  | <a href="#">Check stock or order</a> |
| SN75ALS191PS                | <u>PS</u>      | 8           | 0 TO 70              | OBSOLETE      |                                                        |                     |                                      |

**Table Data Updated on: 11/19/2000**

© Copyright 2000 Texas Instruments Incorporated. All rights reserved. [Trademarks](#) | [Privacy Policy](#)  
| [Important Notice](#)