

ADVANCE INFORMATION

All information in this data sheet is preliminary and subject to change.

7/94

MAXIM

Calibrated, Low-Drift, +4.096V/+5V/+10V Precision Voltage References

General Description

The MAX676/MAX677/MAX678 precision +4.096V, +5V, and +10V voltage references feature a factory-programmed on-chip ROM that calibrates each reference at specific temperatures, and reduces the temperature drift to less than 1ppm/°C over temperature—the lowest in the industry.

The MAX676/MAX677/MAX678 have excellent line and load regulation: 20ppm/V and 3ppm/mA, respectively. Load regulation specifications are guaranteed for source currents up to 5mA and sink currents up to 500µA. The 4.096V MAX676 operates from a supply voltage as low as 4.75V, making it an ideal reference for single 5V, high resolution ADCs.

Applications

High Resolution 16-Bit ADCs and DACs
Precision Test and Measurement Systems
Precision, Calibrated Voltage-Reference Standard
High-Accuracy Transducers

Features

- ◆ Lowest Temperature Drift:
1ppm/°C Max Over -40°C to +85°C
1.5ppm/°C Max Over -55°C to +125°C
- ◆ 0.02% Initial Accuracy
- ◆ 3ppm/mA Max Load Regulation
- ◆ 20ppm/V Max Line Regulation
- ◆ 4.096V Reference Operates from 5V ±5% Supply
- ◆ Available in Surface-Mount Package

Ordering Information


PART	TEMP. RANGE	PIN-PACKAGE	MAX DRIFT (ppm/°C)
MAX676ACPP	0°C to +70°C	20 Plastic DIP	1.0
MAX676BCPP	0°C to +70°C	20 Plastic DIP	2.0
MAX676ACWP	0°C to +70°C	20 Wide SO	1.0
MAX676BCWP	0°C to +70°C	20 Wide SO	2.0
MAX676ACJP	0°C to +70°C	20 Cerdip	1.0
MAX676AEPP	-40°C to +85°C	20 Plastic DIP	1.0
MAX676BEPP	-40°C to +85°C	20 Plastic DIP	2.0
MAX676AEWP	-40°C to +85°C	20 Wide SO	1.0
MAX676BEWP	-40°C to +85°C	20 Wide SO	2.0
MAX676AEJP	-40°C to +85°C	20 Cerdip	1.0
MAX676AMJP	-55°C to +125°C	20 Cerdip	1.5
MAX676BMJP	-55°C to +125°C	20 Cerdip	3.0

Ordering Information continued on next page.


MAX676/MAX677/MAX678

6

Typical Operating Circuit

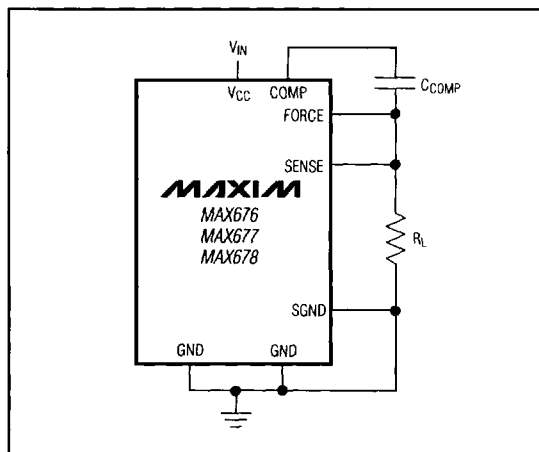

Pin Configuration

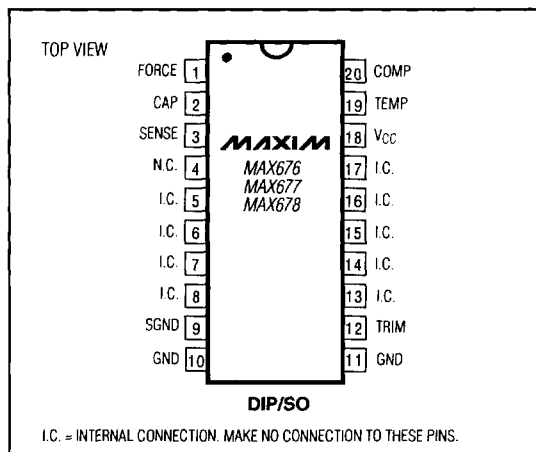

MAXIM

Maxim Integrated Products 6-5

Call toll free 1-800-998-8800 for free samples or literature.

Calibrated, Low-Drift, +4.096V/+5V/+10V Precision Voltage References

MAX676/MAX677/MAX678

Ordering Information (continued)

PART	TEMP. RANGE	PIN-PACKAGE	MAXDRIFT (ppm/°C)
MAX677 ACPP	0°C to +70°C	20 Plastic DIP	1.0
MAX677BCPP	0°C to +70°C	20 Plastic DIP	2.0
MAX677ACWP	0°C to +70°C	20 Wide SO	1.0
MAX677BCWP	0°C to +70°C	20 Wide SO	2.0
MAX677ACJP	0°C to +70°C	20 Cerdip	1.0
MAX677AEPP	-40°C to +85°C	20 Plastic DIP	1.0
MAX677BEPP	-40°C to +85°C	20 Plastic DIP	2.0
MAX677AEWP	-40°C to +85°C	20 Wide SO	1.0
MAX677BEWP	-40°C to +85°C	20 Wide SO	2.0
MAX677AEJP	-40°C to +85°C	20 Cerdip	1.0
MAX677AMJP	-55°C to +125°C	20 Cerdip	1.5
MAX677BMJP	-55°C to +125°C	20 Cerdip	3.0
MAX678 ACPP	0°C to +70°C	20 Plastic DIP	1.0
MAX678BCPP	0°C to +70°C	20 Plastic DIP	2.0
MAX678ACWP	0°C to +70°C	20 Wide SO	1.0
MAX678BCWP	0°C to +70°C	20 Wide SO	2.0
MAX678ACJP	0°C to +70°C	20 Cerdip	1.0
MAX678AEPP	-40°C to +85°C	20 Plastic DIP	1.0
MAX678BEPP	-40°C to +85°C	20 Plastic DIP	2.0
MAX678AEWP	-40°C to +85°C	20 Wide SO	1.0
MAX678BEWP	-40°C to +85°C	20 Wide SO	2.0
MAX678AEJP	-40°C to +85°C	20 Cerdip	1.0
MAX678AMJP	-55°C to +125°C	20 Cerdip	1.5
MAX678BMJP	-55°C to +125°C	20 Cerdip	3.0