

DM74ALS564A

Octal D-Type Edge-Triggered Flip-Flop with 3-STATE Outputs

General Description

These 8-bit registers feature totem-pole 3-STATE outputs designed specifically for driving highly-capacitive or relatively low-impedance loads. The high-impedance state and increased high-logic-level drive provide these registers with the capability of being connected directly to and driving the bus lines in a bus-organized system without need for interface or pull-up components. They are particularly attractive for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The eight flip-flops of the ALS564A are edge-triggered inverting D-type flip-flops. On the positive transition of the clock, the $\overline{Q}$ outputs will be set to the complement of the logic states that were set up at the D inputs.


A buffered output control input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus lines significantly.

The output control does not affect the internal operation of the flip-flops. That is, the old data can be retained or new data can be entered even while the outputs are off.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range
- Advanced oxide-isolated, ion-implanted Schottky TTL process
- 3-STATE buffer-type outputs drive bus lines directly

Connection Diagram

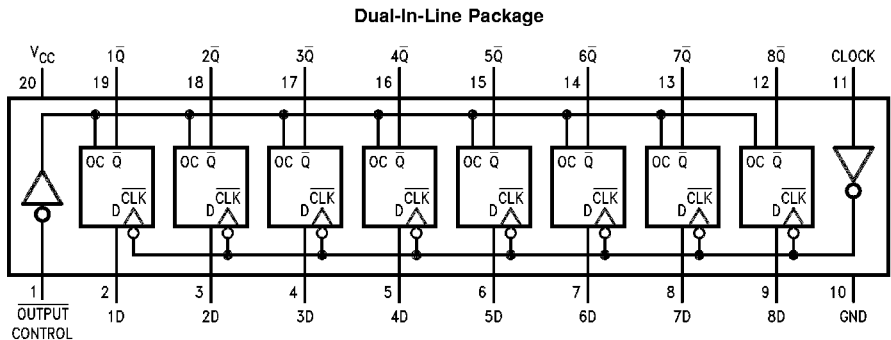

Order Number DM74ALS564AWM or DM74ALS564AN
See Package Number M20B or N20A

DS006225-1

Function Table

Output Control	Clock	D	Output $\overline{Q}$
L	$\uparrow$	H	L
L	$\uparrow$	L	H
L	L	X	$\overline{Q}_0$
H	X	X	Z

L = Low State, H = High State, X = Don't Care
 $\uparrow$ = Positive Edge Transition
Z = High Impedance State
 $\overline{Q}_0$ = Previous Condition of $\overline{Q}$

Absolute Maximum Ratings (Note 2)

Supply Voltage	7V	DM74ALS	Storage Temperature Range	0°C to +70°C
Input Voltage	7V		Typical θ_{JA}	-65°C to +150°C
Voltage Applied to Disabled Output	5.5V		N Package	56.0°C/W
Operating Free Air Temperature Range			M Package	75.0°C/W

Recommended Operating Conditions

Symbol	Parameter	Min	Nom	Max	Units
V _{CC}	Supply Voltage	4.5	5	5.5	V
V _{IH}	High Level Input Voltage	2			V
V _{IL}	Low Level Input Voltage			0.8	V
I _{OH}	High Level Output Current			-2.6	mA
I _{OL}	Low Level Output Current			24	mA
f _{CLOCK}	Clock Frequency	0		30	MHz
t _w	Width of Clock Pulse	High	14		ns
		Low	14		ns
t _{SU}	Data Setup Time (Note 3)	15↑			ns
t _H	Data Hold Time (Note 3)	0↑			ns
T _A	Free Air Operating Temperature	0		70	°C

Note 1: This product meets application requirements of 500 temperature cycles from -65°C to +150°C.

Note 2: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 3: The (↑) arrow indicates the positive edge of the Clock is used for reference.

Electrical Characteristics


over recommended operating free air temperature range. All typical values are measured at V_{CC} = 5V, T_A = 25°C.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{IK}	Input Clamp Voltage	V _{CC} = 4.5V, I _I = -18 mA			-1.2	V
V _{OH}	High Level Output Voltage	V _{CC} = 4.5V V _{IL} = V _{IL} Max	I _{OH} = Max	2.4	3.2	V
		V _{CC} = 4.5V to 5.5V	I _{OH} = -400 μA	V _{CC} - 2		V
V _{OL}	Low Level Output Voltage	V _{CC} = 4.5V	I _{OL} = 12 mA	0.25	0.4	V
		V _{IH} = 2V	I _{OL} = 24 mA	0.35	0.5	V
I _I	Input Current @ Max Input Voltage	V _{CC} = 5.5V, V _{IH} = 7V			0.1	mA
I _{IH}	High Level Input Current	V _{CC} = 5.5V, V _{IH} = 2.7V			20	μA
I _{IL}	Low Level Input Current	V _{CC} = 5.5V, V _{IL} = 0.4V			-0.2	mA
I _O	Output Drive Current	V _{CC} = 5.5V, V _O = 2.25V	-30		-112	mA
I _{OZH}	Off-State Output Current High Level Voltage Applied	V _{CC} = 5.5V, V _{IH} = 2V V _O = 2.7V			20	μA
I _{OZL}	Off-State Output Current Low Level Voltage Applied	V _{CC} = 5.5V, V _{IH} = 2V V _O = 0.4V			-20	μA
I _{CC}	Supply Current	V _{CC} = 5.5V	Outputs High	10	18	mA
		Outputs Open	Outputs Low	15	24	mA
			Outputs Disabled	16	30	mA


Switching Characteristics							
over recommended operating free air temperature range (Note 4)							
Symbol	Parameter	Conditions	From	To	Min	Max	Units
f _{MAX}	Maximum Clock Frequency	V _{CC} = 4.5V to 5.5V R _L = 500Ω C _L = 50 pF			30		MHz
t _{PLH}	Propagation Delay Time Low to High Level Output		Clock	Any $\overline{Q}$	4	14	ns
t _{PHL}	Propagation Delay Time High to Low Level Output		Clock	Any $\overline{Q}$	4	14	ns
t _{PZH}	Output Enable Time to High Level Output		Output Control	Any $\overline{Q}$	4	18	ns
t _{PZL}	Output Enable Time to Low Level Output		Output Control	Any $\overline{Q}$	4	18	ns
t _{PHZ}	Output Disable Time from High Level Output		Output Control	Any $\overline{Q}$	2	10	ns
t _{PLZ}	Output Disable Time from Low Level Output		Output Control	Any $\overline{Q}$	3	15	ns

Note 4: See Section 5 for test waveforms and output load.


Logic Diagram

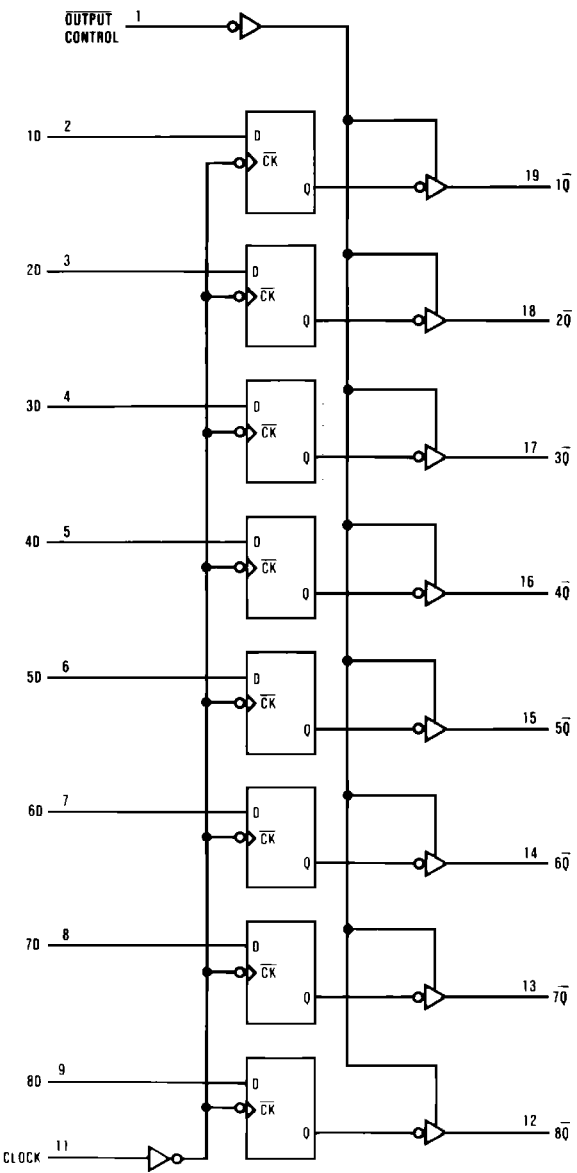

DS006225-2

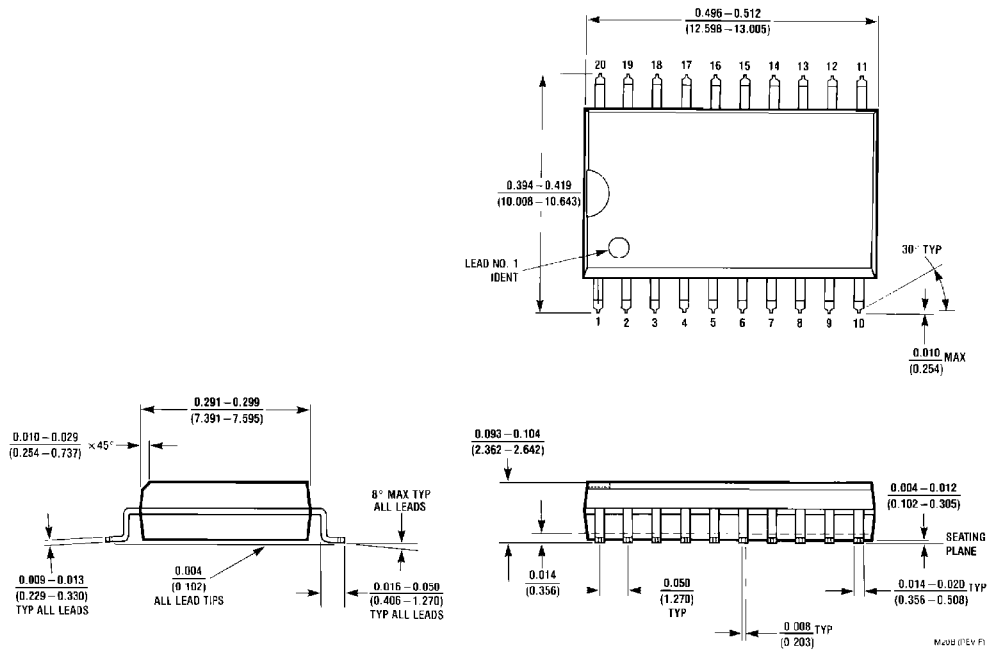Physical Dimensions inches (millimeters) unless otherwise noted

S.O. Package (M)
Order Number DM74AL564AWM
Package Number M20B

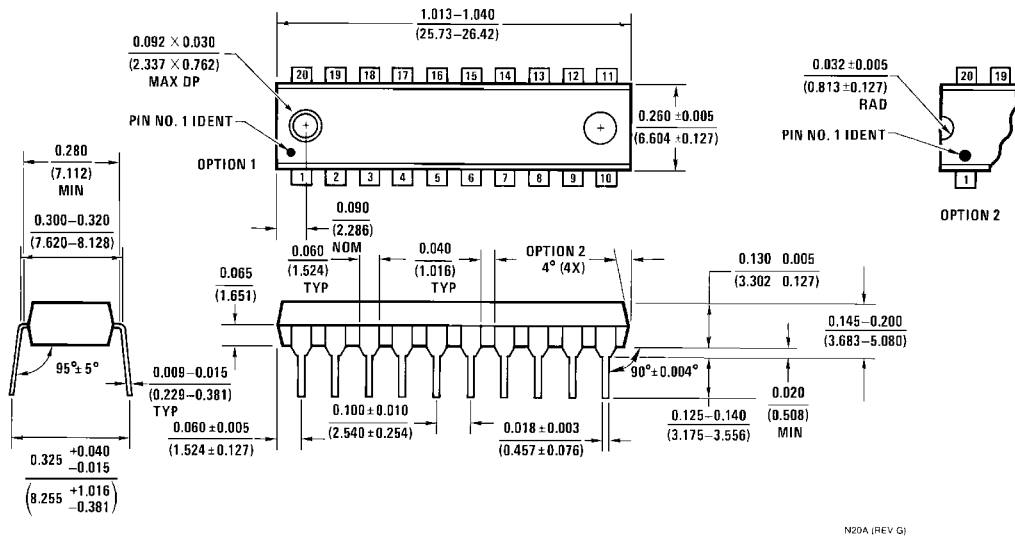

Molded Dual-In-Line Package (N)
Order Number DM74ALS564AN
Package Number N20A

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor Corporation Americas Customer Response Center Tel: 1-888-522-5372 www.fairchildsemi.com	Fairchild Semiconductor Europe Fax: +49 (0) 1 80-530 85 86 Email: europe.support@nsc.com Deutsch Tel: +49 (0) 8 141-35-0 English Tel: +44 (0) 1 793-85-68-56 Italy Tel: +39 (0) 2 57 5631	Fairchild Semiconductor Hong Kong Ltd. 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: +852 2737-7200 Fax: +852 2314-0061	National Semiconductor Japan Ltd. Tel: 81-3-5620-6175 Fax: 81-3-5620-6179
--	---	---	--

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.