

EMG 45-NZG/G24/SI

Order No.: 2954989



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2954989>

Voltage regulator module with fixed-voltage regulator, input 24 V-29 V
AC/ 28 V-38 V DC, output 24 V DC/1 A

Commercial data

EAN	4017918085223
Pack	1 pcs.
Customs tariff	85044081
Weight/Piece	0.2003 KG

Product notes

WEEE/RoHS-compliant since:
04/01/2007



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage	27 V AC 5%
	28 V DC ... 38 V DC
AC frequency range	60 Hz ... 50 Hz

Nominal power consumption	Approx. 41 VA
Input fuse	1.25 A (normal-blow (5 x 20))

Output data

Nominal output voltage	24 V DC $\pm 4\%$
Output current	1 A
Residual ripple	$\leq 150 \text{ mV}_{\text{PP}}$
Name of protection	Thermo-electronic disconnect
Protective circuit/component	Varistor

General data

Width	45 mm
Height	86 mm
Depth	75 mm
Weight	178 g
Operating voltage display	LED green
Operating mode	100% operating factor
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C
Mounting position	Vertical, horizontal
Assembly instructions	Can be aligned with spacing = 5 mm

Connection data, input

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Screw thread	M3

Connection data, output

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²

Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm

Certificates / Approvals



Certification GOST, UL

UL

Comments	Input
Nominal voltage U _N	27 V
Nominal current I _N	1.52 A
Comments	Output
Nominal voltage U _N	24 V
Nominal current I _N	1 A

Accessories


Item	Designation	Description
------	-------------	-------------

Marking


2947035	EMG-GKS 12	Equipment marker, width 12 mm
---------	------------	-------------------------------

Diagrams/Drawings

Diagram

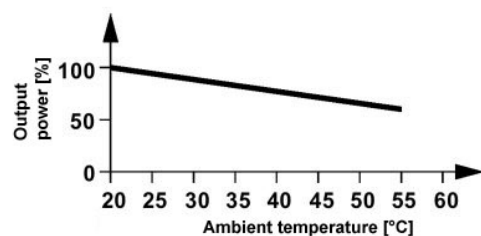

Circuit diagram

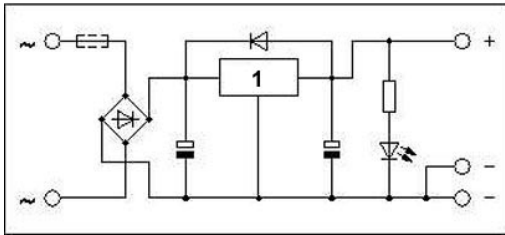

1 = regulator

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;