


## Quad channel high-side driver

Datasheet - production data

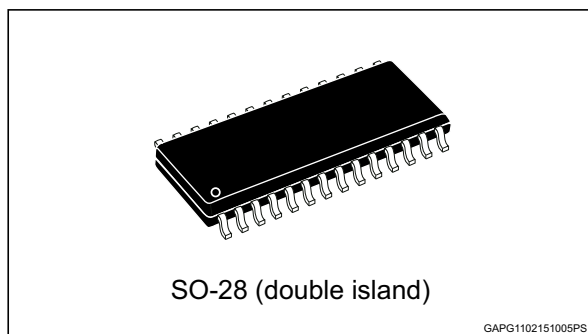

- Undervoltage shutdown
- Overvoltage clamp
- Output stuck to  $V_{CC}$  detection
- Load current limitation
- Reverse battery protection
- Electrostatic discharge protection

### Description

The VNQ830P-E is a quad HSD formed by assembling two VND830P-E chips in the same SO-28 package. The VND830P-E is a monolithic device made using STMicroelectronics™ VIPower™ M0-3 technology. The VNQ830P-E is intended for driving any type of multiple load with one side connected to ground.

The active  $V_{CC}$  pin voltage clamp protects the device against low energy spikes. Active current limitation combined with thermal shutdown and automatic restart protects the device against over-load. The device detects the open-load condition in both the on and off-state.

In the off-state the device detects if the output is shorted to  $V_{CC}$ . The device automatically turns off in the case where the ground pin becomes disconnected.

### Features

| Type      | $R_{DS(on)}$         | $I_{OUT}$ | $V_{CC}$ |
|-----------|----------------------|-----------|----------|
| VNQ830P-E | 65 mΩ <sup>(1)</sup> | 6 A       | 36V      |

1. Per each channel.

- ECOPACK®: lead free and RoHS compliant
- Automotive Grade: compliance with AEC guidelines
- Very low standby current
- CMOS compatible input
- On-state open-load detection
- Off-state open-load detection
- Thermal shutdown protection and diagnosis

Table 1. Device summary

| Package | Order codes |               |
|---------|-------------|---------------|
|         | Tube        | Tape and reel |
| SO-28   | VNQ830P-E   | VNQ830PTR-E   |

# Contents

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| <b>1</b> | <b>Block diagram and pin description</b>                    | <b>5</b>  |
| <b>2</b> | <b>Electrical specifications</b>                            | <b>7</b>  |
| 2.1      | Absolute maximum ratings                                    | 7         |
| 2.2      | Thermal data                                                | 8         |
| 2.3      | Electrical characteristics                                  | 8         |
| 2.4      | Electrical characteristics curves                           | 14        |
| <b>3</b> | <b>Application information</b>                              | <b>17</b> |
| 3.1      | GND protection network against reverse battery              | 17        |
| 3.1.1    | Solution 1: a resistor in the ground line (RGND only)       | 17        |
| 3.1.2    | Solution 2: a diode (D <sub>GND</sub> ) in the ground line  | 18        |
| 3.2      | Load dump protection                                        | 18        |
| 3.3      | MCU I/O protection                                          | 18        |
| 3.4      | Open-load detection in off-state                            | 19        |
| 3.5      | Maximum demagnetization energy ( $V_{CC} = 13.5\text{ V}$ ) | 20        |
| <b>4</b> | <b>Package and PCB thermal data</b>                         | <b>21</b> |
| 4.1      | SO-28 thermal data                                          | 21        |
| <b>5</b> | <b>Package information</b>                                  | <b>24</b> |
| 5.1      | SO-28 package information                                   | 24        |
| 5.2      | SO-28 packing information                                   | 26        |
| <b>6</b> | <b>Revision history</b>                                     | <b>27</b> |

## List of tables

|           |                                                                    |    |
|-----------|--------------------------------------------------------------------|----|
| Table 1.  | Device summary . . . . .                                           | 1  |
| Table 2.  | Suggested connections for unused and not connected pins . . . . .  | 6  |
| Table 3.  | Absolute maximum ratings . . . . .                                 | 7  |
| Table 4.  | Thermal data (per island) . . . . .                                | 8  |
| Table 5.  | Power . . . . .                                                    | 8  |
| Table 6.  | Protections . . . . .                                              | 9  |
| Table 7.  | V <sub>CC</sub> - output diode . . . . .                           | 9  |
| Table 8.  | Switching (V <sub>CC</sub> = 13V; T <sub>j</sub> = 25°C) . . . . . | 10 |
| Table 9.  | Logic inputs. . . . .                                              | 10 |
| Table 10. | Status pin . . . . .                                               | 10 |
| Table 11. | Open-load detection . . . . .                                      | 11 |
| Table 12. | Truth table. . . . .                                               | 12 |
| Table 13. | Electrical transient requirements. . . . .                         | 12 |
| Table 14. | Thermal calculation according to the PCB heatsink area . . . . .   | 21 |
| Table 15. | Thermal parameters . . . . .                                       | 23 |
| Table 16. | SO-28 mechanical data . . . . .                                    | 24 |
| Table 17. | Document revision history. . . . .                                 | 27 |

## List of figures

|            |                                                                           |    |
|------------|---------------------------------------------------------------------------|----|
| Figure 1.  | Block diagram . . . . .                                                   | 5  |
| Figure 2.  | Configuration diagram (top view) . . . . .                                | 6  |
| Figure 3.  | Current and voltage conventions . . . . .                                 | 8  |
| Figure 4.  | Status timings . . . . .                                                  | 11 |
| Figure 5.  | Switching characteristics . . . . .                                       | 11 |
| Figure 6.  | Waveforms . . . . .                                                       | 13 |
| Figure 7.  | Off-state output current . . . . .                                        | 14 |
| Figure 8.  | High level input current . . . . .                                        | 14 |
| Figure 9.  | Input clamp voltage . . . . .                                             | 14 |
| Figure 10. | Turn-on voltage slope . . . . .                                           | 14 |
| Figure 11. | Overvoltage shutdown . . . . .                                            | 14 |
| Figure 12. | Turn-off voltage slope . . . . .                                          | 14 |
| Figure 13. | $I_{LIM}$ vs $T_{case}$ . . . . .                                         | 15 |
| Figure 14. | On-state resistance vs $V_{CC}$ . . . . .                                 | 15 |
| Figure 15. | Input high level . . . . .                                                | 15 |
| Figure 16. | Input hysteresis voltage . . . . .                                        | 15 |
| Figure 17. | On-state resistance vs $T_{case}$ . . . . .                               | 15 |
| Figure 18. | Input low level . . . . .                                                 | 15 |
| Figure 19. | Status leakage current . . . . .                                          | 16 |
| Figure 20. | Status low output voltage . . . . .                                       | 16 |
| Figure 21. | Status clamp voltage . . . . .                                            | 16 |
| Figure 22. | [Figure title] . . . . .                                                  | 16 |
| Figure 23. | Open-load off-state voltage detection threshold . . . . .                 | 16 |
| Figure 24. | Application schematic . . . . .                                           | 17 |
| Figure 25. | Open-load detection in off-state . . . . .                                | 19 |
| Figure 26. | Maximum turn-off current versus load inductance . . . . .                 | 20 |
| Figure 27. | SO-28 PC board . . . . .                                                  | 21 |
| Figure 28. | $R_{thj-amb}$ vs PCB copper area in open box free air condition . . . . . | 22 |
| Figure 29. | SO-28 thermal impedance junction ambient single pulse . . . . .           | 22 |
| Figure 30. | Thermal fitting model of a quad channel HSD in SO-28 . . . . .            | 23 |
| Figure 31. | SO-28 package outline . . . . .                                           | 24 |
| Figure 32. | SO-28 tube shipment (no suffix) . . . . .                                 | 26 |
| Figure 33. | SO-28 tape and reel shipment (suffix "TR") . . . . .                      | 26 |

# 1 Block diagram and pin description

Figure 1. Block diagram

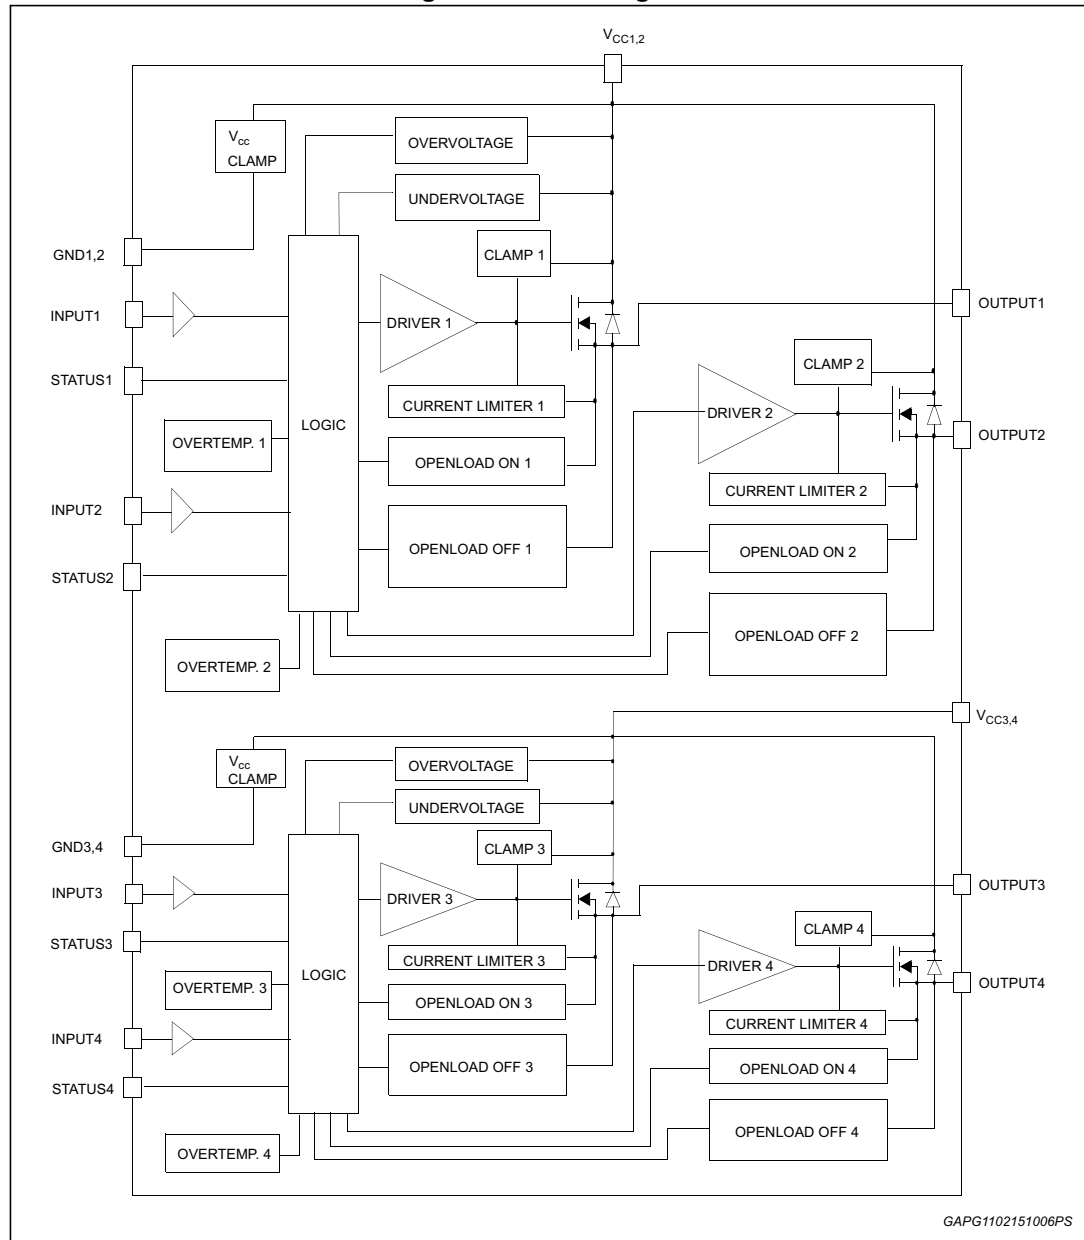


Figure 2. Configuration diagram (top view)

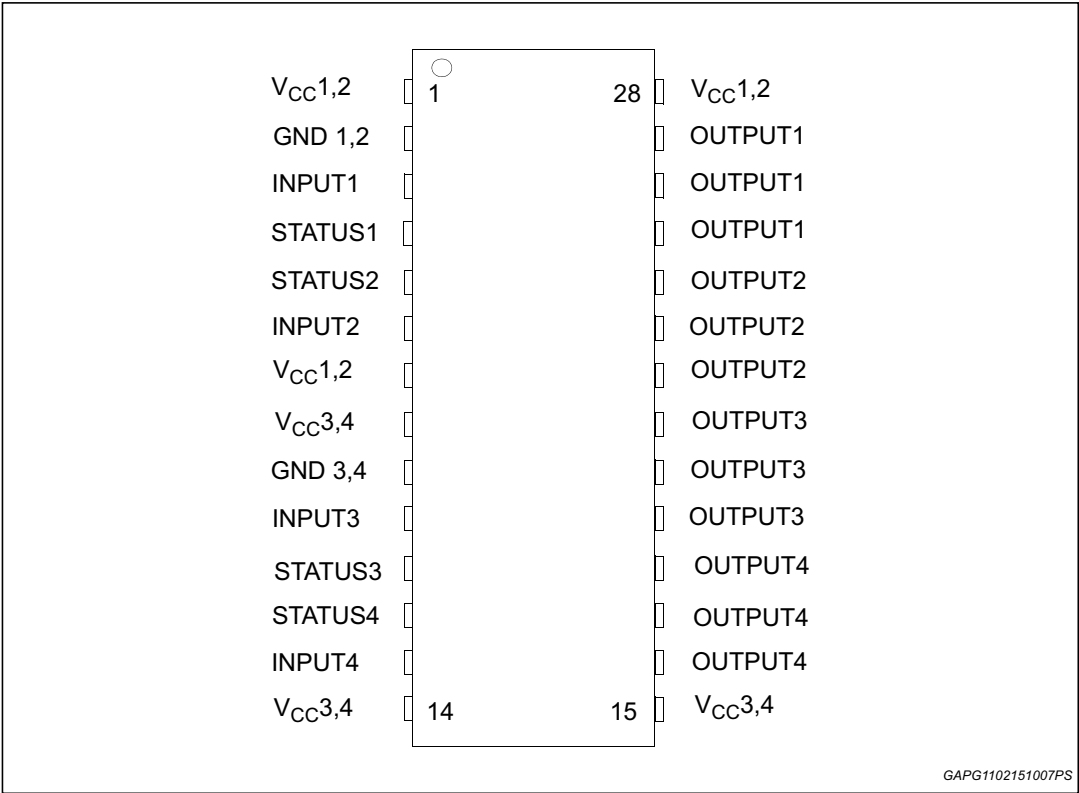


Table 2. Suggested connections for unused and not connected pins

| Connection / pin | Status | N.C. | Output | Input                  |
|------------------|--------|------|--------|------------------------|
| Floating         | X      | X    | X      | X                      |
| To ground        |        | X    |        | Through 10 KΩ resistor |

## 2 Electrical specifications

### 2.1 Absolute maximum ratings

Stressing the device above the rating listed in [Table 3](#) may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality document.

**Table 3. Absolute maximum ratings**

| Symbol     | Parameter                                                                                                                                                       | Value              | Unit             |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------|
| $V_{CC}$   | DC supply voltage                                                                                                                                               | 41                 | V                |
| $-V_{CC}$  | Reverse DC supply voltage                                                                                                                                       | -0.3               | V                |
| $-I_{GND}$ | DC reverse ground pin current                                                                                                                                   | -200               | mA               |
| $I_{OUT}$  | DC output current                                                                                                                                               | Internally limited | A                |
| $-I_{OUT}$ | Reverse DC output current                                                                                                                                       | -6                 | A                |
| $I_{IN}$   | DC input current                                                                                                                                                | $\pm 10$           | mA               |
| $I_{STAT}$ | DC status current                                                                                                                                               | $\pm 10$           | mA               |
| $V_{ESD}$  | Electrostatic discharge (Human Body Model: $R=1.5\text{ K}\Omega$ ; $C=100\text{ pF}$ )                                                                         |                    |                  |
|            | – INPUT                                                                                                                                                         | 4000               | V                |
|            | – STATUS                                                                                                                                                        | 4000               | V                |
|            | – OUTPUT                                                                                                                                                        | 5000               | V                |
|            | – $V_{CC}$                                                                                                                                                      | 5000               | V                |
| $E_{MAX}$  | Maximum switching energy<br>( $L=1.5\text{ mH}$ ; $R_L=0\text{ }\Omega$ ; $V_{bat}=13.5\text{ V}$ ; $T_{jstart}=150\text{ }^\circ\text{C}$ ; $I_L=9\text{ A}$ ) | 140                | mJ               |
| $P_{tot}$  | Power dissipation (per island) at $T_{lead}=25\text{ }^\circ\text{C}$                                                                                           | 6.25               | W                |
| $T_j$      | Junction operating temperature                                                                                                                                  | Internally limited | $^\circ\text{C}$ |
| $T_{stg}$  | Storage temperature                                                                                                                                             | - 55 to 150        | $^\circ\text{C}$ |

## 2.2 Thermal data

**Table 4. Thermal data (per island)**


| Symbol         | Parameter                                             | Value             |                   | Unit |
|----------------|-------------------------------------------------------|-------------------|-------------------|------|
| $R_{thj-lead}$ | Thermal resistance junction-lead                      | 15                |                   | °C/W |
| $R_{thj-amb}$  | Thermal resistance junction-ambient<br>(one chip ON)  | 60 <sup>(1)</sup> | 44 <sup>(2)</sup> | °C/W |
| $R_{thj-amb}$  | Thermal resistance junction-ambient<br>(two chips ON) | 46 <sup>(1)</sup> | 31 <sup>(2)</sup> | °C/W |

1. When mounted on a standard single-sided FR-4 board with 0.5cm<sup>2</sup> of Cu (at least 35 µm thick) connected to all V<sub>CC</sub> pins. Horizontal mounting and no artificial air flow.
2. When mounted on a standard single-sided FR-4 board with 6cm<sup>2</sup> of Cu (at least 35 µm thick) connected to all V<sub>CC</sub> pins. Horizontal mounting and no artificial air flow.

## 2.3 Electrical characteristics

Values specified in this section are for 8 V < V<sub>CC</sub> < 36 V; -40°C < T<sub>j</sub> < 150°C, unless otherwise stated.

**Figure 3. Current and voltage conventions**

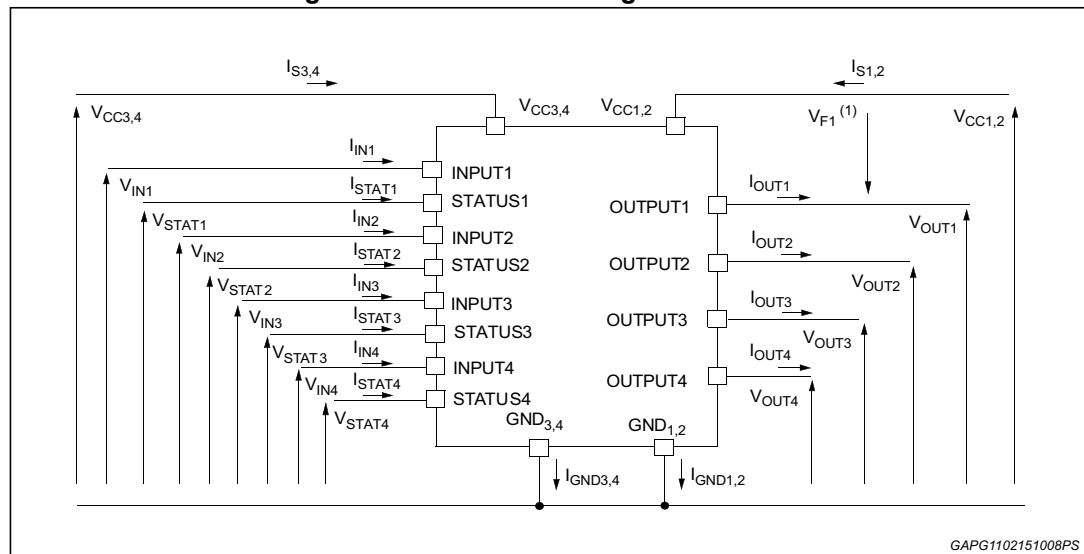

1.  $V_{Fn} = V_{CCn} - V_{OUTn}$  during reverse battery condition.

**Table 5. Power**

| Symbol           | Parameter                | Test conditions | Min. | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------|------|------|------|------|
| V <sub>CC</sub>  | Operating supply voltage |                 | 5.5  | 13   | 36   | V    |
| V <sub>USD</sub> | Undervoltage shutdown    |                 | 3    | 4    | 5.5  | V    |
| V <sub>OV</sub>  | Overvoltage shutdown     |                 | 36   |      |      | V    |



Table 5. Power (continued)

| Symbol        | Parameter                | Test conditions                                                                                     | Min. | Typ. | Max.      | Unit                   |
|---------------|--------------------------|-----------------------------------------------------------------------------------------------------|------|------|-----------|------------------------|
| $R_{ON}$      | On-state resistance      | $I_{OUT} = 2\text{ A}$ ; $T_j = 25^\circ\text{C}$<br>$I_{OUT} = 2\text{ A}$ ; $V_{CC} > 8\text{ V}$ |      |      | 65<br>130 | $m\Omega$<br>$m\Omega$ |
| $I_S$         | Supply current           | Off-state; $V_{CC} = 13\text{ V}$ ;<br>$V_{IN} = V_{OUT} = 0\text{ V}$                              |      | 12   | 40        | $\mu\text{A}$          |
|               |                          | Off-state; $V_{CC} = 13\text{ V}$ ;<br>$V_{IN} = V_{OUT} = 0\text{ V}$ ; $T_j = 25^\circ\text{C}$   |      | 12   | 25        | $\mu\text{A}$          |
|               |                          | On-state; $V_{CC} = 13\text{ V}$ ; $V_{IN} = 5\text{ V}$ ;<br>$I_{OUT} = 0\text{ A}$                |      | 5    | 7         | $\text{mA}$            |
| $I_{L(off1)}$ | Off-state output current | $V_{IN} = V_{OUT} = 0\text{ V}$                                                                     | 0    |      | 50        | $\mu\text{A}$          |
| $I_{L(off2)}$ | Off-state output current | $V_{IN} = 0\text{ V}$ ; $V_{OUT} = 3.5\text{ V}$                                                    | -75  |      | 0         | $\mu\text{A}$          |
| $I_{L(off3)}$ | Off-state output current | $V_{IN} = V_{OUT} = 0\text{ V}$ ; $V_{CC} = 13\text{ V}$ ;<br>$T_j = 125^\circ\text{C}$             |      |      | 5         | $\mu\text{A}$          |
| $I_{L(off4)}$ | Off-state output current | $V_{IN} = V_{OUT} = 0\text{ V}$ ; $V_{CC} = 13\text{ V}$ ;<br>$T_j = 25^\circ\text{C}$              |      |      | 3         | $\mu\text{A}$          |

Table 6. Protections

| Symbol      | Parameter                           | Test conditions                               | Min.          | Typ.          | Max.          | Unit             |
|-------------|-------------------------------------|-----------------------------------------------|---------------|---------------|---------------|------------------|
| $T_{TSD}$   | Shutdown temperature                |                                               | 150           | 175           | 200           | $^\circ\text{C}$ |
| $T_R$       | Reset temperature                   |                                               | 135           |               |               | $^\circ\text{C}$ |
| $T_{hyst}$  | Thermal hysteresis                  |                                               | 7             | 15            |               | $^\circ\text{C}$ |
| $t_{SDL}$   | Status delay in overload conditions | $T_j > T_{TSD}$                               |               |               | 20            | $\mu\text{s}$    |
| $I_{lim}$   | Current limitation                  | $V_{CC} = 13\text{ V}$                        | 6             | 9             | 15            | $\text{A}$       |
|             |                                     | $5.5\text{ V} < V_{CC} < 36\text{ V}$         |               |               | 15            | $\text{A}$       |
| $V_{demag}$ | Turn-off output clamp voltage       | $I_{OUT} = 2\text{ A}$ ;<br>$L = 6\text{ mH}$ | $V_{CC} - 41$ | $V_{CC} - 48$ | $V_{CC} - 55$ | $\text{V}$       |

**Note:** To ensure long term reliability under heavy overload or short circuit conditions, protection and related diagnostic signals must be used together with a proper software strategy. If the device is subjected to abnormal conditions, this software must limit the duration and number of activation cycles.

Table 7.  $V_{CC}$  - output diode

| Symbol | Parameter          | Test conditions                                       | Min. | Typ. | Max. | Unit       |
|--------|--------------------|-------------------------------------------------------|------|------|------|------------|
| $V_F$  | Forward on voltage | $-I_{OUT} = 1.2\text{ A}$ ; $T_j = 150^\circ\text{C}$ | —    | —    | 0.6  | $\text{V}$ |

Table 8. Switching ( $V_{CC} = 13V$ ;  $T_j = 25^\circ C$ )

| Symbol                | Parameter              | Test conditions                                                                    | Min. | Typ.          | Max. | Unit      |
|-----------------------|------------------------|------------------------------------------------------------------------------------|------|---------------|------|-----------|
| $t_{d(on)}$           | Turn-on delay time     | $R_L = 6.5 \Omega$ from $V_{IN}$ rising edge to $V_{OUT} = 1.3 V$ (see Figure 5)   | —    | 30            | —    | $\mu s$   |
| $t_{d(off)}$          | Turn-off delay time    | $R_L = 6.5 \Omega$ from $V_{IN}$ falling edge to $V_{OUT} = 11.7 V$ (see Figure 5) | —    | 30            | —    | $\mu s$   |
| $dV_{OUT}/dt_{(on)}$  | Turn-on voltage slope  | $R_L = 6.5 \Omega$ from $V_{OUT} = 1.3 V$ to $V_{OUT} = 10.4 V$ (see Figure 5)     | —    | See Figure 10 | —    | $V/\mu s$ |
| $dV_{OUT}/dt_{(off)}$ | Turn-off voltage slope | $R_L = 6.5 \Omega$ from $V_{OUT} = 11.7 V$ to $V_{OUT} = 1.3 V$ (see Figure 5)     | —    | See Figure 12 | —    | $V/\mu s$ |

Table 9. Logic inputs

| Symbol        | Parameter                | Test conditions   | Min. | Typ. | Max. | Unit    |
|---------------|--------------------------|-------------------|------|------|------|---------|
| $V_{IL}$      | Input low level          |                   |      |      | 1.25 | V       |
| $I_{IL}$      | Low level input current  | $V_{IN} = 1.25 V$ | 1    |      |      | $\mu A$ |
| $V_{IH}$      | Input high level         |                   | 3.25 |      |      | V       |
| $I_{IH}$      | High level input current | $V_{IN} = 3.25 V$ |      |      | 10   | $\mu A$ |
| $V_{I(hyst)}$ | Input hysteresis voltage |                   | 0.5  |      |      | V       |
| $V_{ICL}$     | Input clamp voltage      | $I_{IN} = 1 mA$   | 6    | 6.8  | 8    | V       |
|               |                          | $I_{IN} = -1 mA$  |      | -0.7 |      | V       |

Table 10. Status pin

| Symbol      | Parameter                    | Test conditions                       | Min. | Typ. | Max. | Unit    |
|-------------|------------------------------|---------------------------------------|------|------|------|---------|
| $V_{STAT}$  | Status low output voltage    | $I_{STAT} = 1.6 mA$                   |      |      | 0.5  | V       |
| $I_{LSTAT}$ | Status leakage current       | Normal operation;<br>$V_{STAT} = 5 V$ |      |      | 10   | $\mu A$ |
| $C_{STAT}$  | Status pin input capacitance | Normal operation;<br>$V_{STAT} = 5 V$ |      |      | 100  | pF      |
| $V_{SCL}$   | Status clamp voltage         | $I_{STAT} = 1 mA$                     | 6    | 6.8  | 8    | V       |
|             |                              | $I_{STAT} = -1 mA$                    |      | -0.7 |      | V       |

Table 11. Open-load detection

| Symbol         | Parameter                                       | Test conditions        | Min. | Typ. | Max. | Unit          |
|----------------|-------------------------------------------------|------------------------|------|------|------|---------------|
| $I_{OL}$       | Open-load on-state detection threshold          | $V_{IN} = 5\text{ V}$  | 50   | 100  | 200  | mA            |
| $t_{DOL(on)}$  | Open-load on-state detection delay              | $I_{OUT} = 0\text{ A}$ |      |      | 200  | $\mu\text{s}$ |
| $V_{OL}$       | Open-load off-state voltage detection threshold | $V_{IN} = 0\text{ V}$  | 1.5  | 2.5  | 3.5  | V             |
| $t_{DOL(off)}$ | Open-load detection delay at turn-off           |                        |      |      | 1000 | $\mu\text{s}$ |

Figure 4. Status timings

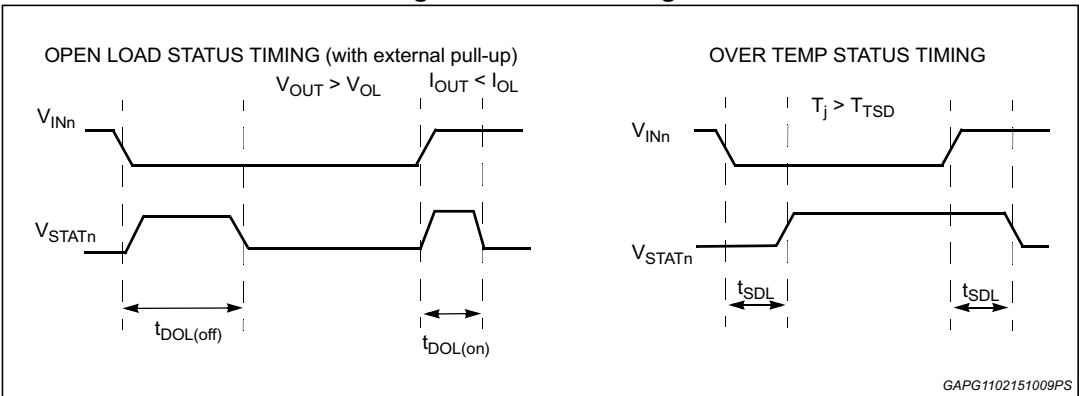


Figure 5. Switching characteristics

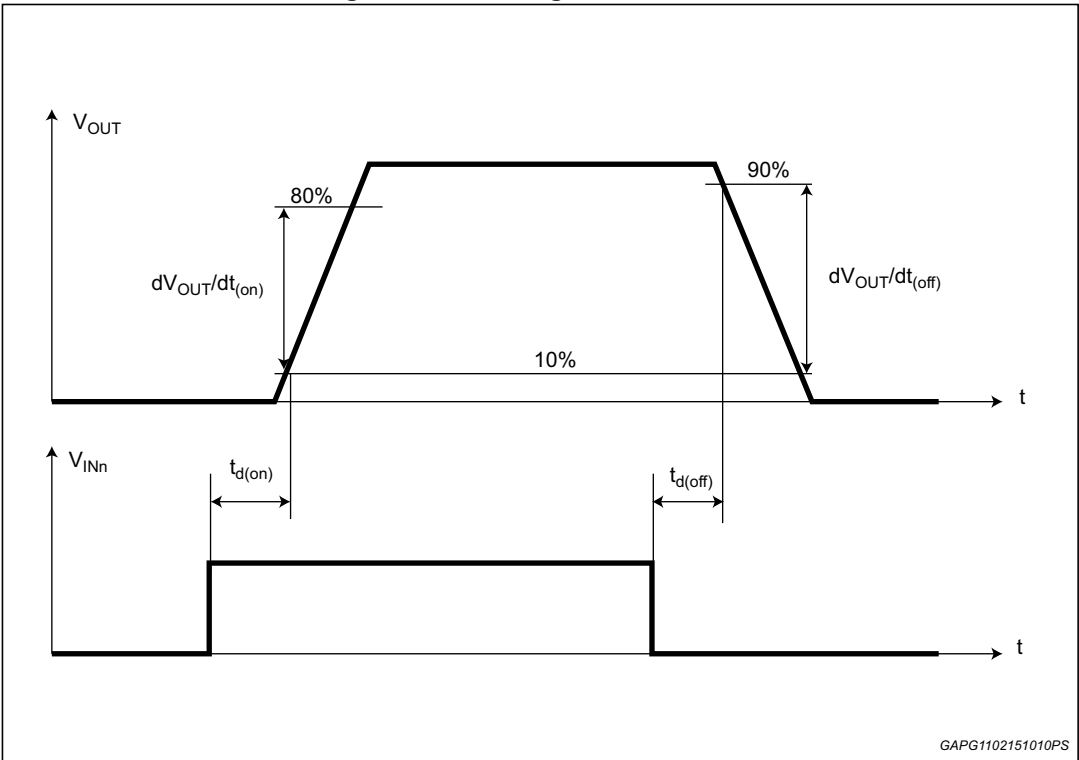


Table 12. Truth table


| Conditions                | Input | Output | Status                |
|---------------------------|-------|--------|-----------------------|
| Normal operation          | L     | L      | H                     |
|                           | H     | H      | H                     |
| Current limitation        | L     | L      | H                     |
|                           | H     | X      | ( $T_j < T_{TSD}$ ) H |
|                           | H     | X      | ( $T_j > T_{TSD}$ ) L |
| Overtemperature           | L     | L      | H                     |
|                           | H     | L      | L                     |
| Undervoltage              | L     | L      | X                     |
|                           | H     | L      | X                     |
| Overvoltage               | L     | L      | H                     |
|                           | H     | L      | H                     |
| Output voltage > $V_{OL}$ | L     | H      | L                     |
|                           | H     | H      | H                     |
| Output current < $I_{OL}$ | L     | L      | H                     |
|                           | H     | H      | L                     |

Table 13. Electrical transient requirements

| ISO T/R<br>7637/1<br>test pulse | Test level             |                        |                        |                        |                          |
|---------------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|
|                                 | I                      | II                     | III                    | IV                     | Delays and impedance     |
| 1                               | -25 V <sup>(1)</sup>   | -50 V <sup>(1)</sup>   | -75 V <sup>(1)</sup>   | -100 V <sup>(1)</sup>  | 2 ms, 10 $\Omega$        |
| 2                               | +25 V <sup>(1)</sup>   | +50 V <sup>(1)</sup>   | +75 V <sup>(1)</sup>   | +100 V <sup>(1)</sup>  | 0.2 ms, 10 $\Omega$      |
| 3a                              | -25 V <sup>(1)</sup>   | -50 V <sup>(1)</sup>   | -100 V <sup>(1)</sup>  | -150 V <sup>(1)</sup>  | 0.1 $\mu$ s, 50 $\Omega$ |
| 3b                              | +25 V <sup>(1)</sup>   | +50 V <sup>(1)</sup>   | +75 V <sup>(1)</sup>   | +100 V <sup>(1)</sup>  | 0.1 $\mu$ s, 50 $\Omega$ |
| 4                               | -4 V <sup>(1)</sup>    | -5 V <sup>(1)</sup>    | -6 V <sup>(1)</sup>    | -7 V <sup>(1)</sup>    | 100 ms, 0.01 $\Omega$    |
| 5                               | +26.5 V <sup>(1)</sup> | +46.5 V <sup>(2)</sup> | +66.5 V <sup>(2)</sup> | +86.5 V <sup>(2)</sup> | 400 ms, 2 $\Omega$       |

1. All functions of the device are performed as designed after exposure to disturbance.
2. One or more functions of the device is not performed as designed after exposure and cannot be returned to proper operation without replacing the device.

Figure 6. Waveforms

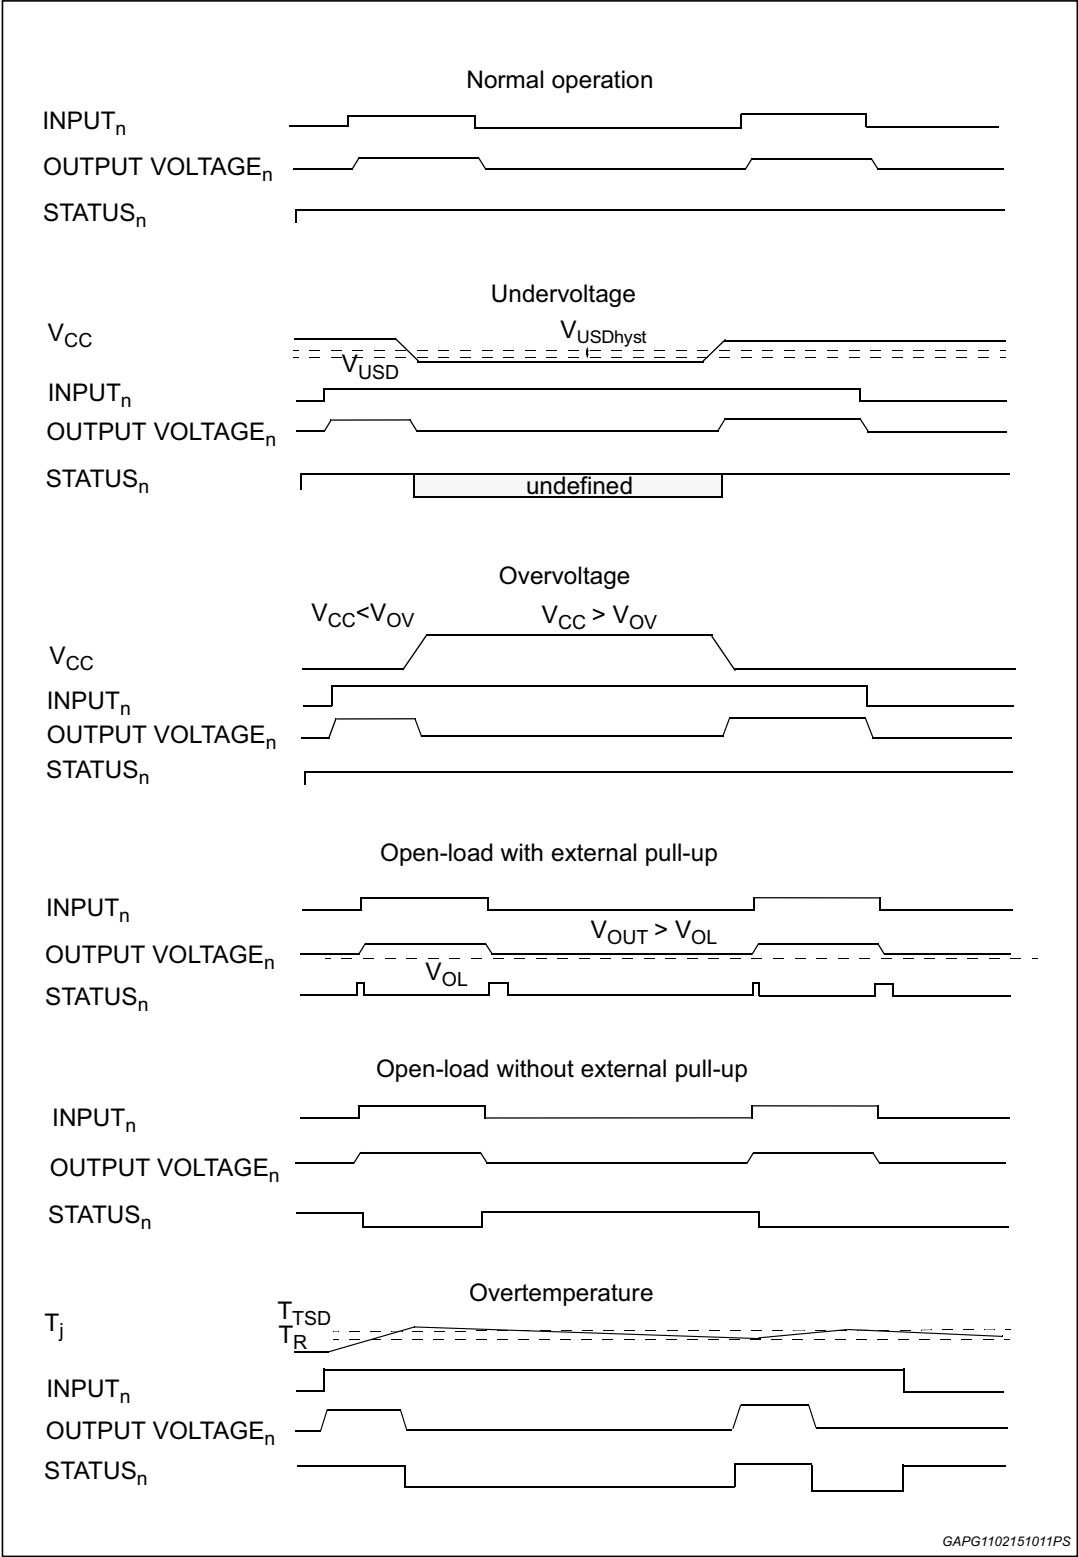

GAPG1102151011PS

2.4 Electrical characteristics curves

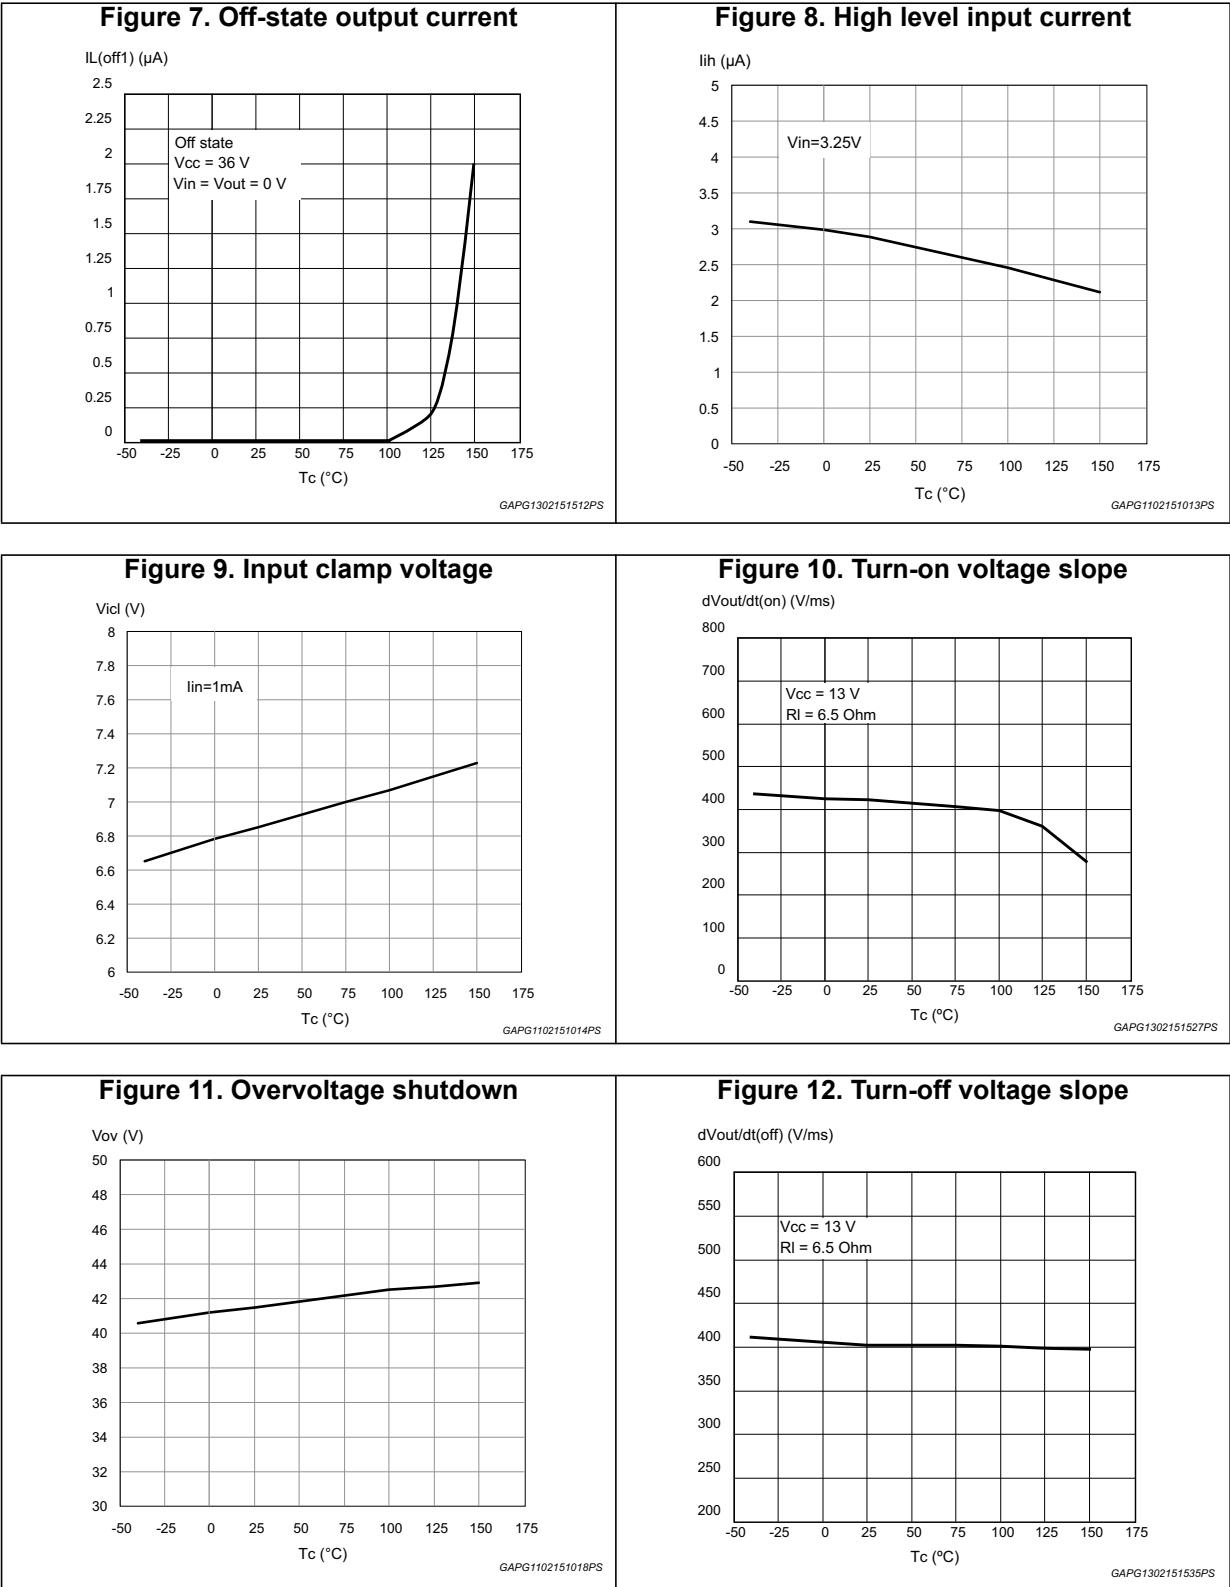


Figure 13.  $I_{LIM}$  vs  $T_{case}$

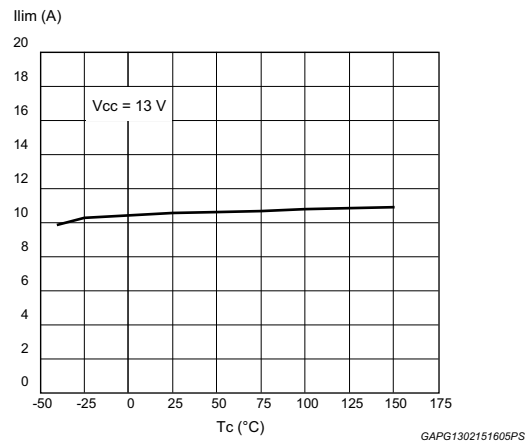


Figure 14. On-state resistance vs  $V_{CC}$

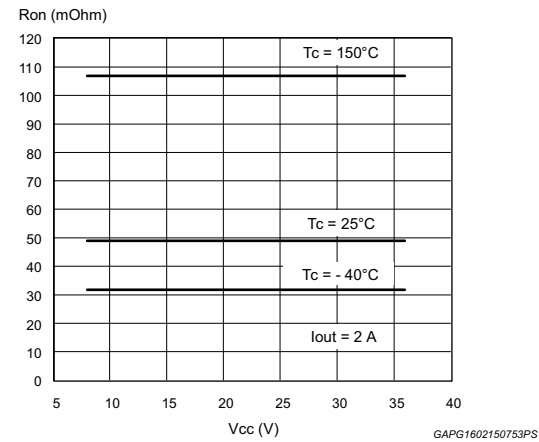


Figure 15. Input high level

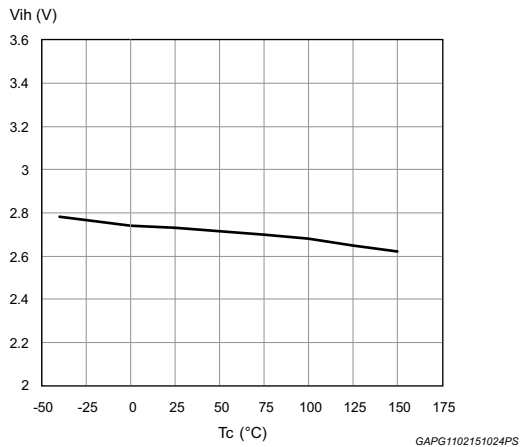


Figure 16. Input hysteresis voltage

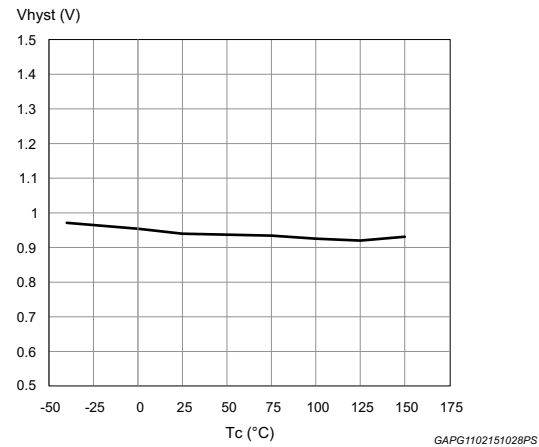


Figure 17. On-state resistance vs  $T_{case}$

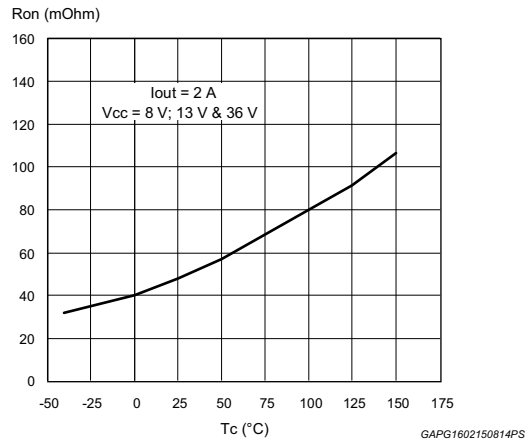


Figure 18. Input low level



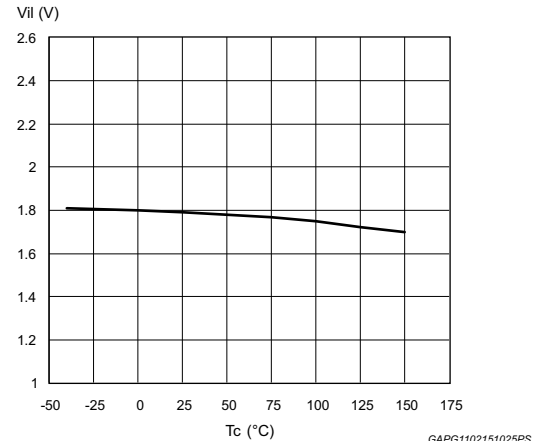


Figure 19. Status leakage current

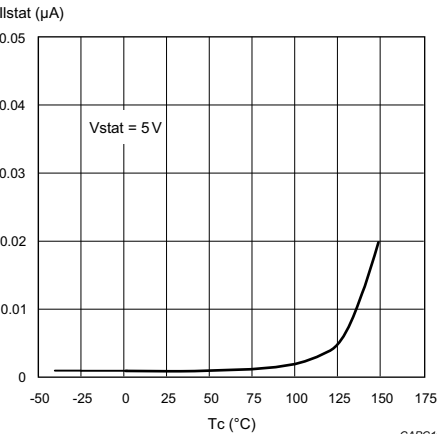


GAPG1102151015PS

Figure 20. Status low output voltage

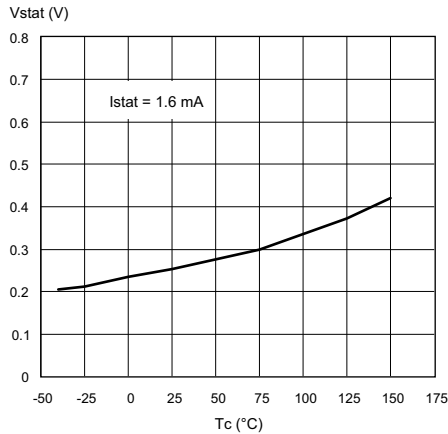


GAPG1102151016PS

Figure 21. Status clamp voltage

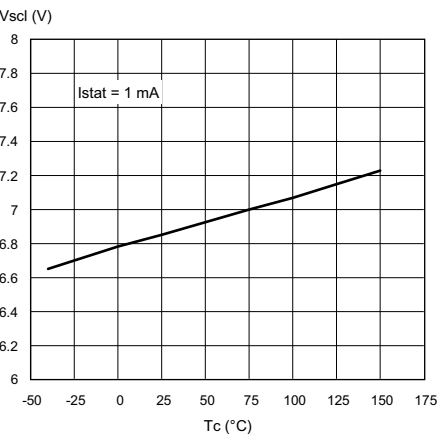


GAPG1102151017PS

Figure 22. [Figure title]

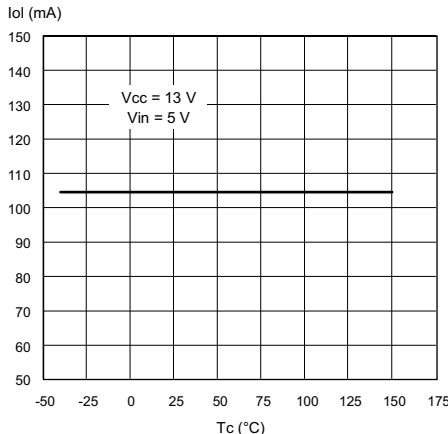

GAPG1602150855PS

Figure 23. Open-load off-state voltage detection threshold

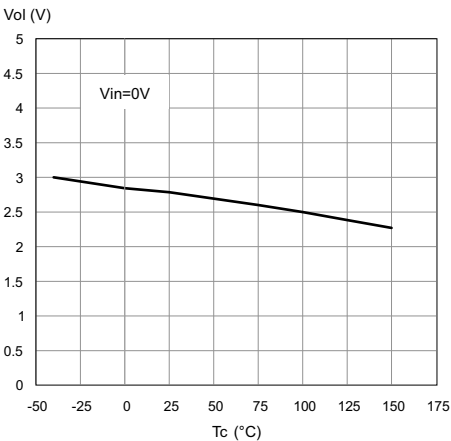


GAPG1102151027PS



### 3 Application information

Figure 24. Application schematic

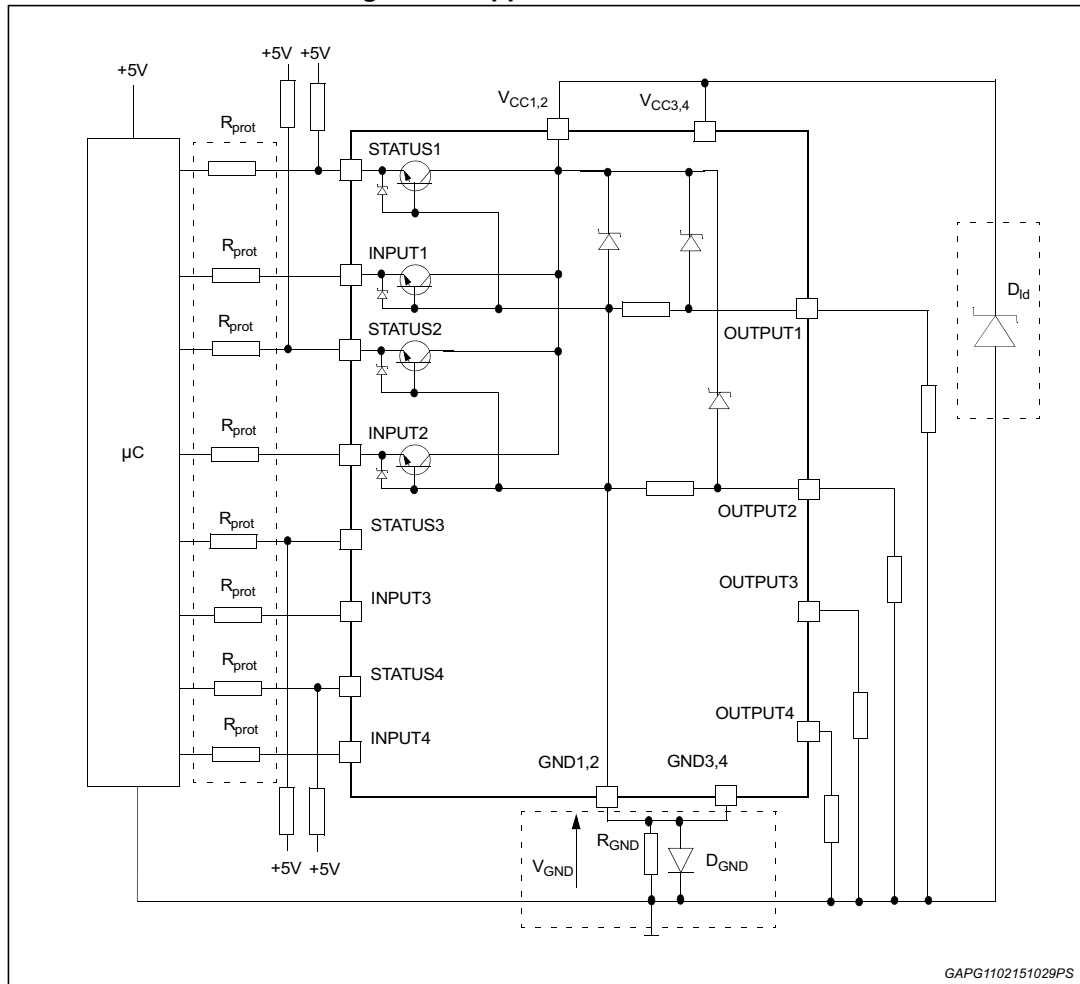

Note: Channels 3 & 4 have the same internal circuit as channel 1 & 2.

#### 3.1 GND protection network against reverse battery

This section provides two solutions for implementing a ground protection network against reverse battery.

##### 3.1.1 Solution 1: a resistor in the ground line ( $R_{GND}$ only)

This can be used with any type of load.

The following show how to dimension the  $R_{GND}$  resistor:

1.  $R_{GND} \leq 600 \text{ mV} / 2 (I_{S(on)max})$
2.  $R_{GND} \geq (-V_{CC}) / (-I_{GND})$

where  $-I_{GND}$  is the DC reverse ground pin current and can be found in the absolute maximum rating section of the device datasheet.

Power dissipation in  $R_{GND}$  (when  $V_{CC} < 0$  during reverse battery situations) is:

$$P_D = (-V_{CC})^2 / R_{GND}$$

This resistor can be shared amongst several different HSDs. Please note that the value of this resistor should be calculated with formula (1) where  $I_{S(on)max}$  becomes the sum of the maximum on-state currents of the different devices.

Please note that, if the microprocessor ground is not shared by the device ground, then the  $R_{GND}$  produces a shift ( $I_{S(on)max} * R_{GND}$ ) in the input thresholds and the status output values. This shift varies depending on how many devices are ON in the case of several high-side drivers sharing the same  $R_{GND}$ .

If the calculated power dissipation requires the use of a large resistor, or several devices have to share the same resistor, then ST suggests using solution 2 below.

### 3.1.2 Solution 2: a diode ( $D_{GND}$ ) in the ground line

A resistor ( $R_{GND} = 1 \text{ k}\Omega$ ) should be inserted in parallel to  $D_{GND}$  if the device is driving an inductive load. This small signal diode can be safely shared amongst several different HSD. Also in this case, the presence of the ground network produces a shift ( $\sim 600\text{mV}$ ) in the input threshold and the status output values if the microprocessor ground is not common with the device ground. This shift not varies if more than one HSD shares the same diode/resistor network. Series resistor in INPUT and STATUS lines are also required to prevent that, during battery voltage transient, the current exceeds the Absolute Maximum Rating. Safest configuration for unused INPUT and STATUS pin is to leave them unconnected.

## 3.2 Load dump protection

$D_{ld}$  is necessary (voltage transient suppressor) if the load dump peak voltage exceeds the  $V_{CC}$  maximum DC rating. The same applies if the device is subject to transients on the  $V_{CC}$  line that are greater than those shown in [Table 13](#).

## 3.3 MCU I/O protection

If a ground protection network is used and negative transients are present on the  $V_{CC}$  line, the control pins are pulled negative. ST suggests to insert a resistor ( $R_{prot}$ ) in line to prevent the microcontroller I/O pins from latching up.

The value of these resistors is a compromise between the leakage current of microcontroller and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of microcontroller I/Os:

$$-V_{CCpeak} / I_{latchup} \leq R_{prot} \leq (V_{OH\mu C} - V_{IH} - V_{GND}) / I_{IHmax}$$

### Example

For the following conditions:

$$V_{CCpeak} = -100 \text{ V}$$

$$I_{\text{latchup}} \geq 20 \text{ mA}$$

$$V_{\text{OH}\mu\text{C}} \geq 4.5 \text{ V}$$

$$5 \text{ k}\Omega \leq R_{\text{prot}} \leq 65 \text{ k}\Omega.$$

Recommended values are:

$$R_{\text{prot}} = 10 \text{ k}\Omega$$

### 3.4 Open-load detection in off-state

Off-state open-load detection requires an external pull-up resistor ( $R_{PU}$ ) connected between OUTPUT pin and a positive supply voltage ( $V_{PU}$ ) like the +5 V line used to supply the microprocessor.

The external resistor has to be selected according to the following requirements:

1. No false open load indication when load is connected: in this case we have to avoid  $V_{OUT}$  to be higher than  $V_{OLmin}$ ; this results in the following condition:


$$V_{OUT} = (V_{PU} / (R_L + R_{PU}))R_L < V_{OLmin}.$$

2. No misdetection when load is disconnected: in this case the  $V_{OUT}$  has to be higher than  $V_{OLmax}$ ; this results in the following condition:

$$R_{PU} < (V_{PU} - V_{OLmax}) / I_{L(off2)}.$$


Because  $I_{S(OFF)}$  may significantly increase if  $V_{out}$  is pulled high (up to several mA), the pull-up resistor  $R_{PU}$  should be connected to a supply that is switched OFF when the module is in standby.

**Figure 25. Open-load detection in off-state**

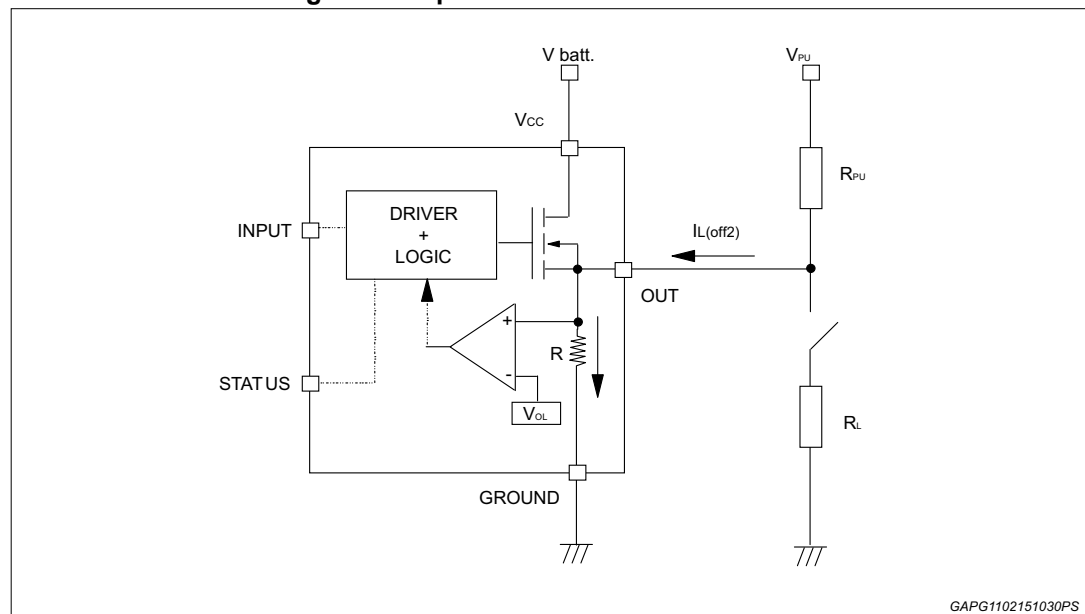

### 3.5 Maximum demagnetization energy ( $V_{CC} = 13.5\text{ V}$ )

Figure 26. Maximum turn-off current versus load inductance

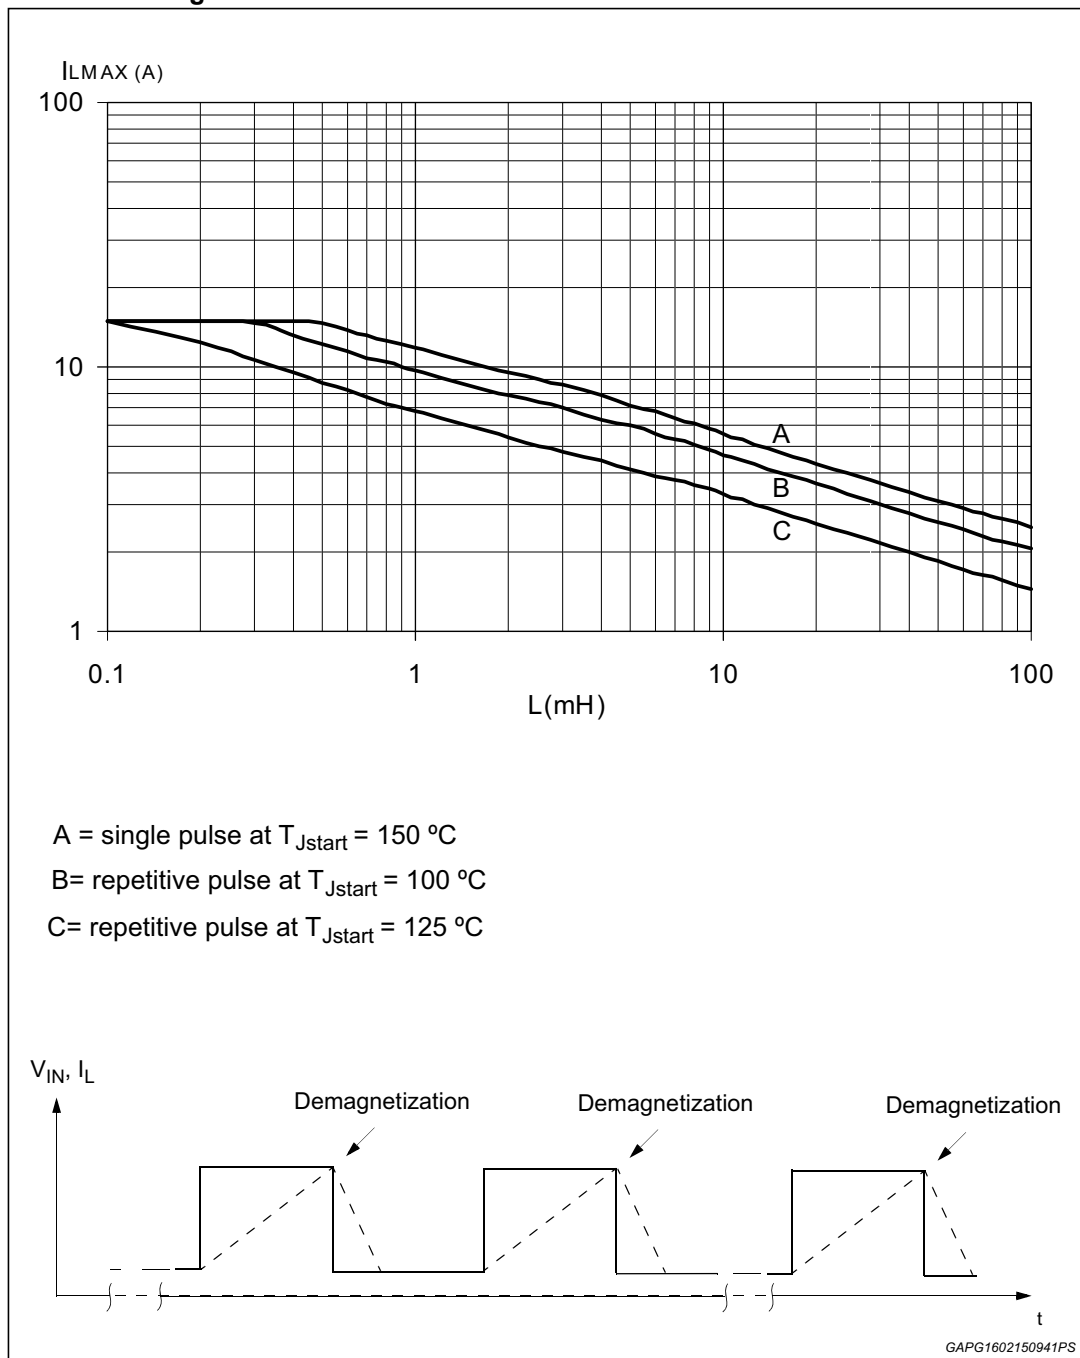


Note: Values are generated with  $R_L = 0\text{ }\Omega$ .

In case of repetitive pulses,  $T_{Jstart}$  (at beginning of each demagnetization) of every pulse must not exceed the temperature specified above for curves B and C.

## 4 Package and PCB thermal data

### 4.1 SO-28 thermal data

Figure 27. SO-28 PC board

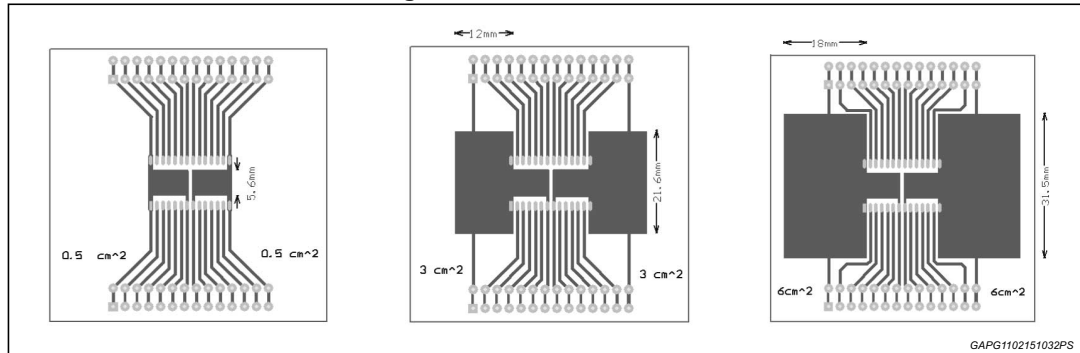

Note: Layout condition of  $R_{th}$  and  $Z_{th}$  measurements (PCB FR4 area = 58 mm x 58 mm, PCB thickness = 2 mm, Cu thickness = 35  $\mu$ m, Copper areas: 0.5 cm<sup>2</sup>, 3 cm<sup>2</sup>, 6 cm<sup>2</sup>).

Table 14. Thermal calculation according to the PCB heatsink area

| Chip 1 | Chip 2 | $T_{jchip1}$                                                        | $T_{jchip2}$                                                        | Note                         |
|--------|--------|---------------------------------------------------------------------|---------------------------------------------------------------------|------------------------------|
| ON     | OFF    | $R_{thA} \times P_{dchip1} + T_{amb}$                               | $R_{thC} \times P_{dchip1} + T_{amb}$                               |                              |
| OFF    | ON     | $R_{thC} \times P_{dchip2} + T_{amb}$                               | $R_{thA} \times P_{dchip2} + T_{amb}$                               |                              |
| ON     | ON     | $R_{thB} \times (P_{dchip1} + P_{dchip2}) + T_{amb}$                | $R_{thB} \times (P_{dchip1} + P_{dchip2}) + T_{amb}$                | $P_{dchip1} = P_{dchip2}$    |
| ON     | ON     | $(R_{thA} \times P_{dchip1}) + R_{thC} \times P_{dchip2} + T_{amb}$ | $(R_{thA} \times P_{dchip2}) + R_{thC} \times P_{dchip1} + T_{amb}$ | $P_{dchip1} \neq P_{dchip2}$ |

$R_{thA}$  = thermal resistance junction to ambient with one chip ON

$R_{thB}$  = thermal resistance junction to ambient with both chips ON and  $P_{dchip1} = P_{dchip2}$

$R_{thC}$  = mutual thermal resistance


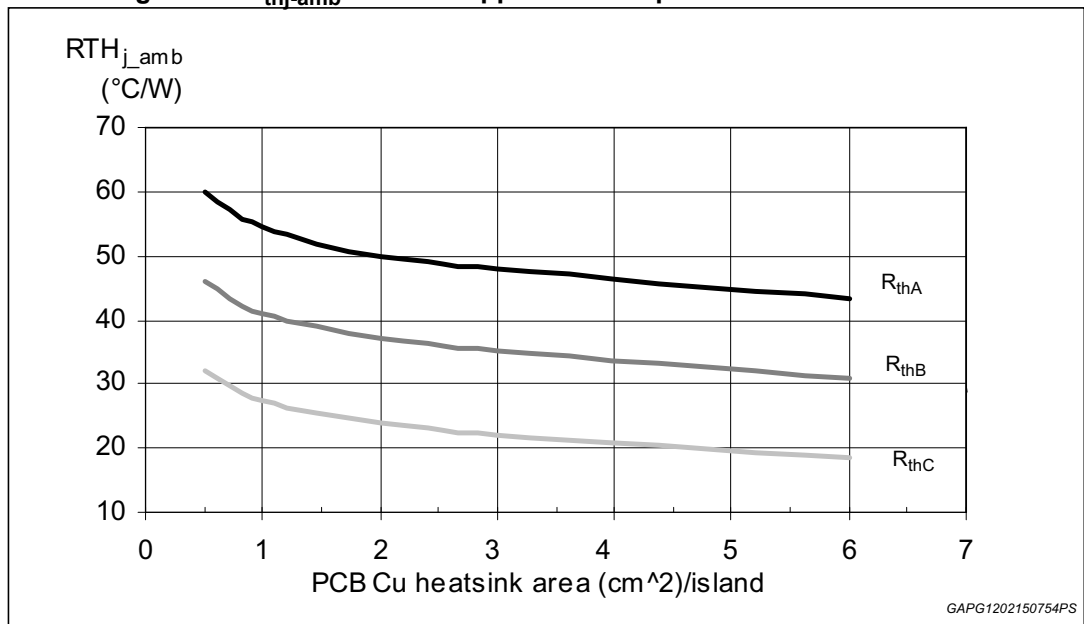
Figure 28.  $R_{thj-amb}$  vs PCB copper area in open box free air condition

Figure 29. SO-28 thermal impedance junction ambient single pulse

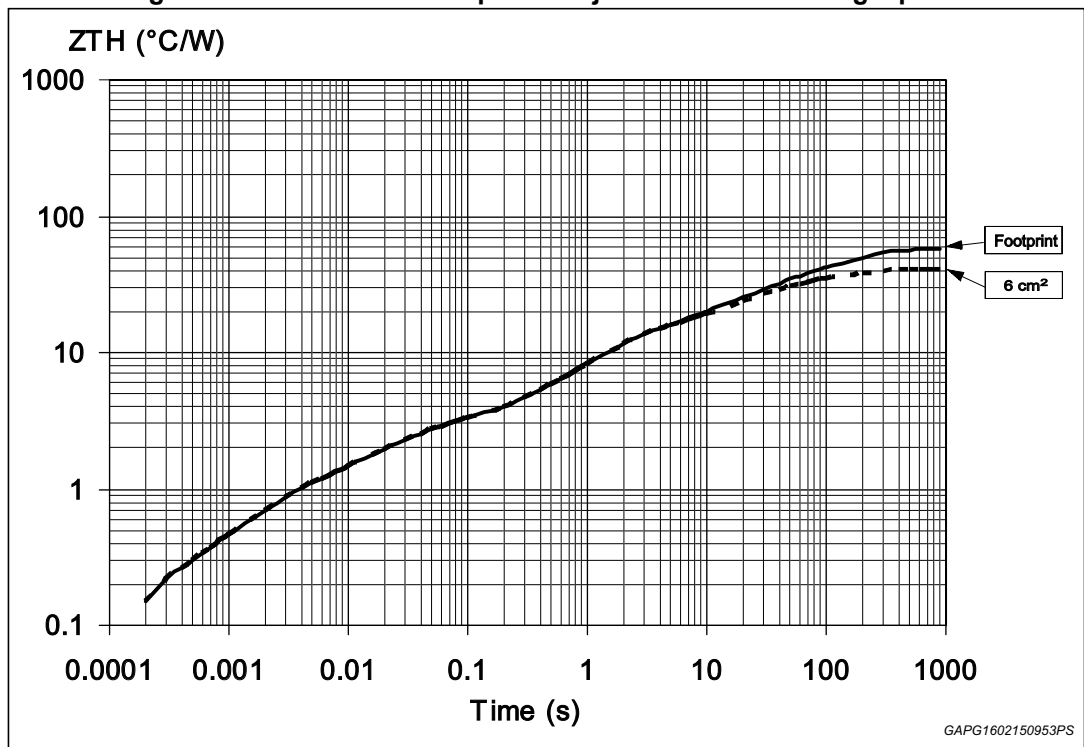

**Equation 1:** pulse calculation formula

$$Z_{TH\delta} = R_{TH} \cdot \delta + Z_{THtp}(1 - \delta)$$

where  $\delta = t_p/T$

Figure 30. Thermal fitting model of a quad channel HSD in SO-28

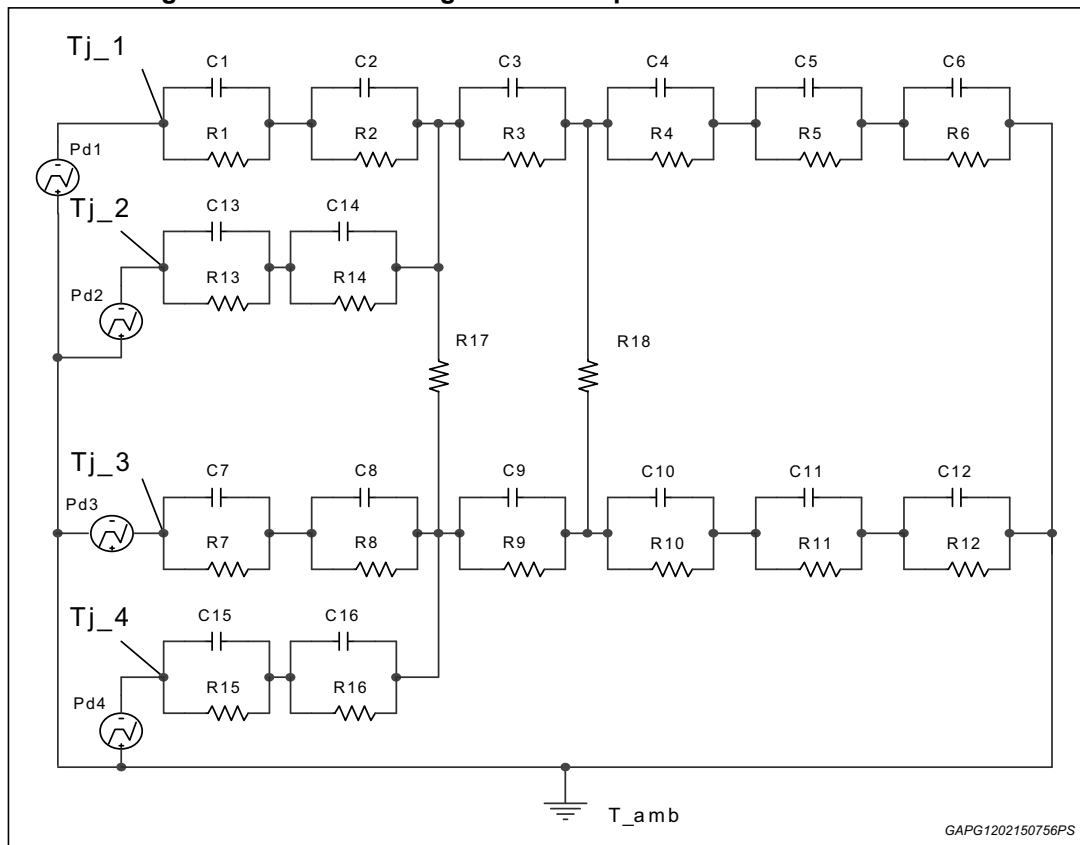


Table 15. Thermal parameters

| Area / island (cm <sup>2</sup> ) | Footprint | 6  |
|----------------------------------|-----------|----|
| R1 = R7 = R13 = R15 (°C/W)       | 0.15      |    |
| R2 = R8 = R14 = R16 (°C/W)       | 0.7       |    |
| R3 = R9 (°C/W)                   | 1.8       |    |
| R4 = R10 (°C/W)                  | 10        |    |
| R5 = R11 (°C/W)                  | 15        |    |
| R6 = R12 (°C/W)                  | 30        | 13 |
| C1 = C7 = C13 = C15 (W.s/°C)     | 0.0005    |    |
| C2 = C8 = C14 = C16 (W.s/°C)     | 3E-03     |    |
| C3 = C9 (W.s/°C)                 | 1.50E-02  |    |
| C4 = C10 (W.s/°C)                | 0.15      |    |
| C5 = C11 (W.s/°C)                | 1.5       |    |
| C6 = C12 (W.s/°C)                | 5         | 8  |
| R17 = R18 (°C/W)                 | 150       |    |

## 5 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 5.1 SO-28 package information

Figure 31. SO-28 package outline

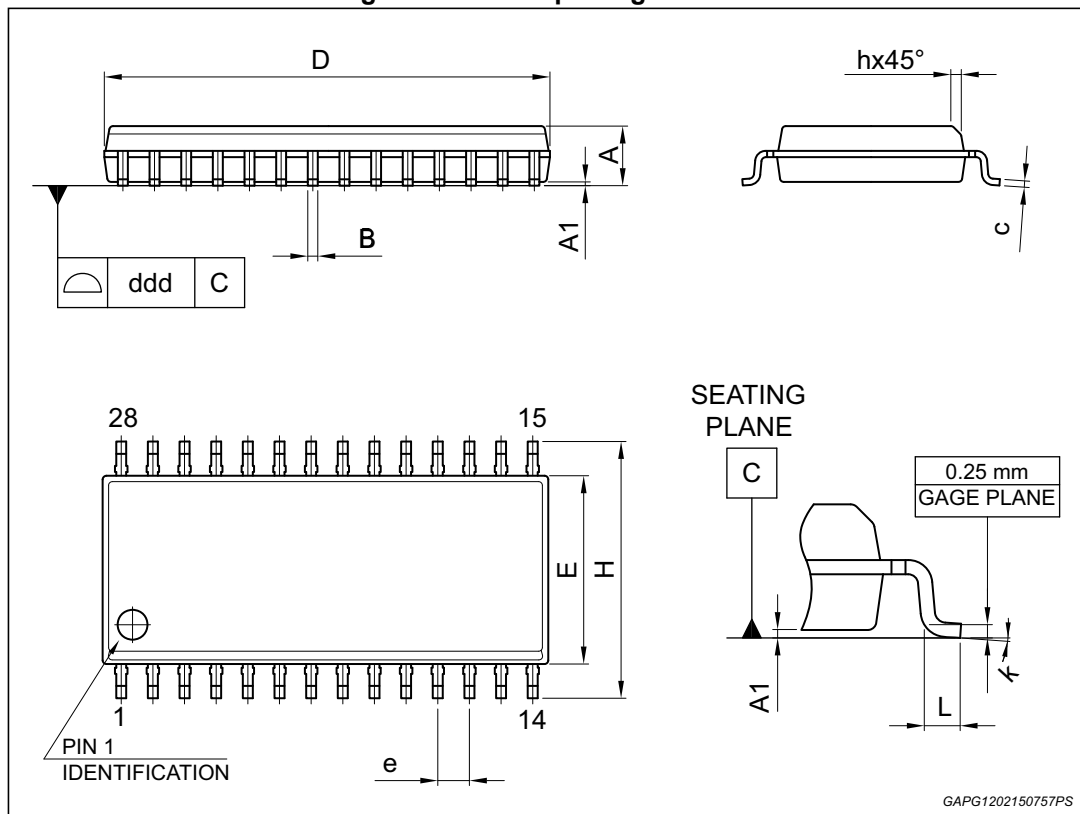


Table 16. SO-28 mechanical data

| Ref.             | Dimensions  |      |       |
|------------------|-------------|------|-------|
|                  | Millimeters |      |       |
|                  | Min.        | Typ. | Max.  |
| A                | 2.35        |      | 2.65  |
| A1               | 0.10        |      | 0.30  |
| B                | 0.33        |      | 0.51  |
| C                | 0.23        |      | 0.32  |
| D <sup>(1)</sup> | 17.70       |      | 18.10 |



Table 16. SO-28 mechanical data

| Ref. | Dimensions  |      |       |
|------|-------------|------|-------|
|      | Millimeters |      |       |
|      | Min.        | Typ. | Max.  |
| E    | 7.40        |      | 7.60  |
| e    |             | 1.27 |       |
| H    | 10.0        |      | 10.65 |
| h    | 0.25        |      | 0.75  |
| L    | 0.40        |      | 1.27  |
| k    | 0°          |      | 8°    |
| ddd  |             |      | 0.10  |

1. Dimension "D" does not include mold flash, protrusions or gate burrs.  
Mold flash, protrusions or gate burrs shall not exceed 0.15mm per side.

# 5.2 SO-28 packing information

Figure 32. SO-28 tube shipment (no suffix)


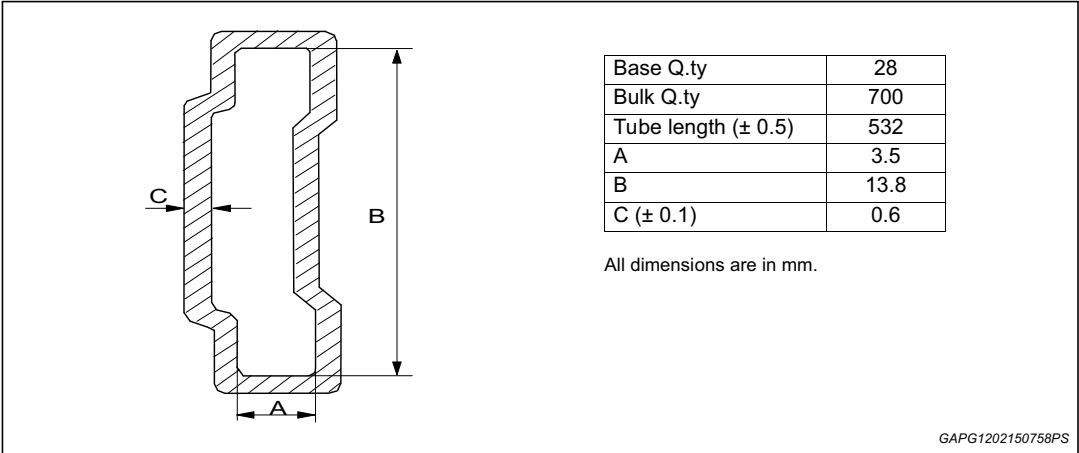


Figure 33. SO-28 tape and reel shipment (suffix “TR”)

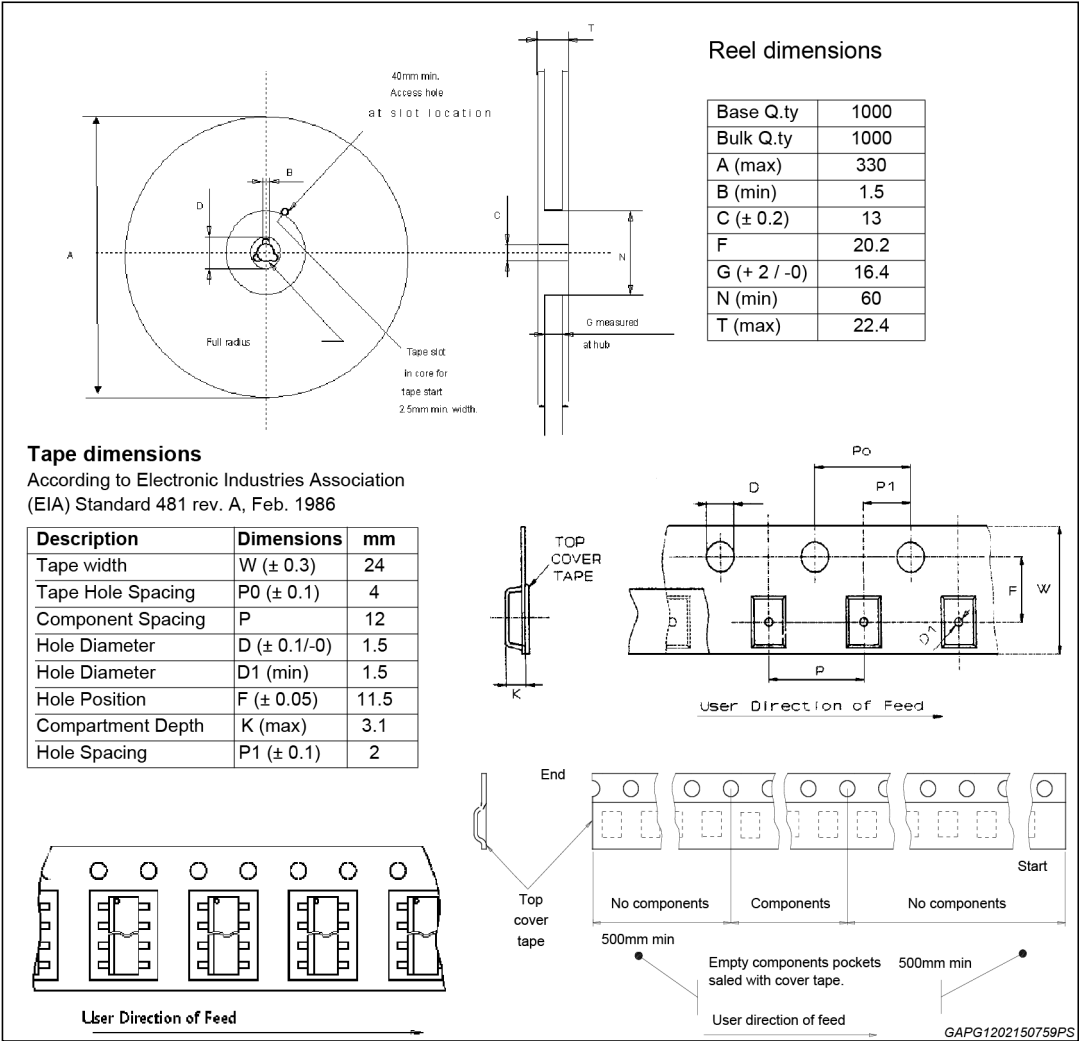

## 6 Revision history

Reported

**Table 17. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                             |
|-------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 03-May-2006 | 1        | Initial release.                                                                                                                                                                    |
| 18-Dec-2008 | 2        | Document reformatted and restructured.<br>Added contents, list of tables and figures.<br>Added <i>ECOPACK<sup>®</sup> packages</i> information.                                     |
| 03-May-2010 | 3        | Changed <i>Features</i> list.<br>Replaced VND830P-E to VND830-E.                                                                                                                    |
| 07-Feb-2011 | 4        | <i>Table 3: Absolute maximum ratings</i><br>– E <sub>MAX</sub> : updated value<br>Updated <i>Figure 5: Switching characteristics</i><br>Updated <i>Table 15: Thermal parameters</i> |
| 19-Sep-2013 | 5        | Updated Disclaimer.                                                                                                                                                                 |
| 16-Feb-2015 | 6        | Updated:<br>– <i>Section 5.1: SO-28 package information</i> ;<br>– Tape dimensions in <i>Figure 33: SO-28 tape and reel shipment (suffix "TR") on page 26</i> .                     |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved