




## Overview

## Features

- Optimized for headlight beam control applications
- Current-peak-blanking (no electrolytic capacitor at  $V_S$ )
- Delivers up to 0.8 A continuous
- Low saturation voltage; typ.1.2 V total @ 25 °C; 0.4 A
- Output protected against short circuit
- Overtemperature protection with hysteresis
- Over- and undervoltage lockout
- No crossover current
- Internal clamp diodes
- Enhanced power packages
- Green Product (RoHS compliant)
- AEC Qualified



**PG-DSO-14-22**

| Type      | Ordering Code | Package      |
|-----------|---------------|--------------|
| TLE 4206G | on request    | PG-DSO-14-22 |

## Description

The TLE 4206G is a protected H-Bridge Driver designed specifically for automotive headlight beam control and industrial servo control applications. The part is built using the Siemens bipolar high voltage power technology DOPL.


The standard enhanced power PG-DSO-14-22 package meets the application requirements and saves PCB-board space and costs. Moreover the package is RoHS compliant.

The servo-loop-parameter pos.- and neg. Hysteresis, pos.- and neg. deadband and angle-amplification are programmable with external resistors.

An internal window-comparator controls the input line. In the case of a fault condition, like short circuit to GND, short circuit to supply-voltage, and broken wire, the TLE 4206 stops the motor immediately (brake condition).

The “programmable current-peak-blanking” disables the servo-loop during the  $V_S$  voltage drop caused by the stall current spike. So there is no need of an electrolytic blocking capacitor at the  $V_S$ -terminal.


Furthermore the built in features like over- and undervoltage-lockout, short-circuit-protection and over-temperature-protection will open a wide range of automotive- and industrial applications.

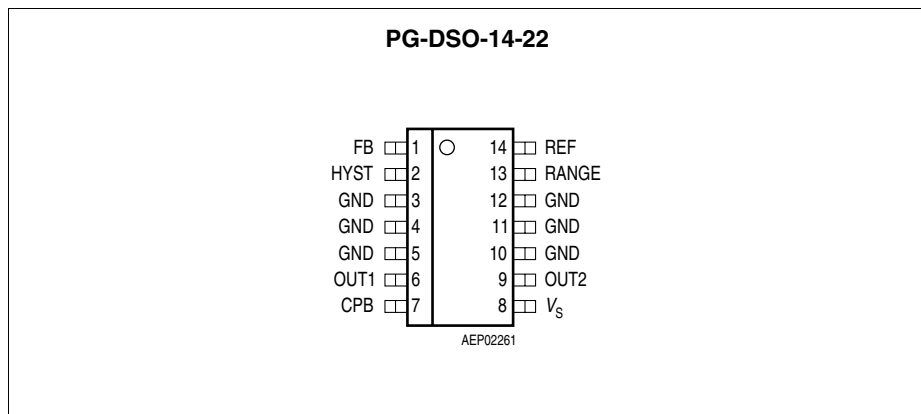

**Figure 1 Pin Configuration** (top view)

### Pin Definitions and Functions

| Pin No.<br>P-DSO-14-8  | Symbol | Function                    |
|------------------------|--------|-----------------------------|
| 1                      | FB     | Feedback Input              |
| 2                      | HYST   | Hysteresis I/O              |
| 3, 4, 5,<br>10, 11, 12 | GND    | Ground                      |
| 6                      | OUT1   | Power Output 1              |
| 7                      | CPB    | Current Peak Blanking Input |
| 8                      | $V_S$  | Power Supply Voltage        |
| 9                      | OUT2   | Power Output 2              |
| 13                     | RANGE  | Range Input                 |
| 14                     | REF    | Reference Input             |

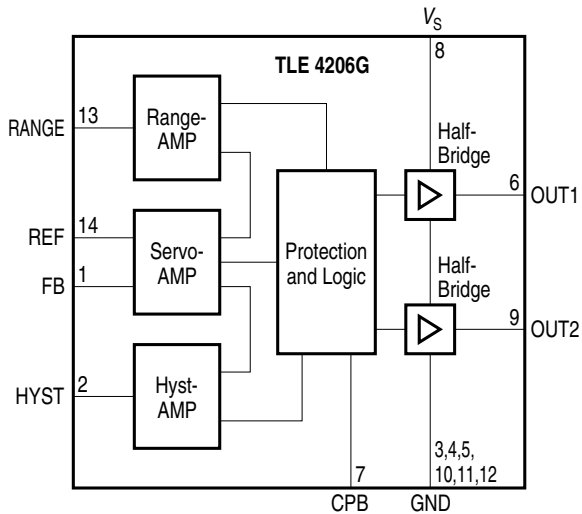

**Figure 2 Block Diagram**

## Absolute Maximum Ratings

| Parameter | Symbol | Limit Values |      | Unit | Remarks |
|-----------|--------|--------------|------|------|---------|
|           |        | min.         | max. |      |         |

## Voltages

|                                                        |       |       |    |   |                                          |
|--------------------------------------------------------|-------|-------|----|---|------------------------------------------|
| Supply voltage                                         | $V_S$ | - 0.3 | 45 | V | —                                        |
| Supply voltage                                         | $V_S$ | - 1   | —  | V | $t < 0.5 \text{ s}; I_S > - 2 \text{ A}$ |
| Logic input voltages<br>(FB, REF, RANGE, HYST,<br>CPB) | $V_I$ | - 0.3 | 20 | V | —                                        |

## Currents

|                                         |           |            |        |          |                               |
|-----------------------------------------|-----------|------------|--------|----------|-------------------------------|
| Output current (OUT1, OUT2)             | $I_{OUT}$ | —          | —      | A        | internally limited            |
| Output current (Diode)                  | $I_{OUT}$ | - 1        | 1      | A        | —                             |
| Input current<br>(FB, REF, RANGE, HYST) | $I_{IN}$  | - 2<br>- 6 | 2<br>6 | mA<br>mA | $t < 2 \text{ ms}; t/T < 0.1$ |

## Temperatures

|                      |           |      |     |    |   |
|----------------------|-----------|------|-----|----|---|
| Junction temperature | $T_j$     | - 40 | 150 | °C | — |
| Storage temperature  | $T_{stg}$ | - 50 | 150 | °C | — |

## Thermal Resistances

|                                    |               |   |    |     |                   |
|------------------------------------|---------------|---|----|-----|-------------------|
| Junction pin<br>(PG-DSO-14-22)     | $R_{thj-pin}$ | — | 25 | K/W | measured to pin 5 |
| Junction ambient<br>(PG-DSO-14-22) | $R_{thjA}$    | — | 65 | K/W | —                 |

*Note: Maximum ratings are absolute ratings; exceeding any one of these values may cause irreversible damage to the integrated circuit.*

## Operating Range

| Parameter                 | Symbol       | Limit Values |               | Unit | Remarks                               |
|---------------------------|--------------|--------------|---------------|------|---------------------------------------|
|                           |              | min.         | max.          |      |                                       |
| Supply voltage            | $V_S$        | 8            | 18            | V    | After $V_S$ rising above $V_{UV\ ON}$ |
| Supply voltage increasing | $V_S$        | − 0.3        | $V_{UV\ ON}$  | V    | Outputs in tristate                   |
| Supply voltage decreasing | $V_S$        | − 0.3        | $V_{UV\ OFF}$ | V    | Outputs in tristate                   |
| Output current            | $I_{OUT1-2}$ | − 0.8        | 0.8           | A    | –                                     |
| Input current (FB, REF)   | $I_{IN}$     | − 50         | 500           | μA   | –                                     |
| Junction temperature      | $T_j$        | − 40         | 150           | °C   | –                                     |

### Electrical Characteristics

$8\text{ V} < V_S < 18\text{ V}$ ;  $I_{\text{OUT}1-2} = 0\text{ A}$ ;  $-40\text{ }^{\circ}\text{C} < T_j < 150\text{ }^{\circ}\text{C}$   
(unless otherwise specified)

| Parameter | Symbol | Limit Values |      |      | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
|           |        | min.         | typ. | max. |      |                |

### Current Consumption

|                |       |   |    |    |    |                                                                       |
|----------------|-------|---|----|----|----|-----------------------------------------------------------------------|
| Supply current | $I_S$ | – | 12 | 20 | mA | –                                                                     |
| Supply current | $I_S$ | – | 20 | 30 | mA | $I_{\text{OUT}1} = 0.4\text{ A}$<br>$I_{\text{OUT}2} = -0.4\text{ A}$ |
| Supply current | $I_S$ | – | 30 | 50 | mA | $I_{\text{OUT}1} = 0.8\text{ A}$<br>$I_{\text{OUT}2} = -0.8\text{ A}$ |

### Over- and Under Voltage Lockout

|                       |                     |      |      |    |   |                                        |
|-----------------------|---------------------|------|------|----|---|----------------------------------------|
| UV Switch ON voltage  | $V_{\text{UV ON}}$  | –    | 7.4  | 8  | V | $V_S$ increasing                       |
| UV Switch OFF voltage | $V_{\text{UV OFF}}$ | 6.3  | 6.9  | –  | V | $V_S$ decreasing                       |
| UV ON/OFF Hysteresis  | $V_{\text{UVHY}}$   | –    | 0.5  | –  | V | $V_{\text{UV ON}} - V_{\text{UV OFF}}$ |
| OV Switch OFF voltage | $V_{\text{OV OFF}}$ | –    | 20.5 | 23 | V | $V_S$ increasing                       |
| OV Switch ON voltage  | $V_{\text{OV ON}}$  | 17.5 | 20   | –  | V | $V_S$ decreasing                       |
| OV ON/OFF Hysteresis  | $V_{\text{OVHY}}$   | –    | 0.5  | –  | V | $V_{\text{OV OFF}} - V_{\text{OV ON}}$ |

### Electrical Characteristics (cont'd)

$8\text{ V} < V_S < 18\text{ V}$ ;  $I_{\text{OUT}1-2} = 0\text{ A}$ ;  $-40\text{ }^{\circ}\text{C} < T_j < 150\text{ }^{\circ}\text{C}$

(unless otherwise specified)

| Parameter | Symbol | Limit Values |      |      | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
|           |        | min.         | typ. | max. |      |                |

### Outputs OUT1-2

#### Saturation Voltages

|                                                    |                    |   |      |      |   |                                    |
|----------------------------------------------------|--------------------|---|------|------|---|------------------------------------|
| Source (upper)<br>$I_{\text{OUT}} = -0.2\text{ A}$ | $V_{\text{SAT U}}$ | – | 0.85 | 1.15 | V | $T_j = 25\text{ }^{\circ}\text{C}$ |
| Source (upper)<br>$I_{\text{OUT}} = -0.4\text{ A}$ | $V_{\text{SAT U}}$ | – | 0.90 | 1.20 | V | $T_j = 25\text{ }^{\circ}\text{C}$ |
| Sink (upper)<br>$I_{\text{OUT}} = -0.8\text{ A}$   | $V_{\text{SAT U}}$ | – | 1.10 | 1.50 | V | $T_j = 25\text{ }^{\circ}\text{C}$ |
| Sink (lower)<br>$I_{\text{OUT}} = 0.2\text{ A}$    | $V_{\text{SAT L}}$ | – | 0.15 | 0.23 | V | $T_j = 25\text{ }^{\circ}\text{C}$ |
| Sink (lower)<br>$I_{\text{OUT}} = 0.4\text{ A}$    | $V_{\text{SAT L}}$ | – | 0.25 | 0.40 | V | $T_j = 25\text{ }^{\circ}\text{C}$ |
| Sink (lower)<br>$I_{\text{OUT}} = 0.8\text{ A}$    | $V_{\text{SAT L}}$ | – | 0.45 | 0.75 | V | $T_j = 25\text{ }^{\circ}\text{C}$ |

|                                            |                  |   |     |     |   |                                                        |
|--------------------------------------------|------------------|---|-----|-----|---|--------------------------------------------------------|
| Total drop $I_{\text{OUT}} = 0.2\text{ A}$ | $V_{\text{SAT}}$ | – | 1.0 | 1.4 | V | $V_{\text{SAT}} = V_{\text{SAT U}} + V_{\text{SAT L}}$ |
| Total drop $I_{\text{OUT}} = 0.4\text{ A}$ | $V_{\text{SAT}}$ | – | 1.2 | 1.7 | V | $V_{\text{SAT}} = V_{\text{SAT U}} + V_{\text{SAT L}}$ |
| Total drop $I_{\text{OUT}} = 0.8\text{ A}$ | $V_{\text{SAT}}$ | – | 1.6 | 2.5 | V | $V_{\text{SAT}} = V_{\text{SAT U}} + V_{\text{SAT L}}$ |

#### Clamp Diodes

|                        |                  |   |     |     |    |                      |
|------------------------|------------------|---|-----|-----|----|----------------------|
| Forward voltage; upper | $V_{\text{FU}}$  | – | 1   | 1.5 | V  | $I_F = 0.4\text{ A}$ |
| Upper leakage current  | $I_{\text{LKU}}$ | – | –   | 5   | mA | $I_F = 0.4\text{ A}$ |
| Forward voltage; lower | $V_{\text{FL}}$  | – | 0.9 | 1.4 | V  | $I_F = 0.4\text{ A}$ |

### Electrical Characteristics (cont'd)

$8\text{ V} < V_S < 18\text{ V}$ ;  $I_{\text{OUT}1-2} = 0\text{ A}$ ;  $-40\text{ }^{\circ}\text{C} < T_j < 150\text{ }^{\circ}\text{C}$   
(unless otherwise specified)

| Parameter | Symbol | Limit Values |      |      | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
|           |        | min.         | typ. | max. |      |                |

### Input-Interface

#### Input REF

|                   |                   |   |     |   |            |                                              |
|-------------------|-------------------|---|-----|---|------------|----------------------------------------------|
| Quiescent voltage | $V_{\text{REF}q}$ | – | 200 | – | mV         | $I_{\text{REF}} = 0\text{ }\mu\text{A}$      |
| Input resistance  | $R_{\text{REF}}$  | – | 6   | – | k $\Omega$ | $0\text{ V} < V_{\text{REF}} < 0.5\text{ V}$ |

#### Input FB

|                   |                  |   |     |   |            |                                             |
|-------------------|------------------|---|-----|---|------------|---------------------------------------------|
| Quiescent voltage | $V_{\text{FB}q}$ | – | 200 | – | mV         | $I_{\text{FB}} = 0\text{ }\mu\text{A}$      |
| Input resistance  | $R_{\text{FB}}$  | – | 6   | – | k $\Omega$ | $0\text{ V} < V_{\text{FB}} < 0.5\text{ V}$ |

### Input/Output HYST

|                                                                                                 |                        |     |      |     |               |                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------|------------------------|-----|------|-----|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current Amplification<br>$A_{\text{HYST}} = I_{\text{HYST}} / (I_{\text{REF}} - I_{\text{FB}})$ | $A_{\text{HYST}}$      | 0.8 | 0.95 | 1.1 | –             | $-20\text{ }\mu\text{A} < I_{\text{HYST}} < -10\text{ }\mu\text{A}$ ;<br>$10\text{ }\mu\text{A} < I_{\text{HYST}} < 20\text{ }\mu\text{A}$ ;<br>$I_{\text{REF}} = 250\text{ }\mu\text{A}$<br>$V_{\text{HYST}} = V_S / 2$ |
| Current Offset                                                                                  | $I_{\text{HYSTIO}}$    | –2  | 0.35 | 3   | $\mu\text{A}$ | $I_{\text{REF}} = I_{\text{FB}} = 250\text{ }\mu\text{A}$<br>$V_{\text{HYST}} = V_S / 2$                                                                                                                                 |
| Threshold voltage High                                                                          | $V_{\text{HYH}} / V_S$ | –   | 52   | –   | %             | –                                                                                                                                                                                                                        |
| Deadband voltage High                                                                           | $V_{\text{DBH}} / V_S$ | –   | 50.4 | –   | %             | –                                                                                                                                                                                                                        |
| Deadband voltage Low                                                                            | $V_{\text{DBL}} / V_S$ | –   | 49.6 | –   | %             | –                                                                                                                                                                                                                        |
| Threshold voltage Low                                                                           | $V_{\text{HYL}} / V_S$ | –   | 48   | –   | %             | –                                                                                                                                                                                                                        |
| Hysteresis Window                                                                               | $V_{\text{HYW}} / V_S$ | 3   | 4    | 5   | %             | $(V_{\text{HYH}} - V_{\text{HYL}}) / V_S$                                                                                                                                                                                |
| Deadband Window                                                                                 | $V_{\text{DBW}} / V_S$ | 0.4 | 0.8  | 1.2 | %             | $(V_{\text{DBH}} - V_{\text{DBL}}) / V_S$                                                                                                                                                                                |

### Electrical Characteristics (cont'd)

$8\text{ V} < V_S < 18\text{ V}$ ;  $I_{\text{OUT}1-2} = 0\text{ A}$ ;  $-40\text{ }^{\circ}\text{C} < T_j < 150\text{ }^{\circ}\text{C}$

(unless otherwise specified)

| Parameter | Symbol | Limit Values |      |      | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
|           |        | min.         | typ. | max. |      |                |

### Input RANGE


|                         |                    |      |     |     |               |                                       |
|-------------------------|--------------------|------|-----|-----|---------------|---------------------------------------|
| Input current           | $I_{\text{RANGE}}$ | - 1  | -   | 1   | $\mu\text{A}$ | $0\text{ V} < V_{\text{RANGE}} < V_S$ |
| Switch-OFF voltage High | $V_{\text{OFFH}}$  | - 25 | 0   | 100 | mV            | refer to $V_S$                        |
| Switch-OFF voltage Low  | $V_{\text{OFFL}}$  | 300  | 400 | 500 | mV            | refer to GND                          |

### Input CPB (Current Peak Blanking)

|                        |                    |   |     |     |               |                                                                       |
|------------------------|--------------------|---|-----|-----|---------------|-----------------------------------------------------------------------|
| Charge current         | $I_{\text{CPBCH}}$ | - | 6.5 | -   | $\mu\text{A}$ | $V_{\text{HYL}} > V_{\text{HYST}}$ ;<br>$V_{\text{CPB}} = 0\text{ V}$ |
| Low voltage            | $V_{\text{CPBL}}$  | - | 20  | 100 | mV            | $V_{\text{HYL}} < V_{\text{HYST}}$<br>$< V_{\text{HYH}}$              |
| High voltage threshold | $V_{\text{CPBH}}$  | 5 | 5.7 | 6.5 | V             | $V_{\text{HYL}} > V_{\text{HYST}}$                                    |
| Clamp voltage          | $V_{\text{CPBC}}$  | - | 6.2 | -   | V             | $V_{\text{HYL}} > V_{\text{HYST}}$                                    |
| Blanking time          | $t_{\text{CPB}}$   | - | 40  | -   | ms            | $C_{\text{CPB}} = 47\text{ nF}$                                       |


### Thermal Shutdown

|                                        |                  |     |     |     |                    |   |
|----------------------------------------|------------------|-----|-----|-----|--------------------|---|
| Thermal shutdown junction temperature  | $T_{\text{JSD}}$ | 150 | 175 | 200 | $^{\circ}\text{C}$ | - |
| Thermal switch-on junction temperature | $T_{\text{JSO}}$ | 120 | -   | 170 | $^{\circ}\text{C}$ | - |
| Temperature hysteresis                 | $\Delta T$       | -   | 30  | -   | K                  | - |

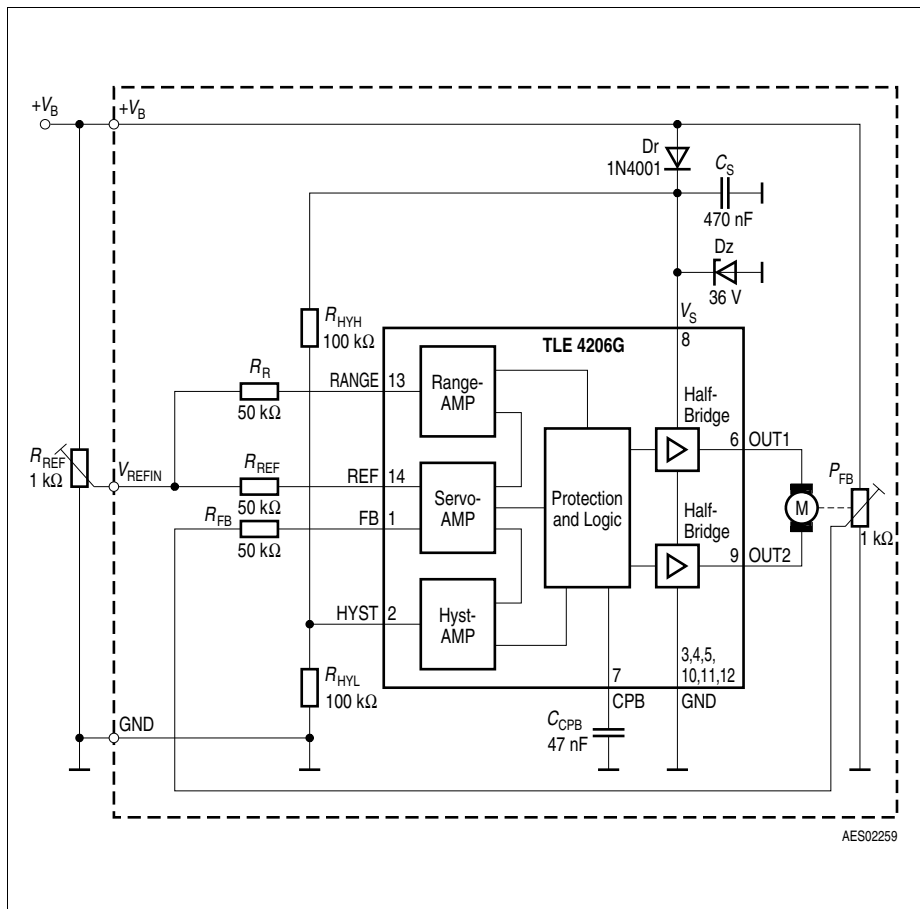


AES02259

**Figure 3 Application Circuit**

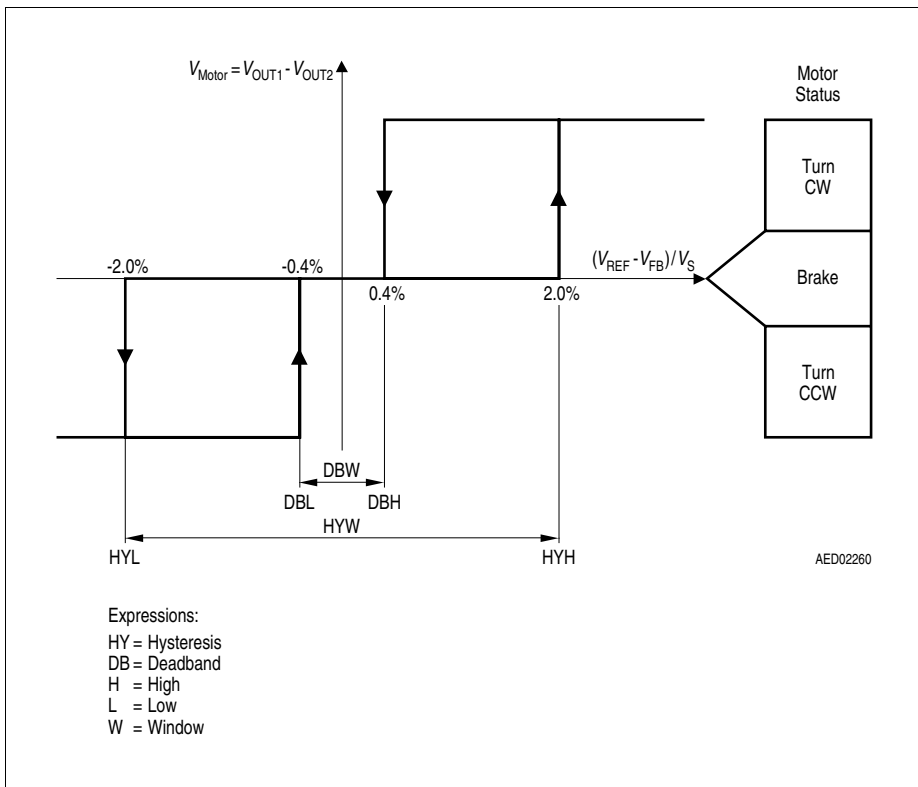

**Figure 4 Hysteresis, Phaselag and Deadband-Definitions**

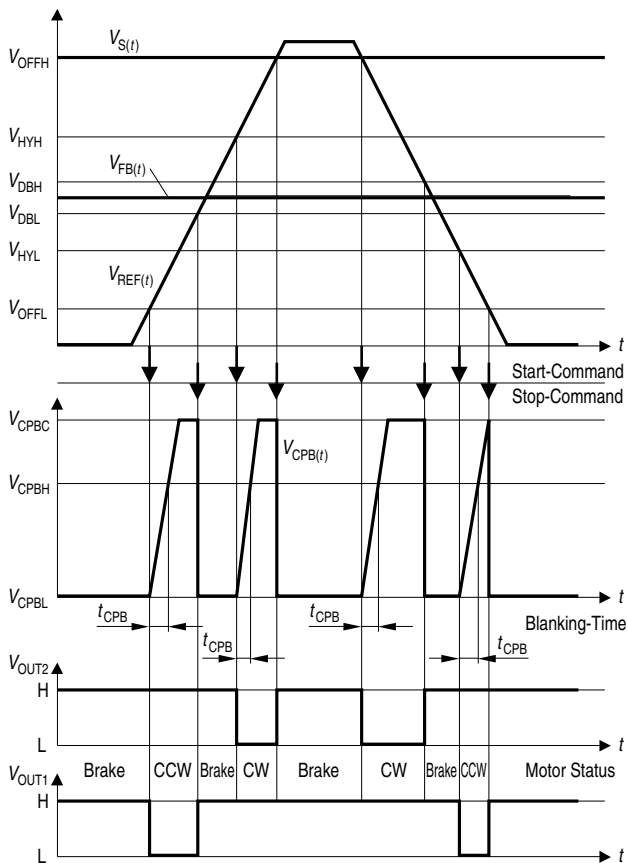

Testconditions:  $V_S = V_B$ ; no revers polarity voltage diode

$R_{HYH} = R_{HYL} = 100 \text{ k}\Omega$ ;

$R_{REF} = R_{FB} = 50 \text{ k}\Omega$


AED02314

**Figure 5 Timing and Phaselag**

## Package Outlines

### PG-DSO-14-22

(Plastic Green - Dual Small Outline Package)

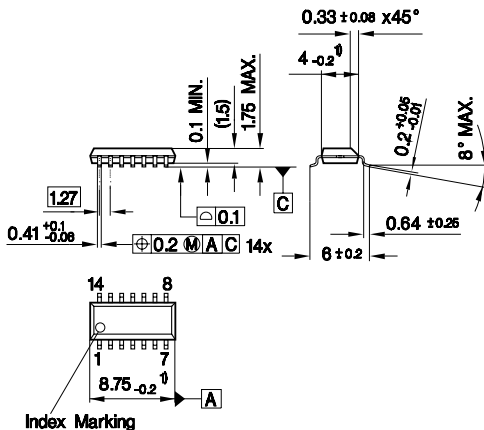

### Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

You can find all of our packages, sorts of packing and others in our Infineon Internet Page "Products": <http://www.infineon.com/products>.

SMD = Surface Mounted Device

Dimensions in mm

## Revision History

| Version  | Date       | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev. 1.1 | 2007-08-10 | <p>RoHS-compliant version of the TLE 4206</p> <ul style="list-style-type: none"> <li>• All pages: Infineon logo updated</li> <li>• Page 1: <ul style="list-style-type: none"> <li>“AEC qualified” and “RoHS” logo added, “Green Product (RoHS compliant)” and “AEC qualified” statement added to feature list, package names changed to RoHS compliant versions, package pictures updated, ordering codes removed</li> </ul> </li> <li>• Page 13: <ul style="list-style-type: none"> <li>Package names changed to RoHS compliant versions, “Green Product” description added</li> </ul> </li> </ul> |
| Rev. 1.2 | 2008-02-04 | <ul style="list-style-type: none"> <li>• Revision History added</li> <li>• Legal Disclaimer added</li> <li>• Page1: Update Package Picture</li> <li>• Editorial change: deleted "fully" (The term "fully protected" often leads to misunderstandings as it is unclear with respect to which parameters).</li> </ul>                                                                                                                                                                                                                                                                                 |

**Edition 2008-02-04**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2/4/08 Infineon Technologies AG  
All Rights Reserved.**

#### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.