

S-UM5588 is a Octal programmable 5-level high-voltage ultrasound transmit beam-former.

The S-UM5588 comprises control logic, waveform memory, delay calculator, level translators, gate drive buffers with floating voltage regulators, high-voltage, high-current MOSFETs, and active T/R switches.

■ Functions

- Octal programmable 5-level transmit beam-former with active T/R-switch

■ Features

- 0 to $\pm 100\text{V}$ output voltage
- $\pm 2\text{A}$ source and sink current for the 1st and 2nd high-voltage pulses (V_{PP1}/V_{NN1} , V_{PP2}/V_{NN2})
- 2-mode output current control for the 2nd high-voltage rail
- $\pm 1\text{A}$ source and sink peak current for active ground clamp
- 250Ω active ground clamp without blocking diode for active ground
- 20MHz output frequency at $\pm 60\text{V}$ output, 220pF load
- Symmetrical positive and negative pulse waveforms for low 2nd order harmonic distortion
- 1.8V to 3.3V LVCMOS logic interface
- Waveform memory and registers with 100MHz Write / 50MHz Read SPI
- $0.2\mu\text{s}$ to $41\mu\text{s}$ common delay time range from TRIG signal
- 0 to $1.275\mu\text{s}$ channel-to-channel delay time range
- 5ns channel-to-channel delay time resolution with dual-edge 100MHz LVDS/LVCMOS clock
- Minimum 10ns pulse width with 5ns time resolution with dual-edge 100MHz LVDS/LVCMOS clock
- 15Ω active T/R switch
- Noise-cut diodes at each high-voltage output
- High-voltage clamp diodes between each high-voltage output and power rails
- Automatic thermal protection with indicator
- Power-up/down reset function for free power sequencing and for fail-safe in abrupt power drop
- Latch-up free, low crosstalk between channels by SOI CMOS technology
- QFN-68(1010)B: 68-lead $10\times 10\text{mm}$ QFN package (RoHS compliant)

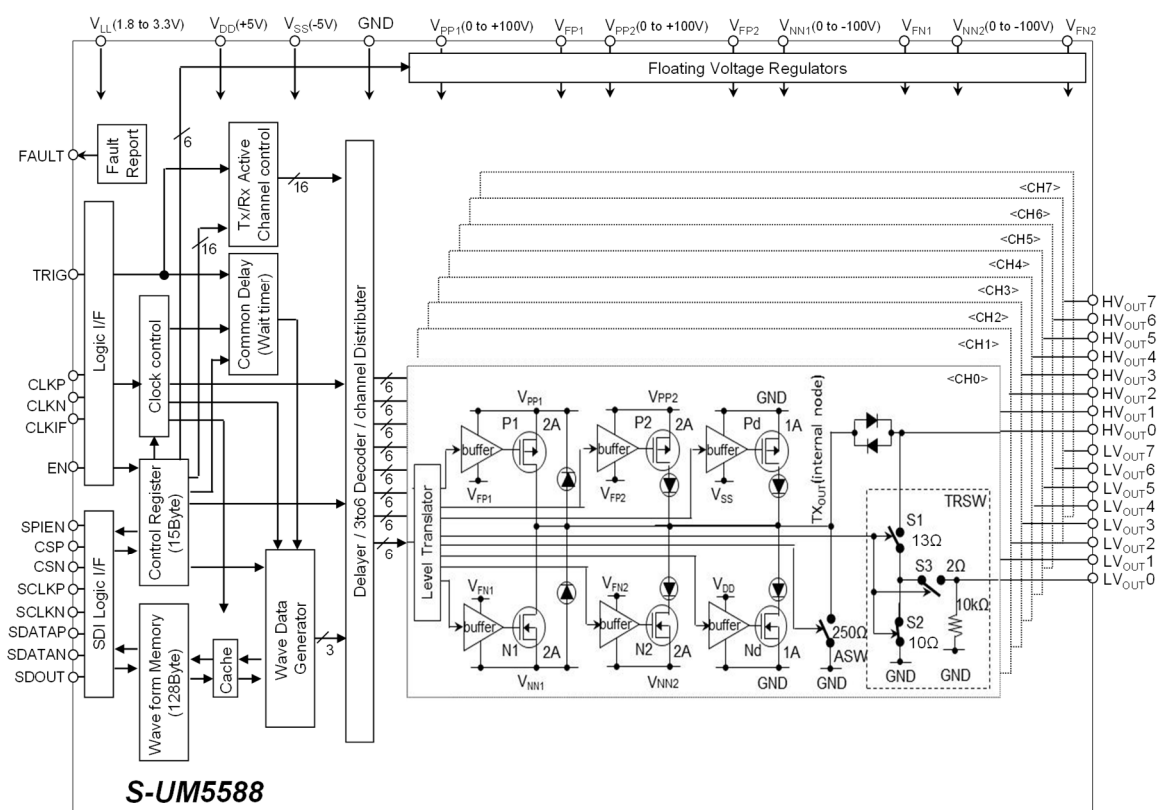


Figure 1 Block Diagram
ABLIC Inc.

■ Absolute Maximum Ratings

T_A=25°C unless otherwise specified.

Table 1 Absolute Maximum Ratings

No.	Items	Symbol	Value	Units	Condition
1	Logic supply voltage	V _{LL}	-0.4 to +7	V	
2	Positive supply voltage	V _{DD}	-0.4 to +7	V	
3	Negative supply voltage	V _{SS}	-7 to +0.4	V	
4	Positive high-voltage supplies	V _{PP1} , V _{PP2}	-0.5 to +105	V	
5	Negative high-voltage supplies	V _{NN1} , V _{NN2}	-105 to +0.5	V	
6	High-voltage outputs (x=0 to 7)	HV _{OUTX}	-105 to +105	V	
7	Low-voltage outputs (x=0 to 7)	LV _{OUTX}	-1 to +1	V	
8	Logic output voltage	SDOUT, FAULT	-0.4 to +7	V	
9	Logic input voltages	EN, CLKIF, CLKP, CLKN, TRIG, SPIEN, CSP, CSN, SCLKP, SCLKN, SDATAP, SDATAN	-0.4 to +7	V	
10	Operating junction temperature	T _{Jop}	-20 to +125	°C	
11	Storage temperature	T _{STG}	-55 to +150	°C	
12	Maximum power dissipation	P _{Dmax}	4	W	

Remark Stresses beyond the absolute maximum ratings may cause permanent damage to the product.

■ Operating Supply Voltages and Logic Inputs

1. Operating supply voltage and temperature

Table 2 Operating Supply Voltage and Temperature

No.	Items	Symbol	Min.	Typ.	Max.	Units	Condition
1	Logic supply voltage	V _{LL}	1.71	1.8 to 3.3	3.6	V	
2	Positive supply voltage	V _{DD}	4.75	5	5.25	V	
3	Negative supply voltage	V _{SS}	-5.25	-5	-4.75	V	
4	Positive high-voltage supplies	V _{PP1} , V _{PP2}	0	—	100	V	
5	Negative high-voltage supplies	V _{NN1} , V _{NN2}	-100	—	0	V	
6	IC substrate voltage *1	V _{SUB}	—	0	—	V	
7	V _{PP_} , V _{NN_} slew rate	SR _{MAX}	—	—	25	V/ms	
8	Operating free-air Temperature	T _a	0	—	75	°C	

*1. The package exposed pad internally connected to the chip substrate must be soldered to the ground.

2. Logic inputs and outputs

2.1 LVDS differential logic inputs

Table 3 CLKP/CLKN, CSP/CSN, SCLKP/SCLKN, SDATAP/SDATAN

No.	Items	Symbol	Min.	Typ.	Max.	Units	Condition
1	High-level input voltage	V_{IH}	1.265	—	—	V	$V_{IHCMR}(Typ) + V_{DIFF}(Min)/2$
2	Low-level input voltage	V_{IL}	—	—	1.135	V	$V_{IHCMR}(Typ) - V_{DIFF}(Min)/2$
3	Differential input voltage range	$V_{DIFF(range)}$	0.13	0.35	0.49	$\pm V$	Same as voltage swing
4	Differential input voltage peak to peak swing	$V_{DIFF(p-p)}$	0.26	0.7	0.98	V_{pp}	Differential peak-to-peak absolute voltage swing
5	Input voltage common mode range	V_{IHCMR}	0.84	1.2	1.56	V	
6	High-level input current	I_{IH}	—	—	5.8	mA	
7	Low-level input current	I_{IL}	—	—	5.8	mA	
8	Input rise/fall time	t_r, t_f	—	—	600	ps	20% to 80% of V_{DIFF}
9	Input clock frequency (Tx)	f_{CLK}	—	—	100	MHz	CLKP/CLKN, SCLKP/SCLKN
	Input clock frequency (SPI)	f_{SCLK}	—	—	100	MHz	SCLKP/SCLKN (Write mode)
			—	—	50	MHz	SCLKP/SCLKN (Read mode)
10	Clock duty cycle	D_{CLK}	48	50	52	%	CLKP/CLKN
		D_{SCLK}	45	50	55	%	SCLKP/SCLKN
11	CS setup time	t_{SU_CS}	2.5	—	—	ns	CS to SCLK rise
12	CS hold time	t_{HLD_CS}	2.5	—	—	ns	CS to SCLK rise
13	CS width	t_{W_CS}	$1043T_{SCLK}$	—	—	ns	Data write to memory
			$1050T_{SCLK}$	—	—	ns	Data read from memory
			$75T_{SCLK}$	—	—	ns	Data Write to 7Byte register
			$82T_{SCLK}$	—	—	ns	Data read from 7Byte register
			$147T_{SCLK}$	—	—	ns	Data write to 16Byte register
			$154T_{SCLK}$	—	—	ns	Data read from 16Byte register
			$26T_{SCLK}$	—	—	ns	Data read of other register
14	SDATA setup time	t_{SU_SDATA}	2.5	—	—	ns	SDATA to SCLK rise
15	SDATA hold time	t_{HLD_SDATA}	2.5	—	—	ns	SDATA to SCLK rise

Remark External termination Resister (100Ω) is necessary for LVDS I/F differential inputs.

2.2 CMOS logic inputs & outputs

Table 4 CLKP/CLKN, CSP/CSN, SCLKP/SCLKN, SDATAP/SDATAN^{*3}
EN, CLKIF, TRIG, SPIEN, SDOUT

No.	Items	Symbol	Min.	Typ.	Max.	Units	Condition
1	High-level logic input voltage	V_{IH}	$0.8V_{LL}$	—	V_{LL}	V	
2	Low-level logic input voltage	V_{IL}	0	—	$0.2V_{LL}$	V	
3	Logic input capacitance	C_{IN}	—	3	—	pF	
4	Logic input high current ^{*1}	I_{IH}	-10	—	10	μA	
5	Logic input low current ^{*2}	I_{IL}	-10	—	10	μA	
6	Input rise/fall time	t_r, t_f	—	—	2.0	ns	10% to 90% of signal
7	TRIG fall to clock rise setup time	$t_{SU_TRFtoCKR}$	1.5	—	—	ns	LVDS clock
			1.5	—	—		CMOS clock
8	TRIG fall to clock rise hold time	$t_{HLD_TRFtoCKR}$	1.5	—	—	ns	LVDS clock
			1.5	—	—		CMOS clock
9	TRIG width	t_{W_TRIG}	$3T_{CLK}$	—	—	ns	
10	High-level logic output voltage	V_{OH}	$0.8V_{LL}$	—	V_{LL}	V	SDOUT
11	Low-level logic output voltage	V_{OL}	0	—	$0.2V_{LL}$	V	SDOUT
12	Logic output off leak current	$I_{OFFLEAK}$	-10	—	10	μA	SDOUT Hi-Z output
13	SDOUT propagation delay	t_{D_SDOUT}	8	12	18	ns	$V_{LL}=1.8V$, 10pF load
			7	11	17	ns	$V_{LL}=2.5V$, 10pF load
			6	10	16	ns	$V_{LL}=3.3V$, 10pF load

*1. CLKIF has 50μA leakage at $V_{LL}=2.5V$ due to 50kΩ internal pull-down resistor.

*2. EN, SPIEN has 50μA leakage at $V_{LL}=2.5V$ due to 50kΩ internal pull-up resistor.

*3. Differential CMOS or Single-ended CMOS is also available for CLKP/N, CSP/N, SCLKP/N and SDATAP/N.
 In case of single-ended CMOS, N-terminals (CLKN, CSPN, SCLKN and SDATAN) need to be connected to half of V_{LL} ($V_{LL}/2$).

2.3 Open drain output

Table 5 FAULT

No.	Items	Symbol	Min.	Typ.	Max.	Units	Condition
1	Pull-up voltage	$V_{PUFAULT}$	—	—	V_{LL}	V	Connected to V_{LL} with R1
2	Output low voltage	$V_{OLFAULT}$	—	—	0.5	V	Active, $V_{LL}=2.5V$, $R1=2.5k\Omega$
3	Output current	I_{FAULT}	—	1.0	—	mA	$V_{LL}=2.5V$, $R1=2.5k\Omega$
4	Off leak current	$I_{OFFLEAK}$	-10	—	10	μA	Disabled (Hi-Z)

2.4 Logic inputs timing chart

2.4.1 LVDS clock inputs

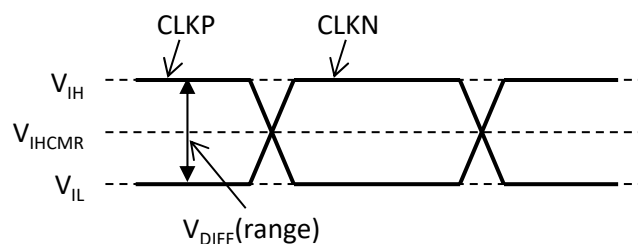


Figure 2 Differential Input Voltage Range ($V_{DIFF(range)}$)

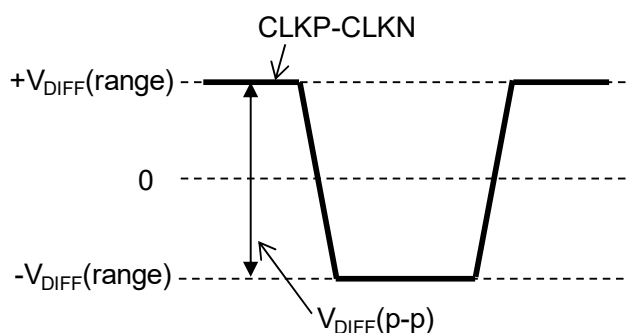


Figure 3 Differential Input Voltage Peak to Peak Swing ($V_{DIFF(p-p)}$)

2.4.2 TRIG and setup/hold time

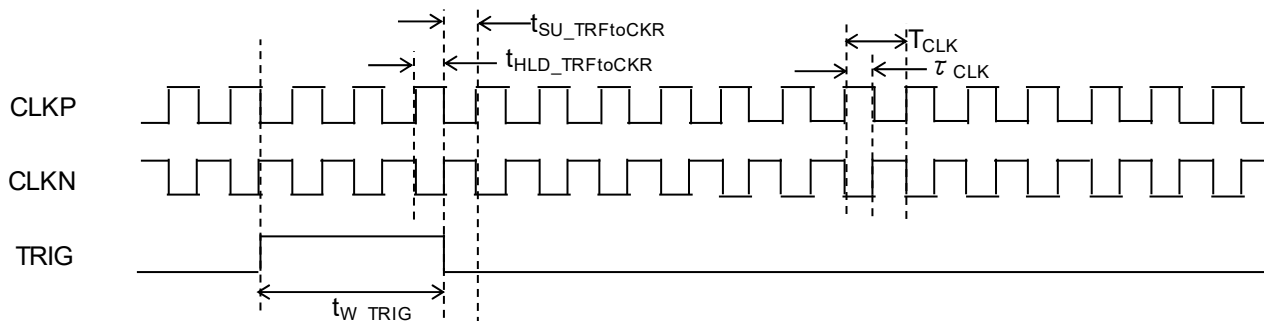


Figure 4

2.4.3 SPI inputs and setup/hold time

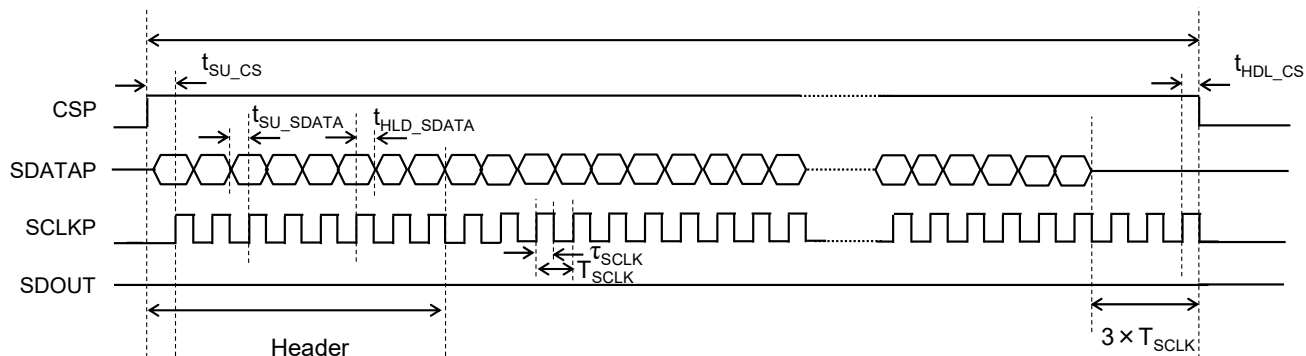


Figure 5 Write Data to Waveform Memory or Registers

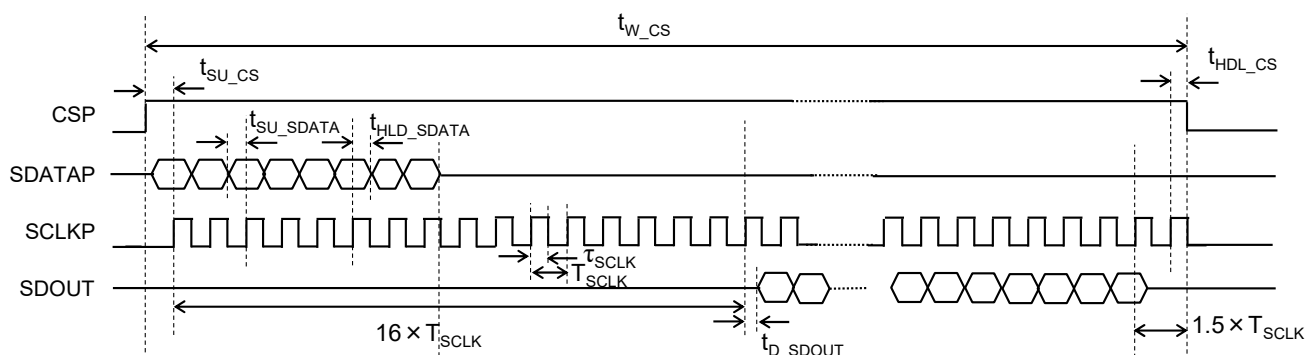


Figure 6 Read Data from Waveform Memory or Registers

2.4.4 Note on CSP rise timing

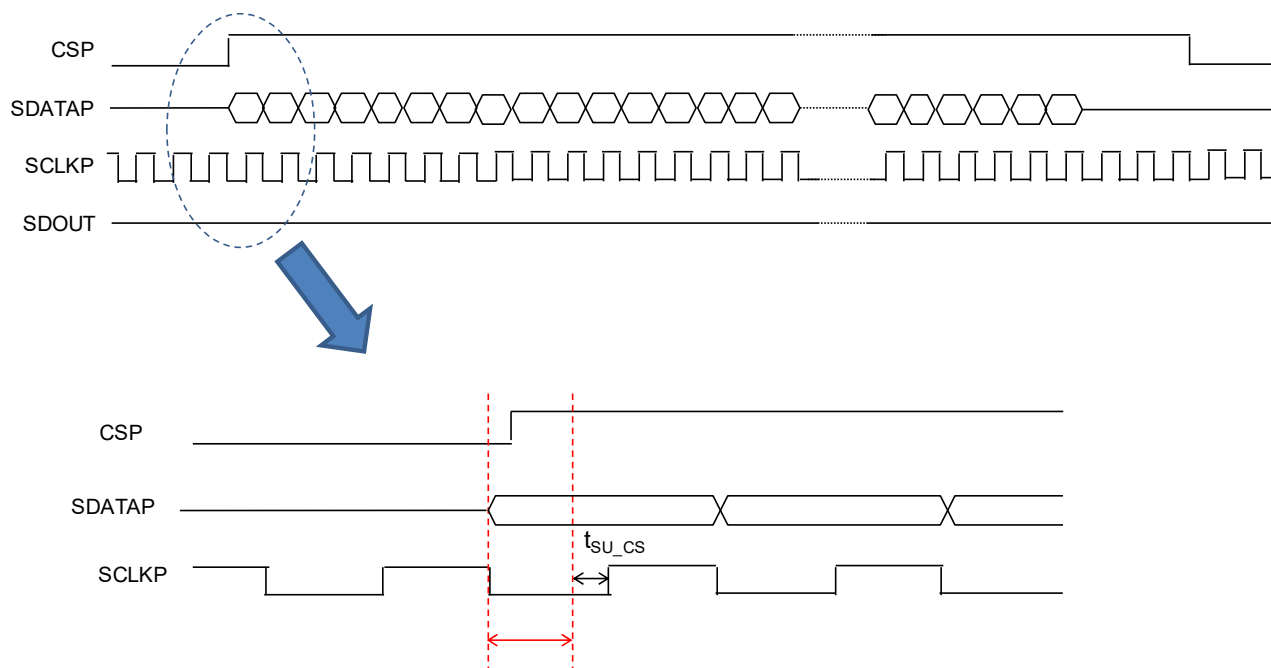


Figure 7 Note on CSP rise timing in case that SCLKP operates before CSP rising as following.

In case that SCLKP operates before CSP rising, CSP has to rise during SCLKP is "low" except for setup time "t_{SU_CS}".

■ Typical Application Circuit

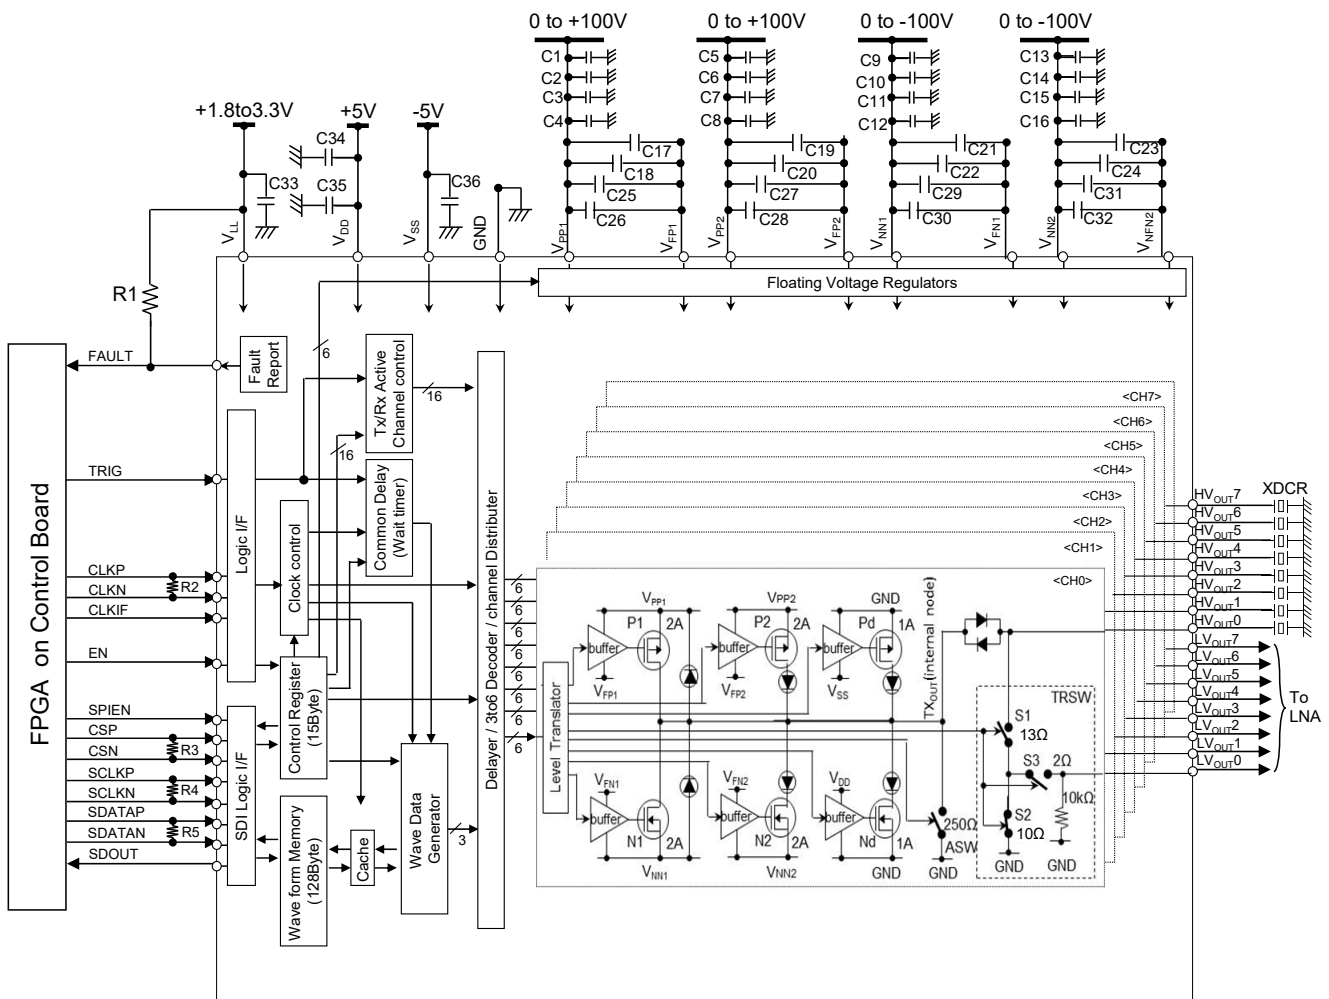


Figure 8 Typical Application Circuit

Remark

- C1 to C16: Ceramic capacitors of $\geq 200\text{V}$ $0.1\mu\text{F}$ to $1\mu\text{F}$
- C17 to C24: Ceramic capacitors of $\geq 16\text{V}$ $10\mu\text{F}$
- C25 to C36: Ceramic capacitors of $\geq 16\text{V}$ $0.1\mu\text{F}$
- R1: $2.5\text{k}\Omega$
- R2 to R5: 100Ω (for LVDS)

Note:

1. High-voltage power supply pins, VPP/VNN, can draw fast transient currents up to $\pm 2.0\text{A}$. Therefore, ceramic capacitors of $\geq 200\text{V}$ $0.1\mu\text{F}$ to $1\mu\text{F}$ (C1 to 16) should be connected as close to the pins as possible for bypassing purpose.
2. Ceramic capacitors of $\geq 16\text{V}$ $10\mu\text{F}$ (C17 to 24), and $\geq 16\text{V}$ $0.1\mu\text{F}$ (C25 to 36) should also be connected between high-voltage power supply pins and corresponding floating voltage pins VFP/VFN, and low-voltage power supply pins for bypassing purpose. Connect those as close to the pins as possible.
3. It is also important to minimize the trace length and to have enough trace width of those high voltage and floating voltage lines.
4. The thermal tab on the bottom of the package must be soldered to the GND.
5. External 100Ω should be connected between differential LVDS inputs of SPI and Clock.

■ Electrical Characteristics

1. Operating supply currents

Table 6 Operating Supply Currents (1/2)

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, $CLKP/CLKN=100MHz$, HV_{OUT} load= $220pF//200\Omega$, LV_{OUT} load= $47pF//200\Omega$, unless otherwise specified.

No.	Items		Symbol	Spec			Units	Conditions
				Min.	Typ.	Max.		
1	V_{LL} current	SPIEN=H	I_{LLQD}	—	0.05	—	mA	Quiescent current-1 EN=1(Disable) Current mode 1 (CC='1') $V_{PP1}/V_{NN1}=\pm 100V$ $V_{PP2}/V_{NN2}=\pm 100V$
		SPIEN=L		—	0.1	—	mA	
2	V_{DD} current	SPIEN=H	I_{DDQD}	—	5.5	—	mA	
		SPIEN=L		—	13.5	—	mA	
3	V_{SS} current		I_{SSQD}	—	1	—	mA	
4	V_{PP1} current		I_{PP1QD}	—	0.1	—	mA	
5	V_{PP2} current		I_{PP2QD}	—	0.1	—	mA	
6	V_{NN1} current		I_{NN1QD}	—	0.1	—	mA	
7	V_{NN2} current		I_{NN2QD}	—	0.1	—	mA	
8	V_{LL} current	SPIEN=H	I_{LLQE}	—	0.1	—	mA	Quiescent current-2 EN=0(Enable) Current mode 1 (CC='1') $V_{PP1}/V_{NN1}=\pm 100V$ $V_{PP2}/V_{NN2}=\pm 100V$
		SPIEN=L		—	0.15	—	mA	
9	V_{DD} current	SPIEN=H, CLKIF=H(CMOS)	I_{DDQE}	—	12	—	mA	
		SPIEN=H, CLKIF=L(LVDS)		—	14	—	mA	
		SPIEN=L, CLKIF=H(CMOS)		—	20	—	mA	
		SPIEN=L, CLKIF=L(LVDS)		—	22	—	mA	
10	V_{SS} current		I_{SSQE}	—	1	—	mA	
11	V_{PP1} current		I_{PP1QE}	—	0.3	—	mA	
12	V_{PP2} current		I_{PP2QE}	—	0.3	—	mA	
13	V_{NN1} current		I_{NN1QE}	—	0.3	—	mA	
14	V_{NN2} current		I_{NN2QE}	—	0.3	—	mA	
15	V_{LL} current	SPIEN=H	I_{LLPW}	—	0.1	—	mA	PW operating current EN=0 Current mode 1 (CC='1') 8-channel active Bipolar 3-level 2-cycle $f=5MHz$, $PRT=200\mu s$ $V_{PP1}/V_{NN1}=\pm 60V$ $V_{PP2}/V_{NN2}=\pm 5V$
		SPIEN=L		—	0.15	—	mA	
16	V_{DD} current	SPIEN=H, CLKIF=H(CMOS)	I_{DDPW}	—	15	—	mA	
		SPIEN=H, CLKIF=L(LVDS)		—	17	—	mA	
		SPIEN=L, CLKIF=H(CMOS)		—	23	—	mA	
		SPIEN=L, CLKIF=L(LVDS)		—	25	—	mA	
17	V_{SS} current		I_{SSPW}	—	2	—	mA	
18	V_{PP1} current		I_{PP1PW}	—	4	—	mA	
19	V_{PP2} current		I_{PP2PW}	—	0.3	—	mA	
20	V_{NN1} current		I_{NN1PW}	—	4	—	mA	
21	V_{NN2} current		I_{NN2PW}	—	0.3	—	mA	

Table 6 Operating Supply Currents (2/2)

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, $CLKP/CLKN=100MHz$, HV_{OUT} load= $220pF//200\Omega$, LV_{OUT} load= $47pF//200\Omega$ unless otherwise specified.

No.	Items		Symbol	Spec			Units	Conditions
				Min.	Typ.	Max.		
16	V_{LL} current	SPIEN=H	I_{LLCW1}	—	0.1	—	mA	CW operating current-1 EN=0, CKDIV[1:0]=10 Current mode 1 (CC='1') 8-channel active Bipolar 3-level Continuous f=5MHz $V_{PP1}/V_{NN1}=\pm 60V$ $V_{PP2}/V_{NN2}=\pm 5V$
		SPIEN=L		—	0.15	—	mA	
17	V_{DD} current	SPIEN=H, CLKIF=H(CMOS)	I_{DDCW1}	—	108	—	mA	
		SPIEN=H, CLKIF=L(LVDS)		—	110	—	mA	
		SPIEN=L, CLKIF=H(CMOS)		—	116	—	mA	
		SPIEN=L, CLKIF=L(LVDS)		—	118	—	mA	
18	V_{SS} current		I_{SSCW1}	—	24	—	mA	
19	V_{PP1} current		I_{PP1CW1}	—	0.3	—	mA	
20	V_{PP2} current		I_{PP2CW1}	—	190	—	mA	
21	V_{NN1} current		I_{PP2CW1}	—	0.3	—	mA	
22	V_{NN2} current		I_{NN2CW1}	—	200	—	mA	
23	V_{LL} current	SPIEN=H	I_{LLCW2}	—	0.1	—	mA	CW operating current-2 EN=0, CKDIV[1:0]=10 Current mode 0 (CC='0') 8-channel active Bipolar 3-level Continuous f=5MHz $V_{PP1}/V_{NN1}=\pm 60V$ $V_{PP2}/V_{NN2}=\pm 5V$
		SPIEN=L		—	0.15	—	mA	
24	V_{DD} current	SPIEN=H, CLKIF=H(CMOS)	I_{DDCW2}	—	105	—	mA	
		SPIEN=H, CLKIF=L(LVDS)		—	107	—	mA	
		SPIEN=L, CLKIF=H(CMOS)		—	113	—	mA	
		SPIEN=L, CLKIF=L(LVDS)		—	115	—	mA	
25	V_{SS} current		I_{SSCW2}	—	21	—	mA	
26	V_{PP1} current		I_{PP1CW2}	—	0.24	—	mA	
27	V_{PP2} current		I_{PP2CW2}	—	175	—	mA	
28	V_{NN1} current		I_{NN1CW2}	—	0.24	—	mA	
29	V_{NN2} current		I_{NN2CW2}	—	185	—	mA	

2. Static characteristics

Table 7 Static Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, $V_{FP}[2:0]=V_{FN}[2:0]=000$, $DRV_{PADJ}=DRV_{NADJ}=0$, unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	HV _{OUTX} output voltage range	HV _{OUTX}	-100	—	+100	V	
2	HV _{OUTX} high-side peak current	I _{OH}	—	2.0	—	A	P1 active, V _{PP1} /V _{NN1} =±60V
			—	2.0	—	A	P2 active, V _{PP2} /V _{NN2} =±60V, CC=1
			—	1.0	—	A	P2 active, V _{PP2} /V _{NN2} =±60V, CC=0
3	HV _{OUTX} high-side GND clamp peak current	I _{OHCL}	—	1.0	—	A	Nd active, V _{PP1} /V _{NN1} =V _{PP2} /V _{NN2} =±60V
4	HV _{OUTX} low-side peak current	I _{OL}	—	2.0	—	A	N1 active, V _{PP} /V _{NN} =±60V
			—	2.0	—	A	N2 active, V _{PP} /V _{NN} =±60V, CC=1
			—	1.0	—	A	N2 active, V _{PP} /V _{NN} =±60V, CC=0
5	HV _{OUTX} low-side GND clamp peak current	I _{OLCL}	—	1.0	—	A	Pd active, V _{PP1} /V _{NN1} =V _{PP2} /V _{NN2} =±60V
6	HV _{OUTX} high-side on-resistance	R _{ONH}	—	15	—	Ω	I _{OH} =100mA, P1 active
			—	15	—	Ω	I _{OH} =100mA, P2 active, CC=1
			—	23	—	Ω	I _{OH} =100mA, P2 active, CC=0
7	HV _{OUTX} high-side GND clamp on-resistance	R _{ONHCL}	—	20	—	Ω	I _{OHCL} =100mA, Pd active
8	HV _{OUTX} low-side on-resistance	R _{ONL}	—	15	—	Ω	I _{OL} =100mA, N1 active
			—	15	—	Ω	I _{OL} =100mA, N2 active, CC=1
			—	23	—	Ω	I _{OL} =100mA, N2 active, CC=0
9	HV _{OUTX} low-side GND clamp on-resistance	R _{ONLCL}	—	20	—	Ω	I _{OLCL} =100mA, Nd active
10	HV _{OUTX} off-capacitance	C _{HVOFF}	—	34	—	pF	TX _{OUTX} =GND, TRSW=off

3. Dynamic characteristics

Table 8 Dynamic Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, $CLKP/CLKN=100MHz$, $VFPCTL[2:0]=VFNCTL[2:0]='000'$, HV_{OUT} load=220pF//200 Ω , LV_{OUT} load=47pF//200 Ω , unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	Output frequency	f_{OUT}	—	20	—	MHz	
2	Output rise propagation delay	t_{dr}	—	40	—	ns	
3	Output fall propagation delay	t_{df}	—	40	—	ns	
4	Output rise propagation delay clamp	t_{drCL}	—	40	—	ns	
5	Output fall propagation delay clamp	t_{dfCL}	—	40	—	ns	
6	Propagation delay matching	Δt_d	—	± 1	± 3	ns	
7	Output rise time	t_r	—	18	—	ns	P1 active
			—	18	—	ns	P2 active, CC=1
			—	33	—	ns	P2 active, CC=0
		t_{rCL}	—	15	—	ns	Pd active
8	Output fall time	t_f	—	18	—	ns	N1 active
			—	18	—	ns	N2 active, CC=1
			—	33	—	ns	N2 active, CC=0
		t_{fCL}	—	15	—	ns	Nd active
9	2nd harmonic distortion	HD2	—	-40	—	dBc	Bipolar, 2-cycle, $f_{OUT}=5MHz$
10	Pulse cancellation	HDPC	—	-40	—	dBc	
		HDPC2	—	-40	—	dBc	
11	RMS output jitter	t_j	—	10	—	ps	Bipolar CW, $f_{OUT}=5MHz$, $V_{PP}/V_{NN}=\pm 5V$, HV_{OUT} load=50 Ω
12	Crosstalk between channels	X_{TLK}	—	-70	—	dB	$f_{OUT}=5MHz$, 10V _{p-p} , HV_{OUT} load=50 Ω

4. Integrated peripheral circuits characteristics

4.1 T/R Switch characteristics

Table 9 T/R Switch Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $V_{PP1}/V_{NN1}=V_{PP2}/V_{NN2}=\pm 60V$, $T_A=25^\circ C$, unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	LV _{OUTX} output voltage range	LV _{OUTX}	-0.85	–	+0.85	V	
2	TRSW on-resistance	R _{ONTR}	–	15	–	Ω	HV _{OUTX} =100mV, LV _{OUTX} =0V
3	TRSW on-capacitance	C _{ONTR}	–	15	–	pF	LV _{OUTX} =0V
4	TRSW off-resistance on HV _{OUTX}	R _{OFFTRHV}	1	–	–	MΩ	
5	TRSW off-resistance on LV _{OUTX}	R _{OFFTRLV}	8	10	12	kΩ	
6	Spike voltage on HV _{OUTX} and LV _{OUTX}	V _{TRN}	–	–	110	mV _{PP}	220pF//200Ω load on HV _{OUTX} 47pF//200Ω load on LV _{OUTX}
7	TRSW turn-on time	t _{dTRON}	–	300	–	ns	Logic input-to-ready for Rx signal See Fig.15
8	TRSW turn-off time	t _{dTROFF}	–	50	100	ns	See Fig.15

4.2 Analog Switch

Table 10 Analog Switch Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	ASW on-resistance	R _{ONASW}	–	250	–	Ω	

4.3 HV Blocking Diode

Table 11 HV Blocking Diode Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	Forward voltage	V _{FHVD}	–	1.0	–	V	I _F =100mA
			–	1.2	–	V	I _F =200mA
2	Reverse voltage	V _{RHVD}	200	–	–	V	I _R =1μA

4.4 LV Noise-cut Diode

Table 12 LV Noise-cut Diode Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	Forward voltage	V _{FLVD}	–	1.1	–	V	I _F =100mA
			–	1.25	–	V	I _F =200mA

4.5 Thermal Protection

Table 13 Thermal Protection Characteristics

$V_{LL}=2.5V$, $V_{DD}/V_{SS}=\pm 5V$, $T_A=25^\circ C$, unless otherwise specified.

No.	Items	Symbol	Spec			Units	Condition
			Min.	Typ.	Max.		
1	THP temperature threshold	T _{THP}	90	110	120	°C	THPCTL[1:0]=00
			120	130	140	°C	THPCTL[1:0]=01
			140	150	160	°C	THPCTL[1:0]=10
			–	Disabled	–	°C	THPCTL[1:0]=11 (THP is disabled)
2	THP reset hysteresis	T _{HYSTHP}	5	10	20	°C	

■ Operation Mode

Table 14 Operation Mode

Section	EN	CSP	SPIEN*2	TRIG	Tx Pattern Signal	SPI LVDS Receiver	Memory Write	Memory Read	Register Write	Register Read	Tx	Rx	Operation mode
A	1	0	0	x	x	Bias on	—	—	—	—	—	—	IC disabled
			1			Bias off	—	—	—	—	—	—	
B	1	1	0	x	x	Bias on	✓	✓	—	✓	—	—	IC disabled, W/R of Memory and Read of Register
			1			Bias off	—	—	—	—			
C	0	1	0	x	x	Bias on	✓	✓	✓	✓	—	✓*1	Rx, W/R of Memory or Register, Reset of Tx Operation
			1			Bias off	—	—	—	—			
D	0	0	0	1	x	Bias on	—	—	—	—	—	✓*1	Rx & Reset of Tx Operation
			1			Bias off	—	—	—	—			
E	0	0	0	0	Generated	Bias on	—	—	—	—	✓*1	—	Tx
			1			Bias off	—	—	—	—			
F	0	0	0	0	none	Bias on	—	—	—	—	—	✓*1	Rx
			1			Bias off	—	—	—	—			

*1. Individual register parameter on Tx/Rx active channel (TXACT[x] and RXACT[x]) is necessary to be set "1".

*2. SPIEN Signal is used to reduce the bias current of SPI LVDS Receiver when SPI is not used. (Power on/off time of LVDS receiver is <300ns/<100ns.)

Remark ✓: Available
—: Not available
x: Don't care

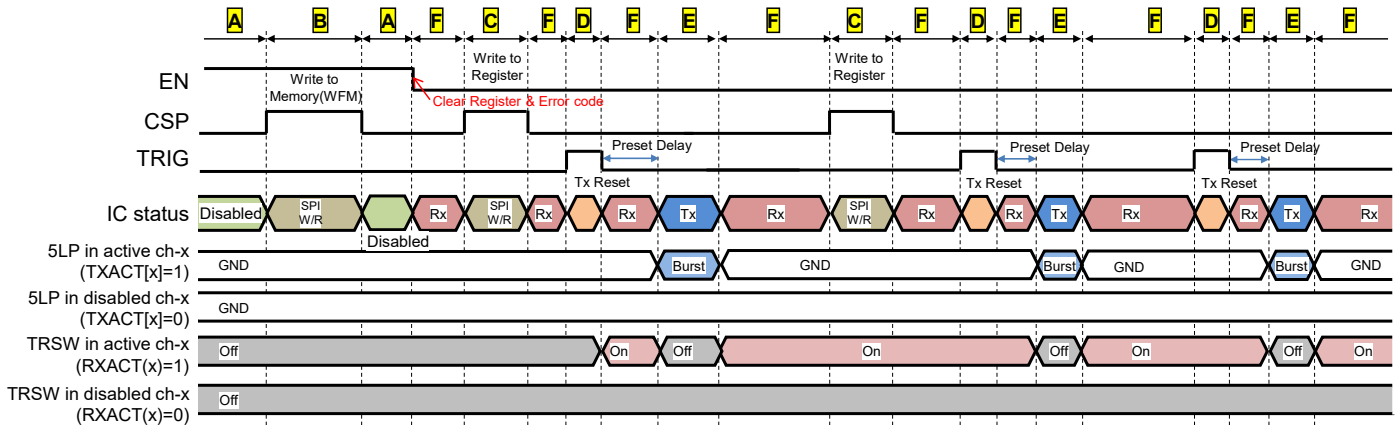


Figure 9 An Example of Operating Sequence

■ SPI Header Configuration

Table 15 SPI Operation Table

SDATA Control Header (First 1Byte of SDATA)								SPI Operation
D7 (MSB)	D6	D5	D4	D3	D2	D1	D0 (LSB)	
0	0	0	0	0000 (Reserved)				Write to the first 7Byte (R#0 to R#6) Control Registers and CRC[7:0]
0	1	0	0					Write to all 16Byte Control Registers and CRC[7:0]
1	0	0	0					N/A
1	1	0	0					Write to Memory and CRC[7:0]
0	0	0	1					Read from the first 7Byte (R#0 to R#6) Control Registers and CRC[7:0]
0	1	0	1					Read from all 16Byte Control Registers and CRC[7:0]
1	0	0	1					N/A
1	1	0	1					Read from Memory and CRC[7:0] through SDOUT pin
×	×	1	0					Read from ERROR[7:0] through SDOUT pin
×	×	1	1					Read from DSUM[7:0] through SDOUT pin

< 8bit CRC Conditions>

CRC initial value = 00000000

CRC Polynomial equation is $X^8+X^5+X^4+1$

Remark ×: Don't care

■ Access to Memory or Registers with SPI

1. SPI write to memory or registers operation

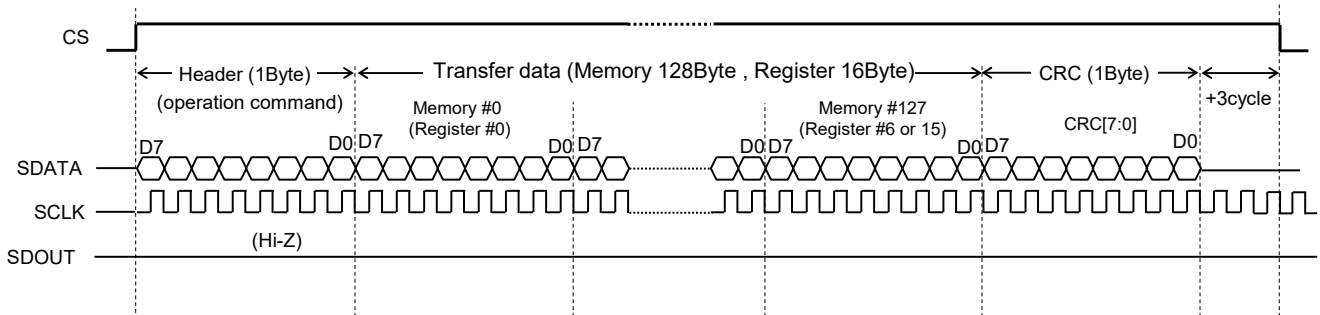


Figure 10 Sequence of Writing to Memory or Registers with SPI

Remark <CRC Conditions>

CRC initial value = 00000000

CRC Polynomial equation is $X^8 + X^5 + X^4 + 1$

In SPI "WRITE" operation, internal logic circuit also calculates the CRC, and writes it to internal Register DSUM[7:0]. If CRC[7:0] matches DSUM[7:0], ERROR[0] = 0. If unmatched, ERROR[0] = 1 and FAULT pin reports, unless fault report is released.

2. Read back form memory or registers operation

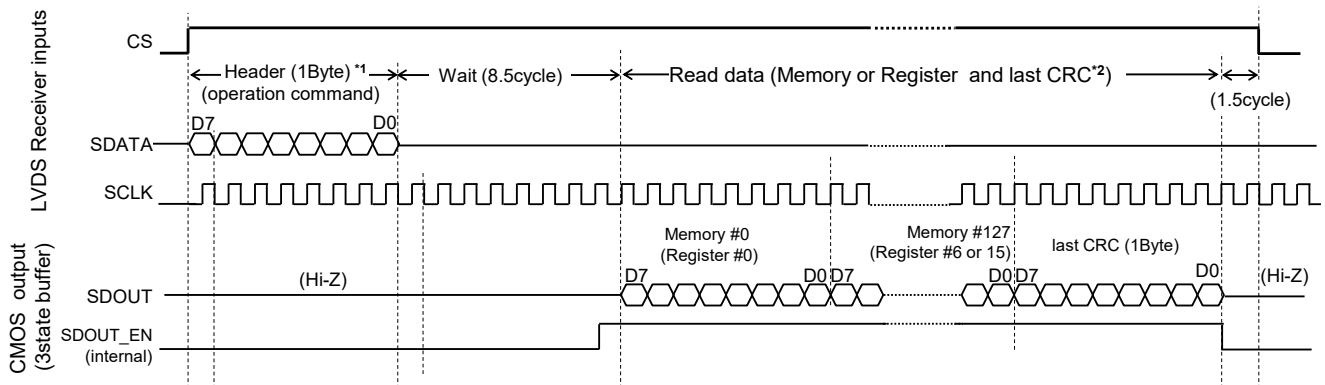


Figure 11 Sequence of Reading from Memory or Registers with SPI

*1. In case of "READ" operation, SDATA inputs except for Header are ignored. (CRC error detection is disabled).

*2. Last CRC is the received CRC data from FPGA in previous "WRITE" operation to Memory or Register.

■ 5LP+TRSW Operation Example

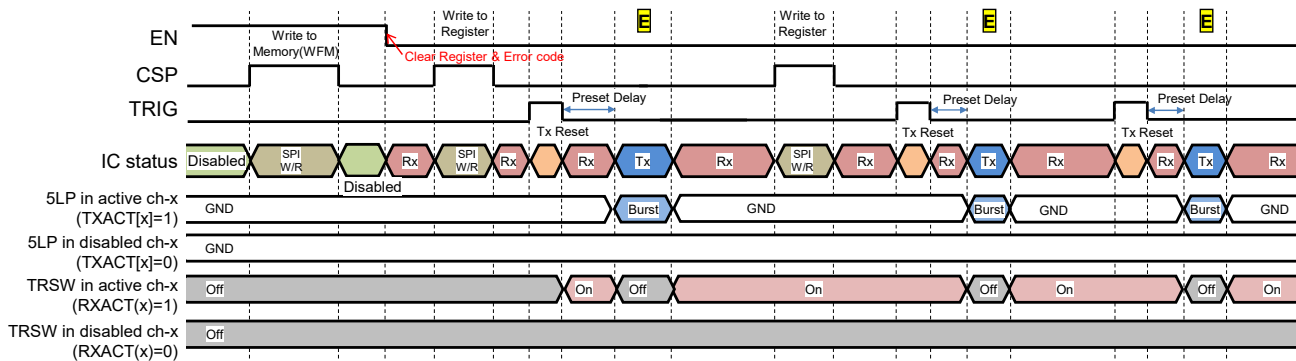


Figure 12 An Example of IC State Timing Diagram and 5LP Operation

- Tx starts from TRIG fall edge with preset delay time.
- TRSW turns on except for Tx Burst period or IC-disabled.

Generating Tx WF Pattern

CODE_[1:0] = output state ($\pm$ HV, GND) see Truth Table
Pulse width = $5\text{ns} \times (W_{[4:0]} + 2)$ (decimal, 10ns to 165ns)
START [6:0] = starting address
STOP [6:0] = stopping address
Repeat count(s) = 1, $1 \times \text{REPEAT}[7:0]$, $16 \times \text{REPEAT}[7:0]$, CW
CW mode ends with CS = 1 or TRIG = 1.

Generating Tx Delay (8ch)

CHx delay time from TRIG fall edge = BASE-DELAY + CHx-DELAY
BASE-DELAY(common) = $160\text{ns} \times (\text{BASEDL}[7:0]) + 200\text{ns}$
(decimal, $0.2\mu\text{s}$ to $41\mu\text{s}$)
CHx-DELAY(/ch) = $5\text{ns} \times (\text{CHxDL}[7:0])$
(x=0 to 7, decimal, 0 to $1.275\mu\text{s}$)
Delay time resolution = 5ns

WFM									
M#	Item	D7	D6	D5	D4	D3	D2	D1	D0
0	Pulse #0	CODE0	CODE0	CODE0	W0	W0	W0	W0	W0
1	Pulse #1	CODE1	CODE1	CODE1	W1	W1	W1	W1	W1
2	Pulse #2	CODE2	CODE2	CODE2	W2	W2	W2	W2	W2
...	...	...	...	...	...	...	...	...	...
127	Pulse #127	CODE127	CODE127	CODE127	W127	W127	W127	W127	W127

Register									
R#	DT	D6	D5	D4	D3	D2	D1	D0	
0	reserved	START[6]	START[5]	START[4]	START[3]	START[2]	START[1]	START[0]	
1	reserved	STOP[6]	STOP[5]	STOP[4]	STOP[3]	STOP[2]	STOP[1]	STOP[0]	
2	INV	MUL-RPT	reserved	CC	CKDIV[1]	CKDIV[0]	THPCTL[1]	THPCTL[0]	
3	REPEAT[7]	REPEAT[6]	REPEAT[5]	REPEAT[4]	REPEAT[3]	REPEAT[2]	REPEAT[1]	REPEAT[0]	
4	DRVPADJ	VFP[2]	VFP[1]	VFP[0]	DRVNADJ	VFN[2]	VFN[1]	VFN[0]	
5	TXACT[7]	TXACT[6]	TXACT[5]	TXACT[4]	TXACT[3]	TXACT[2]	TXACT[1]	TXACT[0]	
6	RXACT[7]	RXACT[6]	RXACT[5]	RXACT[4]	RXACT[3]	RXACT[2]	RXACT[1]	RXACT[0]	
7	BASEDL[7]	BASEDL[6]	BASEDL[5]	BASEDL[4]	BASEDL[3]	BASEDL[2]	BASEDL[1]	BASEDL[0]	
8	CH0DL[7]	CH0DL[6]	CH0DL[5]	CH0DL[4]	CH0DL[3]	CH0DL[2]	CH0DL[1]	CH0DL[0]	
9	CH1DL[7]	CH1DL[6]	CH1DL[5]	CH1DL[4]	CH1DL[3]	CH1DL[2]	CH1DL[1]	CH1DL[0]	
10	CH2DL[7]	CH2DL[6]	CH2DL[5]	CH2DL[4]	CH2DL[3]	CH2DL[2]	CH2DL[1]	CH2DL[0]	
11	CH3DL[7]	CH3DL[6]	CH3DL[5]	CH3DL[4]	CH3DL[3]	CH3DL[2]	CH3DL[1]	CH3DL[0]	
12	CH4DL[7]	CH4DL[6]	CH4DL[5]	CH4DL[4]	CH4DL[3]	CH4DL[2]	CH4DL[1]	CH4DL[0]	
13	CH5DL[7]	CH5DL[6]	CH5DL[5]	CH5DL[4]	CH5DL[3]	CH5DL[2]	CH5DL[1]	CH5DL[0]	
14	CH6DL[7]	CH6DL[6]	CH6DL[5]	CH6DL[4]	CH6DL[3]	CH6DL[2]	CH6DL[1]	CH6DL[0]	
15	CH7DL[7]	CH7DL[6]	CH7DL[5]	CH7DL[4]	CH7DL[3]	CH7DL[2]	CH7DL[1]	CH7DL[0]	

■ Truth Table

Table 16 Truth Table

IC status			External singal			Internal Tx-PT(x)	Control Register		WFM CODE[2:0]			Control Register	Chx 5LP MOSFET/ASW/TRSW status								Chx Output state	
mode	SPI	EN	CS	TRIG	TXACT		RXACT	[2]	[1]	[0]	INV	P1	N1	P2	N2	Pd	Nd	250Ω ASW	TRSW	TXOUT _x	LVOUT _x	
A	IC disabled	no op.	1	0	x	none	x	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ	
B		Mem. W	1	1	x	none	x	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ	
C	Rx & Tx Reset by SPI W/R	Memory W/R or Register W/R	0	1	x	none	0	0	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ	
			0	1	x	none	0	1	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	ON	GND	HVOUT _x
			0	1	x	none	1	0	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ
			0	1	x	none	1	1	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	ON	GND	HVOUT _x
D	Rx & Tx Reset By TRIG	no op.	0	0	1	none	0	0	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ
			0	0	1	none	0	1	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	ON	GND	HVOUT _x
			0	0	1	none	1	0	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ
			0	0	1	none	1	1	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	ON	GND	HVOUT _x
E	Tx	no op.	0	0	0	Gen.	1	x	0	0	0	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ
			0	0	0	Gen.	1	x	0	0	1	0	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	+HV1	10kΩ
			0	0	0	Gen.	1	x	0	0	1	1	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	-HV1	10kΩ
			0	0	0	Gen.	1	x	0	1	0	0	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	-HV1	10kΩ
			0	0	0	Gen.	1	x	0	1	0	1	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	+HV1	10kΩ
			0	0	0	Gen.	1	x	0	1	1	x	N/A								N/A	
			0	0	0	Gen.	1	x	1	0	0	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ
			0	0	0	Gen.	1	x	1	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	+HV2	10kΩ
			0	0	0	Gen.	1	x	1	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	-HV2	10kΩ
			0	0	0	Gen.	1	x	1	1	0	0	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	-HV2	10kΩ
			0	0	0	Gen.	1	x	1	1	0	1	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	+HV2	10kΩ
			0	0	0	Gen.	1	x	1	1	1	x	N/A								N/A	
F	Rx	no op.	0	0	0	none	x	0	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	GND	10kΩ	
			0	0	0	none	x	1	x	x	x	x	OFF	OFF	OFF	OFF	ON	ON	ON	ON	GND	HVOUT _x

Remark x: Don't care

Table 17 Truth Table

DRV P ADJ	DRV N ADJ	I _{OUT} [A]	
		P1	N1
0	0	2	2
0	1	2	2.1
1	0	2.1	2
1	1	2.1	2.1

Table 18 Truth Table

Current mode	CC	I _{OUT} [A]	
		P2	N2
0	0	1	1
1	1	2	2

Table 19 Truth Table

VFPCTL			VPP1-VFP1 [V]	VPP2-VFP2 [V]
[2]	[1]	[0]		
0	0	0	5	5
0	0	1	5.15	5.15
0	1	0	5.3	5.3
0	1	1	5.45	5.45
1	0	0	5	5
1	0	1	4.85	4.85
1	1	0	4.7	4.7
1	1	1	4.55	4.55

Table 20 Truth Table

VFNCTL			VFN1-VNN1 [V]	VFN2-VNN2 [V]
[2]	[1]	[0]		
0	0	0	5	5
0	0	1	5.15	5.15
0	1	0	5.3	5.3
0	1	1	5.45	5.45
1	0	0	5	5
1	0	1	4.85	4.85
1	1	0	4.7	4.7
1	1	1	4.55	4.55

■ Timing Chart

Control Registers

START[6:0] = n

STOP[6:0] = n+1

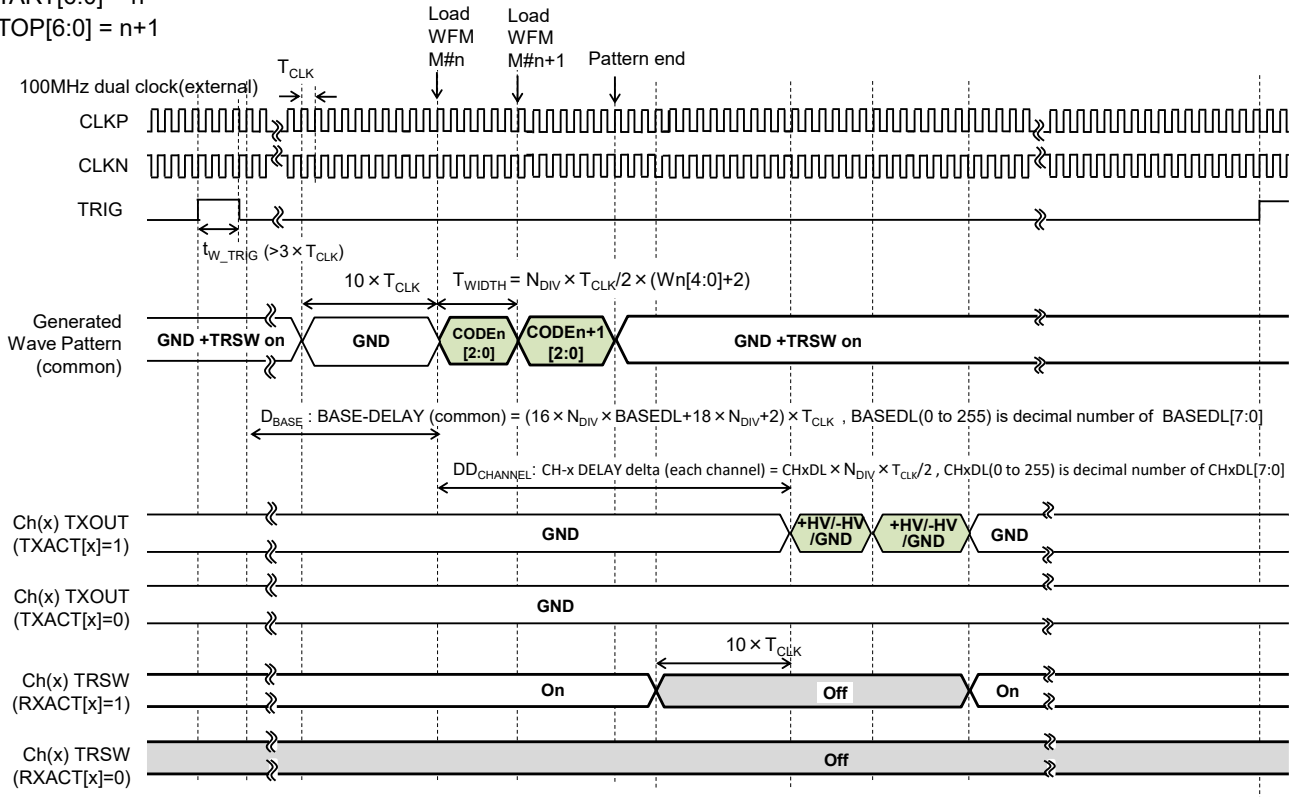


Figure 13 An Example of 5LP State Timing Diagram with Register TXACT[x] & RXACT[x] (x=0 to 15)

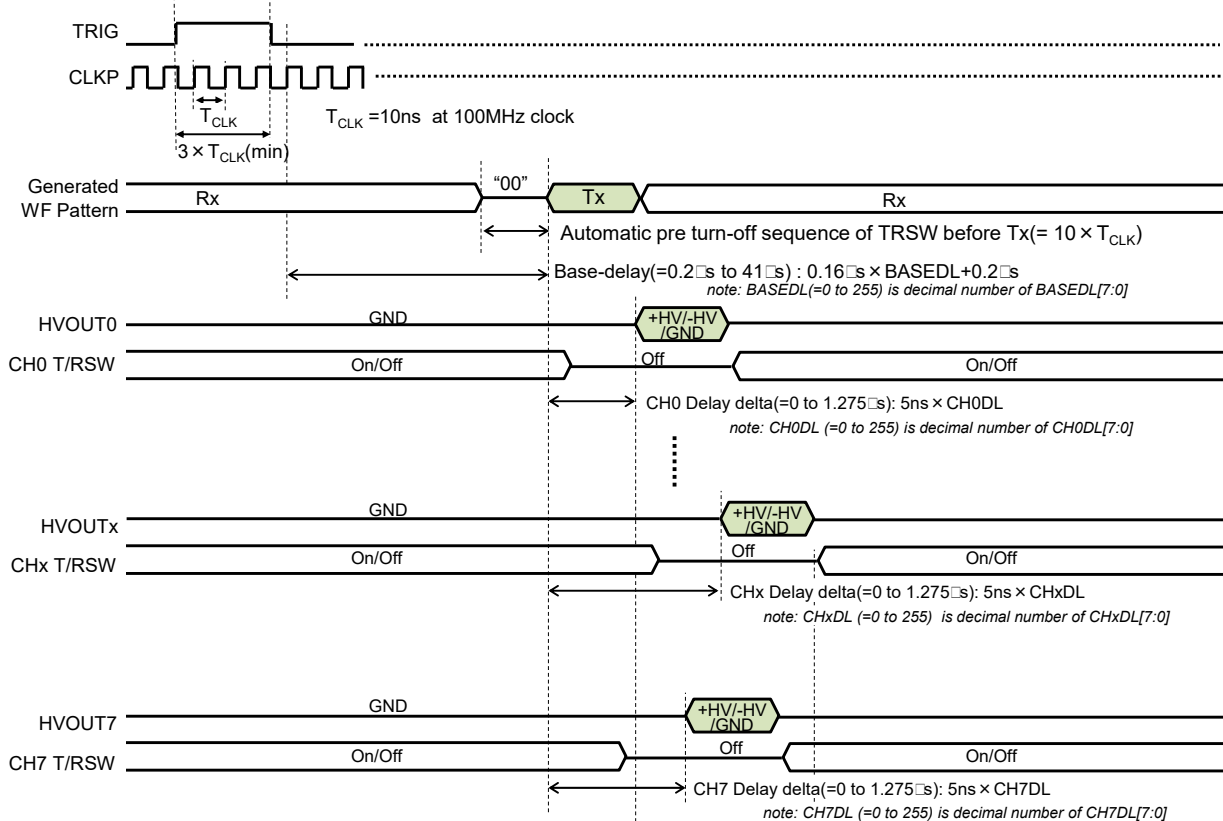


Figure 14 An Example of 5LP State Timing Diagram with Register BASEDL[7:0] & CHxDL[8:0] (x=0 to 15)

■ Tx Propagation Delay and Rise/Fall Time Definition

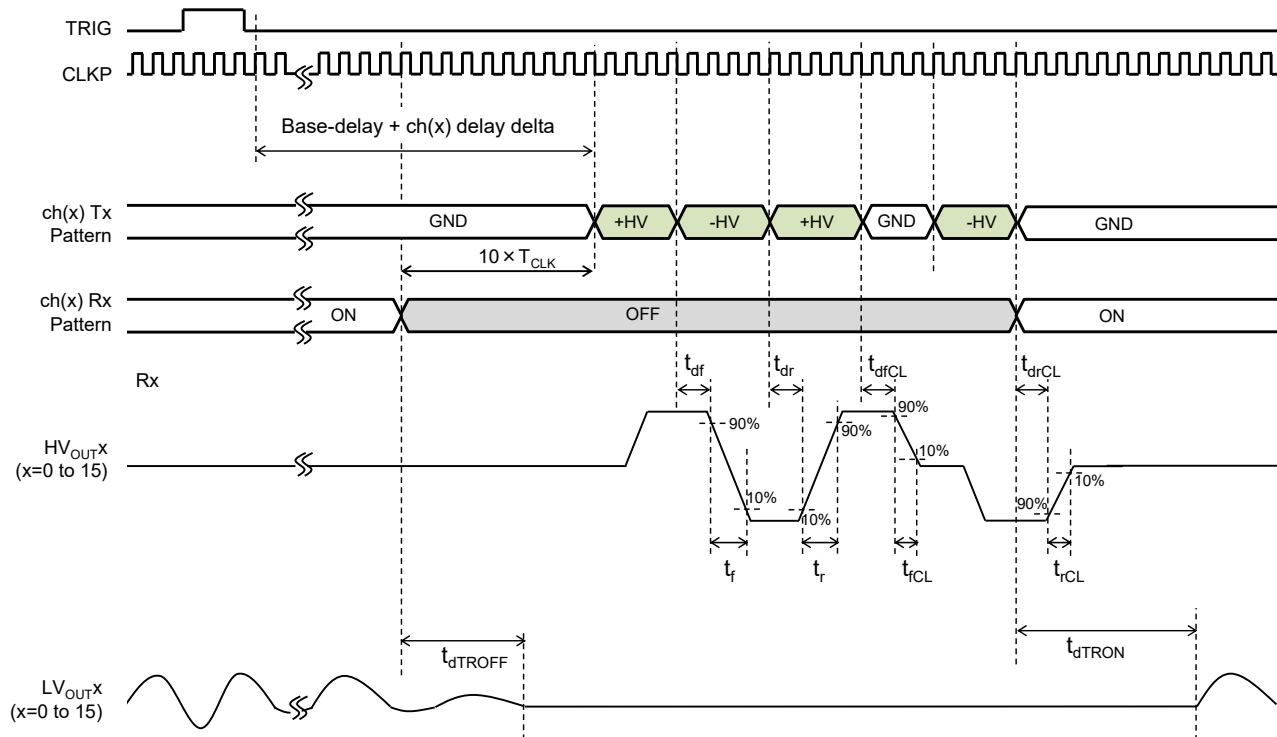


Fig.15 Tx propagation Delay and Rise/Fall Time

■ Tx Pulse Width and Delay Control Table

Table 21 Tx Pulse Width and Delay Control Table

Clock frequency = 100MHz ($T_{CLK}=10ns$)

No.	Items		Symbol	Spec			Units	Note
				Min.	Typ.	Max.		
1	Tx pulse width	$N_{DIV}=1$	T_{WIDTH}	10	—	165	ns	$T_{WIDTH} [ns] = N_{DIV} \times T_{CLK} / 2 \times (WIDTHx + 2)$ $WIDTHx (=0 \text{ to } 31)$ is decimal number of $WIDTHx[4:0]$ in memory #x, x=0 to 127
		$N_{DIV}=2$		20	—	330		
		$N_{DIV}=4$		40	—	660		
2	Tx pulse width resolution	$N_{DIV}=1$	ΔT_{WIDTH}	—	5	—	ns	$\Delta T_{WIDTH} = N_{DIV} \times T_{CLK} / 2$
		$N_{DIV}=2$		—	10	—		
		$N_{DIV}=4$		—	20	—		
3	Base delay range	$N_{DIV}=1$	D_{BASE}	0.2	—	41	μs	$D_{BASE} = (16 \times N_{DIV} \times BASEDL + 18 \times N_{DIV} + 2) \times T_{CLK}$ $BASEDL (=0 \text{ to } 255)$ is decimal number of $BASEDL[7:0]$
		$N_{DIV}=2$		0.38	—	81.98		
		$N_{DIV}=4$		0.74	—	163.94		
4	Base delay resolution	$N_{DIV}=1$	ΔD_{BASE}	—	0.16	—	μs	$\Delta D_{BASE} = 16 \times N_{DIV} \times T_{CLK}$
		$N_{DIV}=2$		—	0.32	—		
		$N_{DIV}=4$		—	0.64	—		
5	CHx delay delta range (x=0 to 15)	$N_{DIV}=1$	$DD_{CHANNEL}$	0	—	1275	ns	$DD_{CHANNEL} = N_{DIV} \times T_{CLK} / 2 \times CHxDL$ $CHxDL (=0 \text{ to } 255)$ is decimal number of $CHxDL[7:0]$ x=0 to 7
		$N_{DIV}=2$		0	—	2550		
		$N_{DIV}=4$		0	—	5100		
6	CHx delay delta resolution (x=0 to 15)	$N_{DIV}=1$	$\Delta DD_{CHANNEL}$	—	5	—	ns	$\Delta DD_{CHANNEL} = N_{DIV} \times T_{CLK} / 2$
		$N_{DIV}=2$		—	10	—		
		$N_{DIV}=4$		—	20	—		

Remark $N_{DIV} (=1, 2, 4)$ is internal clock dividing factor with Register CKDIV[1:0].

CKDIV[1:0]=00: $N_{DIV} = 1$

CKDIV[1:0]=01: $N_{DIV} = 2$

CKDIV[1:0]=10, 11: $N_{DIV} = 4$

■ Memory MAP

Table 22 Memory Map

Memory #	D7	D6	D5	D4	D3	D2	D1	D0
0	CODE0[2:0]			WIDTH0[4:0]				
1	CODE1[2:0]			WIDTH1[4:0]				
2	CODE2[2:0]			WIDTH2[4:0]				
3	CODE3[2:0]			WIDTH3[4:0]				
:	:			:				
:	:			:				
:	:			:				
124	CODE124[2:0]			WIDTH124[4:0]				
125	CODE125[2:0]			WIDTH125[4:0]				
126	CODE126[2:0]			WIDTH126[4:0]				
127	CODE127[2:0]			WIDTH127[4:0]				

- Remark**
1. In Memory Map, each 1-byte code consists of upper 3-bit CODEx[3:0] and lower 5-bit WIDTHx[4:0].
Suffix "x" corresponds to 1-byte Memory number (x=0 to 127).
 2. CODEx[2:0] stands for an output state of Tx burst as shown in Truth Table.
 3. WIDTHx[4:0] expresses the pulse width (T_{WIDTH}) which is calculated as follows.

$$T_{\text{WIDTH}} [\text{ns}] = N_{\text{DIV}} \times T_{\text{CLK}} / 2 \times (\text{WIDTHx} + 2)$$
 4. Where, T_{CLK} is the CLKP/CLKN clock period, WIDTHx(=0 to 31) is decimal number of WIDTHx[4:0] and N_{DIV} (=1,2,4) is internal clock dividing factor with Register CKDIV[1:0].
 5. In case of 100MHz CLK,
 CKDIV[1:0]=00 : N_{DIV} =1, T_{WIDTH} [ns] is 10ns to 165ns (5ns step).
 CKDIV[1:0]=01 : N_{DIV} =2, T_{WIDTH} [ns] is 20ns to 330ns (10ns step).
 CKDIV[1:0]=10, 11 : N_{DIV} =4, T_{WIDTH} [ns] is 40ns to 660ns (20ns step).

■ Register Parameter Function

Table 23 Register Parameter Function

Items	Register	type	function
WFM Read Address(start)	START [6:0]	common	Starting address of the Waveform Memory for generating the Tx waveform pattern
WFM Read Address(stop)	STOP [6:0]	common	Stop address of the Waveform Memory for generating the Tx waveform pattern
TX Waveform control	INV	common	Inversion control of generating Tx waveform pattern
Wave generation Repeat control(1)	MUL-RPT	common	Multiplying factor selection for REPEAT[7:0] (1: $1 \times \text{REPEAT}[7:0]$, 0: $16 \times \text{REPEAT}[7:0]$)
Tx driver current control	CC	common	P2/N2 Tx driver current control (0=1A, 1=2A)
Tx clock dividing	CKDIV [1:0]	common	Internal clock dividing factor "N _{Div} " selection (00:N _{Div} =1, 01:N _{Div} =2, 10 or 11 :N _{Div} =4)
P1 Driver adjustment	DRVPAJ	common	P1 driver current, 0:2A, 1:2.1A
N1 Driver adjustment	DRVNADJ	common	N1 driver current, 0:2A, 1:2.1A
Built-in power supply control for P1	VFP[2:0]	common	VFP[2]=0: VPP1-VFP1 (=5 to 5.45) : $5+0.15 \times \text{VFP}$, VFP is decimal number of VFP[1:0] VFP[2]=1: VPP1-VFP1(=4.55 to 5) : $5-0.15 \times \text{VFP}$, VFP is decimal number of VFP[1:0]
Built-in power supply control for N1	VFN[2:0]	common	VFN[2]=0: VFN1-VNN1 (=5 to 5.45) : $5+0.15 \times \text{VFN}$, VFN is decimal number of VFN[1:0] VFN[2]=1: VFN1-VNN1(=4.55 to 5) : $5-0.15 \times \text{VFN}$, VFN is decimal number of VFN[1:0]
THP detection control	THPCTL[1:0]	common	THP detection control (00:110deg, 01:130deg, 10:150deg, 11:Disabled)
Wave generation Repeat control (2)	REPEAT[7:0]	common	Repeat counts control of Tx waveform pattern generation
Active channel control for Tx	TXACT [7:0]	/channel	Active channel control in Tx, TXACT[x] corresponds to ch(x) in Tx
Active channel control for Rx	RXACT [7:0]	/channel	Active channel control of T/R-SW, RXACT[x] corresponds to TRSW of ch(x)
TX delay control (1)	BASEDL[7:0]	common	Tx offset delay (common to all channel) : $(16 \times \text{N}_{\text{Div}} \times \text{BASEDL} + 14 \times \text{N}_{\text{Div}} + 2) \times \text{T}_{\text{CLK}}$ BASEDL(=0 to 255) is decimal number of BASEDL[7:0], T _{CLK} is external clock period.
TX delay control (2)	CHxDL [7:0]	/channel	Tx delay for each channel x (x=0 to 7) : $\text{N}_{\text{Div}} \times \text{T}_{\text{CLK}} / 2 \times \text{CHxDL}$ CHxDL(=0 to 255) is decimal number of CHxDL[7:0], T _{CLK} is external clock period.

REPEAT[7:0] (Repeat counts control of Tx waveform pattern generation)

REPEAT[7:0]=00000000 : repeat count = 1

REPEAT[7:0]=00000001 to 11111110 : repeat count = 1(or 16)×REPEAT[7:0]

REPEAT[7:0]=11111111 : continuous

■ Register MAP

Table 24 Tx Control Register MAP

R#	D7	D6	D5	D4	D3	D2	D1	D0
0	reserved	START[6]	START[5]	START[4]	START[3]	START[2]	START[1]	START[0]
1	reserved	STOP[6]	STOP[5]	STOP[4]	STOP[3]	STOP[2]	STOP[1]	STOP[0]
2	INV	MUL-RPT	reserved	CC	CKDIV[1]	CKDIV[0]	THPCTL[1]	THPCTL[0]
3	REPEAT[7]	REPEAT[6]	REPEAT[5]	REPEAT[4]	REPEAT[3]	REPEAT[2]	REPEAT[1]	REPEAT[0]
4	DRVPAJ	VFP[2]	VFP[1]	VFP[0]	DRVNADJ	VFN[2]	VFN[1]	VFN[0]
5	TXACT[7]	TXACT[6]	TXACT[5]	TXACT[4]	TXACT[3]	TXACT[2]	TXACT[1]	TXACT[0]
6	RXACT[7]	RXACT[6]	RXACT[5]	RXACT[4]	RXACT[3]	RXACT[2]	RXACT[1]	RXACT[0]
7	BASEDL[7]	BASEDL[6]	BASEDL[5]	BASEDL[4]	BASEDL[3]	BASEDL[2]	BASEDL[1]	BASEDL[0]
8	CH0DL[7]	CH0DL[6]	CH0DL[5]	CH0DL[4]	CH0DL[3]	CH0DL[2]	CH0DL[1]	CH0DL[0]
9	CH1DL[7]	CH1DL[6]	CH1DL[5]	CH1DL[4]	CH1DL[3]	CH1-DL[2]	CH1DL[1]	CH1DL[0]
10	CH2DL[7]	CH2DL[6]	CH2DL[5]	CH2DL[4]	CH2DL[3]	CH2DL[2]	CH2DL[1]	CH2DL[0]
11	CH3DL[7]	CH3DL[6]	CH3DL[5]	CH3DL[4]	CH3DL[3]	CH3DL[2]	CH3DL[1]	CH3DL[0]
12	CH4DL[7]	CH4DL[6]	CH4DL[5]	CH4DL[4]	CH4DL[3]	CH4DL[2]	CH4DL[1]	CH4DL[0]
13	CH5DL[7]	CH5DL[6]	CH5DL[5]	CH5DL[4]	CH5DL[3]	CH5DL[2]	CH5DL[1]	CH5DL[0]
14	CH6DL[7]	CH6DL[6]	CH6DL[5]	CH6DL[4]	CH6DL[3]	CH6DL[2]	CH6DL[1]	CH6DL[0]
15	CH7DL[7]	CH7DL[6]	CH7DL[5]	CH7DL[4]	CH7DL[3]	CH7DL[2]	CH7DL[1]	CH7DL[0]

■ CRC and ERROR Register

Table 25 CRC, Calculated CRC and ERROR Register MAP

Register	D7	D6	D5	D4	D3	D2	D1	D0
CRC	CRC[7:0]							
Calculated CRC	DSUM[7:0]							
Error	ERROR[7:0]							

Table 26 CRC, Calculated CRC and ERROR Register Function

CRC[7:0]	Transferred CRC data in SDATA CRC initial value = 00000000 CRC polynomial equation is $X^8+X^5+X^4+1$
DSUM[7:0]	Calculated CRC values with transferred SDATA signal
ERROR[7:0]	When Error has occurred, ERROR register corresponding to error type is set to be "1". ERROR[7:3] : Not used. ERROR[2]: Threshold over of the junction temperature set in advance. ERROR[1]: Start and stop address for Tx waveform pattern generation are same. ERROR[0]: SPI transfer error (CRC un-match) has occurred.

Remark Error[7:0] are cleared when IC is powered on or "EN" becomes from "high" to "low" (fall edge).

■ Pin Configuration

Table 27 Pin Configuration (1/2)

Pin#	Pin Name	Function
1	LVOUT1	Low voltage output of channel 1
2	LVOUT0	Low voltage output of channel 0
3	HGND	channel 0 to channel 3 Drive power ground (0V)
4	GND	Logic power ground (0V)
5	GND	Logic power ground (0V)
6	EN	Control of chip enable, H=disable, L=enable (50kΩ internal pull-up)
7	FAULT	Fault output flag, open N-MOS drain
8	VDD	Positive low voltage power supply (+5V)
9	CLKP	Positive LVDS/CMOS clock input (up to 100MHz)
10	CLKN	Negative LVDS/CMOS clock Input (up to 100MHz)
11	GND	Logic power ground (0V)
12	TRIG	Tx Trigger signal
13	VLL	Positive low voltage power supply (+2.5 to 3.3V)
14	CLKIF	I/F selection for CLKP/CLKN, H:CMOS L:LVDS (50kΩ internal pull-down)
15	HGND	channel 4 to channel 7 Drive power ground (0V)
16	LVOUT7	Low voltage output of channel 7
17	LVOUT6	Low voltage output of channel 6
18	VFP1	Built-in power supply for channel 4 to channel 7 P-MOS (P1) gate drive
19	HVOUT7	High voltage output of channel 7
20	VPP1	Positive high voltage power supply (0 to +100V) for channel 4 to channel 7 P-MOS (P1) Driver
21	VPP1	Positive high voltage power supply (0 to +100V) for channel 4 to channel 7 P-MOS (P1) Driver
22	HVOUT6	High voltage output of channel 6
23	VPP2	Positive high voltage power supply (0 to +100V) for channel 4 to channel 7 P-MOS (P2) Driver
24	VPP2	Positive high voltage power supply (0 to +100V) for channel 4 to channel 7 P-MOS (P2) Driver
25	VFP2	Built-in power supply for channel 4 to channel 7 P-MOS (P2) gate drive
26	HGND	channel 4 to channel 7 Drive power ground (0V)
27	VFN2	Built-in power supply for channel 4 to channel 7 N-MOS (N2) gate drive
28	VNN2	Negative high voltage power supply (0 to -100V) channel 4 to channel 7 N-MOS (N2) Driver
29	VNN2	Negative high voltage power supply (0 to -100V) channel 4 to channel 7 N-MOS (N2) Driver
30	HVOUT5	High voltage output of channel 5
31	VNN1	Negative high voltage power supply (0 to -100V) channel 4 to channel 7 N-MOS (N1) Driver
32	VNN1	Negative high voltage power supply (0 to -100V) channel 4 to channel 7 N-MOS (N1) Driver
33	HVOUT4	High voltage output of channel 4
34	VFN1	Built-in power supply for channel 4 to channel 7 N-MOS (N1) gate drive
35	LVOUT5	Low voltage output of channel 5
36	LVOUT4	Low voltage output of channel 4
37	HGND	channel 4 to channel 7 Drive power ground (0V)
38	SDOUT	SPI serial output data (CMOS)
39	SPIEN	Control of SPI Reciver Enable, H=disable, L=enable (50kΩ internal pull-up)
40	SDATAP	SPI positive serial input data (LVDS/CMOS)
41	SDATAN	SPI negative serial input data (LVDS/CMOS)
42	VDD	Positive low voltage power supply (+5V)
43	GND	Logic power ground (0V)
44	VSS	Negative low voltage power supply (-5V)
45	SCLKP	SPI Positive LVDS/CMOS clock input (up to 100MHz)
46	SCLKN	SPI negative LVDS/CMOS clock Input (up to 100MHz)
47	CSP	SPI positive chip select signal (LVDS/CMOS)
48	CSN	SPI negative chip select signal (LVDS/CMOS)
49	HGND	channel 0 to channel 3 Drive power ground (0V)
50	LVOUT3	Low voltage output of channel 3
51	LVOUT2	Low voltage output of channel 2

Table 27 Pin Configuration (2/2)

Pin#	Pin Name	Function
52	VFN1	Built-in power supply for channel 0 to channel 3 N-MOS (N1) gate drive
53	HVOUT3	High voltage output of channel 3
54	VNN1	Negative high voltage power supply (0 to -100V) channel 0 to channel 3 N-MOS (N1) Driver
55	VNN1	Negative high voltage power supply (0 to -100V) channel 0 to channel 3 N-MOS (N1) Driver
56	HVOUT2	High voltage output of channel 2
57	VNN2	Negative high voltage power supply (0 to -100V) channel 0 to channel 3 N-MOS (N2) Driver
58	VNN2	Negative high voltage power supply (0 to -100V) channel 0 to channel 3 N-MOS (N2) Driver
59	VFN2	Built-in power supply for channel 0 to channel 3 N-MOS (N2) gate drive
60	HGND	channel 0 to channel 7 Drive power ground (0V)
61	VFP2	Built-in power supply for channel 0 to channel 3 P-MOS (P2) gate drive
62	VPP2	Positive high voltage power supply (0 to +100V) for channel 0 to channel 3 P-MOS (P2) Driver
63	VPP2	Positive high voltage power supply (0 to +100V) for channel 0 to channel 3 P-MOS (P2) Driver
64	HVOUT1	High voltage output of channel 1
65	VPP1	Positive high voltage power supply (0 to +100V) for channel 0 to channel 3 P-MOS (P1) Driver
66	VPP1	Positive high voltage power supply (0 to +100V) for channel 0 to channel 3 P-MOS (P1) Driver
67	HVOUT0	High voltage output of channel 0
68	VFP1	Built-in power supply for channel 0 to channel 3 P-MOS (P1) gate drive

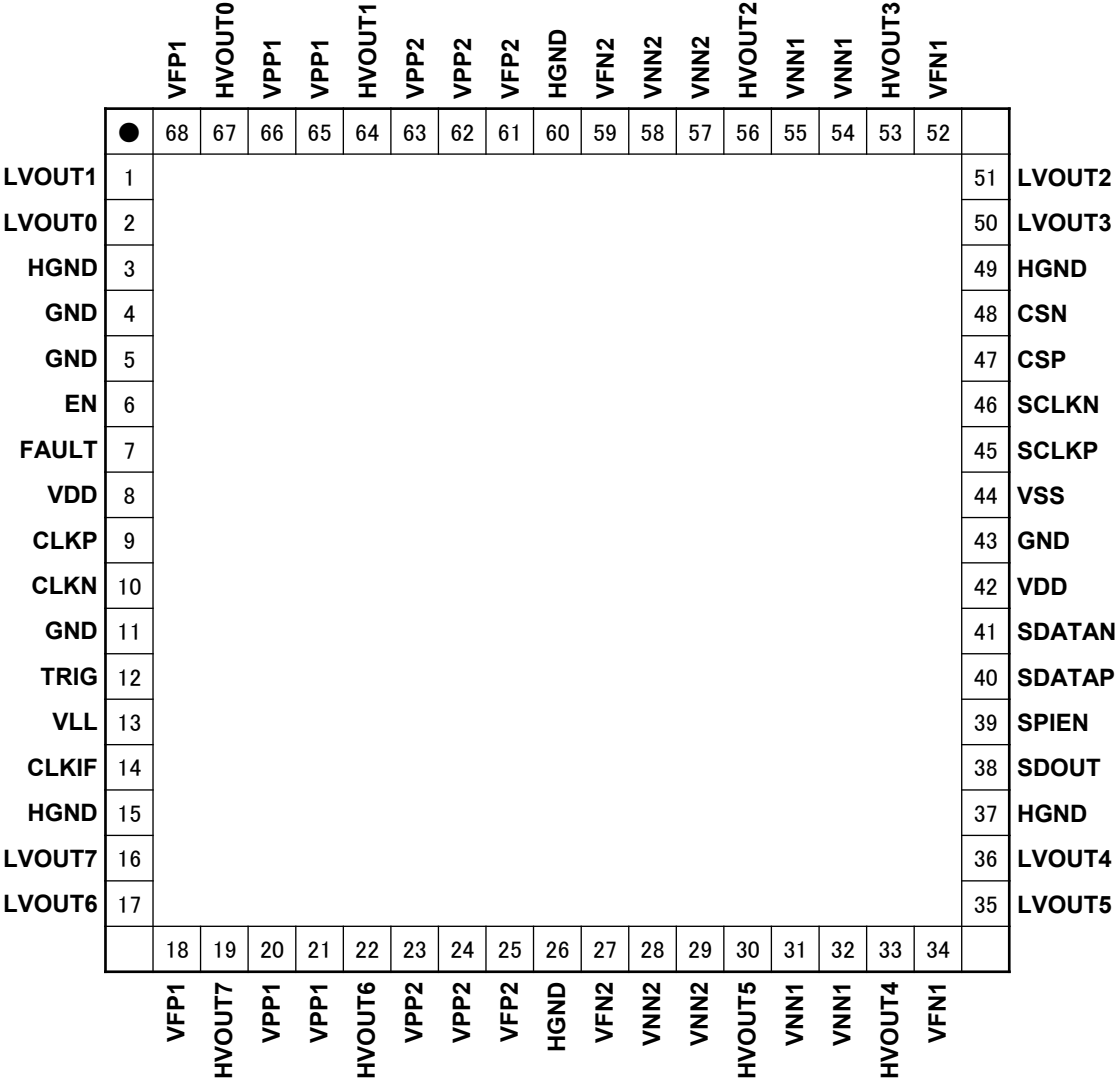


Figure 16 Pin Configuration

■ Package

Table 28 Package Drawing Codes

Package Name	Dimension	Tray	Marking	Land	Packing
QFN-68(1010)B	QN068-B-P	QN068-B-T	QN068-B-M	QN068-B-L	QN068-B-K

■ Storage, Mounting

1. Storage Conditions

1. 1 The storage location should be kept at 5 to 35 °C and 40 to 70% relative humidity. Keeping in a dry box is recommended. Moisture-proof property is assured for 12 months from delivery date for sealed moisture-proof packing, while it is guaranteed for 7 days from unpacked date under the condition above.
1. 2 When the storage conditions do not conform to those above or other conditions occur indicating moisture exposure, the ICs should be dried to avoid package cracks. A baking process at 125 °C lasting for 24 hours results in sufficient dehumidification. The baking is not allowed more than twice, and the ICs should be mounted within 7 days after initial baking or within 10 days of total exposure after the second dehumidification.

2. Reflow soldering

The temperature rise may be different in the resin and a terminal part due to the reflow soldering. It is necessary to check the package surface temperature (resin) before setting the temperature profile.

Figure 17 shows the resistance to soldering heat condition for package (Reflow method).

Confirm the heat resistance of the package shown below. (Based on JEDEC J-STD-020).

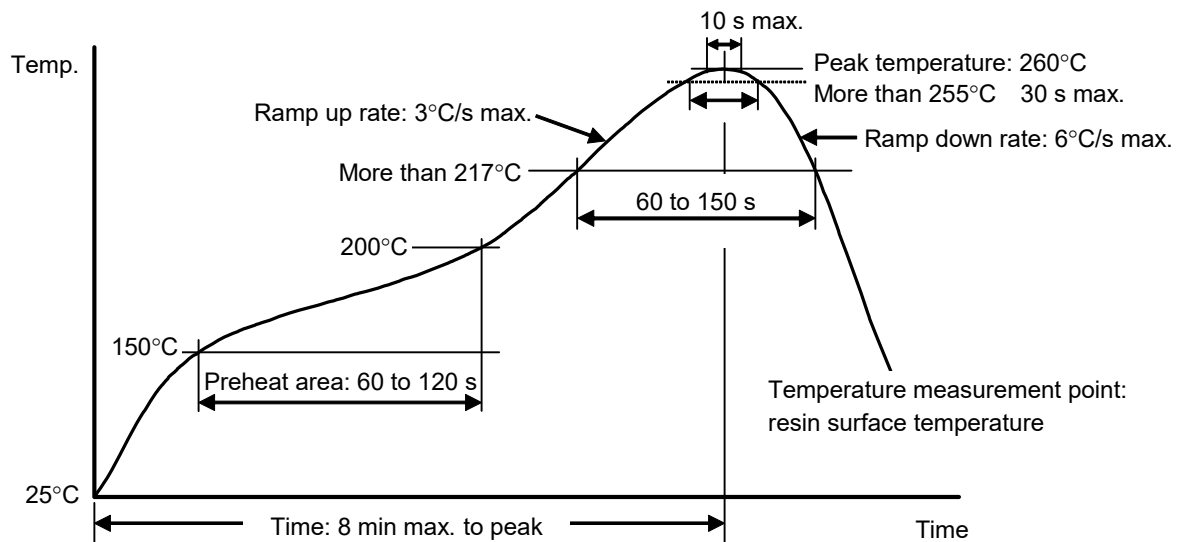



Figure 17 Resistance to soldering heat condition for package (Reflow method)

■ Important Notice

1. ABLIC Inc. warrants performance of its hardware products (hereinafter called “products”) to the specifications applicable at the time of sale in accordance with the Product Specification. Testing and other quality control techniques are utilized to the extent ABLIC Inc. needs to meet specifications described in the Product Specification. Specific testing of all parameters of each device is not necessarily performed, except those mandated by related laws and/or regulations.
2. Should any claim be made within one month of product delivery about products’ failure to meet performance described in the Product Specification, all the products in relevant lot(s) shall be re-tested and re-delivered. Products delivered more than one month before of such claim shall not be counted for such response.
3. ABLIC Inc. assumes no obligation or any way of compensation should any fault about customer products and applications using ABLIC Inc. products be found in marketplace. Only in such a case fault of ABLIC Inc. is evident and products concerned do not meet the Product Specification, compensation shall be conducted if claimed within one year of product delivery up to in the way of product replacement or payment of equivalent amount.
4. ABLIC Inc. reserves the right to make changes to the Product Specification at any time and to discontinue mass production of the relevant products without notice. Customers are advised before placing orders to confirm that the Product Specification of inquiry is the latest version and that the relevant product is currently on mass production status.
5. In no event shall ABLIC Inc. be liable for any damage that may result from an accident or any other cause during operation of the user’s units according to the Product Specification. ABLIC Inc. assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the Product Specification.
6. No license is granted by the Product Specification under any patents or other rights of any third party or ABLIC Inc.
7. The Product Specification may not be reproduced or duplicated, in any form, in whole or in part, without the expressed written permission of ABLIC Inc.
8. Resale of ABLIC Inc. products with statements different from or beyond the parameters described in the Product Specification voids all express and any implied warranties for the products, and is an unfair and deceptive business practice. ABLIC Inc. is not responsible or liable for any such statements.
9. Products (technologies) described in the Product Specification are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting those products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.

■ Cautions



1. Customers are advised to follow the cautions below to protect products from damage caused by electrical static discharge (ESD).
 1. 1 Material of container or any device to carry products should be free from ESD, which may be caused by vibration while transportation. It is recommended that electric-conductive container or aluminum sheet be used as an effective countermeasure.
 1. 2 Those who touch products such as work platform, machine, measurement/test equipment should be grounded.
 1. 3 Those who deal with products should be grounded through a large series impedance around 100kΩ to 1MΩ.
 1. 4 Prevent friction with other materials made with high polymer.
 1. 5 Prevent vibration or friction when carrying the printed circuit board (PCB) where products are mounted. To short circuit terminals is a recommended countermeasure to keep the same electric potential on the PCB.
 1. 6 Avoid dealing with or storing products in an extremely arid environment.
2. "Absolute maximum ratings" should never be exceeded during use regardless of any change in external conditions. Otherwise, products may be damaged or destroyed. In no event shall ABLIC Inc. be liable for any failure in products or any secondary damage resulting from use at a value exceeding the absolute maximum ratings.
3. Products may experience failures due to accident or unexpected surge voltages. Accordingly, adopt safe design features, such as redundancy or prevention of erroneous action, to avoid extensive damage in the event of a failure. (If a semiconductor device fails, there may be cases in which the semiconductor device, wiring or wiring pattern will emit smoke or cause a fire or in which the semiconductor device will burst.)
4. Products may experience failures or malfunction in poor surroundings, such as electrical leakage in products due to long-term use in high humidity, malfunctioning or permanent damage due to chemical reaction of products in corrosive environment or due to discharge by strongly charged object near products or due to excessive mechanical shock. To use products in radiation environment is not assumed. To use products near material easy to ignite may cause a fire due to its flammable package. Avoid using products in such environment or take appropriate countermeasures depending on the environment.
5. Products are not designed, manufactured, or warranted to be suitable for use where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, life-support-related medical equipment, fuel control equipment and various kinds of safety equipment). Inclusion of products in such application shall be fully at the risk of customers. ABLIC Inc. assumes no liability for applications assistance, customer product design, or performance.

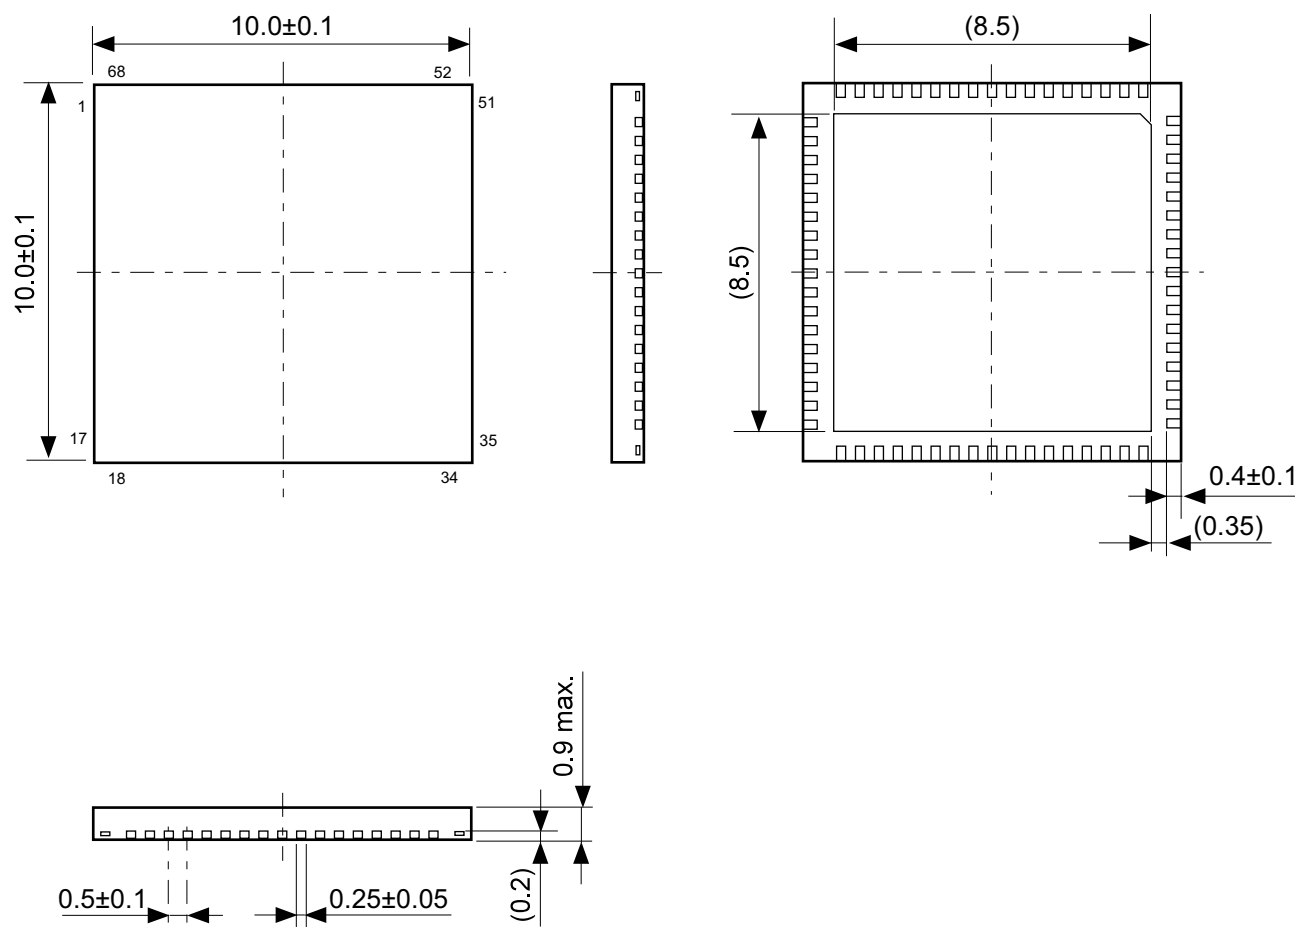

No. QN068-B-P-SD-1.0

TITLE	QFN68-B-PKG Dimensions
No.	QN068-B-P-SD-1.0
ANGLE	
UNIT	mm
ABLIC Inc.	

TITLE	QFN68-B-Tray		
No.	QN068-B-T-SD-1.0		
ANGLE		QTY.	168
UNIT	mm		
ABLIC Inc.			

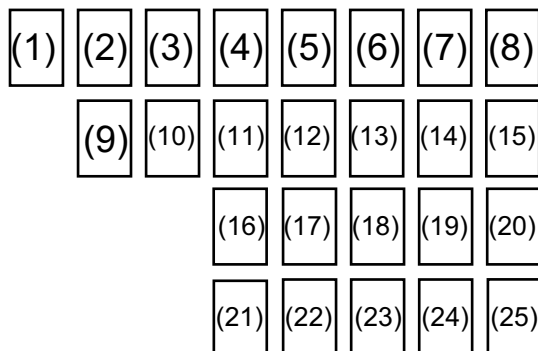

(1) to (10) : Product code

(11) , (12) : Quality control code

(13) : Year of assembly

(14) : Month of assembly


(15) : Week of assembly

(16) to (25) : Quality control code

(A) : 1-pin mark


No. QN068-B-M-S1-1.0

TITLE	QFN68-B-Markings		
No.	QN068-B-M-S1-1.0		
ANGLE			
UNIT		TYPE	LASER
ABLIC Inc.			

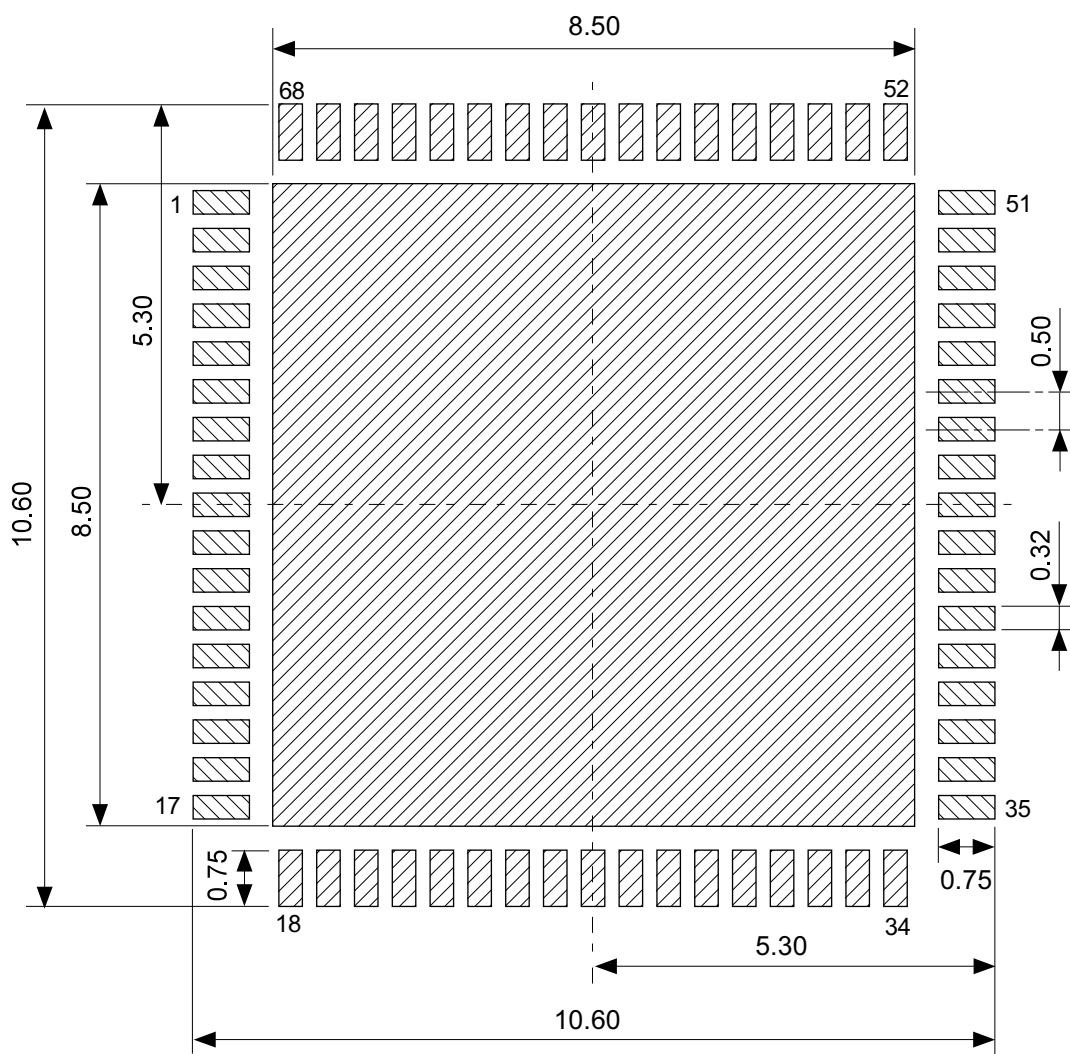

No. QN068-B-L-SD-1.0

TITLE	QFN68-B -Land Recommendation
No.	QN068-B-L-SD-1.0
ANGLE	
UNIT	mm
ABLIC Inc.	

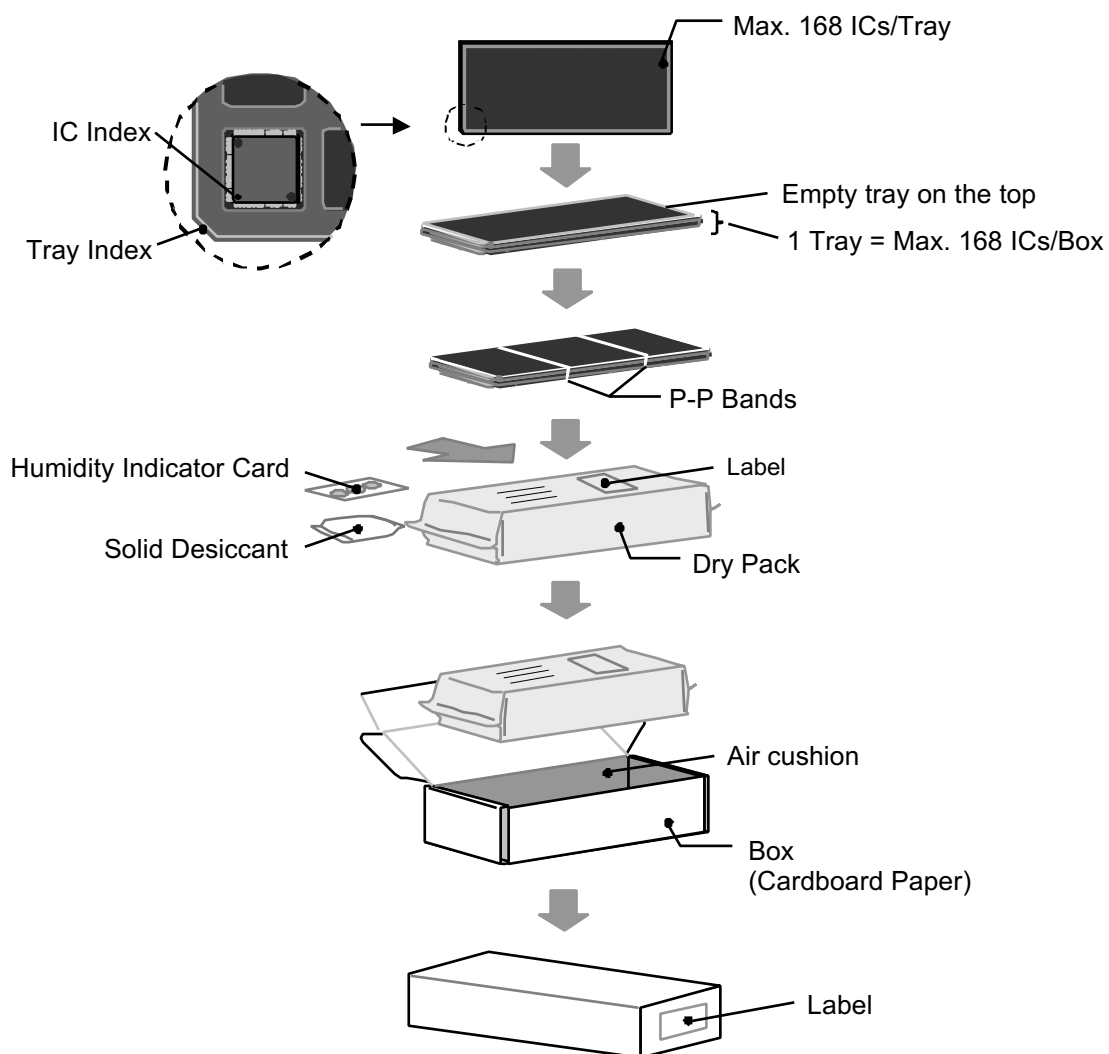

TITLE	QFN68-B -Packing Procedure
No.	QN068-B-K-SD-2.0
ANGLE	
UNIT	
ABLIC Inc.	

Disclaimers (Handling Precautions)

1. All the information described herein (product data, specifications, figures, tables, programs, algorithms and application circuit examples, etc.) is current as of publishing date of this document and is subject to change without notice.
2. The circuit examples and the usages described herein are for reference only, and do not guarantee the success of any specific mass-production design.
ABLIC Inc. is not liable for any losses, damages, claims or demands caused by the reasons other than the products described herein (hereinafter "the products") or infringement of third-party intellectual property right and any other right due to the use of the information described herein.
3. ABLIC Inc. is not liable for any losses, damages, claims or demands caused by the incorrect information described herein.
4. Be careful to use the products within their ranges described herein. Pay special attention for use to the absolute maximum ratings, operation voltage range and electrical characteristics, etc.
ABLIC Inc. is not liable for any losses, damages, claims or demands caused by failures and / or accidents, etc. due to the use of the products outside their specified ranges.
5. Before using the products, confirm their applications, and the laws and regulations of the region or country where they are used and verify suitability, safety and other factors for the intended use.
6. When exporting the products, comply with the Foreign Exchange and Foreign Trade Act and all other export-related laws, and follow the required procedures.
7. The products are strictly prohibited from using, providing or exporting for the purposes of the development of weapons of mass destruction or military use. ABLIC Inc. is not liable for any losses, damages, claims or demands caused by any provision or export to the person or entity who intends to develop, manufacture, use or store nuclear, biological or chemical weapons or missiles, or use any other military purposes.
8. The products are not designed to be used as part of any device or equipment that may affect the human body, human life, or assets (such as medical equipment, disaster prevention systems, security systems, combustion control systems, infrastructure control systems, vehicle equipment, traffic systems, in-vehicle equipment, aviation equipment, aerospace equipment, and nuclear-related equipment), excluding when specified for in-vehicle use or other uses by ABLIC, Inc. Do not apply the products to the above listed devices and equipments.
ABLIC Inc. is not liable for any losses, damages, claims or demands caused by unauthorized or unspecified use of the products.
9. In general, semiconductor products may fail or malfunction with some probability. The user of the products should therefore take responsibility to give thorough consideration to safety design including redundancy, fire spread prevention measures, and malfunction prevention to prevent accidents causing injury or death, fires and social damage, etc. that may ensue from the products' failure or malfunction.
The entire system in which the products are used must be sufficiently evaluated and judged whether the products are allowed to apply for the system on customer's own responsibility.
10. The products are not designed to be radiation-proof. The necessary radiation measures should be taken in the product design by the customer depending on the intended use.
11. The products do not affect human health under normal use. However, they contain chemical substances and heavy metals and should therefore not be put in the mouth. The fracture surfaces of wafers and chips may be sharp. Be careful when handling these with the bare hands to prevent injuries, etc.
12. When disposing of the products, comply with the laws and ordinances of the country or region where they are used.
13. The information described herein contains copyright information and know-how of ABLIC Inc. The information described herein does not convey any license under any intellectual property rights or any other rights belonging to ABLIC Inc. or a third party. Reproduction or copying of the information from this document or any part of this document described herein for the purpose of disclosing it to a third-party is strictly prohibited without the express permission of ABLIC Inc.
14. For more details on the information described herein or any other questions, please contact ABLIC Inc.'s sales representative.
15. This Disclaimers have been delivered in a text using the Japanese language, which text, despite any translations into the English language and the Chinese language, shall be controlling.

2.4-2019.07