

**Rochester Electronics
Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceed the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

SN54LS381A, SN54S381, SN74LS381A, SN54LS382A, SN74LS382A, SN74S381 ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

D2430, JANUARY 1981 — REVISED MARCH 1988

PIN DESIGNATIONS

DESIGNATION	PIN NOS.	FUNCTION
A3, A2, A1, A0	17, 19, 1, 3	WORD A INPUTS
B3, B2, B1, B0	16, 18, 2, 4	WORD B INPUTS
S2, S1, S0	7, 6, 5	FUNCTION-SELECT INPUTS
C_n	15	CARRY INPUT FOR ADDITION, INVERTED CARRY INPUT FOR SUBTRACTION
F3, F2, F1, F0	12, 11, 9, 8	FUNCTION OUTPUTS
$\bar{P}$ ('LS381A 'S381 ONLY)	14	ACTIVE-LOW CARRY PROPAGATE OUTPUT
$\bar{G}$ ('LS381A 'S381 ONLY)	13	ACTIVE-LOW CARRY GENERATE OUTPUT
$C_n + 4$ ('LS382A ONLY)	14	RIPPLE-CARRY OUTPUT
OVR ('LS382A ONLY)	13	OVERFLOW OUTPUT
VCC	20	SUPPLY VOLTAGE
GND	10	GROUND

- Fully Parallel 4-Bit ALUs in 20-Pin Package for 0.300-Inch Row Spacing
- Ideally Suited for High-Density Economical Processors
- LS381A and 'S381 Feature $\bar{G}$ and $\bar{P}$ Outputs for Look-Ahead Carry Cascading
- 'LS382A Features Ripple Carry ($C_n + 4$) and Overflow (OVR) Outputs
- Arithmetic and Logic Operations Selected Specifically to Simplify System Implementation:
 - A Minus B
 - B Minus A
 - A Plus B
 - and Five Other Functions

description

The 'LS381A, 'S381 and 'LS382A are low-power Schottky and Schottky TTL arithmetic logic units (ALUs)/function generators that perform eight binary arithmetic/logic operations on two 4-bit words as shown in the function table. The exclusive-OR, AND, or OR function of the two Boolean variables is provided without the use of external circuitry. Also, the outputs can be cleared (low) or preset (high) as desired. The 'LS381A and 'S381 provide two cascade outputs ($\bar{P}$ and $\bar{G}$ for expansion utilizing SN54S182/SN74S182 look-ahead carry generators. The 'LS382 provides a $C_n + 4$ output to ripple the carry to the C_n input of the next stage. The 'LS382A detects and indicates two's complement overflow condition via the OVR output. The overflow output is logically equivalent to $C_n + 3 \oplus C_n + 4$. When the 'LS382A is cascaded to handle word lengths longer than four bits in length, only the most significant overflow (OVR) output is used.

The SN54' family is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74' family is characterized for operation from 0°C to 70°C .


SN54LS381A, SN54S381

... J OR W PACKAGE

SN74LS381A, SN74S381

... DW OR N PACKAGE

(TOP VIEW)




SN54LS382A ...

J OR W PACKAGE

SN74LS382A ...

DW OR N PACKAGE


(TOP VIEW)



SN54LS381A, SN54S381


... FK PACKAGE

(TOP VIEW)



SN54LS382A ... FK PACKAGE

(TOP VIEW)



FUNCTION TABLE

SELECTION	ARITHMETIC/LOGIC		
S2	S1	S0	OPERATION
L	L	L	CLEAR
L	L	H	B MINUS A
L	H	L	A MINUS B
L	H	H	A PLUS B
H	L	L	A $\oplus$ B
H	L	H	A + B
H	H	L	AB
H	H	H	PRESET

H = high level, L = low level

2

TTL Devices

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75285

2-899

SN54LS381A, SN54S381, SN74LS381A, SN54LS382A, SN74LS382A, SN74S381
ARITHMETIC LOGIC UNITS/FUNCTIONS GENERATORS

function table

Certain differences exist in the $\overline{G}$, $\overline{P}$ ('LS381A, 'S381) and OVR, C_{n+4} ('LS382A) function table compared with similar parts from other technologies and other vendors. No differences exist in the arithmetic modes (B minus A, A minus B, and A plus B), where these outputs perform valuable cascade functions. There are slight differences in the other modes (CLEAR, $A + B$, $A \oplus B$, AB, and PRESET), where these outputs are strictly "don't care".

This function table is a condensed version and assumes for A_n that A0, A1, A2, and A3 inputs all agree and for B_n that B0, B1, B2, and B3 inputs all agree. This table is intended to point out the response of these $\overline{G}$, $\overline{P}$ ('LS381A, 'S381) and OVR, C_{n+4} ('LS382A) outputs in all modes of operation to facilitate incoming inspection.

FUNCTION TABLE

ARITHMETIC/LOGIC OPERATION	INPUTS						OUTPUTS				'LS381A, 'S381		'LS382A)	
	S2	S1	S0	C_n	A_n	B_n	F3	F2	F1	F0	$\overline{G}$	$\overline{P}$	OVR	C_{n+4}
CLEAR	L	L	L	X	X	X	L	L	L	L	H	H	L	L
B MINUS A	L	L	H	L	L	L	H	H	H	H	H	L	L	L
				L	L	H	H	H	H	L	H	H	L	H
				L	H	L	L	L	L	L	H	H	L	L
				L	H	H	H	H	H	H	H	L	L	L
				H	L	L	L	L	L	L	H	L	L	H
				H	L	H	H	H	H	H	L	H	L	H
				H	H	L	L	L	L	H	H	L	L	L
				H	H	H	L	L	L	L	H	L	L	H
A MINUS B	L	H	L	L	L	L	H	H	H	H	H	L	L	L
				L	L	H	L	L	L	L	L	H	L	L
				L	H	L	H	H	H	L	L	H	L	H
				L	H	H	H	H	H	H	H	L	L	L
				H	L	L	L	L	L	L	H	L	L	H
				H	L	H	L	L	L	H	H	L	L	L
				H	H	L	H	H	H	H	L	H	L	H
				H	H	H	L	L	L	L	H	L	L	H
A PLUS B	L	H	H	L	L	L	L	L	L	L	H	H	L	L
				L	L	H	H	H	H	H	H	L	L	L
				L	H	L	H	H	H	H	L	H	L	L
				L	H	H	H	H	H	L	L	H	L	H
				H	L	L	L	L	L	H	H	L	L	L
				H	L	H	L	L	L	L	H	L	L	H
				H	H	L	L	L	L	L	H	L	L	H
				H	H	H	H	H	H	H	L	H	L	H
$A \odot B$	H	L	L	X	L	L	L	L	L	L	H	H	L	L
				L	L	H	H	H	H	H	H	L	L	L
				H	L	H	H	H	H	H	H	L	H	H
				L	H	L	H	H	H	H	H	L	L	L
				H	H	L	H	H	H	H	H	L	H	H
				X	H	H	L	L	L	L	H	H	L	L
				L	L	L	L	L	L	L	H	L	L	L
				H	L	H	H	H	H	H	H	L	H	H
$A \cdot B$	H	H	L	X	L	L	L	L	L	L	H	H	L	L
				X	L	H	L	L	L	L	H	H	L	L
				X	H	L	L	L	L	L	H	H	L	L
				L	H	H	H	H	H	H	H	L	L	L
				H	H	H	H	H	H	H	H	L	H	H
				L	X	X	H	H	H	H	H	L	L	L
				H	X	X	H	H	H	H	H	L	H	H
				H	X	X	H	H	H	H	H	L	H	H


2

TTL Devices

SN54LS381A, SN54LS382A, SN74LS381A, SN74LS382A
ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

logic diagram (positive logic)

1S381A, 1S382A

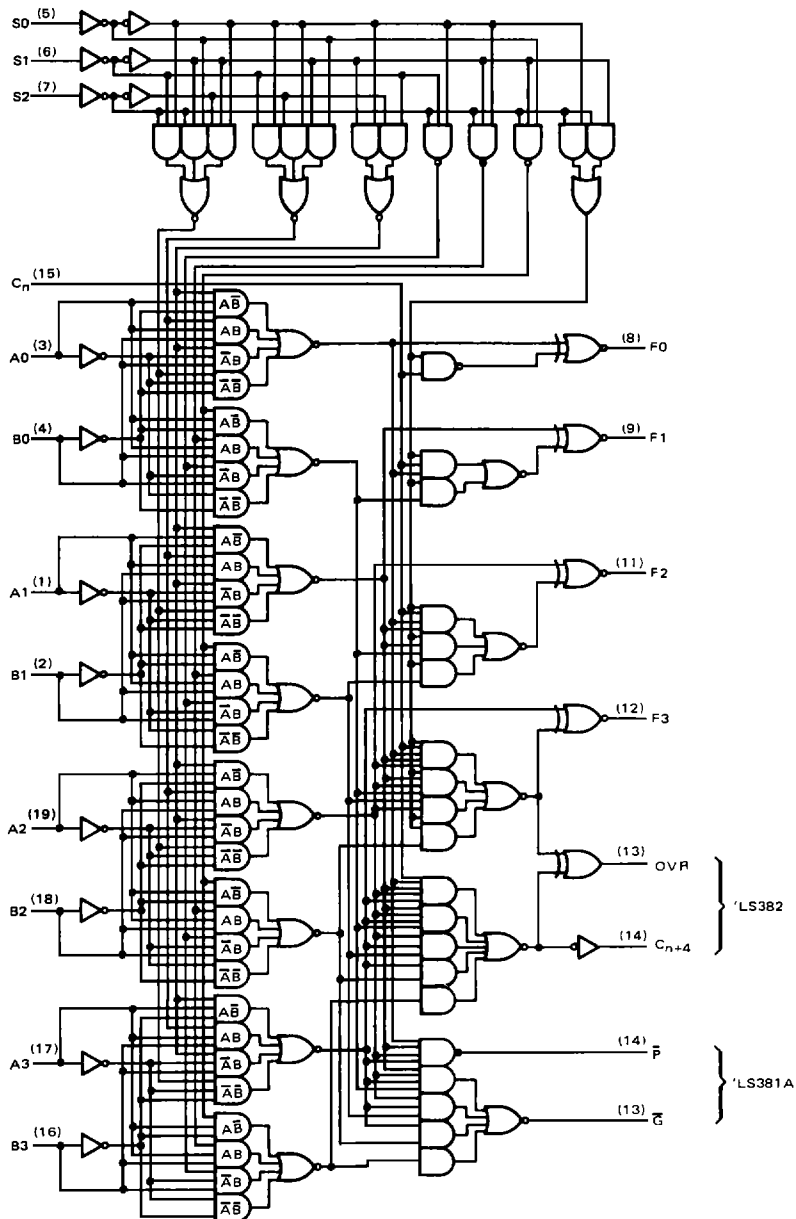

Pin numbers shown are for DW, J, N, and W packages.

2

TTL Devices

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265


2-901

SN54S381, SN74S381 **ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS**

logic diagram and schematics of inputs and outputs

2



TTL Devices

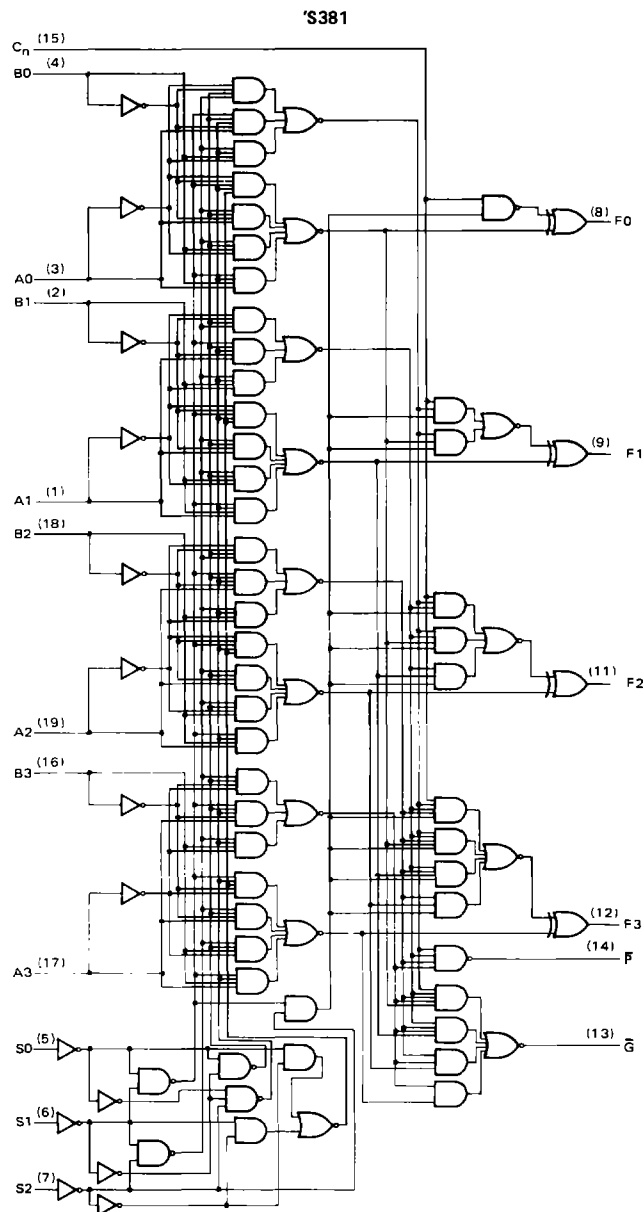

Pin numbers shown are for DW, J, N, and W packages.

SN54LS381A, SN54S381, SN74LS381A, SN54LS382A, SN74LS382A, SN74S381 ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

logic symbols†

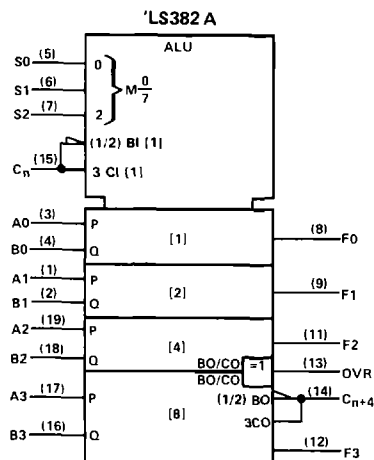
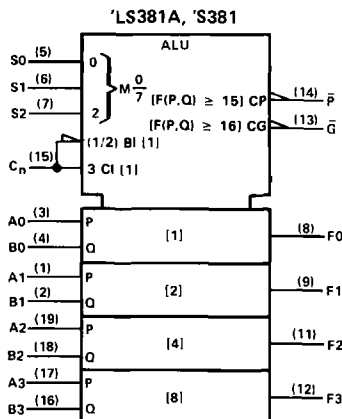


† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.



Pin numbers shown are for DW, J, N, and W packages

schematics of inputs and outputs

'LS381, 'LS382A

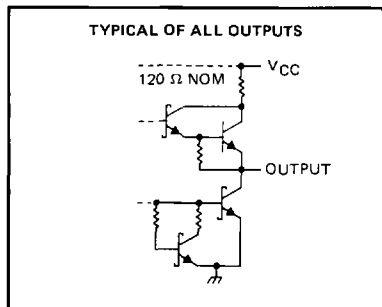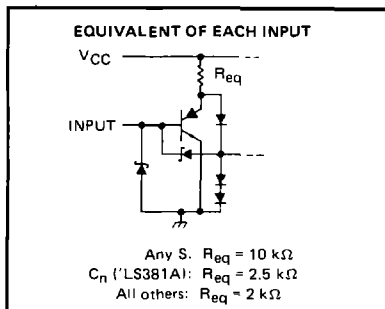

'S381

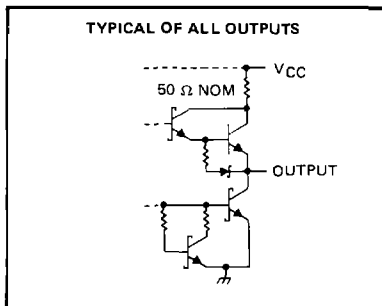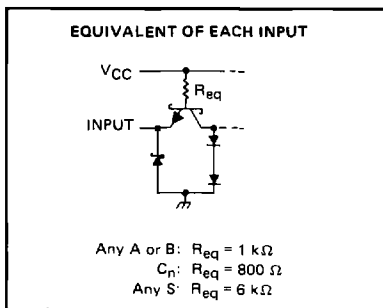

2

TTL Devices

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2-903

SN54LS381A, SN54LS382A, SN74LS381A, SN74LS382A

ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (See Note 1)	7 V
Input voltage	7 V
Operating free-air temperature range: SN54LS381A, SN54LS382A	-55°C to 125°C
SN74LS381A, SN74LS382A	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to the network ground terminal.

recommended operating conditions

				SN54LS*			SN74LS*			UNIT	
				MIN	NOM	MAX	MIN	NOM	MAX		
V _{CC}	Supply voltage			4.5	5	5.5	4.75	5	5.25	V	
V _{IH}	High-level input voltage			2			2			V	
V _{IL}	Low-level input voltage			0.7			0.8			V	
I _{OH}	High-level output current			− 0.4			− 0.4			mA	
I _{OL}	Low-level output current			Ḡ output of 'LS381A			16			mA	
				All other outputs			4				
T _A	Operating free-air temperature			− 55			0			70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS*		SN74LS*		UNIT
				MIN	TYP‡	MAX	MIN	
VIK		VCC = MIN, I _I = − 18 mA		− 1.5		− 1.5		V
VOH		VCC = MIN, VIH = 2 V, VIL = MAX, IOH = − 0.4 mA		2.5	3.4	2.7	3.4	V
VOL	G̅ ('LS381A)	VCC = MIN, VIH = 2 V, VIL = MAX	IOL = 16 mA	0.47	0.7	0.47	0.7	V
	IOL = 4 mA		0.25	0.4	0.25	0.4		
	IOL = 8 mA				0.35	0.5		
II		VCC = MAX, VI = 7 V		0.1		0.1		mA
IIH	Any S	VCC = MAX, VI = 2.7 V		20		20		μA
	Any A or B			100		100		
	CN ('LS381A)			80		80		
	CN ('LS382A)			100		100		
IIL	Any S	VCC = MAX, VI = 0.4 V		− 0.2		− 0.2		mA
	Any A or B			− 1		− 1		
	CN ('LS381A)			− 0.8		− 0.8		
	CN ('LS382A)			− 0.8		− 0.8		
IOS‡		VCC = MAX		− 20	− 100	− 20	− 100	mA
ICC		VCC = MAX, All inputs grounded, outputs open		35	65	35	65	mA

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[‡] All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

[§] Not more than one output should be shorted at a time, and duration of the short circuit should not exceed one second.

2

TTL Devices

SN54LS381A, SN54LS382A, SN74LS381A, SN74LS382A
ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

switching characteristics, VCC = 5 V, TA = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS381A			'LS382			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
tPLH	C _n	Any F	R _L = 2 kΩ, C _L = 15 pF	18	27		18	27		ns
tPHL				14	21		14	21		
tPLH	Any A or B	$\overline{G}$		20	30					ns
tPHL				21	33					
tPLH	Any A or B	$\overline{P}$		21	33					ns
tPHL				23	33					
tPLH	A _i or B _i	F _i		20	30		20	30		ns
tPHL				15	23		15	23		
tPLH	S0, S1, S2	F _i		35	53		35	53		ns
tPHL				34	51		34	51		
tPLH	S0, S1, S2	$\overline{G}$ or $\overline{P}$		31	47					ns
tPHL				32	48					
tPLH	Any A or B	C _{n+4}					28	42		ns
tPHL							26	39		
tPLH	Any A or B	OVR					23	35		ns
tPHL							27	41		
tPLH	S0, S1, S2	C _{n+4} or OVR					38	57		ns
tPHL							36	54		
tPLH	C _n	OVR					10	15		ns
tPHL							13	23		
tPLH	C _n	C _{n+4}					13	21		ns
tPHL							11	20		

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.

2

TTL Devices

SN54S381, SN74S381

ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	5.5 V
Intermitter voltage (see Note 2)	5.5 V
Operating free-air temperature range: SN54S381	-55°C to 125°C
SN74S381	0°C to 70°C
Storage free-air temperature range	-65°C to 150°C

NOTES: 1. Voltage values, except intermitter voltage, are with respect to network ground terminal

2. This is the voltage between two emitters of a multiple-emitter transistor. For this circuit, this rating applies to each A input in conjunction with its respective B input for example A0 with B0, etc

recommended operating conditions

	SN54S381			SN74S381			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}	4.5	5	5.5	4.75	5	5.25	V
High-level output current, I_{OH}			-1			-1	mA
Low-level output current, I_{OL}			20			20	mA
Operating free-air temperature, T_A	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		MIN	TYP‡	MAX	UNIT
V_{IH}	High-level input voltage			2			V
V_{IL}	Low-level input voltage					0.8	V
V_{IK}	Input clamp voltage	$V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$				-1.2	V
V_{OH}	High-level output voltage	SN54S381	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$	2.4	3.4		V
		SN74S381	$V_{IL} = 0.8 \text{ V}, I_{OH} = -1 \text{ mA}$	2.7	3.4		
V_{OL}	Low-level output voltage	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, I_{OL} = 20 \text{ mA}$				0.5	V
I_I	Input current at maximum input voltage	$V_{CC} = \text{MAX}, V_I = 5.5 \text{ V}$				1	mA
I_{IH}	High-level input current	Any S input	$V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$			50	μA
		C_n				250	
		All others				200	
I_{IL}	Low-level input current	Any S input	$V_{CC} = \text{MAX}, V_I = 0.5 \text{ V}$			-2	mA
		C_n				-8	
		All others				-6	
I_{OS}	Short-circuit output current§	$V_{CC} = \text{MAX}$		-40		-100	mA
I_{CC}	Supply current	$V_{CC} = \text{MAX}$			105	160	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$

§ Not more than one output should be shorted at a time.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	C_n	Any F	$C_L = 15 \text{ pF}, \quad R_L = 280 \Omega,$ See Note 3	10	17		ns
t_{PHL}				10	17		
t_{PLH}	Any A or B	$\overline{G}$		12	20		ns
t_{PHL}				12	20		
t_{PLH}	Any A or B	$\overline{P}$		11	18		ns
t_{PHL}				11	18		
t_{PLH}	A_1 or B_1	F_1		18	27		ns
t_{PHL}				16	25		
t_{PLH}	Any S	Any		18	30		ns
t_{PHL}				18	30		

NOTE 3. Load circuits and voltage waveforms are shown in Section 1

2

TTL Devices