


RC4558, RC4558Y, RM4558, RV4558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS073 – MARCH 1976 – REVISED AUGUST 1991

- Continuous-Short-Circuit Protection
- Wide Common-Mode and Differential Voltage Ranges
- No Frequency Compensation Required
- Low Power Consumption
- No Latch-Up
- Unity Gain Bandwidth . . . 3 MHz Typ
- Gain and Phase Match Between Amplifiers
- Low Noise . . . 8 nV/√Hz Typ at 1 kHz
- Designed To Be Interchangeable With Raytheon RC4558, RM4558, and RV4558

D, DB, JG, P, OR PW PACKAGE
(TOP VIEW)



description

The RC4558, RM4558, and RV4558 are dual general-purpose operational amplifiers with each half electrically similar to the μ A741 except that offset null capability is not provided.

The high common-mode input voltage range and the absence of latch-up make these amplifiers ideal for voltage-follower applications. The devices are short-circuit protected and the internal frequency compensation ensures stability without external components.

The RC4558 is characterized for operation from 0°C to 70°C, the RM4558 is characterized for operation over the full military temperature range of -55°C to 125°C, and the RV4558 is characterized for operation from -40°C to 85°C.

AVAILABLE OPTIONS

T _A	V _{IO} max AT 25°C	PACKAGED DEVICES					CHIP FORM (Y)
		SMALL OUTLINE (D)	SSOP (DBLE)	CERAMIC DIP (JG)	PLASTIC DIP (P)	SSOP (PWLE)	
0°C to 70°C	6 mV	RC4558D	RC4558DBLE	—	RC4558P	RC4558PWLE	RC4558Y
-40°C to 85°C	6 mV	RV4558D	—	—	RV4558P	—	—
-55°C to 125°C	6 mV	—	—	RM4558JG	—	—	—


The D package is available taped and reeled. Add the suffix R to the device type (e.g., RC4558DR). The DB and PW packages are available only left-end taped and reeled. RC4558Y is tested at 25°C.

RC4558, RC4558Y, RM4558, RV4558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS073 – MARCH 1976 – REVISED AUGUST 1991

RC4558Y chip information


These chips, properly assembled, display characteristics similar to the RC4558. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

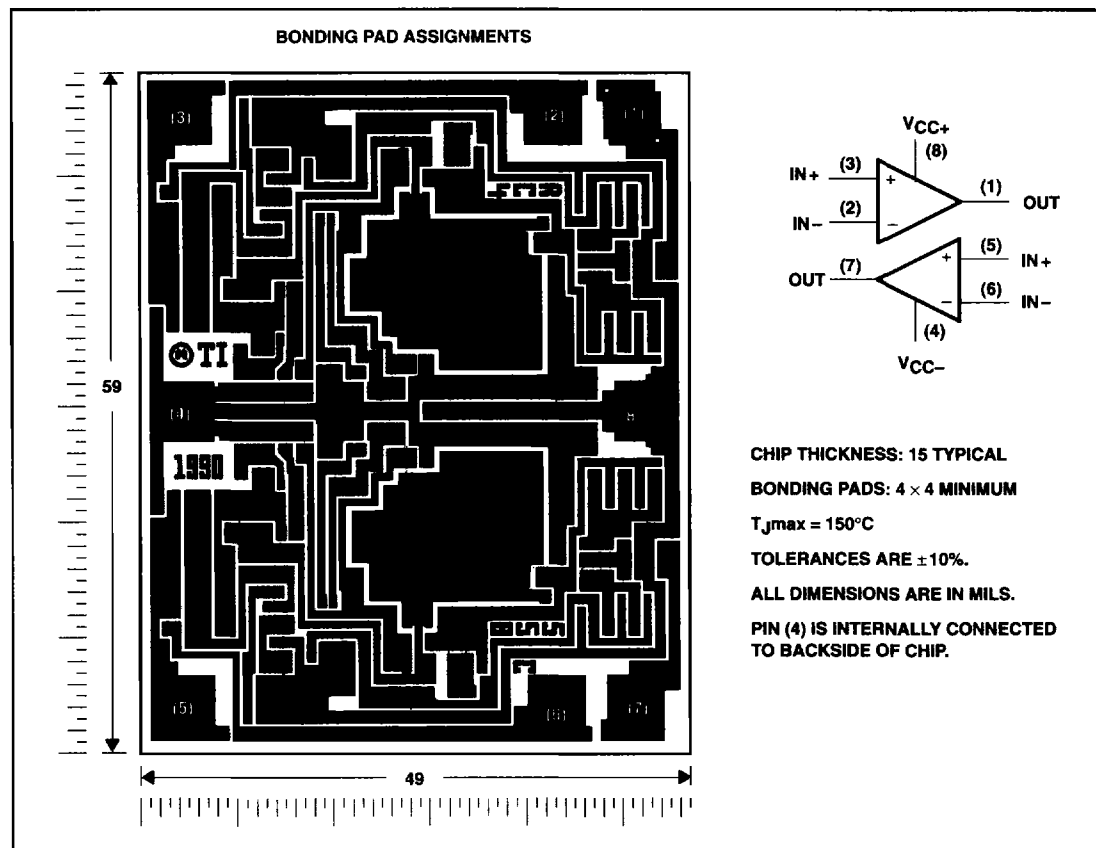

RC4558, RC4558Y, RM4558, RV4558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS073 – MARCH 1976 – REVISED AUGUST 1991

schematic (each amplifier)

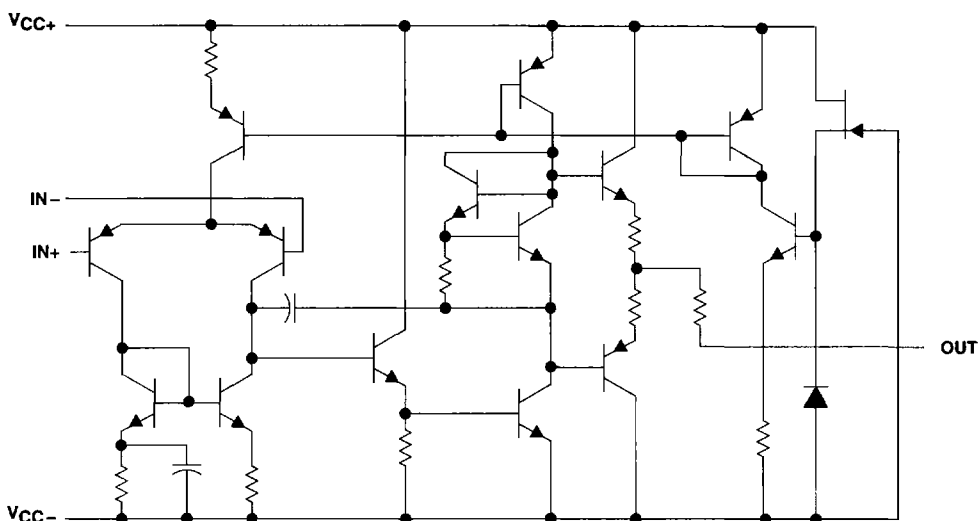

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	RC4558	RM4558	RV4558	UNIT
Supply voltage V_{CC+} (see Note 1)	18	22	18	V
Supply voltage V_{CC-} (see Note 1)	-18	-22	-18	V
Differential input voltage (see Note 2)	± 30	± 30	± 30	V
Input voltage (any input, see Notes 1 and 3)	± 15	± 15	± 15	V
Duration of output short circuit to ground, one amplifier at a time (see Note 4)	unlimited	unlimited	unlimited	
Continuous total dissipation	See Dissipation Rating Table			
Operating free-air temperature range	0 to 70	-55 to 125	-40 to 85	$^{\circ}\text{C}$
Storage temperature range	-65 to 150	-65 to 150	-65 to 150	$^{\circ}\text{C}$
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: JG package		300		$^{\circ}\text{C}$
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, DB, P, or PW package	260		260	$^{\circ}\text{C}$

- NOTES: 1. All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-} .
2. Differential voltages are at IN+ with respect to IN-.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
4. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^{\circ}\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^{\circ}\text{C}$	DERATE ABOVE T_A	$T_A = 70^{\circ}\text{C}$ POWER RATING	$T_A = 85^{\circ}\text{C}$ POWER RATING	$T_A = 125^{\circ}\text{C}$ POWER RATING
D	680 mW	5.8 mW/ $^{\circ}\text{C}$	33 $^{\circ}\text{C}$	464 mW	377 mW	N/A
DB or PW	525 mW	4.2 mW/ $^{\circ}\text{C}$	25 $^{\circ}\text{C}$	336 mW	N/A	N/A
JG	680 mW	8.4 mW/ $^{\circ}\text{C}$	69 $^{\circ}\text{C}$	672 mW	546 mW	210 mW
P	680 mW	8.0 mW/ $^{\circ}\text{C}$	65 $^{\circ}\text{C}$	640 mW	520 mW	N/A



TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

RC4558, RC4558Y, RM4558, RV4558

DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS073 – MARCH 1976 – REVISED AUGUST 1991

recommended operating conditions

	MIN	MAX	UNIT
Supply voltage, V_{CC+}	5	15	V
Supply voltage, V_{CC-}	-5	-15	V

electrical characteristics at specified free-air temperature, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$

PARAMETER	TEST CONDITIONS†		RC4558			RM4558			RV4558			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_O = 0$	25°C	0.5	6		0.5	5		0.5	6		mV
		Full range		7.5			6			7.5		
I_{IO} Input offset current	$V_O = 0$	25°C	5	200		5	200		5	200		nA
		Full range		300			500			500		
I_{IB} Input bias current	$V_O = 0$	25°C	150	500		140	500		140	500		nA
		Full range		800			1500			1500		
V_{ICR} Common-mode input voltage range		25°C	±12	±14		±12	±14		±12	±14		V
V_{OM} Maximum output voltage swing	$R_L = 10\text{ k}\Omega$	25°C	±12	±14		±12	±14		±12	±14		V
	$R_L = 2\text{ k}\Omega$	25°C	±10	±13		±10	±13		±10	±13		
	$R_L \geq 2\text{ k}\Omega$	Full range	±10			±10			±10			
A_{VD} Large-signal differential voltage amplification	$R_L \geq 2\text{ k}\Omega$, $V_O = \pm 10\text{ V}$	25°C	20	300		50	350		20	300		V/mV
		Full range	15			25			15			
B_1 Unity-gain bandwidth		25°C	3			2	3.5		3			MHz
r_i Input resistance		25°C	0.3	5		0.3	5		0.3	5		MΩ
CMRR Common-mode rejection ratio		25°C	70	90		70	90		70	90		dB
k_{SVS} Supply voltage sensitivity ($\Delta V_{IO}/\Delta V_{CC}$)	$V_{CC} = \pm 15\text{ V}$ to $\pm 9\text{ V}$	25°C	30	150		30	150		30	150		μV/V
V_n Equivalent input noise voltage (closed loop)	$A_{VD} = 100$, $R_S = 100\text{ }\Omega$, $f = 1\text{ kHz}$, $BW = 1\text{ Hz}$	25°C	8			8			8			nV/√Hz
I_{CC} Supply current (both amplifiers)	$V_O = 0$, No load	25°C	2.5	5.6		2.5	5.6		2.5	5.6		mA
		MIN T_A	3	6.6		3	6.6		3	6.6		
		MAX T_A	2.3	5		2	5		2.3	5		
P_D Total power dissipation (both amplifiers)	$V_O = 0$, No load	25°C	75	170		75	170		75	170		mW
		MIN T_A	90	200		90	200		90	200		
		MAX T_A	70	150		60	150		70	150		
V_{O1}/V_O Crosstalk attenuation	Open loop	$R_S = 1\text{ k}\Omega$, $f = 10\text{ kHz}$	85			85			85			dB
	$A_{VD} = 100$	25°C	105			105			105			

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Full range is 0°C to 70°C for RC4558, -55°C to 125°C for RM4558, and -40°C to 85°C for RV4558. Minimum T_A is 0°C for RC4558, -55°C for RM4558, and -40°C for RV4558. Maximum T_A is 70°C for RC4558, 125°C for RM4558, and 85°C for RV4558.

RC4558, RC4558Y, RM4558, RV4558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS073 – MARCH 1976 – REVISED AUGUST 1991

operating characteristics, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_r Rise time	$V_I = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$	0.13			ns
Overshoot		5%			
SR Slew rate at unity gain	$V_I = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$	1.1	1.7		V/ μs

electrical characteristics, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	RC4558Y			UNIT
		MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_O = 0$		0.5	6	mV
I_{IO} Input offset current	$V_O = 0$		5	200	nA
I_{IB} Input bias current	$V_O = 0$		150	500	nA
V_{ICR} Common-mode input voltage range		± 12	± 14		V
V_{OM} Maximum output voltage swing	$R_L = 10\text{ k}\Omega$	± 12	± 14		V
	$R_L = 2\text{ k}\Omega$	± 12	± 13		
A_{VD} Large-signal differential voltage amplification	$R_L = 2\text{ k}\Omega$, $V_O = \pm 10\text{ V}$	20	300		V/mV
B_1 Unity-gain bandwidth			3		MHz
r_i Input resistance		0.3	5		M Ω
CMRR Common-mode rejection ratio		70	90		dB
k_{SVS} Supply voltage sensitivity ($\Delta V_{IO}/\Delta V_{CC}$)	$V_{CC} = \pm 15\text{ V}$ to $\pm 9\text{ V}$		30	150	$\mu\text{V/V}$
V_n Equivalent input noise voltage (closed-loop)	$A_{VD} = 100$, $R_S = 100\text{ }\Omega$, $f = 1\text{ kHz}$, $BW = 1\text{ Hz}$		8		nV $\sqrt{\text{Hz}}$
I_{CC} Supply current (both amplifiers)	$V_O = 0$, No load		2.5	5.6	mA
P_D Total power dissipation (both amplifiers)	$V_O = 0$, No load		75	170	mW
V_{O1}/V_{O2} Crosstalk attenuation	Open loop		85		dB
	$A_{VD} = 100$		105		

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified.

operating characteristics, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_r Rise time	$V_I = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$	0.13			ns
Overshoot		5%			
SR Slew rate at unity gain	$V_I = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$	1.1	1.7		V/ μs



**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265