

# MAX14986

## Dual 6GT/s SAS/SATA Redriver with Equalization and Extended Temperature Operation

### General Description

The MAX14986 dual-channel redriver is designed to redrive one full lane of SAS or SATA signals up to 6.0GT/s (gigatransfers per second) and operates from a single +3.3V supply.

The MAX14986 features independent input equalization and output preemphasis. It enhances signal integrity at the receiver by equalizing the signal at the input and establishing preemphasis at the output of the device. SAS and SATA OOB (out-of-band) signaling is supported using high-speed amplitude detection on the inputs and squelch on the corresponding outputs. Inputs and outputs are all internally 50Ω terminated and must be AC-coupled to the SAS/SATA controller IC and SAS/SATA device.

The MAX14986 is available in a small 28-pin, 3.5mm x 5.5mm TQFN package with flow-through traces for ease of layout. This device is specified over the -40°C to +85°C extended operating temperature range.

### Applications

- Industrial/Embedded PCs
- Computer on Modules
- Carrier Boards
- Test Equipment
- Rack Server Industrial PCs
- Medical Equipment


### Benefits and Features

- High-Performance Solution Designed to Overcome Lossy Channels
  - 3dB of Independent (per Channel) Selectable Input EQ and Output Preemphasis
  - Compensates Up to 30in of Channel Losses with Deterministic Jitter: 23psp-p (max); Random Jitter: 1.5psRMS (max)
  - 8dB (typ) of Return Loss Up to 3.0GHz
- Designed to Reliably Operate in Harsh Environments
  - Industrial Temperature Rated: -40°C to +85°C
  - ±2.5kV Human Body Model (HBM) ESD Protection on All Pins
  - Housed in a Flow-Through (3.5mm x 5.5mm, 28-Pin) TQFN Package for Resistance to Vibration/Shocks
- Ease of Design and Layout
  - Single 3.3V Operation
  - Internal Input/Output 50Ω Termination Resistors on All Pins
  - Flow-Through Pinout

**Ordering Information** appears at end of data sheet.

For related parts and recommended products to use with this part, refer to [www.maximintegrated.com/MAX14986.related](http://www.maximintegrated.com/MAX14986.related).

### Pin Configuration

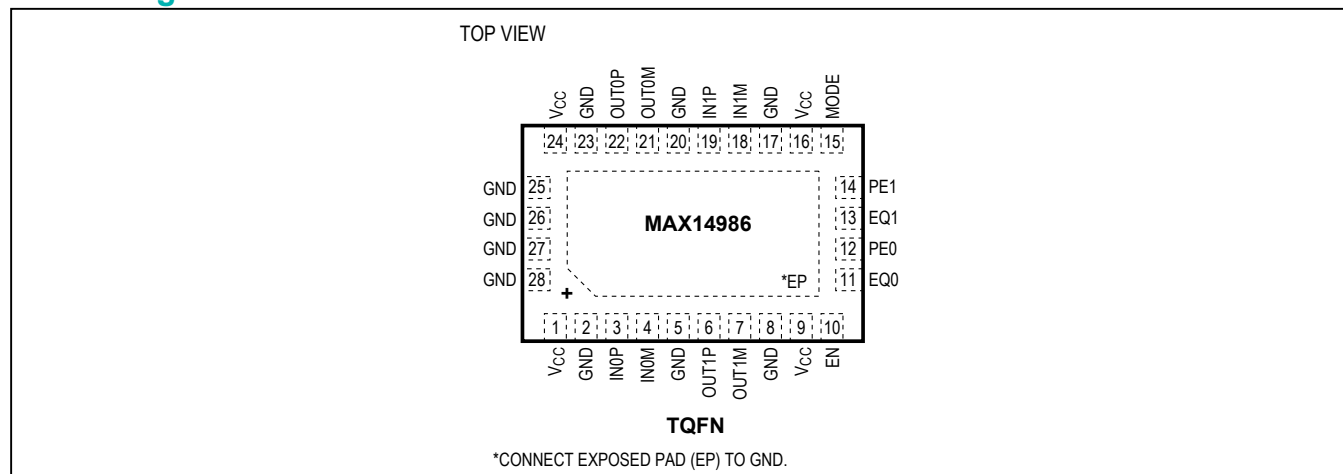

## Absolute Maximum Ratings

(Voltages referenced to GND.)

|                                                                                        |                                  |
|----------------------------------------------------------------------------------------|----------------------------------|
| V <sub>CC</sub> .....                                                                  | -0.3V to +4.0V                   |
| All Other Pins .....                                                                   | -0.3V to (V <sub>CC</sub> + 0.3V |
| Continuous Current (PE <sub>-</sub> , EQ <sub>-</sub> , MODE).....                     | ±15mA                            |
| Peak Current (for 10kHz, 1% duty cycle)<br>(IN <sub>-</sub> , OUT <sub>-</sub> ) ..... | ±100A                            |

Continuous Power Dissipation (T<sub>A</sub> = +70°C)

|                                          |                 |
|------------------------------------------|-----------------|
| TQFN (derate 28.6mW/°C above +70°C)..... | 2286mW          |
| Operating Temperature Range.....         | -40°C to +85°C  |
| Storage Temperature Range .....          | -55°C to +150°C |
| Junction Temperature.....                | +15°C           |
| Lead Temperature (soldering, 10s) .....  | +300°C          |
| Soldering Temperature (reflow) .....     | +260°C          |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Package Thermal Characteristics (Note 1)

Junction-to-Ambient Thermal Resistance (θ<sub>JC</sub>).....2.7°C/WJunction-to-Ambient Thermal Resistance (θ<sub>JA</sub>).....35°C/W

**Note 1:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

## Electrical Characteristics

(V<sub>CC</sub> = +3.0V to +3.6V, C<sub>COUPLE</sub> = 12nF, R<sub>L</sub> = 50Ω, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at V<sub>CC</sub> = +3.3V, T<sub>A</sub> = +25°C.) (Note 2)

| PARAMETER                                   | SYMBOL                | CONDITIONS                                          | MIN  | TYP | MAX  | UNITS             |
|---------------------------------------------|-----------------------|-----------------------------------------------------|------|-----|------|-------------------|
| Operating Power-Supply Range                | V <sub>CC</sub>       |                                                     | 3.0  |     | 3.6  | V                 |
| Operating Supply Current                    | I <sub>CC</sub>       | EQ <sub>-</sub> = PE <sub>-</sub> = GND             |      | 140 | 175  | mA                |
|                                             |                       | EQ <sub>-</sub> = PE <sub>-</sub> = V <sub>CC</sub> |      | 175 | 220  |                   |
| Standby Supply Current                      | I <sub>STBY</sub>     | EN = GND                                            |      | 16  | 20   | mA                |
| Input Termination                           | R <sub>RX-SE</sub>    | Single-ended to V <sub>CC</sub>                     | 42.5 |     | 57.5 | Ω                 |
| Output Termination                          | R <sub>TX-SE</sub>    | Single-ended to V <sub>CC</sub>                     | 42.5 |     | 57.5 | Ω                 |
| <b>AC PERFORMANCE</b>                       |                       |                                                     |      |     |      |                   |
| Differential Input Return Loss<br>(Note 3)  | S <sub>DD11</sub>     | 0.1GHz ≤ f ≤ 0.3GHz                                 | -10  |     |      | dB                |
|                                             |                       | 0.3GHz ≤ f ≤ 3.0GHz                                 | -7.9 |     |      |                   |
|                                             |                       | 3.0GHz ≤ f ≤ 6.0GHz                                 | 0    |     |      |                   |
| Common-Mode Input Return Loss<br>(Note 3)   | S <sub>CC11</sub>     | 0.1GHz ≤ f ≤ 0.3GHz                                 | -6   |     |      | dB                |
|                                             |                       | 0.3GHz ≤ f ≤ 3.0GHz                                 | -5   |     |      |                   |
|                                             |                       | 3.0GHz ≤ f ≤ 6.0GHz                                 | 0    |     |      |                   |
| Differential Output Return Loss<br>(Note 3) | S <sub>DD22</sub>     | 0.1GHz ≤ f ≤ 0.3GHz                                 | -10  |     |      | dB                |
|                                             |                       | 0.3GHz ≤ f ≤ 3.0GHz                                 | -7.9 |     |      |                   |
|                                             |                       | 3.0GHz ≤ f ≤ 6.0GHz                                 | 0    |     |      |                   |
| Common-Mode Output Return<br>Loss (Note 3)  | S <sub>CC22</sub>     | 0.1GHz ≤ f ≤ 0.3GHz                                 | -6   |     |      | dB                |
|                                             |                       | 0.3GHz ≤ f ≤ 3.0GHz                                 | -4   |     |      |                   |
|                                             |                       | 3.0GHz ≤ f ≤ 6.0GHz                                 | 0    |     |      |                   |
| Differential Input Voltage                  | V <sub>IN-DIFF</sub>  | SAS 1.5, 3.0, or 6.0GT/s MODE = GND                 | 275  |     | 1600 | mV <sub>P-P</sub> |
|                                             |                       | SATA 1.5, 3.0, or 6.0GT/s MODE = V <sub>CC</sub>    | 225  |     | 1600 |                   |
| Input Equalization                          | EQ                    | EQ <sub>-</sub> = V <sub>CC</sub> (Note 4)          |      | 3   |      | dB                |
| Differential Output Voltage                 | V <sub>OUT-DIFF</sub> | f = 750MHz, PE <sub>-</sub> = GND                   | 750  |     | 1200 | mV <sub>P-P</sub> |

## Electrical Characteristics (continued)

( $V_{CC} = +3.0V$  to  $+3.6V$ ,  $C_{COUPLE} = 12nF$ ,  $R_L = 50\Omega$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$ .) (Note 2)

| PARAMETER                          | SYMBOL                | CONDITIONS                                                        | MIN | TYP | MAX | UNITS             |
|------------------------------------|-----------------------|-------------------------------------------------------------------|-----|-----|-----|-------------------|
| Output Preemphasis                 | PE                    | $PE_- = V_{CC}$ , Figure 1                                        |     | 3   |     | dB                |
| Propagation Delay                  | $t_{PD}$              | $PE_- = EQ_- = GND$                                               |     | 300 |     | ps                |
| Output Transition Time             | $T_{TX-RF}$           | $PE_- = GND$ , 20% to 80%                                         | 30  |     |     | ps                |
| Differential Output Skew Same Pair | $T_{SK}$              |                                                                   |     | 10  |     | ps                |
| Deterministic Jitter               | $T_{DJ}$              | K28.5 pattern, 6.0GT/s, $PE_- = EQ_- = GND$ (Note 3)              |     |     | 23  | ps <sub>P-P</sub> |
| Random Jitter                      | $T_{RJ}$              | D10.2 pattern, 6.0GT/s, $PE_- = EQ_- = GND$                       |     |     | 1.5 | ps <sub>RMS</sub> |
| OOB Squelch Threshold              | $V_{SQ-DIFF}$         | MODE = GND, $f = 0.75GHz$                                         | 120 |     | 220 | mV <sub>P-P</sub> |
|                                    |                       | MODE = $V_{CC}$ , $f = 0.75GHz$                                   | 75  |     | 200 |                   |
| OOB Squelch Entry Time             | $T_{OOB,SQ}$          | $f = 0.75GHz$ (Note 3)                                            |     |     | 5   | ns                |
| OOB Squelch Exit Time              | $T_{OOB,EX}$          | $f = 0.75GHz$ (Note 3)                                            |     |     | 9   | ns                |
| OOB Differential Offset Delta      | $\Delta V_{OOB,DIFF}$ | Difference between OOB and active-mode output offset              | -50 |     | +50 | mV                |
| OOB Common-Mode Offset Delta       | $\Delta V_{OOB,CM}$   | Difference between OOB and active-mode output common-mode voltage | -30 |     | +30 | mV                |
| OOB Output Disable                 | $V_{OOB,OUT}$         | OOB disabled output level                                         |     |     | 30  | mV <sub>P-P</sub> |
| <b>CONTROL LOGIC INPUTS</b>        |                       |                                                                   |     |     |     |                   |
| Input Logic-High                   | $V_{IH}$              |                                                                   | 1.4 |     |     | V                 |
| Input Logic-Low                    | $V_{IL}$              |                                                                   |     |     | 0.6 | V                 |
| Input Logic Hysteresis             | $V_{HYST}$            |                                                                   |     | 75  |     | mV                |
| Input Leakage Current              | $I_{IN}$              | $V_{CC} = +3.3V$ , $V_{IN} = +0.5V$ or $+1.5V$                    | -50 |     | +50 | $\mu A$           |

**Note 2:** All devices are 100% production tested at  $T_A = +85^\circ C$ . All temperature limits are guaranteed by design.

**Note 3:** Guaranteed by design.

**Note 4:** EQ (input equalization) as employed in this device refers to the equivalent of adding preemphasis before the input. For example, input EQ of 3dB would show the same waveform as output PE of 3dB (see Figure 1).

## Timing Diagram








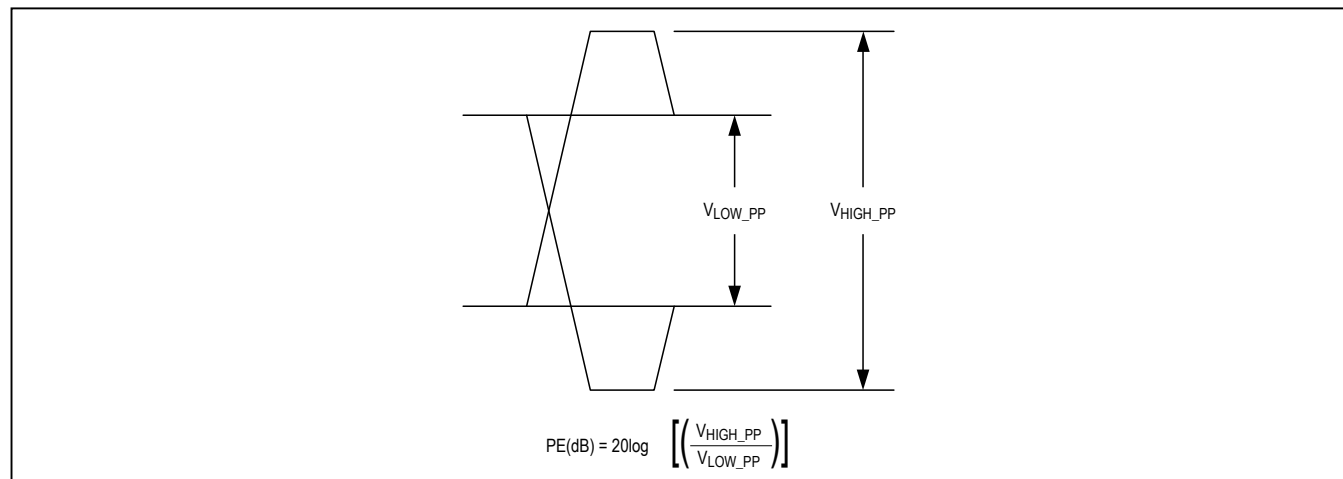


Figure 1. Output Preemphasis








## Typical Operating Characteristics

( $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$ , all eye diagrams measured using K28.5 pattern.)

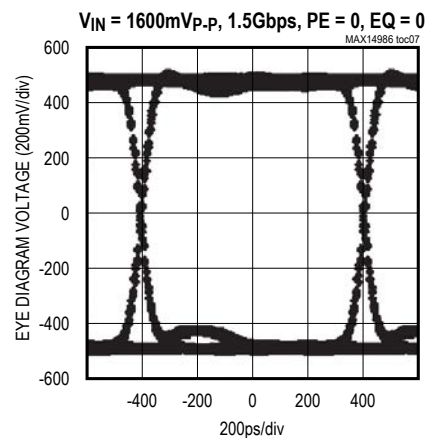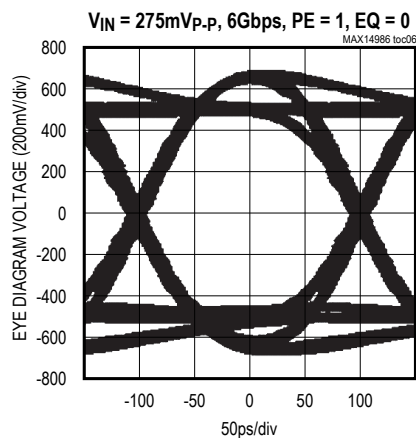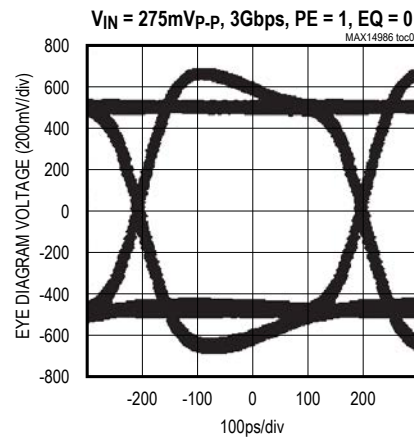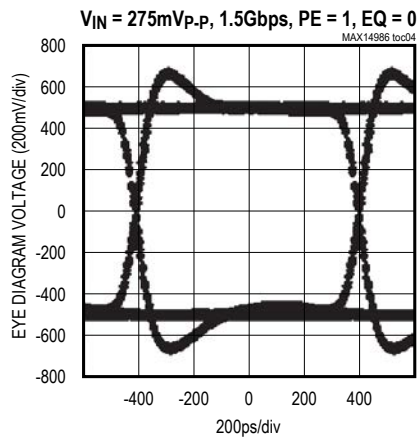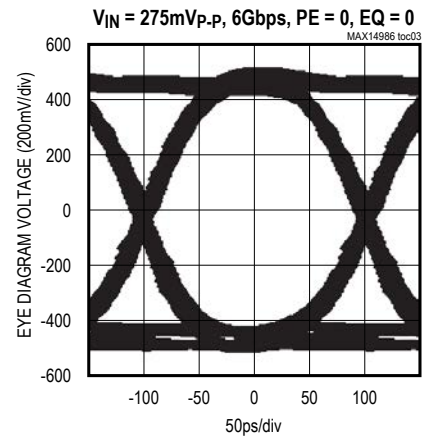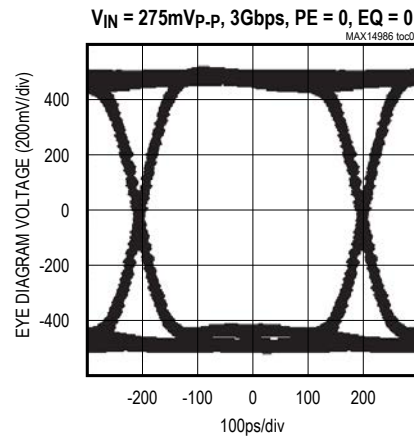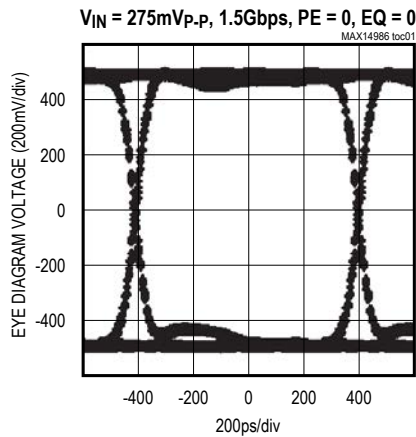







## Typical Operating Characteristics (continued)

( $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$ , all eye diagrams measured using K28.5 pattern.)

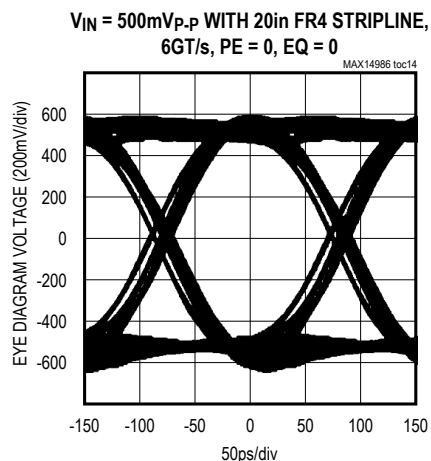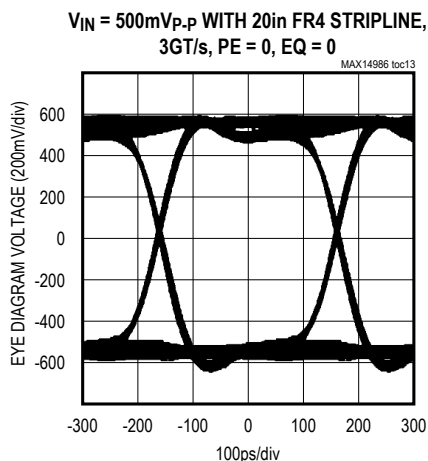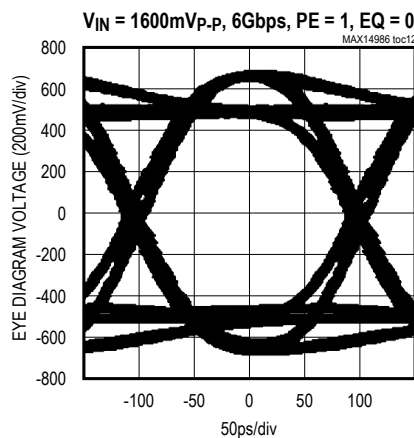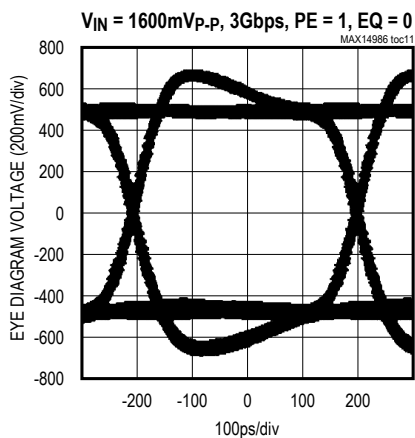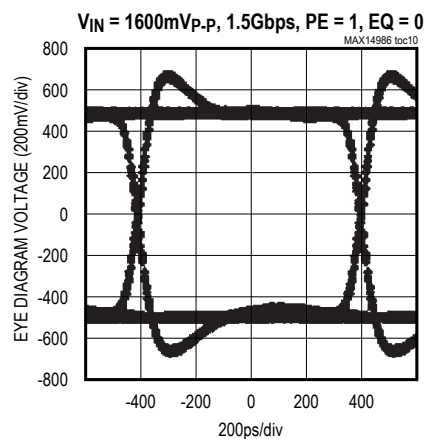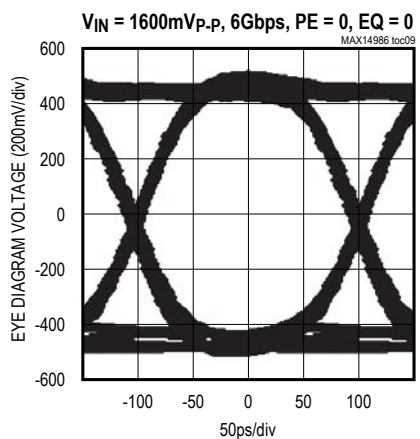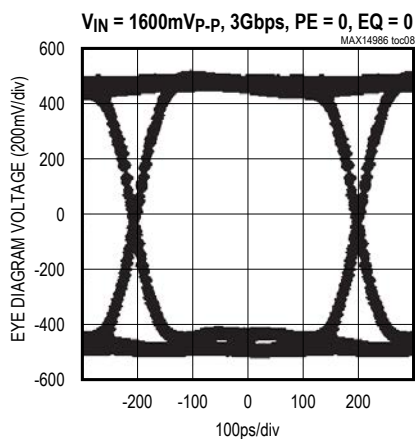



## Typical Operating Characteristics (continued)

( $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$ , all eye diagrams measured using K28.5 pattern.)

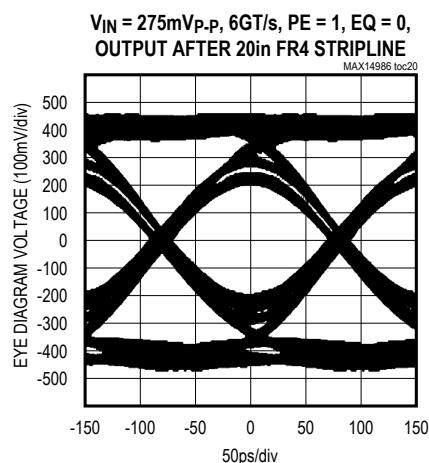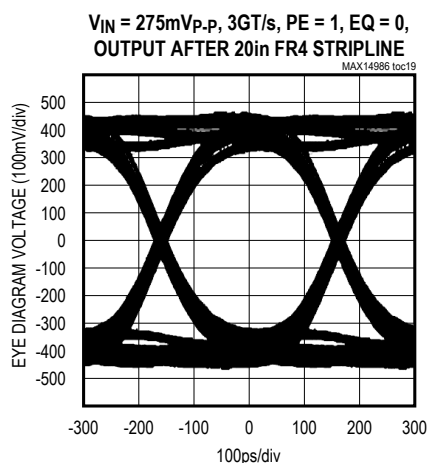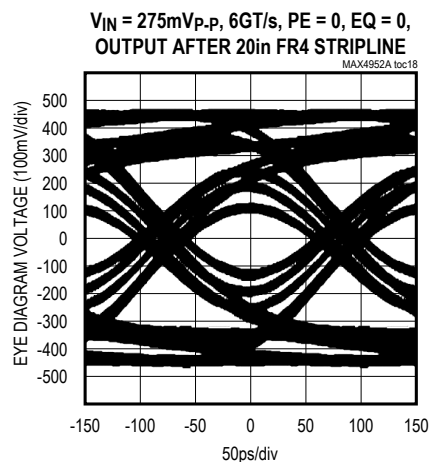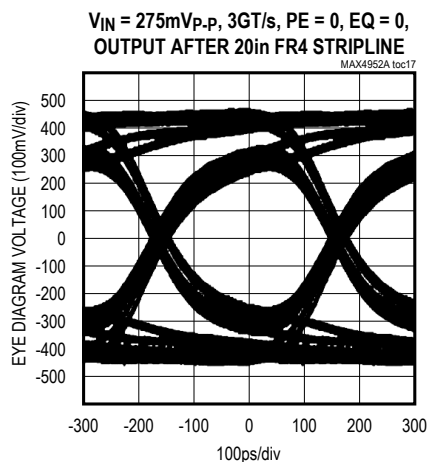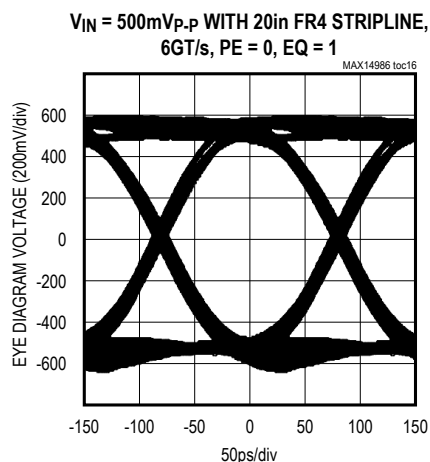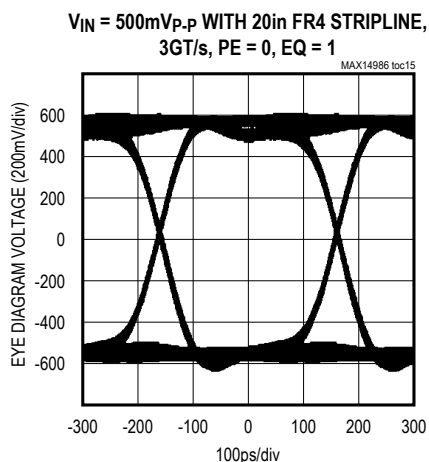

## Pin Description

| PIN                              | NAME            | FUNCTION                                                                                                                                                                                |
|----------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 9, 16, 24                     | V <sub>CC</sub> | Positive Supply Voltage Input. Bypass V <sub>CC</sub> to GND with 2.2μF and 0.01μF capacitors in parallel as close as possible to the device, recommended on each V <sub>CC</sub> pin.  |
| 2, 5, 8,<br>17, 20, 23,<br>25–28 | GND             | Ground                                                                                                                                                                                  |
| 3                                | IN0P            | Noninverting Input 0                                                                                                                                                                    |
| 4                                | IN0M            | Inverting Input 0                                                                                                                                                                       |
| 6                                | OUT1P           | Noninverting Output 1                                                                                                                                                                   |
| 7                                | OUT1M           | Inverting Output 1                                                                                                                                                                      |
| 10                               | EN              | Active-High Enable Input. Drive EN low to put device in standby mode. Drive EN high for normal operation. EN is internally pulled down.                                                 |
| 11                               | EQ0             | Channel 0 Input Equalizer Logic Input. EQ0 is internally pulled down.                                                                                                                   |
| 12                               | PE0             | Channel 0 Output Preemphasis Logic Input. PE0 is internally pulled down.                                                                                                                |
| 13                               | EQ1             | Channel 1 Input Equalizer Logic Input. EQ1 is internally pulled down.                                                                                                                   |
| 14                               | PE1             | Channel 1 Output Preemphasis Logic Input. PE1 is internally pulled down.                                                                                                                |
| 15                               | MODE            | OOB Threshold Logic Input. MODE is internally pulled down.                                                                                                                              |
| 18                               | IN1M            | Inverting Input 1                                                                                                                                                                       |
| 19                               | IN1P            | Noninverting Input 1                                                                                                                                                                    |
| 21                               | OUT0M           | Inverting Output 0                                                                                                                                                                      |
| 22                               | OUT0P           | Noninverting Output 0                                                                                                                                                                   |
| —                                | EP              | Exposed Pad. Internally connected to GND. EP must be electrically connected to a ground plane for proper thermal and electrical operation. Do not use EP as the sole ground connection. |

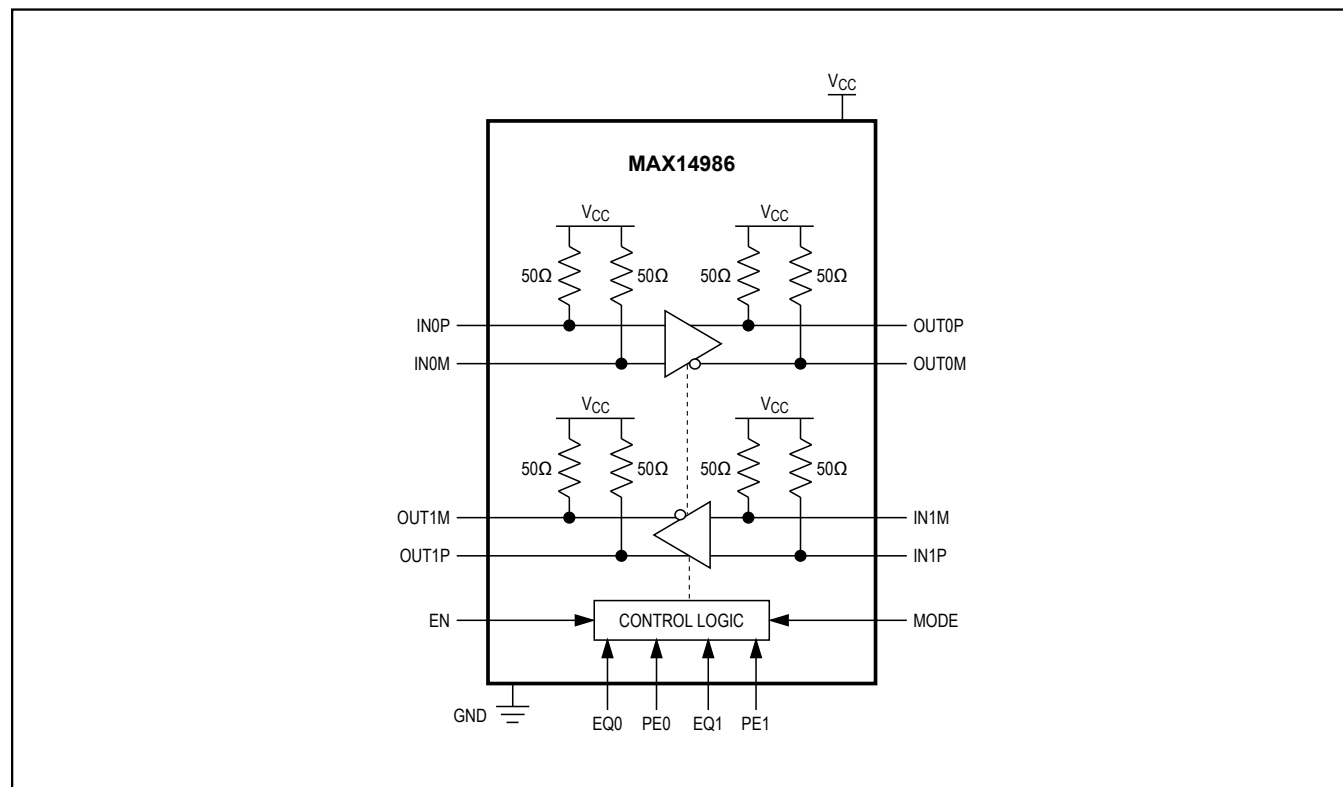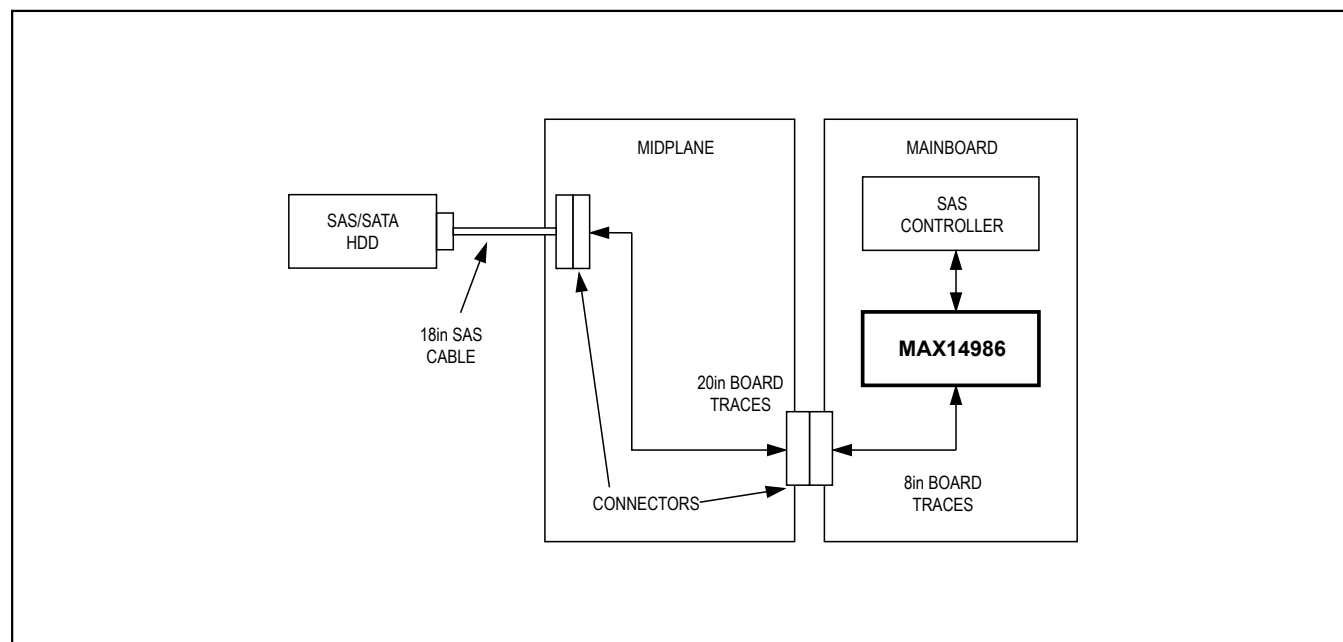**Functional Diagram****Typical Application Circuit**



## Detailed Description

The MAX14986 consists of two identical redrivers with input equalization and output preemphasis useful for SAS or SATA signals up to 6.0GT/s.

### Input/Output Terminations

Inputs and outputs are internally 50Ω terminated to  $V_{CC}$  (see the *Functional Diagram*) and must be AC-coupled using 12nF (max) capacitors to the SAS/SATA controller IC and SAS/SATA device for proper operation.

### Enable Input (EN)

The MAX14986 features an active-high enable input (EN). EN has an internal pulldown resistor of 70kΩ (typ). When EN is driven low or left unconnected, the MAX14986 enters low-power standby mode and the redrivers are disabled. Drive EN high for normal operation.

### Out-of-Band Threshold Selector (MODE)

The MAX14986 provides full OOB signal support through high-speed amplitude detection circuitry. OOB differential input signals less than the internal OOB threshold ( $V_{SQ-DIFF}$ ) are detected as off and not passed to the output. This prevents the system from responding to unwanted noise. OOB differential input signals higher than  $V_{SQ-DIFF}$  are detected as on and passed to the output, allowing OOB signals to transmit through the MAX14986. The logic level of the MODE input sets  $V_{SQ-DIFF}$  for either SAS or SATA OOB signals (see Table 1). MODE has an internal pulldown resistor of 70kΩ (typ).

**Table 1. Out-of-Band Logic Threshold (MODE)**

| MODE | OOB MODE |
|------|----------|
| 0    | SAS      |
| 1    | SATA     |

### Input Equalization (EQ0, EQ1)

The MAX14986 features control logic inputs (EQ0, EQ1) to enable input equalization on either channel, providing 3dB of boost (see Note 4 in the *Electrical Characteristics* table). Drive EQ0 or EQ1 high to enable input equalization on channel 0 or channel 1. Drive EQ0 or EQ1 low to disable input equalization on channel 0 or channel 1 (see Table 2). EQ0 and EQ1 have internal pulldown resistors of 70kΩ (typ).

### Output Preemphasis (PE0, PE1)

The MAX14986 features control logic inputs (PE0, PE1) to enable output preemphasis on either channel, providing 3dB of boost. The MAX14986 uses true preemphasis, so the transition signal is increased after a changing bit, thus increasing the total energy content of the signal when employed. Drive PE0 or PE1 high to enable output preemphasis on channel 0 or channel 1. Drive PE0 or PE1 low to disable output preemphasis on channel 0 or channel 1 (see Table 3). PE0 and PE1 have internal pulldown resistors of 70kΩ (typ).

**Table 2. Input Equalization (EQ0, EQ1)**

| EQ1 | EQ0 | CHANNEL 1 (dB) | CHANNEL 0 (dB) |
|-----|-----|----------------|----------------|
| 0   | 0   | 0              | 0              |
| 0   | 1   | 0              | 3 (typ)        |
| 1   | 0   | 3 (typ)        | 0              |
| 1   | 1   | 3 (typ)        | 3 (typ)        |

**Table 3. Output Preemphasis (PE0, PE1)**

| PE1 | PE0 | CHANNEL 1 (dB) | CHANNEL 0 (dB) |
|-----|-----|----------------|----------------|
| 0   | 0   | 0              | 0              |
| 0   | 1   | 0              | 3 (typ)        |
| 1   | 0   | 3 (typ)        | 0              |
| 1   | 1   | 3 (typ)        | 3 (typ)        |

## Applications Information

### Exposed Pad Package

The exposed pad, 28-pin TQFN package incorporates features that provide a very low thermal resistance path for heat removal from the IC. The exposed pad on the MAX14986 must be soldered to GND for proper thermal and electrical performance. For more information on exposed pad packages, refer to Maxim Application Note HFAN-08.1: *Thermal Considerations of QFN and Other Exposed-Paddle Packages*.

### Layout

Use controlled-impedance transmission lines to interface with high-speed inputs and outputs of the MAX14986. Place power-supply 2.2 $\mu$ F and 0.01 $\mu$ F bypass capacitors as close as possible to  $V_{CC}$ , recommended on each  $V_{CC}$  pin.

### Power-Supply Sequencing

**Caution:** Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the device.

Proper power-supply sequencing is recommended for all devices. Always apply  $V_{CC}$  before applying signals, especially if the signal is not current limited.

## Chip Information

PROCESS: BiCMOS

## Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX14986ETI+ | -40°C to +85°C | 28 TQFN-EP* |

+Denotes a lead(Pb)-free/RoHS-compliant package.

\*EP = Exposed pad.

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 28 TQFN      | T283555+1    | <a href="#">21-0184</a> | <a href="#">90-0123</a> |

MAX14986

## Dual 6GT/s SAS/SATA Redriver with Equalization and Extended Temperature Operation

### Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION     | PAGES<br>CHANGED |
|--------------------|------------------|-----------------|------------------|
| 0                  | 3/13             | Initial release | —                |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*