



F100113 Quad Driver

General Description

The F100113 is a monolithic quad driver with two OR and two NOR outputs and common enable. The common input is buffered to minimize input loading. If the D inputs are not used the Enable can be used to drive sixteen 50Ω lines. All inputs have 50 kΩ pull-down resistors and all outputs are buffered.

Refer to the F100313 Datasheet for:

PCC Packaging


Lower Power

Military Versions

Extended Voltage Specs (−4.2V to −5.7V)

Ordering Code: See Section 8

Logic Symbol




TL/F/9840-3

Pin Names	Description
D_a-D_d	Data Inputs
E	Enable Input
$O_{na}-O_{nd}$	Data Outputs
$\bar{O}_{na}-\bar{O}_{nd}$	Complementary Data Outputs


Connection Diagrams

24-Pin DIP



TL/F/9840-1

24-Pin Flatpak



TL/F/9840-2

Absolute Maximum Ratings

Above which the useful life may be impaired. (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature -65°C to $+150^{\circ}\text{C}$

Maximum Junction Temperature (T_J) $+150^{\circ}\text{C}$

Case Temperature under Bias (T_C)

V_{EE} Pin Potential to Ground Pin

Input Voltage (DC)

Output Current (DC Output HIGH)

Operating Range (Note 2)

0°C to $+85^{\circ}\text{C}$

-7.0V to $+0.5\text{V}$

V_{EE} to $+0.5\text{V}$

-50mA

-5.7V to -4.2V

DC Electrical Characteristics

$V_{EE} = -4.5\text{V}$, $V_{CC} = V_{CCA} = \text{GND}$, $T_C = 0^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ (Note 3)

Symbol	Parameter	Min	Typ	Max	Units	Conditions (Note 4)	
V _{OH}	Output HIGH Voltage	−1025	−955	−880	mV	V _{IN} = V _{IH} (Max) or V _{IL} (Min)	Loading with 50Ω to −2.0V
V _{OL}	Output LOW Voltage	−1810	−1705	−1620			
V _{OHC}	Output HIGH Voltage	−1035			mV	V _{IN} = V _{IH} (Min) or V _{IL} (Max)	Loading with 50Ω to −2.0V
V _{OLC}	Output LOW Voltage			−1610			
V _{IH}	Input HIGH Voltage	−1165		−880	mV	Guaranteed HIGH Signal for All Inputs	
V _{IL}	Input LOW Voltage	−1810		−1475	mV	Guaranteed LOW Signal for All Inputs	
I _{IL}	Input LOW Current	0.50			μA	V _{IN} = V _{IL} (Min)	

DC Electrical Characteristics

$V_{EE} = -4.2\text{V}$, $V_{CC} = V_{CCA} = \text{GND}$, $T_C = 0^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ (Note 3)

Symbol	Parameter	Min	Typ	Max	Units	Conditions (Note 4)	
V _{OH}	Output HIGH Voltage	−1020		−870	mV	V _{IN} = V _{IH} (Max) or V _{IL} (Min)	Loading with 50Ω to −2.0V
V _{OL}	Output LOW Voltage	−1810		−1605			
V _{OHC}	Output HIGH Voltage	−1030			mV	V _{IN} = V _{IH} (Min) or V _{IL} (Max)	Loading with 50Ω to −2.0V
V _{OLC}	Output LOW Voltage			−1595			
V _{IH}	Input HIGH Voltage	−1150		−870	mV	Guaranteed HIGH Signal for All Inputs	
V _{IL}	Input LOW Voltage	−1810		−1475	mV	Guaranteed LOW Signal for All Inputs	
I _{IL}	Input LOW Current	0.50			μA	V _{IN} = V _{IL} (Min)	

DC Electrical Characteristics

$V_{EE} = -4.8\text{V}$, $V_{CC} = V_{CCA} = \text{GND}$, $T_C = 0^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ (Note 3)

Symbol	Parameter	Min	Typ	Max	Units	Conditions (Note 4)	
V _{OH}	Output HIGH Voltage	−1035		−880	mV	V _{IN} = V _{IH} (Max) or V _{IL} (Min)	Loading with 50Ω to −2.0V
V _{OL}	Output LOW Voltage	−1830		−1620			
V _{OHC}	Output HIGH Voltage	−1045			mV	V _{IN} = V _{IH} (Min) or V _{IL} (Max)	Loading with 50Ω to −2.0V
V _{OLC}	Output LOW Voltage			−1610			
V _{IH}	Input HIGH Voltage	−1165		−880	mV	Guaranteed HIGH Signal for All Inputs	
V _{IL}	Input LOW Voltage	−1830		−1490	mV	Guaranteed LOW Signal for All Inputs	
I _{IL}	Input LOW Current	0.50			μA	V _{IN} = V _{IL} (Min)	

Note 1: Absolute maximum ratings are those values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Parametric values specified at -4.2V to -4.8V .

Note 3: The specified limits represent the "worst case" value for the parameter. Since these "worst case" values normally occur at the temperature extremes, additional noise immunity and guard banding can be achieved by decreasing the allowable system operating ranges.

Note 4: Conditions for testing shown in the tables are chosen to guarantee operation under "worst case" conditions.

DC Electrical Characteristics
 $V_{EE} = -4.2V$ to $-4.8V$ unless otherwise specified, $V_{CC} = V_{CCA} = GND$, $T_C = 0^\circ C$ to $+85^\circ C$

Symbol	Parameter	Min	Typ	Max	Units	Conditions
I_{IH}	Input HIGH Current Data Enable			550 350	μA	$V_{IN} = V_{IH(max)}$
I_{EE}	Power Supply Current	-116	-80	-56	mA	Inputs Open

Ceramic Dual-In-Line Package AC Electrical Characteristics
 $V_{EE} = -4.2V$ to $-4.8V$, $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_C = 0^\circ C$		$T_C = +25^\circ C$		$T_C = +85^\circ C$		Units	Conditions
		Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay Data to Output	0.45	1.40	0.45	1.35	0.45	1.40	ns	Figures 1 and 2
t_{PLH} t_{PHL}	Propagation Delay Enable to Output	0.55	1.90	0.55	1.90	0.55	1.90	ns	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	0.45	1.60	0.45	1.50	0.45	1.60	ns	

Cerpak AC Electrical Characteristics
 $V_{EE} = -4.2V$ to $-4.8V$, $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_C = 0^\circ C$		$T_C = +25^\circ C$		$T_C = +85^\circ C$		Units	Conditions
		Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay Data to Output	0.45	1.20	0.45	1.15	0.45	1.20	ns	Figures 1 and 2
t_{PLH} t_{PHL}	Propagation Delay Enable to Output	0.55	1.70	0.55	1.70	0.55	1.70	ns	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	0.45	1.50	0.45	1.40	0.45	1.50	ns	

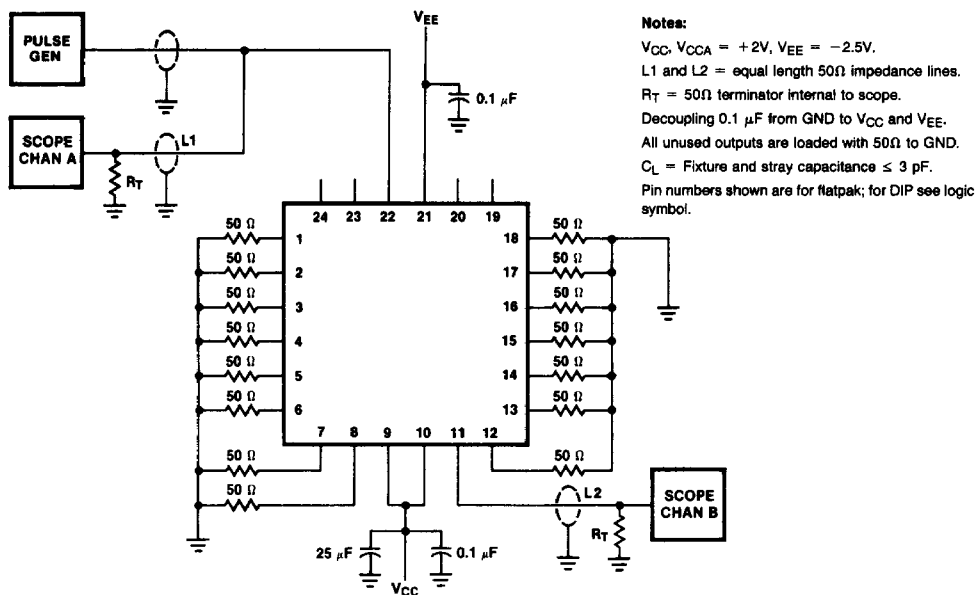


FIGURE 1. AC Test Circuit

TL/F/9840-5

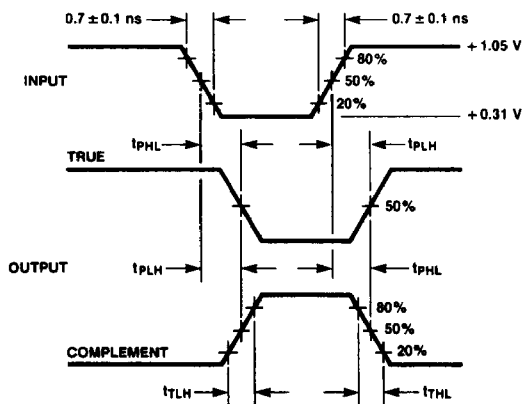


FIGURE 2. Propagation Delay and Transition Times

TL/F/9840-6