


MC10181

4-Bit Arithmetic Logic Unit/ Function Generator

The MC10181 is a high-speed arithmetic logic unit capable of performing 16 logic operations and 16 arithmetic operations on two four-bit words. Full internal carry is incorporated for ripple through operation.

Arithmetic logic operations are selected by applying the appropriate binary word to the select inputs (S0 through S3) as indicated in the tables of arithmetic/logic functions. Group carry propagate (PG) and carry generate (GG) are provided to allow fast operations on very long words using a second order look ahead. The internal carry is enabled by applying a low level voltage to the mode control input (M).

- $P_D = 600 \text{ mW typ/pkg (No Load)}$
- $t_{pd} \text{ (typ): A1 to F} = 6.5 \text{ ns}$
- $C_n \text{ to } C_n + 4 = 3.1 \text{ ns}$
- A1 to $P_G = 5.0 \text{ ns}$
- A1 to $G_G = 4.5 \text{ ns}$
- A1 to $C_n + 4 = 5.0 \text{ ns}$

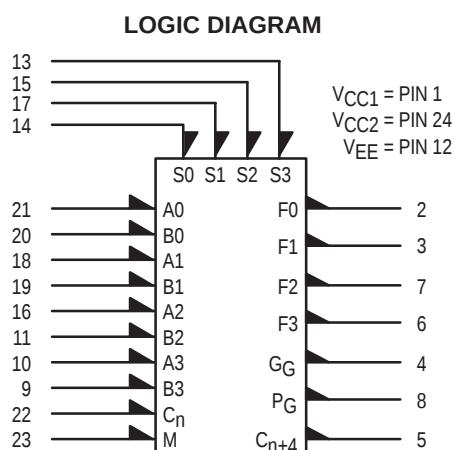


Function Select				Logic Functions M is High C = D.C. F	Arithmetic Operation M is Low C _n is low F
S3	S2	S1	S0		
L	L	L	L	$F = \bar{A}$	$F = A$
L	L	L	H	$F = \bar{A} + \bar{B}$	$F = A \text{ plus } (A \cdot \bar{B})$
L	L	H	L	$F = \bar{A} + B$	$F = A \text{ plus } (A \cdot B)$
L	L	H	H	$F = \text{Logical "1"}$	$F = A \text{ times } 2$
L	H	L	L	$F = \bar{A} \cdot \bar{B}$	$F = (A + B) \text{ plus } 0$
L	H	L	H	$F = \bar{B}$	$F = (A + B) \text{ plus } (A \cdot \bar{B})$
L	H	H	L	$F = A \odot B$	$F = A \text{ plus } B$
L	H	H	H	$F = A + \bar{B}$	$F = A \text{ plus } (A + B)$
H	L	L	L	$F = \bar{A} \cdot B$	$F = (A + \bar{B}) \text{ plus } 0$
H	L	L	H	$F = A \oplus B$	$F = A \text{ minus } B \text{ minus } 1$
H	L	H	L	$F = B$	$F = (A + \bar{B}) \text{ plus } (A \cdot B)$
H	L	H	H	$F = A + B$	$F = A \text{ plus } (A + B)$
H	H	L	L	$F = \text{Logical "0"}$	$F = \text{minus } 1 \text{ (two's complement)}$
H	H	L	H	$F = A \cdot \bar{B}$	$F = (A \cdot \bar{B}) \text{ minus } 1$
H	H	H	L	$F = A \cdot B$	$F = (A \cdot B) \text{ minus } 1$
H	H	H	H	$F = A$	$F = A \text{ minus } 1$




ON Semiconductor

<http://onsemi.com>

MARKING DIAGRAMS

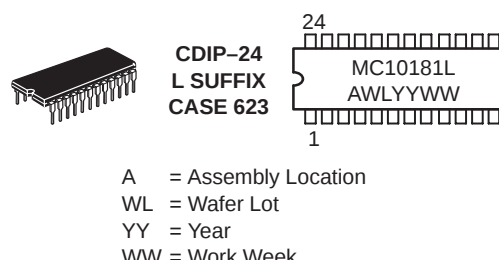

PIN ASSIGNMENT

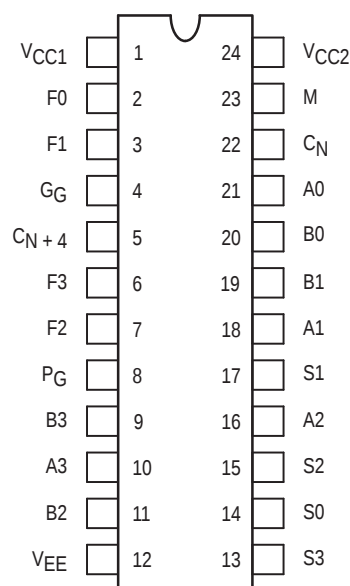


ORDERING INFORMATION

Device	Package	Shipping
MC10181L	CDIP-24	15 Units / Rail

MC10181

POSITIVE LOGIC DIAGRAM

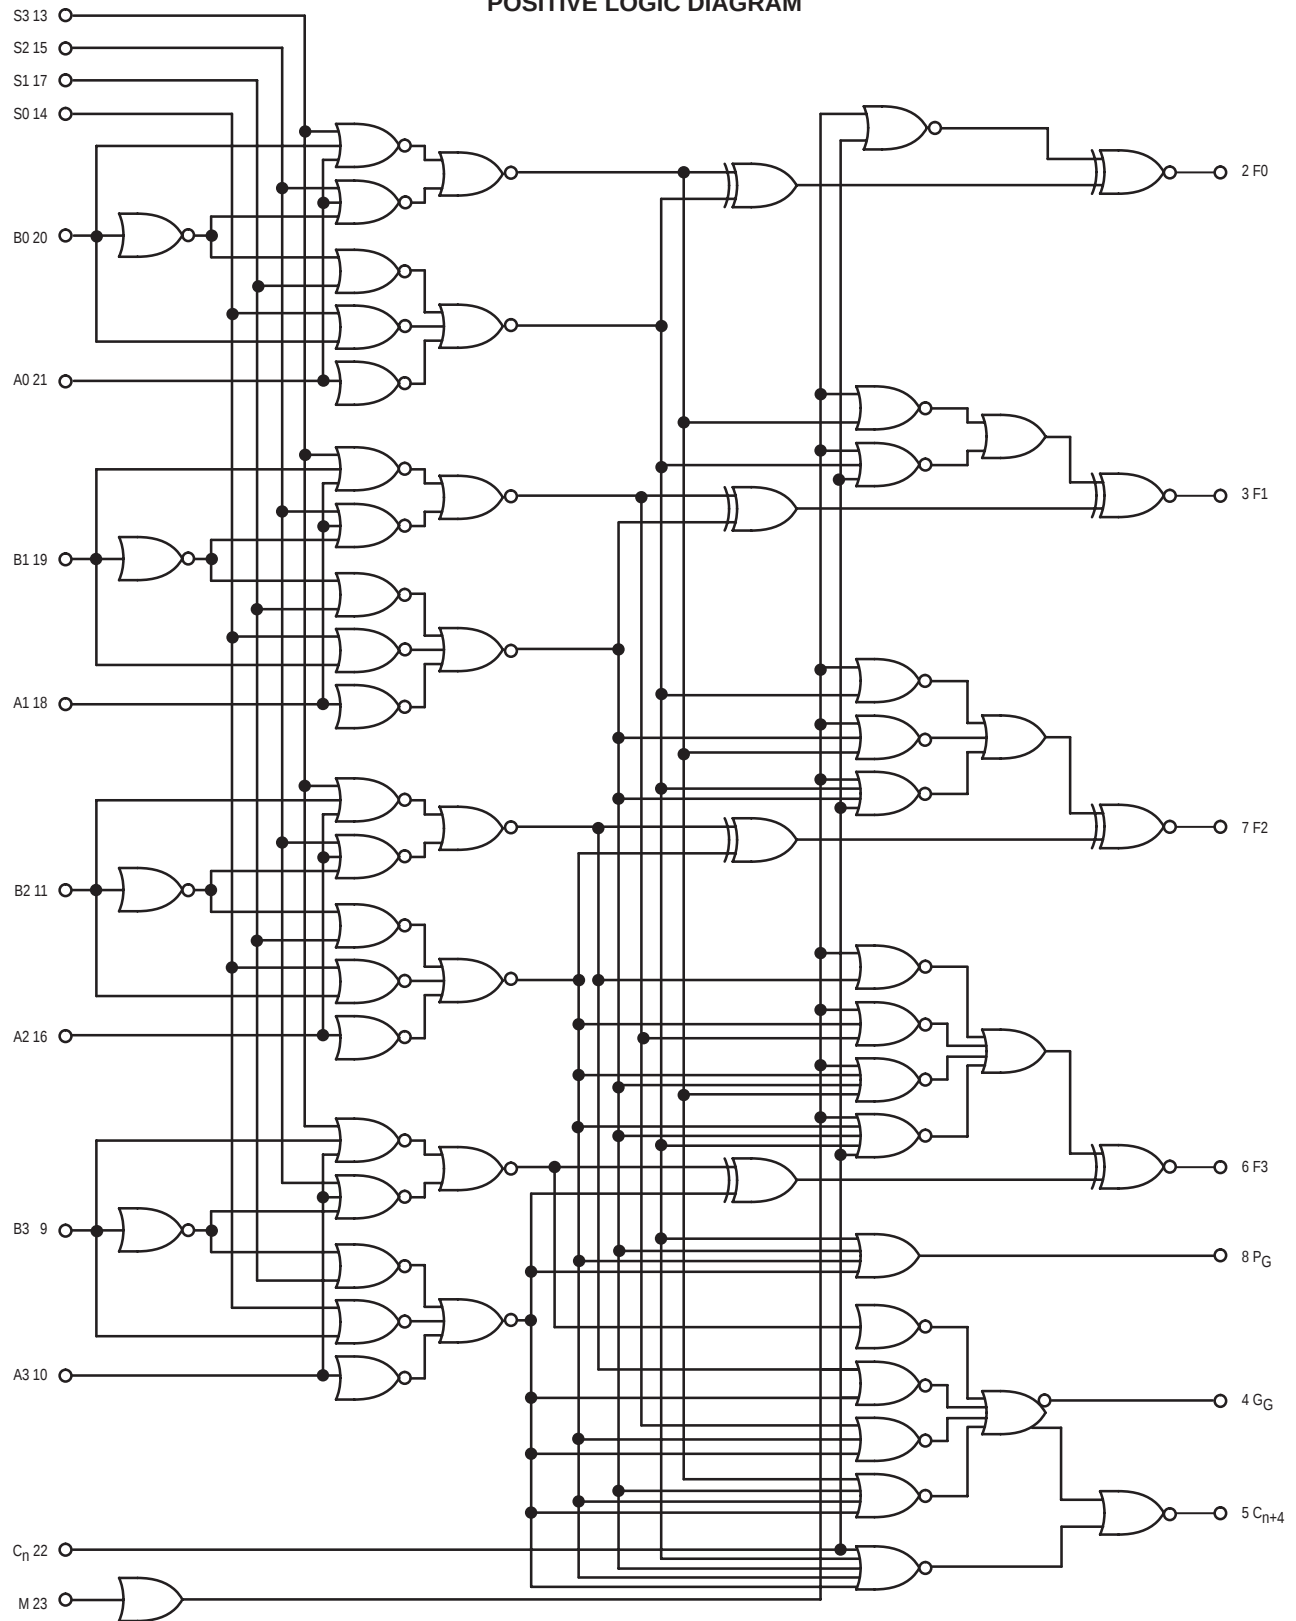

MC10181

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	Test Limits							Unit
			−30°C		+25°C			+85°C		
			Min	Max	Min	Typ	Max	Min	Max	
Power Supply Drain Current	I _E	12		159			145		159	mAdc
Input Current	I _{inH}	9		390			245		245	μAdc
		10		350			220		220	
		11		390			245		245	
		13		320			200		200	
		14		425			265		265	
		15		425			265		265	
		16		350			220		220	
		17		425			265		265	
		18		350			220		220	
		19		390			245		245	
		20		390			245		245	
		21		350			220		220	
		22		460			290		290	
23		320			200		200			
Input Leakage Current	I _{inL}	9	0.5		0.5			0.3		μAdc
		10	0.5		0.5			0.3		
		11	0.5		0.5			0.3		
		13	0.5		0.5			0.3		
		14	0.5		0.5			0.3		
		15	0.5		0.5			0.3		
		16	0.5		0.5			0.3		
		17	0.5		0.5			0.3		
		18	0.5		0.5			0.3		
		19	0.5		0.5			0.3		
		20	0.5		0.5			0.3		
		21	0.5		0.5			0.3		
		22	0.5		0.5			0.3		
23	0.5		0.5			0.3				
Output Voltage Logic 1	V _{OH}	*	−1.060	−0.890	−0.960		−0.810	−0.890	−0.700	Vdc
Output Voltage Logic 0	V _{OL}	*	−2.000	−1.675	−1.990		−1.650	−1.920	−1.615	Vdc
Threshold Voltage Logic 1	V _{OHA}	*	−1.080		−0.980			−0.910		Vdc
Threshold Voltage Logic 0	V _{OLA}	*		−1.655			−1.630		−1.595	Vdc

* Test all input-output combinations according to Function Table.

** For threshold level test, apply threshold input level to only one input pin at a time.

MC10181

ELECTRICAL CHARACTERISTICS (continued)

@ Test Temperature			TEST VOLTAGE VALUES (Volts)					(V _{CC}) Gnd
			V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{EE}	
			–30°C	–0.890	–1.890	–1.205	–1.500	–5.2
			+25°C	–0.810	–1.850	–1.105	–1.475	–5.2
			+85°C	–0.700	–1.825	–1.035	–1.440	–5.2
Characteristic	Symbol	Pin Under Test	TEST VOLTAGE APPLIED TO PINS LISTED BELOW					(V _{CC}) Gnd
			V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{EE}	
Power Supply Drain Current	I _E	12					12	1, 24
Input Current	I _{inH}	9	9				12	1, 24
		10	10				12	1, 24
		11	11				12	1, 24
		13	13				12	1, 24
		14	14				12	1, 24
		15	15				12	1, 24
		16	16				12	1, 24
		17	17				12	1, 24
		18	18				12	1, 24
		19	19				12	1, 24
		20	20				12	1, 24
		21	21				12	1, 24
		22	22				12	1, 24
		23	23				12	1, 24
Input Leakage Current	I _{inL}	9		9			12	1, 24
		10		10			12	1, 24
		11		11			12	1, 24
		13		13			12	1, 24
		14		14			12	1, 24
		15		15			12	1, 24
		16		16			12	1, 24
		17		17			12	1, 24
		18		18			12	1, 24
		19		19			12	1, 24
		20		20			12	1, 24
		21		21			12	1, 24
		22		22			12	1, 24
		23		23			12	1, 24
Output Voltage	Logic 1	V _{OH}	*	*	*		12	1, 24
Output Voltage	Logic 0	V _{OL}	*	*	*		12	1, 24
Threshold Voltage	Logic 1	V _{OHA}	*			**	12	1, 24
Threshold Voltage	Logic 0	V _{OLA}	*			**	12	1, 24

* Test all input–output combinations according to Function Table.

** For threshold level test, apply threshold input level to only one input pin at a time.

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

MC10181

Characteristic	Symbol	Input	Output	Conditions [†]	AC Switching Characteristics							
					-30°C *		+25°C			+85°C *		Unit
					Min	Max	Min	Typ	Max	Min	Max	
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₋ - t ₊ , t ₋	C _n C _n	C _{n+4} C _{n+4}	A0,A1,A2,A3 A0,A1,A2,A3	1.0 1.0	5.1 3.2	1.1 1.0	3.1 2.0	5.0 3.0	1.1 1.0	5.4 3.2	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₊ - t ₋ +, t ₋ - t ₊ , t ₋	C _n C _n C _n	F1 F1 F1	A0 A0 A0	1.7 1.7 1.3	7.2 7.2 5.3	2.0 2.0 1.5	4.5 4.5 3.0	7.0 7.0 5.0	2.0 2.0 1.5	7.5 7.5 5.3	ns ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₊ - t ₋ +, t ₋ - t ₊ , t ₋	A1 A1 A1	F1 F1 F1	— — —	2.6 2.6 1.3	10.4 10.4 5.4	3.0 3.0 1.5	6.5 6.5 3.0	10 10 5.0	3.0 3.0 1.5	10.8 10.8 5.3	ns ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₋ - t ₊ , t ₋	A1 A1	P _G P _G	S0,S3 S0,S3	1.6 0.8	7.0 3.7	2.0 1.1	5.0 2.0	6.5 3.5	2.0 1.1	7.0 3.8	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₋ - t ₊ , t ₋	A1 A1	G _G G _G	A0,A2,A3,C _n A0,A2,A3,C _n	1.1 1.2	7.4 5.1	2.0 1.5	4.5 4.0	7.0 5.0	1.3 1.2	7.7 5.3	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₋ , t ₊ + t ₊ , t ₋	A1 A1	C _{n+4} C _{n+4}	A0,A2,A3,C _n A0,A2,A3,C _n	1.7 1.0	7.3 3.1	2.0 1.0	5.0 2.0	7.0 3.0	2.0 1.0	7.8 3.2	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₊ + t ₊ , t ₋	B1 B1	F1 F1	S3,C _n S3,C _n	2.7 1.2	11.3 5.3	3.0 1.5	8.0 3.5	11 5.0	3.0 1.5	11.9 5.3	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₋ - t ₊ , t ₋	B1 B1	P _G P _G	S0,A1 S0,A1	1.6 1.0	7.7 3.6	2.0 1.1	6.0 2.0	7.5 3.5	2.0 1.1	8.0 3.9	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₋ - t ₊ , t ₋	B1 B1	G _G G _G	S3,C _n S3,C _n	1.7 1.4	8.2 5.2	2.0 1.5	6.0 3.0	8.0 5.0	2.0 1.2	8.6 5.4	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₋ , t ₊ + t ₊ , t ₋	B1 B1	C _{n+4} C _{n+4}	S3,C _n S3,C _n	1.8 0.9	8.2 3.1	2.0 1.0	6.0 2.0	8.0 3.0	2.0 1.0	8.7 3.2	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₊ , t ₊ - t ₊ , t ₋	M M	F1 F1	— —	2.4 1.1	10.3 5.1	3.0 1.5	6.5 4.0	10 5.0	3.0 1.5	10.8 5.3	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₋ , t ₊ + t ₊ , t ₋	S1 S1	F1 F1	A1,B1 A1,B1	2.5 1.0	10.7 5.4	3.0 1.5	6.5 3.0	10 5.0	3.0 1.5	10.8 5.4	ns ns
Propagation Delay Rise Time, Fall Time	t ₋ +, t ₊ - t ₊ , t ₋	S1 S1	P _G P _G	A3,B3 A3,B3	1.7 0.8	8.3 5.1	2.0 1.1	6.0 3.0	8.0 5.0	2.0 1.1	8.4 5.2	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₋ , t ₊ + t ₊ , t ₋	S1 S1	C _{n+4} C _{n+4}	A3,B3 A3,B3	1.6 0.9	9.3 5.3	2.0 1.1	6.0 3.0	9.0 5.0	2.0 1.0	9.9 5.2	ns ns
Propagation Delay Rise Time, Fall Time	t ₊₋ , t ₊ + t ₊ , t ₋	S1 S1	G _G G _G	A3,B3 A3,B3	1.5 0.8	9.6 6.2	2.0 0.8	6.0 3.0	9.0 6.0	1.9 0.8	9.7 6.5	ns ns

[†] Logic high level (+1.11 Vdc) applied to pins listed. All other input pins are left floating or tied to +0.31 Vdc.
V_{CC1} = V_{CC2} = +2.0 Vdc, V_{EE} = -3.2 Vdc

* L Suffix Only