



MOTOROLA

**TYPES SN54ALS157, SN54ALS158,
SN74ALS157, SN74ALS158
QUADRUPL 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS**

000221

USS 1702/125-0


9/70

description

These monolithic data selectors/multiplexers contain inverters and drivers to supply full data selection to the four output gates. A separate strobe input ($\bar{G}$) is provided. A 4-bit word is selected from one of two sources and is routed to the four outputs. The 'ALS157 presents true data whereas the 'ALS158 presents inverted data to minimize propagation delay time.



The SN54ALS157 and SN54ALS158 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS157 and SN74ALS158 are characterized for operation from 0°C to 70°C .

(TOP VIEW)



J Suffix—Case 620-08 (Ceramic)
N Suffix—Case 648-05 (Plastic)

logic symbols

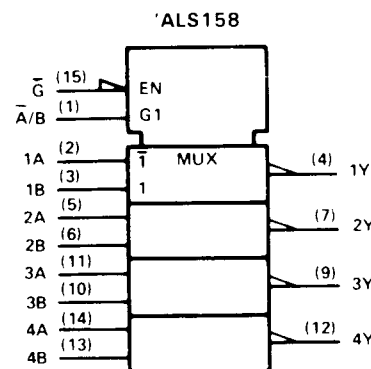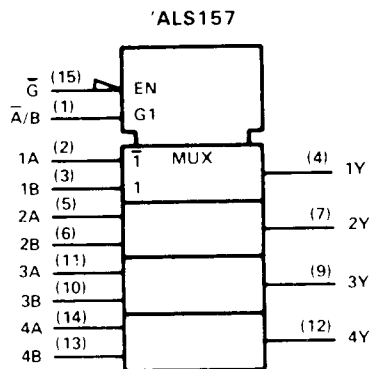

FUNCTION TABLE


STROBE $\bar{G}$	SELECT $\bar{A}/\bar{B}$	DATA		OUTPUT Y	
		A	B	'ALS157	'ALS158
H	X	X	X	L	H
L	L	L	X	L	H
L	L	H	X	H	L
L	H	X	L	L	H
L	H	X	H	H	L

Pin numbers shown are for J and N packages.

Portions of this data sheet are reprinted with permission from the Texas Instruments 1983 ALS/AS Logic Circuits Data Book.

TYPES SN54ALS157, SN54ALS158, SN74ALS157, SN74ALS158 **QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS**

logic diagrams (positive logic)

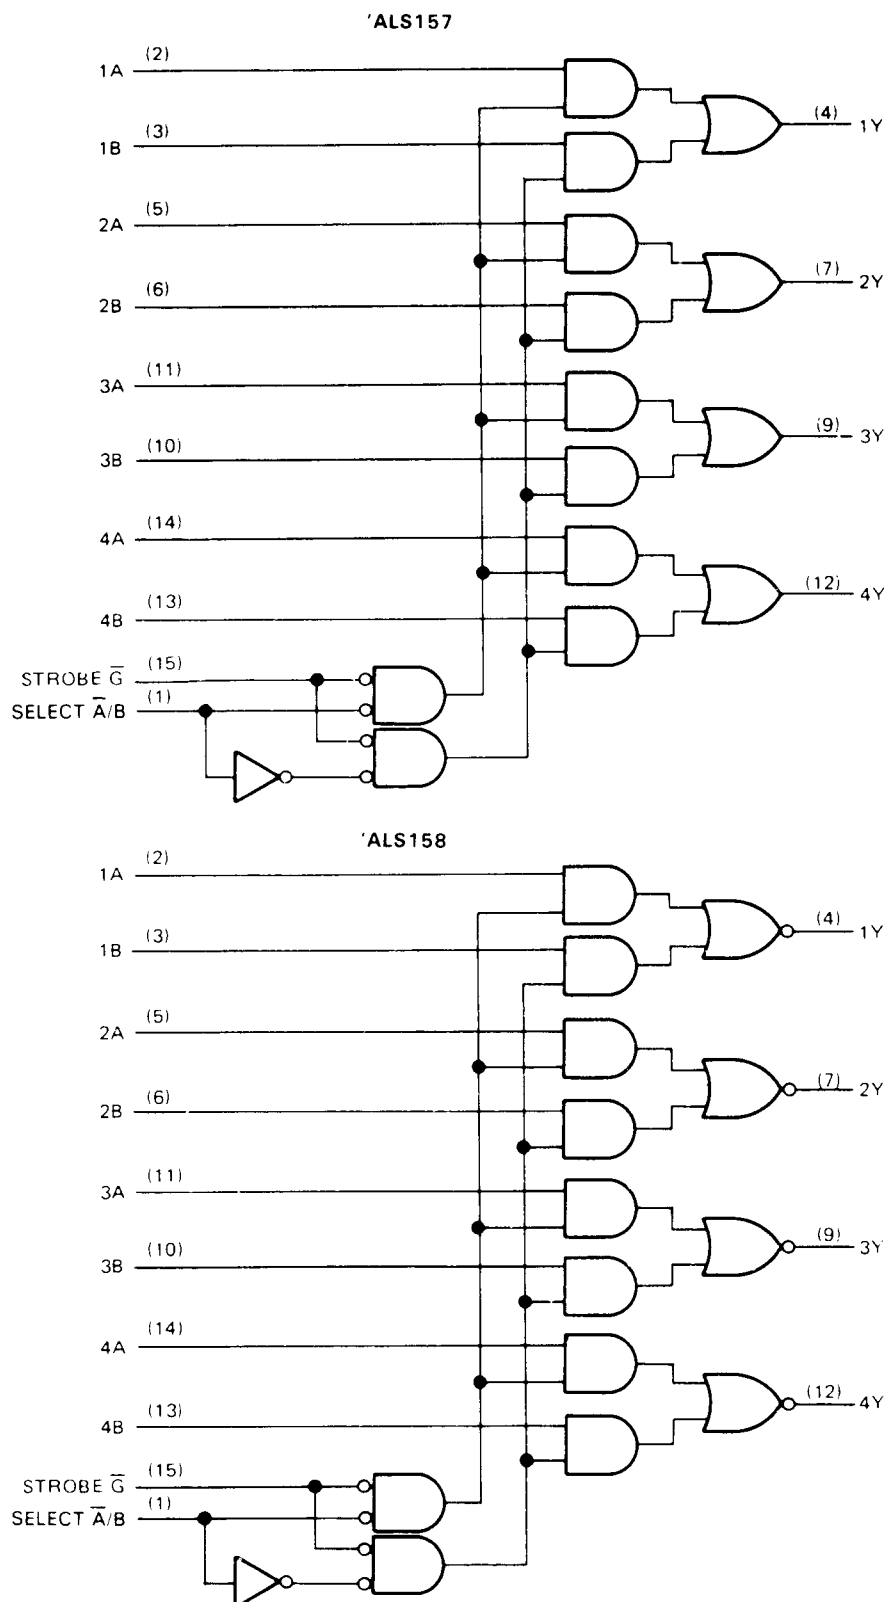

Pin numbers shown are for J and N packages.

TYPES SN54ALS157, SN54ALS158, SN74ALS157, SN74ALS158 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Operating free-air temperature range: SN54ALS157, SN54ALS158	-55 °C to 125 °C
SN74ALS157, SN74ALS158	0 °C to 70 °C
Storage temperature range	-65 °C to 150 °C

recommended operating conditions

		SN54ALS157 SN54ALS158			SN74ALS157 SN74ALS158			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.8			0.8	V
I_{OH}	High-level output current			-0.4			-0.4	mA
I_{OL}	Low-level output current		4			8		mA
T_A	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	SN54ALS157 SN54ALS158			SN74ALS157 SN74ALS158			UNIT
			MIN	TYP†	MAX	MIN	TYP†	MAX	
V_{IK}		$V_{CC} = 4.5 \text{ V}, I_I = -18 \text{ mA}$			-1.5			-1.5	V
V_{OH}		$V_{CC} = 4.5 \text{ V}, I_{OH} = -0.4 \text{ mA}$	2.5	3.4		2.5			V
		$V_{CC} = 4.75 \text{ V}, I_{OH} = -0.4 \text{ mA}$				2.7	3.4		
V_{OL}		$V_{CC} = 4.5 \text{ V}, I_{OL} = 4 \text{ mA}$		0.25	0.4		0.25	0.4	V
		$V_{CC} = 4.75 \text{ V}, I_{OL} = 8 \text{ mA}$					0.35	0.5	
I_I	A or B	$V_{CC} = 5.5 \text{ V}, V_I = 7 \text{ V}$			0.1			0.1	mA
	$\overline{A}$ B or $\overline{B}$				0.2			0.2	
I_{IH}	A or B	$V_{CC} = 5.5 \text{ V}, V_I = 2.7 \text{ V}$			20			20	μA
	$\overline{A}$ B or $\overline{B}$				40			40	
I_{IL}	A or B	$V_{CC} = 5.5 \text{ V}, V_I = 0.4 \text{ V}$			-0.1			-0.1	mA
	$\overline{A}$ B or $\overline{B}$				-0.2			-0.2	
I_{OS}^*		$V_{CC} = 5.5 \text{ V}, V_O = \text{GND}$	-25		-150	-25		-150	mA
I_{CC}	ALS157	$V_{CC} = 5.5 \text{ V}$			8.0			8.0	mA
	ALS158				4.0			4.0	

† All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

*The current produced by grounding the outputs is approximately twice that produced with 2.25 V on the outputs.

TYPES SN54ALS157, SN54ALS158, SN74ALS157, SN74ALS158
QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

'ALS157 switching characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	VCC = 4.5 V to 5.5 V, CL = 50 pF, RL = 500 Ω, TA = MIN to MAX						UNIT
			SN54ALS157			SN74ALS157			
			MIN	TYP†	MAX	MIN	TYP†	MAX	
tPLH	A or B	Y	3	7	14	3	7	13	ns
tPHL			3	6	14	3	6	13	
tPLH	$\overline{A}/B$	Y	6	18	32	6	18	30	ns
tPHL			5	11	22	5	11	20	
tPLH	$\overline{G}$	Y	6	14	27	6	14	25	ns
tPHL			4	9	17	4	9	15	

'ALS158 switching characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R _L = 500 Ω, T _A = MIN to MAX						UNIT
			SN54ALS158			SN74ALS158			
			MIN	TYP†	MAX	MIN	TYP†	MAX	
t _{PLH}	A or B	Y	3	7	17	3	7	14	ns
t _{PHL}			3	6	12	3	6	11	
t _{PLH}	$\overline{A}/B$ 1	Y	5	12	25	5	12	23	ns
t _{PHL}			5	18	35	5	18	30	
t _{PLH}	$\overline{G}$ 15	Y	4	8	17	4	8	16	ns
t _{PHL}			4	13	25	4	13	23	

†All typical values are at $V_{CC} = 5\text{ V}, T_A = 25^\circ\text{C}.$

Motorola reserves the right to make changes to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.



MOTOROLA Semiconductor Products Inc.

P.O. BOX 20912 • PHOENIX, ARIZONA 85036 • A SUBSIDIARY OF MOTOROLA INC.