

4-Channel, 205V, High-Voltage Amplifiers Array

Features

- Four Independent High Voltage Amplifiers
- Up to +205 V Output Voltage
- Gain of 82 V/V with Internal Feedback Resistors
- 0.02 V/ μ s Minimum Output Slew Rate
- Less than 10 ms Settling Time
- Less than 1 k Ω Output Impedance
- Up to 200 pF Output Load
- 30 kHz Gain Bandwidth Product
- 24-lead TSSOP Package

Application

- MEMS Driver


General Description

The HV265 device is a 4-channel high-voltage operational amplifier array with an optional internal feedback resistor network.

The amplifier array IC operates on a 225 V high-voltage supply and a 5 V low-voltage supply. Each channel has its independent input and output ports. When the internal feedback resistor network is used, the closed-loop gain is set to 82 V/V. High value SiCr resistors are used for internal feedback networks to minimize the power consumption. The input accepts voltage in the range of 0.05V and 2.5V.

The output impedance of the amplifier is less than 1 k Ω and the output can drive a capacitive load up to 200 pF. The amplifier is designed to have good temperature stability and low output drift.

Typical Application Circuit

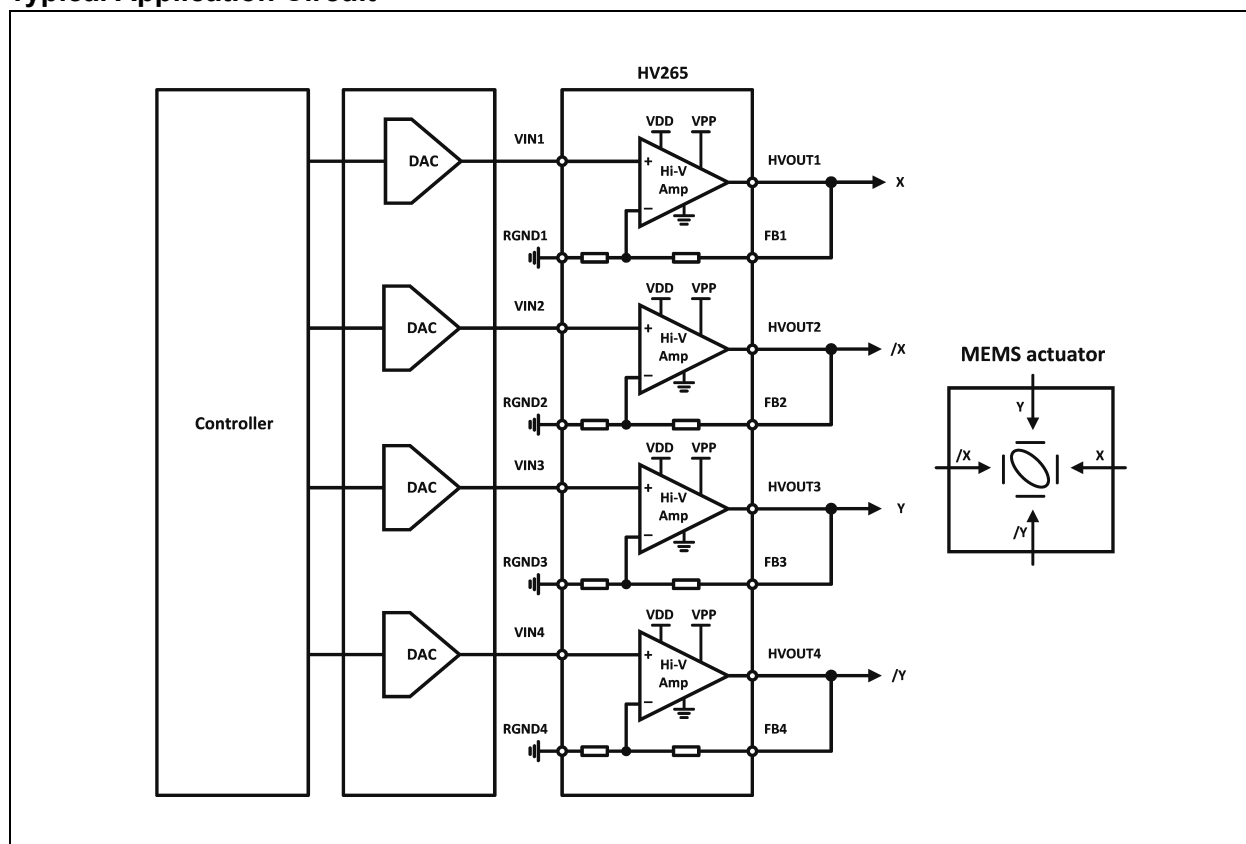

HV265
24-Lead TSSOP

Pin	Label
1	VIN1
2	RGND1
3	GND
4	VIN2
5	RGND2
6	VDD
7	GND
8	VIN3
9	RGND3
10	GND
11	VIN4
12	RGND4
13	NC
14	HVOUT1
15	FB1
16	HVOUT2
17	FB2
18	VPP
19	HVGND
20	HVOUT3
21	FB3
22	HVOUT4
23	FB4
24	NC

See [Table 2-1](#).

The diagram shows four identical 'Hi-V Amp' blocks connected in a vertical cascade. Each block has the following connections:

- Power Supply:** The top input is connected to VDD, and the bottom input is connected to VPP.
- Input:** The non-inverting input (+) is connected to a signal input (VIN1, VIN2, VIN3, or VIN4).
- Output:** The output is connected to a signal output (HVOUT1, HVOUT2, HVOUT3, or HVOUT4).
- Feedback:** The inverting input (-) is connected to a feedback network consisting of a resistor (RGND1, RGND2, RGND3, or RGND4) to ground and a feedback resistor (FB1, FB2, FB3, or FB4) from the output.

NOTES:

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Low supply voltage (V_{DD})	-0.5V to 6.5V
High supply voltage (V_{PP})	-0.5V to 250V
Input analog voltage (V_{IN})	-0.3V to V_{DD}
Maximum junction temperature	+125°C
Storage temperature	-65°C to +150°C
ESD Rating low voltage pins	2 kV HBM, 500 V CDM, 750 V CDM corner lead
ESD Rating high voltage pins	500 V HBM, 500 V CDM, 750 V CDM corner lead

† **Notice:** Stresses above those listed under “Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

TABLE 1-1: OPERATING SUPPLY VOLTAGES

Electrical Specifications: Unless otherwise specified: $T_A = +25^\circ\text{C}$. Boldface specifications apply over the T_A range of -40 to +85°C.						
Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions
High Voltage Supply	V_{PP}	50	—	225	V	Note 1
Low Voltage Supply	V_{DD}	4.5	5.0	5.5	V	

Note 1: Specification is obtained by characterization and is not 100% tested.

ELECTRICAL CHARACTERISTICS

Electrical Specifications: unless otherwise specified, $V_{DD} = 5.0\text{V}$, $V_{PP} = 225\text{V}$, $T_A = +25^\circ\text{C}$.						
Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions
Input Ground Range	R_{GND}	0	0	V_{DD}	V	
Input Analog Voltage	V_{IN}	0	—	3.3	V	
Quiescent V_{PP} Supply Current	I_{PPQ}	—	300	500	μA	$V_{IN} = 0$ or 5V
Quiescent V_{DD} Supply Current	I_{DDQ}	—	3	5	mA	$V_{IN} = 0$ or 5V
V_{PP} Supply Current	I_{PP}	—	—	500	μA	$V_{IN} = 2V_{P-P}$ 100 Hz sine, $C_L = 200$ pF
V_{DD} Supply Current	I_{DD}	—	—	5	mA	$V_{IN} = 2V_{P-P}$ 100 Hz sine, $C_L = 200$ pF
HV _{OUT} Output Voltage Range	HV _{OUT}	1.85		$V_{PP} - 10$	V	$C_L = 200$ pF
HV _{OUT} Sink Current	I_{SINK}	3			mA	$C_L = 200$ pF
HV _{OUT} Source Current	I_{SOURCE}	3			mA	$C_L = 200$ pF
HV _{OUT} High Level Output	V_{OH}	204.8			V	$C_L = 200$ pF, $V_{IN} = 2.7\text{V}$
HV _{OUT} Input DC Offset	HV _{OS}			± 16	mV	Note 3 $C_L = 200$ pF
HV _{OUT} Drift Over Time (Room Temperature)	Drift		± 30		mV	Note 3 $C_L = 200$ pF, $V_{IN} = 2.5\text{V}$
HV _{OUT} Temperature Coefficient (Drift Over Temperature)	Temp.		± 115		mV	Note 3 $C_L = 200$ pF, $V_{IN} = 2.5\text{V}$, $T_J = -40^\circ\text{C}$ to 85°C

Note 1: Recommended Operating Conditions: $V_{IN} = 0\text{V}$, $V_{DD} = 5.0\text{V}$, $V_{PP} = +225\text{V}$ unless noted. $T_J = 25^\circ\text{C}$

2: Design guidance only.

3: Specification is obtained by characterization and is not 100% tested.

AC ELECTRICAL CHARACTERISTICS

Electrical Specifications: unless otherwise specified, $V_{DD} = 5.0V$, $V_{PP} = 225V$, $T_A = +25^{\circ}C$.						
Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions
HV _{OUT} Output Impedance	Z_{OUT}			1000	Ω	Note 3 $V_{IN} = 1.25 V_{DC}$ Test Frequency = 100 Hz $C_L = 200$ pF
Gain Bandwidth Product	GBWP	30			kHz	Note 3 $C_L = 200$ pF
Slew Rate (HV _{OUT} from 10% to 90% and from 90% to 10%)	SR	0.02	-	-	V/ μ s	$C_L = 200$ pF
Settling Time (Within 1% of final HV _{OUT})	t_{ST}			10	ms	Note 3 $C_L = 200$ pF, $V_{IN} = 0$ to 2.4 V
Feedback Impedance $R_f + R_i$	R_{FB}	4.9	7.0	-	M Ω	Note 2
Closed Loop Gain (dVo/dVin) (Internal Feedback Resistor Network)	A_V	75.4	82	88.4	V/V	$C_L = 200$ pF
HV _{OUT} Capacitive Load	C_L	0		200	pF	Note 2
Output Referred Noise	V_N			10	mV _{RMS}	Note 3 Noise from 1 Hz to 10 kHz.
V_{DD} Power Supply Rejection	PSRR1	30			dB	Note 3 1 kHz
V_{PP} Power Supply Rejection	PSRR2	50			dB	Note 3 1 kHz
Crosstalk Rejection	Xtalk	80			dB	Note 3 $V_{IN} = 0$ to 2.5V 100 Hz sine, $C_L = 200$ pF

Note 1: Recommended Operating Conditions: $V_{IN}=0V$, $V_{DD}=5.0V$, $V_{PP}=+225V$ unless noted. $T_J=25^{\circ}C$

2: Design guidance only.

3: Specification is obtained by characterization and is not 100% tested.

TEMPERATURE SPECIFICATIONS

Electrical Specifications: unless otherwise specified, $V_{DD} = 5.0V$, $V_{PP} = 225V$						
Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Operating Junction Temperature Range	T_J	-40	—	+85	°C	
Maximum Junction Temperature	$T_{J(MAX)}$	—	—	+125	°C	
Storage Temperature Range	T_A	-65	—	+150	°C	
Package Thermal Resistances						
Thermal Resistance, 24L-TSSOP	θ_{JA}	—	87	—	°C/W	

1.1 Typical Performance Curves

Note: The graphs and tables provided below are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g. outside specified power supply range) and therefore outside the warranted range.

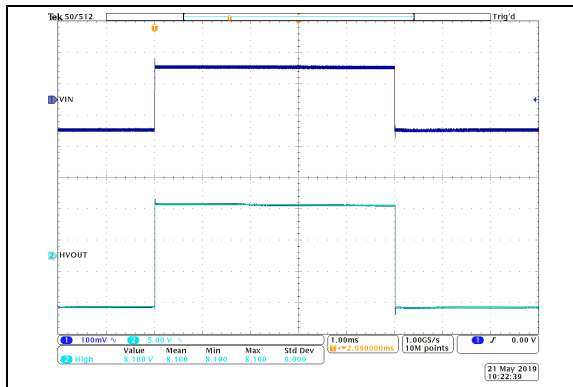


FIGURE 1-1: Typical Small-Signal Pulse Response ($V_{IN}=0.9\sim 1.1V$ pulse 100 Hz. $C_L=200$ pF).

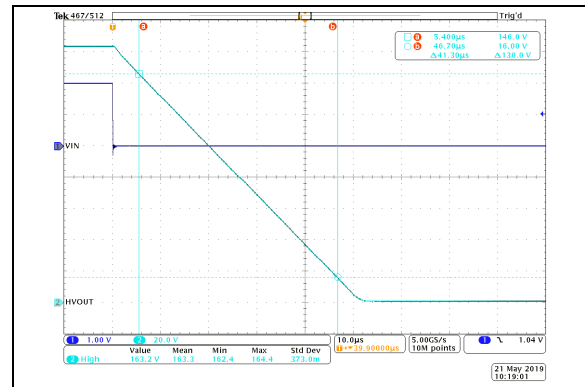


FIGURE 1-4: Typical Fall Time ($V_{IN} = 0\sim 2V$ Pulse 100 Hz. $C_L=200$ pF).

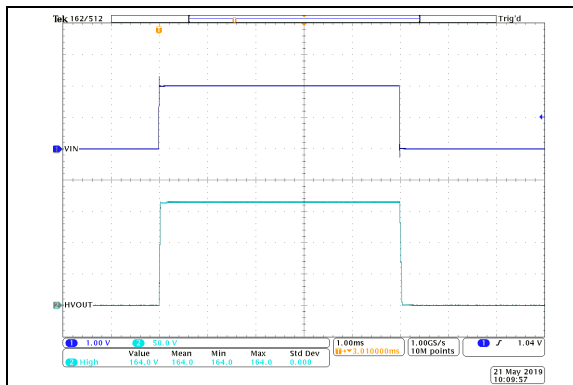


FIGURE 1-2: Typical Large-Signal Pulse Response ($V_{IN} = 0\sim 2V$ pulse 100 Hz. $C_L=200$ pF).

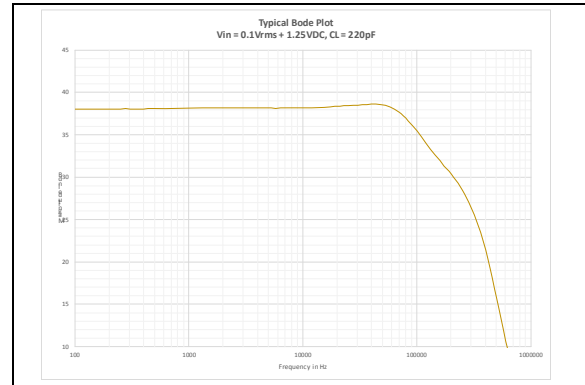


FIGURE 1-5: Typical Bode Plot of Small Signal Input ($V_{IN}=100$ mVp-p with 1.25 VDC).

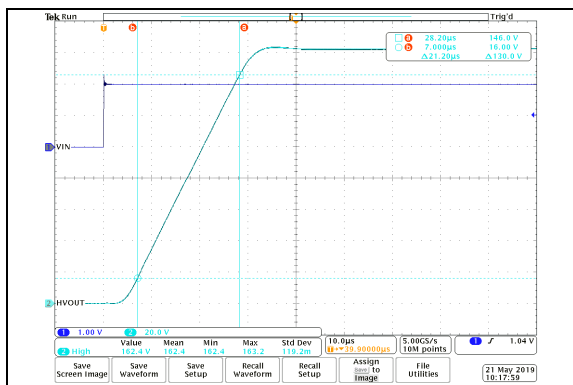


FIGURE 1-3: Typical Rise Time ($V_{IN} = 0\sim 2V$ Pulse 100 Hz. $C_L=200$ pF).

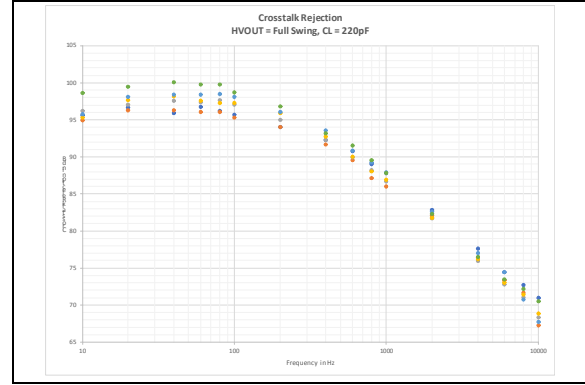


FIGURE 1-6: Typical Crosstalk Rejection vs Frequency.

Note: The graphs and tables provided below are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g. outside specified power supply range) and therefore outside the warranted range.

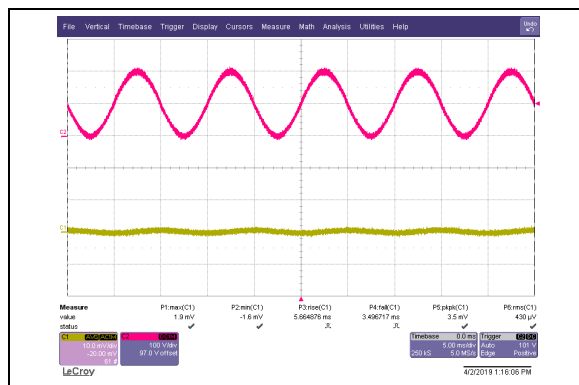


FIGURE 1-7: Typical Crosstalk Rejection in Time Domain (Source $V_{IN} = 0\sim 2.5V$ Sine).

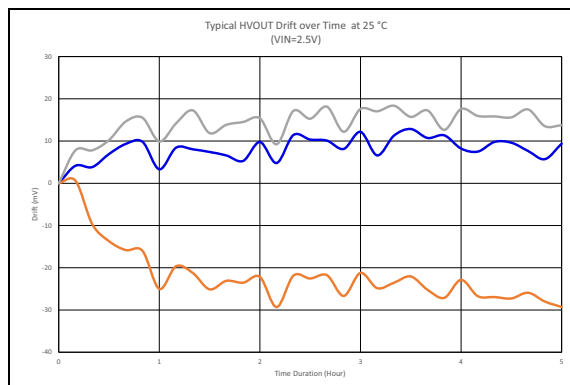


FIGURE 1-10: Typical HV_{OUT} Drift Over Time. $V_{PP}=225V$, $V_{DD}=5.0V$, $V_{IN}=2.5V$ @ $T_A=25^\circ C$.

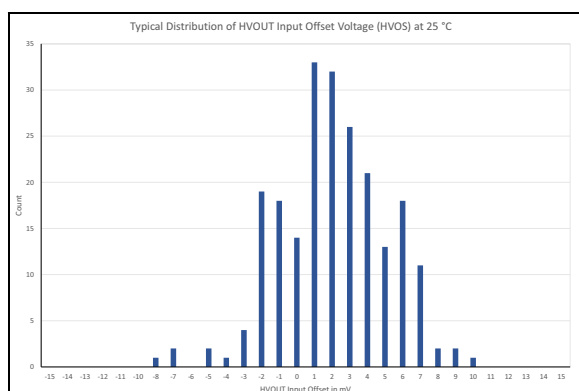


FIGURE 1-8: Distribution of Input Offset at $T_A = 25^\circ C$.

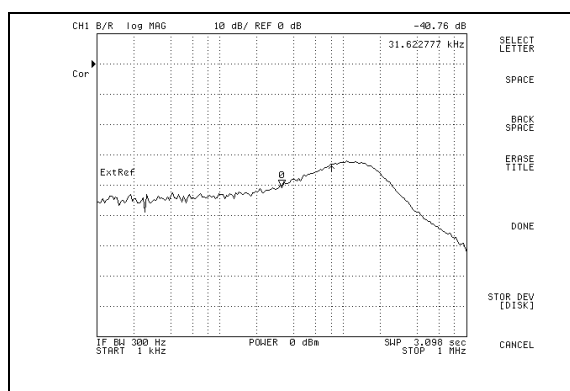


FIGURE 1-11: Typical Power Supply Rejection from V_{DD} vs Frequency.

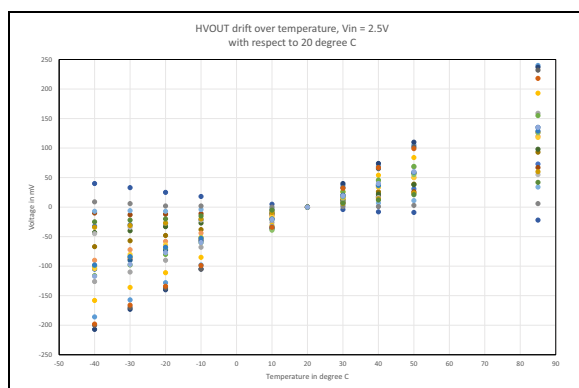


FIGURE 1-9: Distribution of Typical HV_{OUT} Drift Over Temperature ($V_{IN} = 2.5VDC$ in Reference to $T_A = 20^\circ C$).

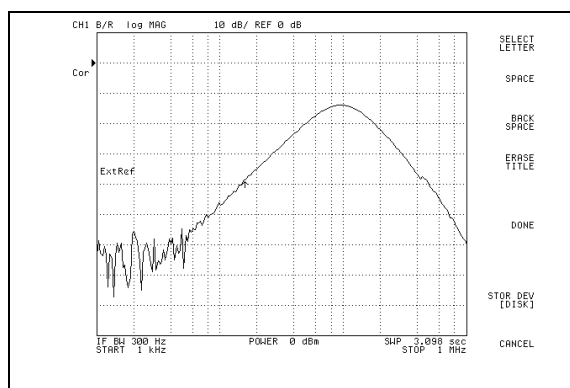


FIGURE 1-12: Typical Power Supply Rejection from V_{PP} vs Frequency.

NOTES:

2.0 PIN DESCRIPTION

The descriptions of the pins are listed in [Table 2-1](#).

TABLE 2-1: PIN FUNCTION TABLE

Pin Number	Symbol	Description
1	V _{IN1}	Amplifier Input 1
2	RGND1	Resistor Ground 1. Typically grounded.
3	GND	Low Voltage Ground
4	V _{IN2}	Amplifier Input 2
5	RGND2	Resistor Ground 2. Typically grounded.
6	VDD	Positive Low Voltage Supply
7	GND	Low Voltage Ground
8	V _{IN3}	Amplifier Input 3
9	RGND3	Resistor Ground 3. Typically grounded.
10	GND	Low Voltage Ground
11	V _{IN4}	Amplifier Input 4
12	RGND4	Resistor Ground 4. Typically grounded.
13	NC	No Connection
14	FB4	Feedback Input 4
15	HV _{OUT4}	High Voltage Output 4
16	FB3	Feedback Input 3
17	HV _{OUT3}	High Voltage Output 3
18	HVGND	High Voltage Ground
19	VPP	Positive High Voltage Supply
20	FB2	Feedback Input 2
21	HV _{OUT2}	High Voltage Output 2
22	FB1	Feedback Input 1
23	HV _{OUT1}	High Voltage Output 1
24	NC	No Connection

3.0 DEVICE DESCRIPTION

3.1 Power-On/Power-Off Sequence

The device can be damaged by an improper power-up/down sequence. The acceptable power-on/off sequences are shown in [Table 3-1](#) and [Table 3-2](#). The

user may add an external diode across V_{PP} and V_{DD} for additional protection. The anode of the diode is connected to V_{DD} and the cathode is connected to V_{PP} . Any low-current high-voltage diode such as a 1N4004 is adequate.

TABLE 3-1: ACCEPTABLE POWER-ON SEQUENCES

Option 1		Option 2	
Steps	Description	Steps	Description
1	V_{DD}	1	V_{DD}
2	V_{PP}	2	Inputs
3	Inputs	3	V_{PP}

TABLE 3-2: ACCEPTABLE POWER-OFF SEQUENCES


Option 1		Option 2	
Steps	Description	Steps	Description
1	Inputs	1	V_{PP}
2	V_{PP}	2	Inputs
3	V_{DD}	3	V_{DD}

NOTES:


4.0 PACKAGING INFORMATION

4.1 Package Marking Information

24-Lead TSSOP

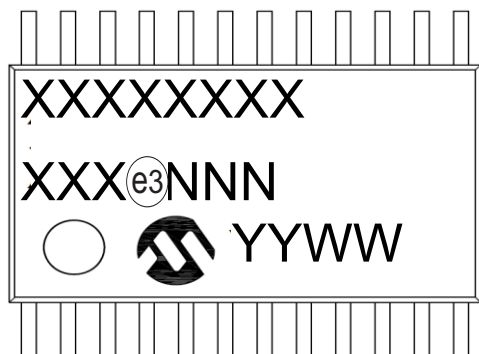

Example



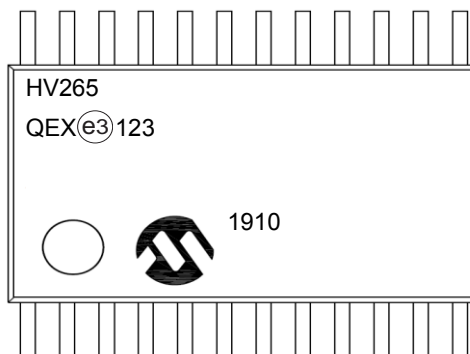


Legend:	XX...X	Product Code or Customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week '01')
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package.

Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.


24-Lead Thin Shrink Small Outline Package (QE) - 4.40 mm Body [TSSOP]
Supertex Legacy & Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

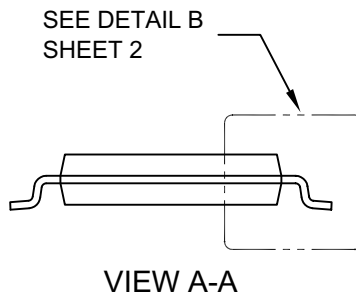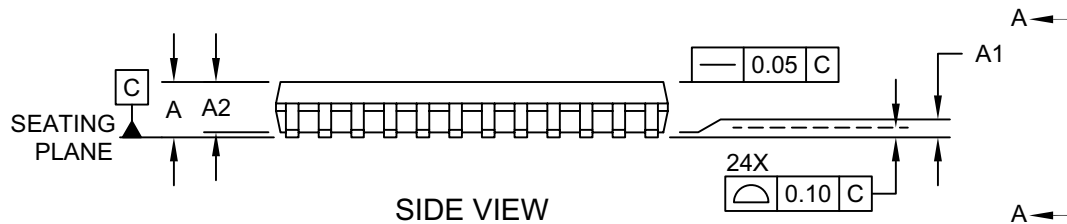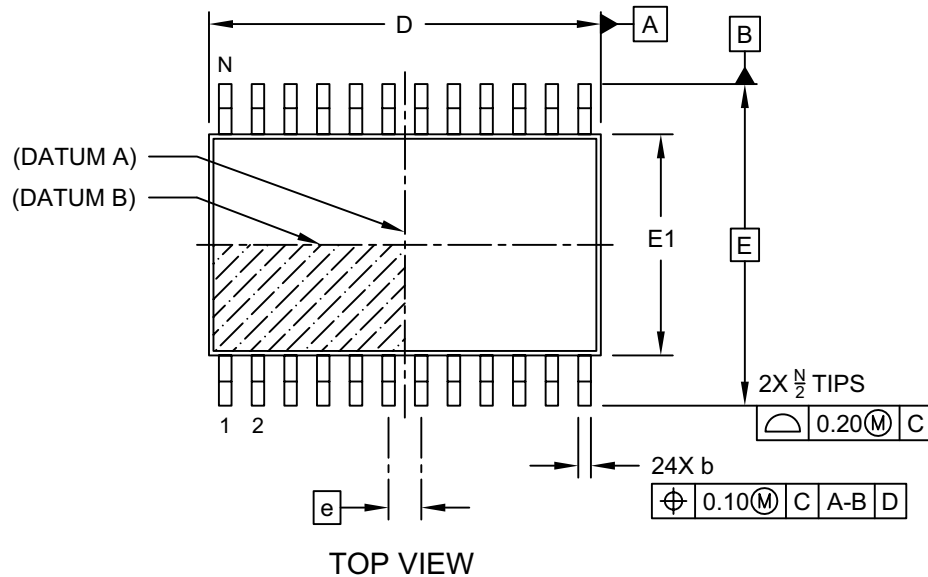

24-Lead Thin Shrink Small Outline Package (QE) - 4.40 mm Body [TSSOP] Supertex Legacy & Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

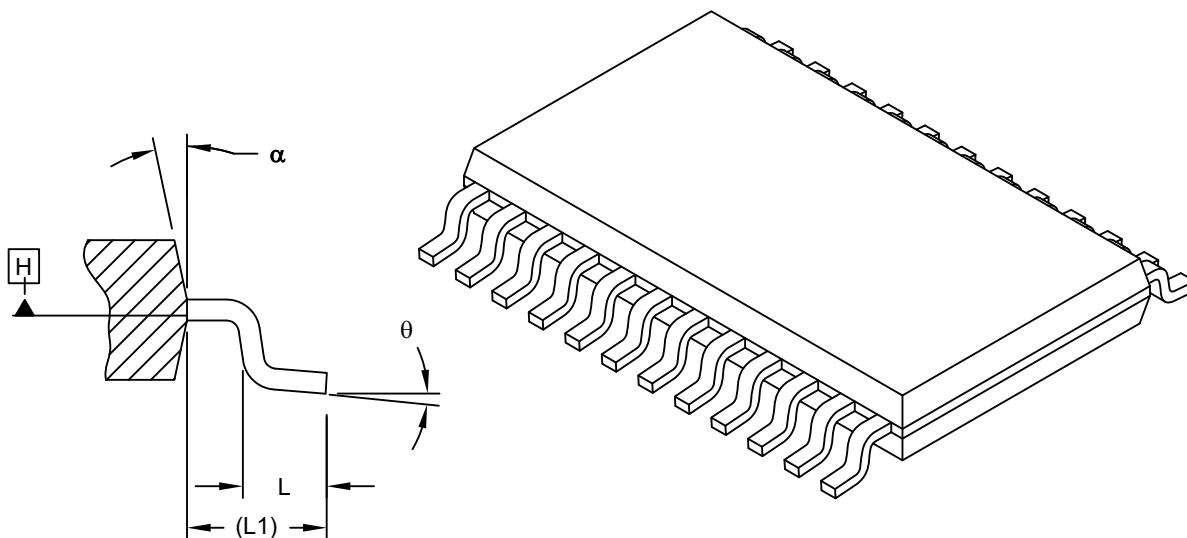

DETAIL B

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Leads	N	24		
Lead Pitch	e	0.65 BSC		
Overall Height	A	0.85	-	1.20
Standoff	A1	0.05	0.10	0.15
Molded Package Thickness	A2	0.80	1.00	1.15
Foot Length	L	0.45	0.60	0.75
Footprint	L1	1.00 REF		
Foot Angle	θ	0°	4°	8°
Overall Width	E	6.40 BSC		
Overall Length	D	7.70	7.80	7.90
Molded Package Width	E1	4.30	4.40	4.50
Lead Width	b	0.19	-	0.30
Mold Draft Angle Top	α	12° REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-284A Sheet 2 of 2

24-Lead Thin Shrink Small Outline Package (QE) - 4.40 mm Body [TSSOP] Supertex Legacy & Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

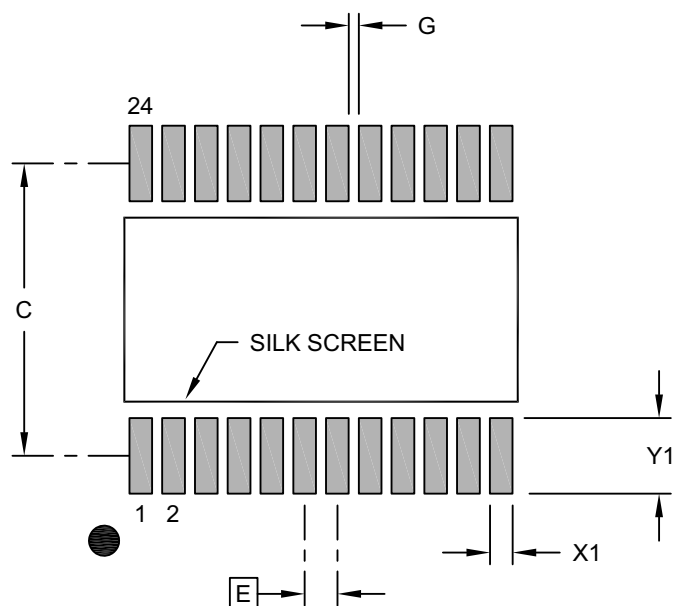

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C		5.80	
Contact Pad Width (X24)	X1			0.45
Contact Pad Length (X24)	Y1			1.50
Contact Pad to Center Pad (X20)	G1	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2284A

APPENDIX A: REVISION HISTORY

Revision A (July 2019)

- Original release of this document.

HV265

NOTES:

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

<u>PART NO.</u>	<u>-X</u>	<u>/XX</u>
Device	Temperature Range	Package
Device:	HV265: 4-Channel, 205V, High-Voltage Amplifiers Array	
Temperature Range:	I = -40°C to +85°C	
Package:	QE = 24LD TSSOP 4.4mm	

Example:

a) HV265-I/QE: 4-Channel 205V High-Voltage Amplifier Array, -40°C to +85°C, 24LD TSSOP package

HV265

NOTES:

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-4776-4

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820