

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceed the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

TIBPAL20L10-30C, TIBPAL20X4-30C, TIBPAL20X8-30C, TIBPAL20X10-30C HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT*™ PAL® CIRCUITS

D2920, DECEMBER 1987

- Functionally Equivalent to MMI PAL[®] Series 24XA
- Preload Capability on Output Registers Simplifies Testing
- Power-Up Clear on Registered Devices
- Package Options Include Both Plastic and Ceramic Chip Carriers in Addition to Plastic and Ceramic DIPs

DEVICE	I INPUTS	3-STATE O OUTPUTS	REGISTERED Q OUTPUTS	I/O PORTS
*PAL20L10	12	2	0	8
*PAL20X4	10	0	4 (3-state buffers)	6
*PAL20X8	10	0	8 (3-state buffers)	2
*PAL20X10	10	0	10 (3-state buffers)	0


description

These programmable array logic devices feature high speed and functional equivalency when compared with currently available devices. These *IMPACT*™ circuits combine the latest Advanced Low-Power Schottky[†] technology with proven titanium-tungsten fuses to provide reliable, high-performance substitutes for conventional TTL logic. Their easy programmability allows for quick design of custom functions and typically results in a more compact circuit board. In addition, chip carriers are available for further reduction in board space.


All of the registered outputs are set to a low level during power-up. In addition, extra circuitry has been provided to allow loading of each register asynchronously to either a high or low state. This feature simplifies testing because the registers can be set to an initial state prior to executing the test sequence.

The TIBPAL20' C suffix devices are characterized for operation from 0°C to 75°C.

TIBPAL20L10'
C SUFFIX . . . JT OR NT PACKAGE
(TOP VIEW)



TIBPAL20L10'
C SUFFIX . . . FN PACKAGE
(TOP VIEW)



NC—No internal connection

Pin assignments in operating mode

2

Data Sheets

IMPACT is a trademark of Texas Instruments Incorporated.

PAL is a registered trademark of Monolithic Memories Inc.

[†]Integrated Schottky-Barrier diode-clamped transistor is patented by Texas Instruments, U.S. Patent Number 3,463,975.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1987, Texas Instruments Incorporated


2-127

TIBPAL20X4-30C, TIBPAL20X8-30C, TIBPAL20X10-30C
HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT™* PAL® CIRCUITS


2

Data Sheets


TIBPAL20X4'
C SUFFIX . . . JT OR NT PACKAGE
(TOP VIEW)




TIBPAL20X4'
C SUFFIX . . . FN PACKAGE
(TOP VIEW)




TIBPAL20X8'
C SUFFIX . . . JT OR NT PACKAGE
(TOP VIEW)




TIBPAL20X8'
C SUFFIX . . . FN PACKAGE
(TOP VIEW)



TIBPAL20X10'
C SUFFIX . . . JT OR NT PACKAGE
(TOP VIEW)



TIBPAL20X10'
C SUFFIX . . . FN PACKAGE
(TOP VIEW)




Pin assignments in operating mode

NC—No internal connection

TIBPAL20L10-30C, TIBPAL20X4-30C **HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT*™ PAL® CIRCUITS**

functional block diagrams (positive logic)

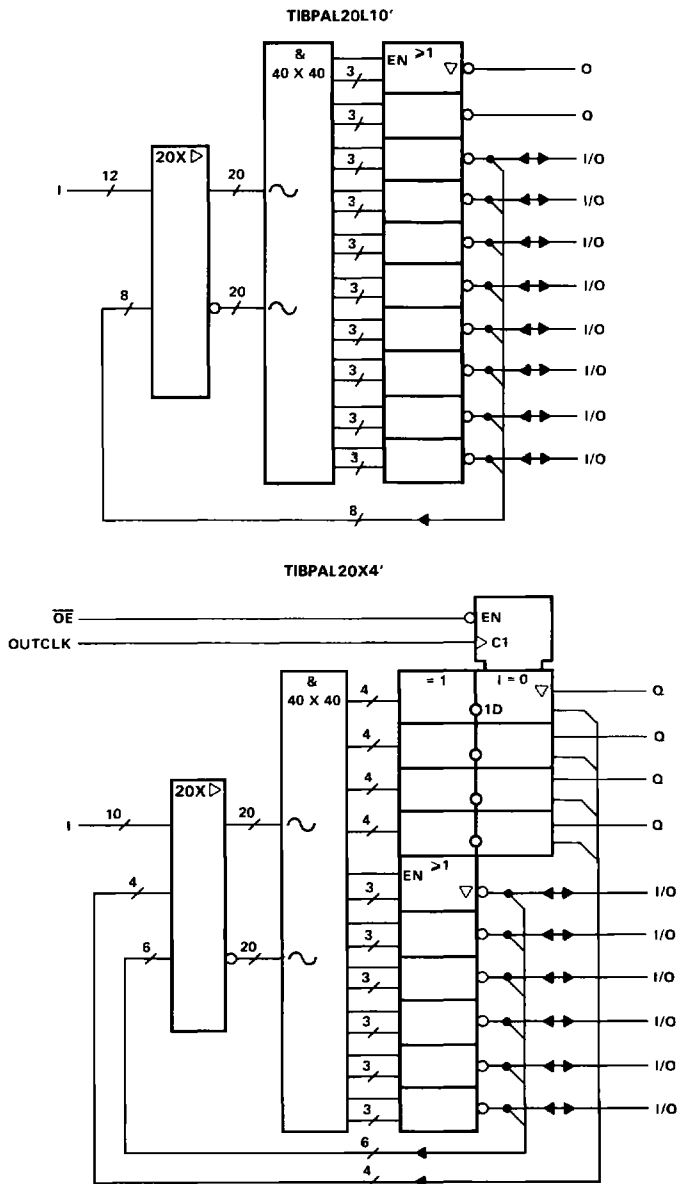

~ denotes fused inputs

2


Data Sheets

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75285

2-129


2 Data Sheets

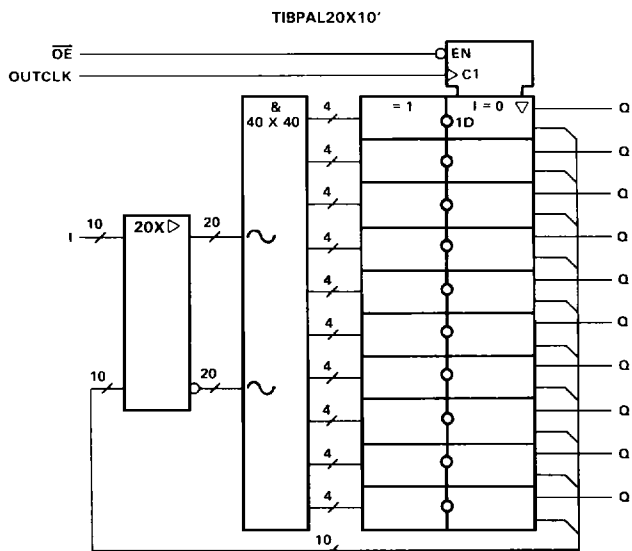

~ denotes fused inputs

TIBPAL20L10-30C
HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT*™ PAL® CIRCUITS

logic diagram (positive logic)

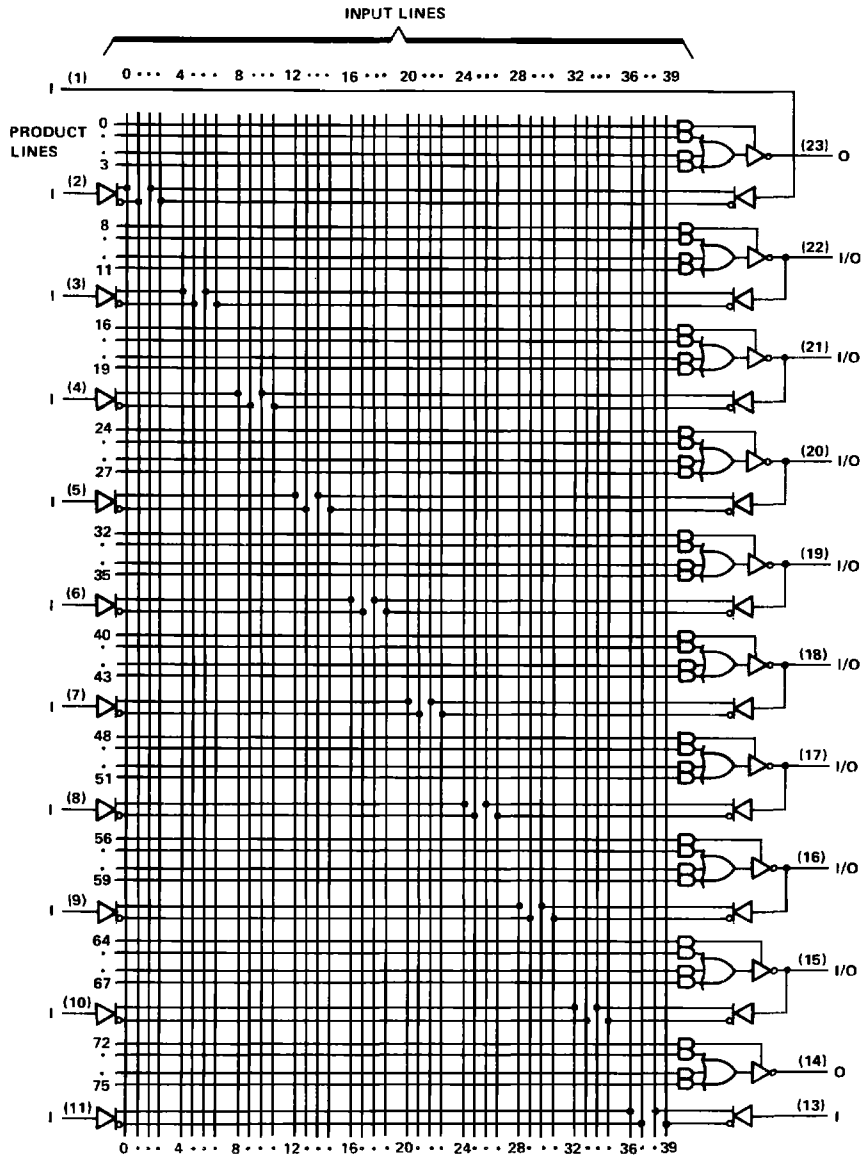


Pin numbers shown are for JT and NT packages.

2

Data Sheets

TIBPAL20X4-30C
HIGH-PERFORMANCE EXCLUSIVE-OR IMPACT™ PAL® CIRCUITS

logic diagram (positive logic)

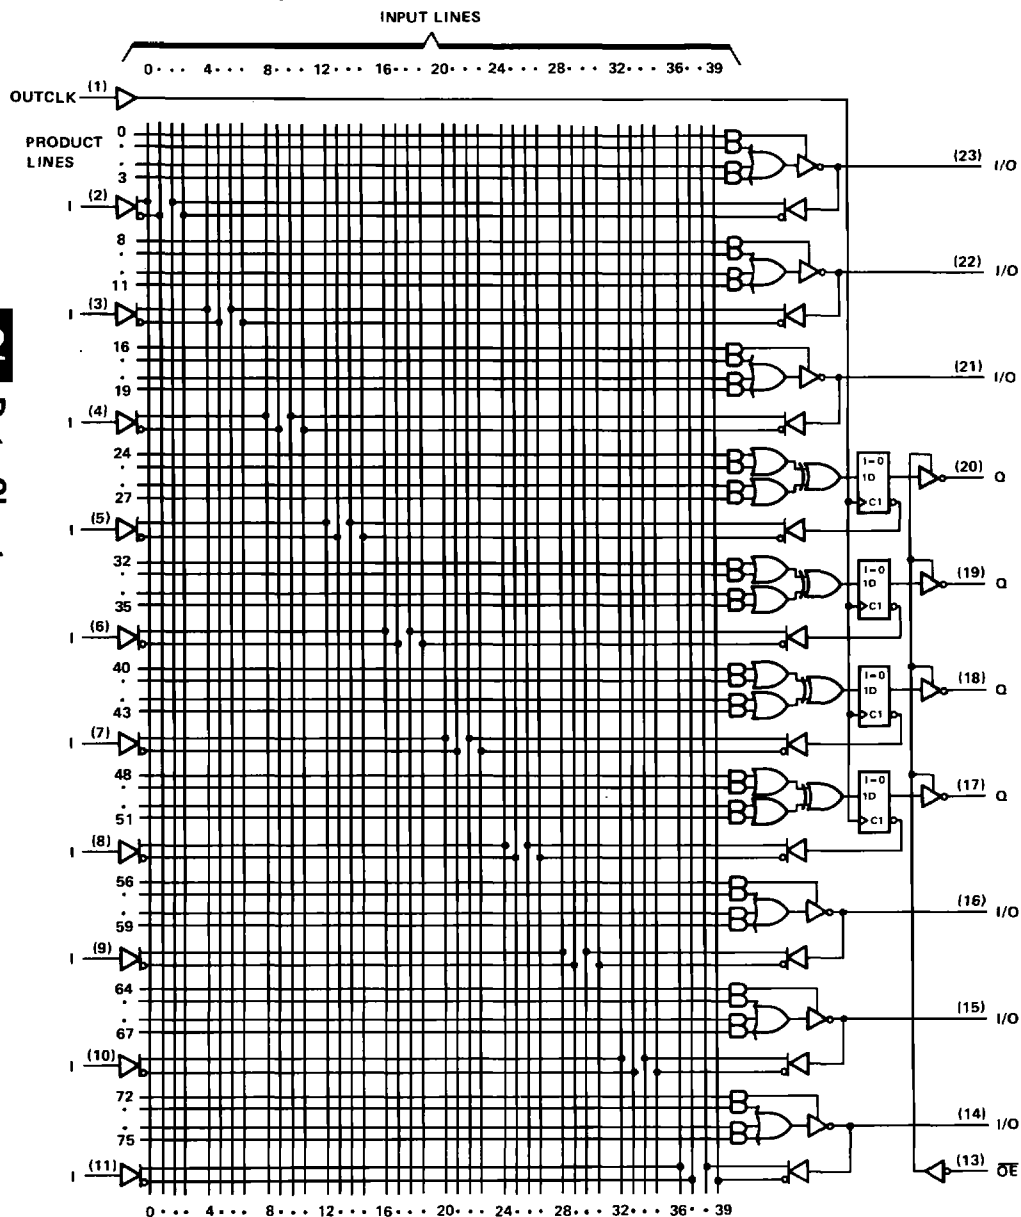


Pin numbers shown are for JT and NT packages.

The timing diagram for the 74181 ALU shows the relationship between input lines, product lines, and output lines over 40 clock cycles. The input lines (0-39) are shown at the top, and the product lines (0-75) are shown on the left. The output lines (13-23) are shown on the right. The diagram illustrates the propagation of signals through the ALU, including the output of the 8-bit product lines (13-23) and the output of the 4-bit ALU result (14-17). The output lines (13-23) are labeled with their respective functions: (13) OE, (14) I/O, (15) Q, (16) Q, (17) Q, (18) Q, (19) Q, (20) Q, (21) Q, (22) Q, and (23) I/O.

2 Data Sheets

TIBPAL20X10-30C
HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT™* PAL® CIRCUITS

logic diagram (positive logic)

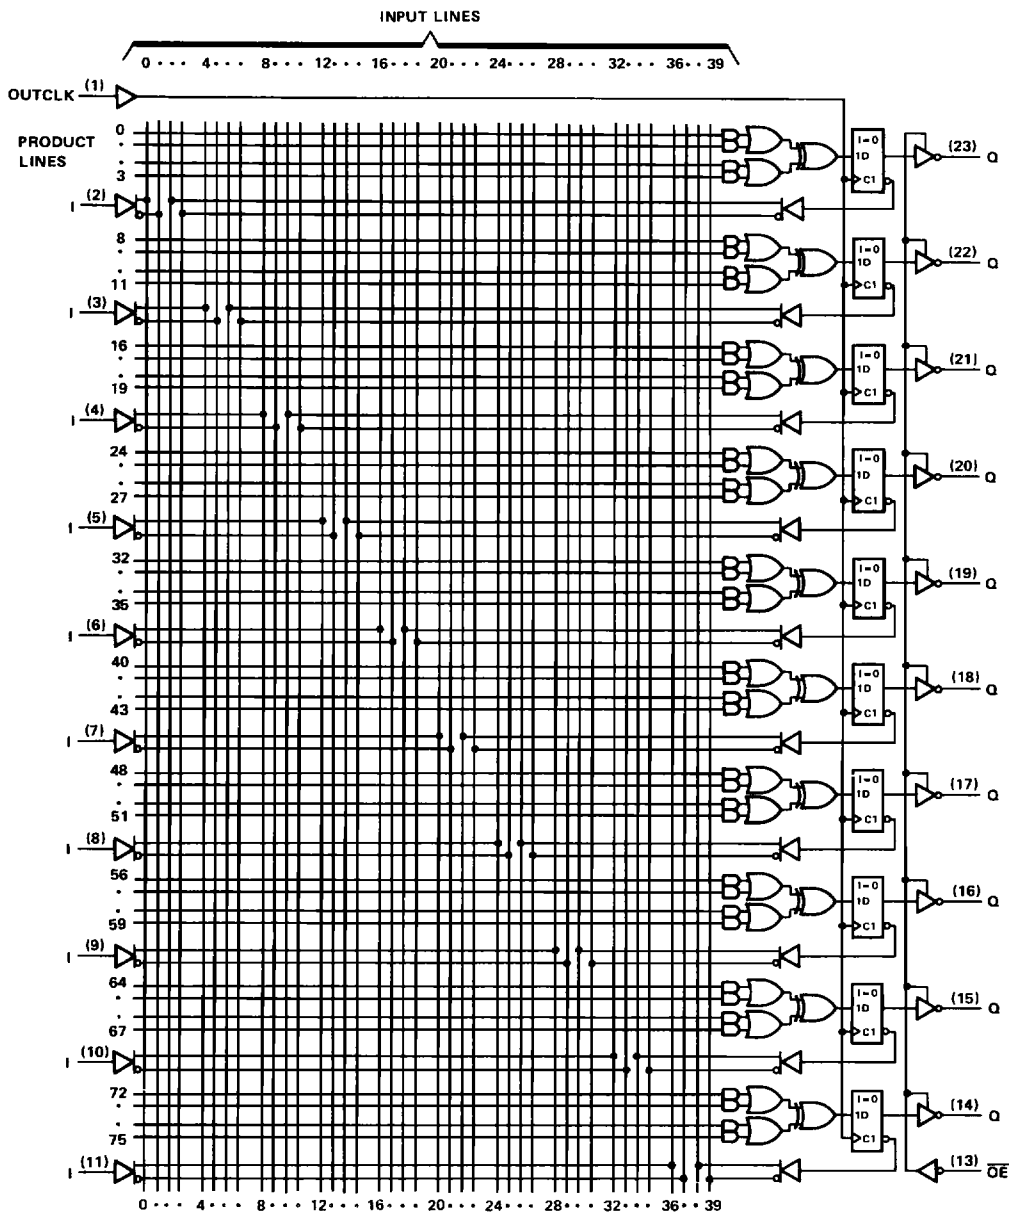

Pin numbers shown are for JT and NT packages.

TIBPAL20L10-30C, TIBPAL20X4-30C, TIBPAL20X8-30C, TIBPAL20X10-30C HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT™* PAL® CIRCUITS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage (see Note 1)	5.5 V
Voltage applied to a disabled output (see Note 1)	5.5 V
Operating free-air temperature range: C suffix	0°C to 75°C
Storage temperature range	–65°C to 150°C

NOTE 1: These ratings apply except for programming pins during a programming cycle.

recommended operating conditions

PARAMETER			– 30C			UNIT
			MIN	NOM	MAX	
V_{CC}	Supply voltage		4.75	5	5.25	V
V_{IH}	High-level input voltage		2		5.5	V
V_{IL}	Low-level input voltage				0.8	V
I_{OH}	High-level output current				–3.2	mA
I_{OL}	Low-level output current				24	mA
f_{clock}	Clock frequency		0		22.2	MHz
t_w	Pulse duration, clock, see Note 2	High		15		ns
		Low		25		
t_{su}	Setup time, input or feedback before OUTCLK†		30			ns
t_h	Hold time, input or feedback after OUTCLK†		0			ns
T_A	Operating free-air temperature		0		75	°C

NOTE 2: The high and low clock pulse durations cannot both be at the minimum values specified. Their sum must be equal to or greater than the minimum clock period, which is the reciprocal of the maximum recommended clock frequency.

electrical characteristics over recommended free-air operating temperature range

PARAMETER		TEST CONDITIONS†	– 30C			UNIT
			MIN	TYP‡	MAX	
V_{IK}		$V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$			–1.2	V
V_{OH}		$V_{CC} = \text{MIN}, I_{OH} = \text{MAX}$	2.4	3.3		V
V_{OL}		$V_{CC} = \text{MIN}, I_{OL} = \text{MAX}$		0.35	0.5	V
I_{OZH}	Outputs	$V_{CC} = \text{MAX}, V_O = 2.7 \text{ V}$			20	μA
	I/O ports				100	
I_{OZL}	Outputs	$V_{CC} = \text{MAX}, V_O = 0.4 \text{ V}$			–20	μA
	I/O ports				–250	
I_I		$V_{CC} = \text{MAX}, V_I = 5.5 \text{ V}$			0.1	mA
I_{IH}		$V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$			20	μA
I_{IL}		$V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$			–0.25	mA
$I_{OS}^{\S}$		$V_{CC} = 5 \text{ V}, V_O = 0$	–30		–130	mA
I_{CC}	'20X4, '20X8, '20X10	$V_{CC} = \text{MAX}, V_I = 0$		120	180	mA
	'20L10			120	165	

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

§ Not more than one output should be shorted at a time and duration of the short-circuit should not exceed one second.

2

Data Sheets

TIBPAL20L10-30C, TIBPAL20X4-30C, TIBPAL20X8-30C, TIBPAL20X10-30C
HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT™* PAL® CIRCUITS

switching characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	FROM	TO	TEST CONDITIONS	- 30C			UNIT
				MIN	TYP†	MAX	
f _{max} ‡	With Feedback		R1 = 200 Ω, R2 = 390 Ω, C _L = 50 pF	22.2			MHz
t _{pd}	I, I/O	O, I/O			23	30	ns
t _{pd}	OUTCLK†	Q			10	15	ns
t _{en}	OE	Q			11	20	ns
t _{dis}	OE†	Q			10	20	ns
t _{en}	I, I/O	O, I/O			19	30	ns
t _{dis}	I, I/O	O, I/O			15	30	ns

† All typical values are at V_{CC} = 5 V, T_A = 25 °C.

‡ f_{max} (with feedback) = $\frac{1}{t_{su} + t_{pd}(\text{CLK to Q})}$; f_{max} without feedback can be calculated as f_{max} (without feedback) = $\frac{1}{t_{whigh} + t_{wlow}}$


programming information

Texas Instruments Programmable Logic Devices can be programmed using widely available software and inexpensive device programmers.





Complete programming specifications, algorithms, and the latest information on hardware, software, and firmware are available upon request. Information on programmers capable of programming Texas Instruments Programmable Logic is also available, upon request, from the nearest TI field sales office, local authorized TI distributor, or by calling Texas Instruments at (214) 997-5762.

TIBPAL20L10-30C, TIBPAL20X4-30C, TIBPAL20X8-30C, TIBPAL20X10-30C
HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT*™ PAL® CIRCUITS

PARAMETER MEASUREMENT INFORMATION



**LOAD CIRCUIT FOR
THREE-STATE OUTPUTS**

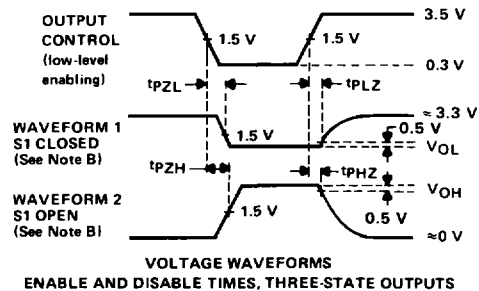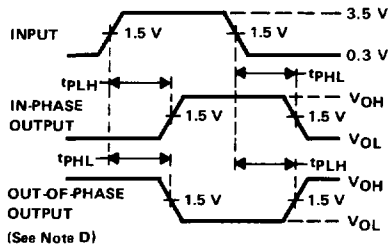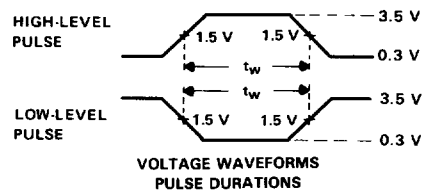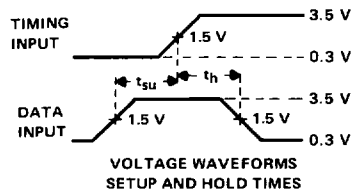

NOTES: A. C_L includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.

Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.

C. All input pulses have the following characteristics: $PRR \leq 1$ MHz, $t_r = t_f = 2$ ns, duty cycle = 50%.

D. When measuring propagation delay times of 3-state outputs, switch S1 is closed.

2


Data Sheets

TIBPAL20L10-30C, TIBPAL20X4-30C, TIBPAL20X8-30C, TIBPAL20X10-30C HIGH-PERFORMANCE EXCLUSIVE-OR *IMPACT™* PAL® CIRCUITS


preload procedures

preload procedure for registered outputs

- Step 1 With V_{CC} at 5 volts, raise Pin 13 ($\overline{OE}$) to V_{IHH} to disable the outputs and clear the registers (output goes low). Since the outputs are low, only high levels need be preloaded.
- Step 2 Raise the selected output to be preloaded high to V_{IHH} .
- Step 3 Lower Pin 13 to V_{IH} .
- Step 4 Remove the voltages applied to the outputs. (At least a 100-ns wait is required between step 3 and step 4)
- Step 5 Lower Pin 13 to V_{IL} to verify preload.

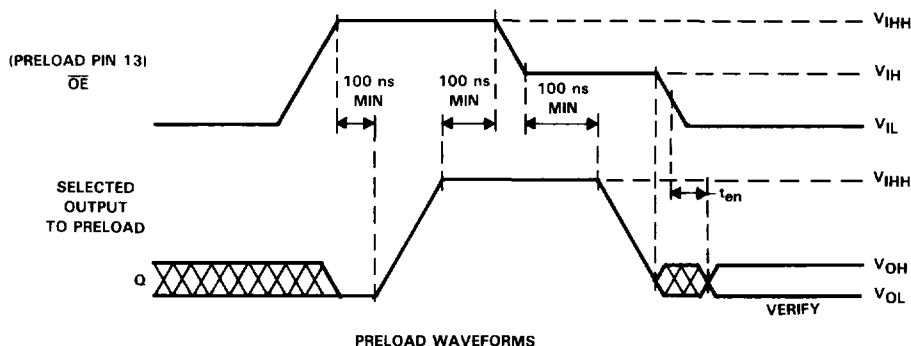

security fuse programming

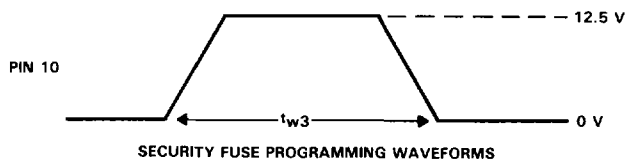

NOTE: Pin numbers shown apply only for the DIP package. If a chip carrier socket adaptor is not used, pin numbers must be changed accordingly.