


SN54ALS465A THRU SN54ALS468A, SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS


D2661, APRIL 1982 — REVISED MAY 1986

- Mechanically and Functionally Interchangeable with DM71/81LS97 and DM71/81LS98
- P-N-P Inputs Reduce Bus Loading
- 3-State Outputs Rated at I_{OL} of 12 mA and 24 mA for SN54ALS' and SN74ALS', Respectively
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

SN54ALS465A, SN54ALS466A . . . J PACKAGE
SN74ALS465A, SN74ALS466A . . . DW OR N PACKAGE
(TOP VIEW)



SN54ALS465A, SN54ALS466A . . . FK PACKAGE
(TOP VIEW)




DEVICE	DATA PATH
'ALS465A	True
'ALS466A	Inverting
'ALS467A	True
'ALS468A	Inverting

description


These octal buffers utilize the latest advanced low-power Schottky technology. The 'ALS465A and 'ALS466A have a two-input active-low AND enable gate controlling all eight data buffers. The 'ALS467A and 'ALS468A have two separate active-low enable inputs each controlling four data buffers. In each case, a high level on any $\bar{G}$ places the affected outputs at high impedance.

The SN54ALS465A, SN54ALS466A, SN54ALS467A, and SN54ALS468A are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS465A, SN74ALS466A, SN74ALS467A, and SN74ALS468A are characterized for operation from 0°C to 70°C .

SN54ALS467A, SN54ALS468A . . . J PACKAGE
SN74ALS467A, SN74ALS468A . . . DW OR N PACKAGE
(TOP VIEW)



SN54ALS467A, SN54ALS468A . . . FK PACKAGE
(TOP VIEW)



PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS
POST OFFICE BOX 655012 • DALLAS, TEXAS 75265



Copyright © 1982, Texas Instruments Incorporated

SN54ALS465A THRU SN54ALS468A, SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS



logic symbols[†]

2

ALS and AS Circuits

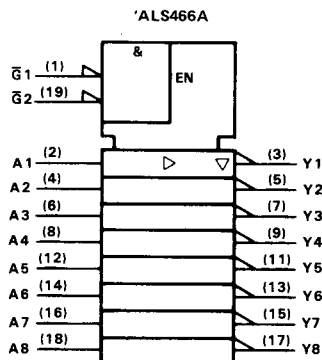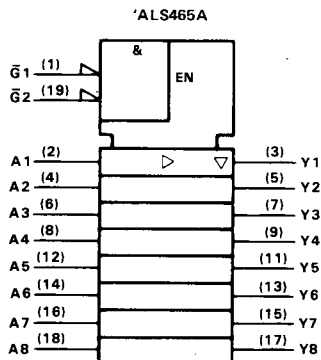



logic diagrams (positive logic)

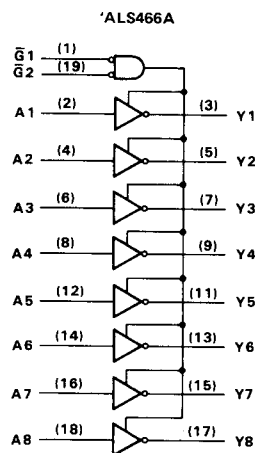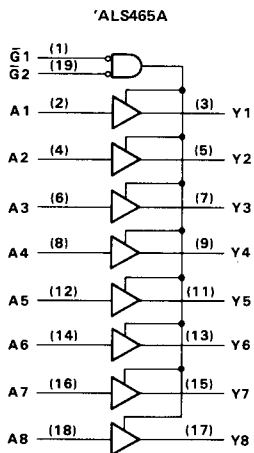



[†]These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, J, and N packages.

SN54ALS465A THRU SN54ALS468A, SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS

logic symbols[†]



logic diagrams (positive logic)

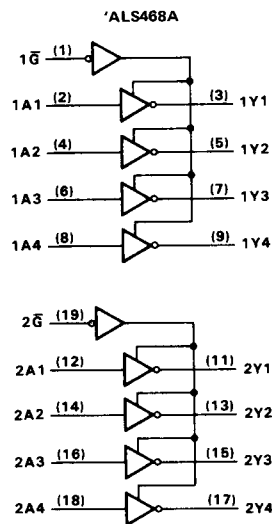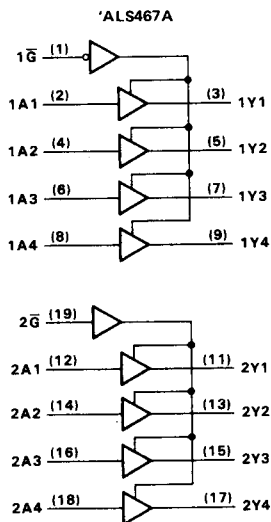

[†]These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, J, and N packages.

SN54ALS465A THRU SN54ALS468A, SN74ALS465A THRU SN74ALS468A OCTAL BUFFERS WITH 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS465A THRU SN54ALS468A	-55°C to 125°C
SN74ALS465A THRU SN74ALS468A	0°C to 70°C
Storage temperature range	-65°C to 150°C

recommended operating conditions

		SN54ALS465A THRU SN54ALS468A			SN74ALS465A THRU SN74ALS468A			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
I_{OH}	High-level output current			-12			-15	mA
I_{OL}	Low-level output current			12			24	mA
							48†	
T_A	Operating free-air temperature	-55		125	0		70	°C

†The extended limit applies only if V_{CC} is maintained between 4.75 V and 5.25 V.

The 48 mA limit applies for SN74ALS465A-1, SN74ALS466A-1, SN74ALS467A-1, and SN74ALS468A-1 only.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	SN54ALS465A THRU SN54ALS468A		SN74ALS465A THRU SN74ALS468A		UNIT		
			MIN	TYP [‡] MAX	MIN	TYP [‡] MAX			
V _{IK}		V _{CC} = 4.5 V, I _I = -18 mA	-1.5		-1.5		V		
V _{OH}		V _{CC} = 4.5 V to 5.5 V, I _{OH} = -0.4 mA	V _{CC} -2		V _{CC} -2		V		
		V _{CC} = 4.5 V, I _{OH} = -3 mA	2.4	3.2	2.4	3.2			
		V _{CC} = 4.5 V, I _{OH} = -12 mA	2						
		V _{CC} = 4.5 V, I _{OH} = -15 mA			2				
V _{OL}		V _{CC} = 4.5 V, I _{OL} = 12 mA	0.25	0.4	0.25	0.4	V		
		V _{CC} = 4.5 V, I _{OL} = 24 mA (I _{OL} = 48 mA for -1 versions)			0.35	0.5			
I _{OZH}		V _{CC} = 5.5 V, V _O = 2.7 V	20		20		μA		
I _{OZL}		V _{CC} = 5.5 V, V _O = 0.4 V	-20		-20		μA		
I _I		V _{CC} = 5.5 V, V _I = 7 V	0.1		0.1		mA		
I _{IH}		V _{CC} = 5.5 V, V _I = 2.7 V	20		20		μA		
I _{IL}		V _{CC} = 5.5 V, V _I = 0.4 V	-0.1		-0.1		mA		
I _O [‡]		V _{CC} = 5.5 V, V _O = 2.25 V	-30	-112	-30	-112	mA		
I _{CC}	'ALS465A 'ALS467A	V _{CC} = 5.5 V	Outputs high		11	21	11	16	mA
			Outputs low		19	33	19	28	
			Outputs disabled		23	38	23	33	
	'ALS466A 'ALS468A	V _{CC} = 5.5 V	Outputs high		7	15	7	10	mA
			Outputs low		16	29	16	24	
			Outputs disabled		19	32	19	27	

‡All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

§The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .

2

ALS and AS Circuits

SN54ALS465A THRU SN54ALS468A, SN74ALS465A THRU SN74ALS468A **OCTAL BUFFERS WITH 3-STATE OUTPUTS**

'ALS465A, 'ALS467A switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R ₁ = 500 Ω, R ₂ = 500 Ω, T _A = MIN to MAX				UNIT
			SN54ALS465A SN54ALS467A		SN74ALS465A SN74ALS467A		
			MIN	MAX	MIN	MAX	
t _{PLH}	A	Y	2	16	2	13	ns
t _{PHL}			4	15	4	12	
t _{PZH}	G̅	Any Y	4	27	4	23	ns
t _{PZL}			5	30	5	25	
t _{PHZ}	G̅	Any Y	2	12	2	10	ns
t _{PLZ}			3	21	3	18	

'ALS466A, 'ALS468A switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	VCC = 4.5 V to 5.5 V, CL = 50 pF, R1 = 500 Ω, R2 = 500 Ω, TA = MIN to MAX				UNIT
			SN54ALS466A SN54ALS468A		SN74ALS466A SN74ALS468A		
			MIN	MAX	MIN	MAX	
tPLH	A	Y	3	14	3	12	ns
tPHL			2	11	2	9	
tPZH	G	Any Y	4	21	4	16	ns
tPZL			7	25	7	23	
tPHZ	G	Any Y	2	12	2	10	ns
tPLZ			2	20	2	17	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

2

ALS and AS Circuits