

LM118, LM218, LM318 FAST GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS063A – JUNE 1976 – REVISED APRIL 1994

- Small-Signal Bandwidth . . . 15 MHz Typ
- Slew Rate . . . 50 V/μs Min
- Bias Current . . . 250 nA Max (LM118, LM218)
- Supply Voltage Range . . . ±5 V to ±20 V
- Internal Frequency Compensation
- Input and Output Overload Protection
- Same Pin Assignments as General-Purpose Operational Amplifiers



description

The LM118, LM218, and LM318 are precision, fast operational amplifiers designed for applications requiring wide bandwidth and high slew rate. They feature a factor-of-ten increase in speed over general-purpose devices without sacrificing dc performance.

These operational amplifiers have internal unity-gain frequency compensation. This considerably simplifies their application, since no external components are necessary for operation. However, unlike most internally compensated amplifiers, external frequency compensation may be added for optimum performance. For inverting applications, feed-forward compensation boosts the slew rate to over 150 V/μs and almost double the bandwidth. Overcompensation can be used with the amplifier for greater stability when maximum bandwidth is not needed. Further, a single capacitor may be added to reduce the settling time for 0.1% error band to under 1 μs.


The high speed and fast settling time of these operational amplifiers make them useful in A/D converters, oscillators, active filters, sample-and-hold circuits, and general-purpose amplifiers.

The LM118 is characterized for operation from –55°C to 125°C. The LM218 is characterized for operation from –25°C to 85°C, and the LM318 is characterized for operation from 0°C to 70°C.

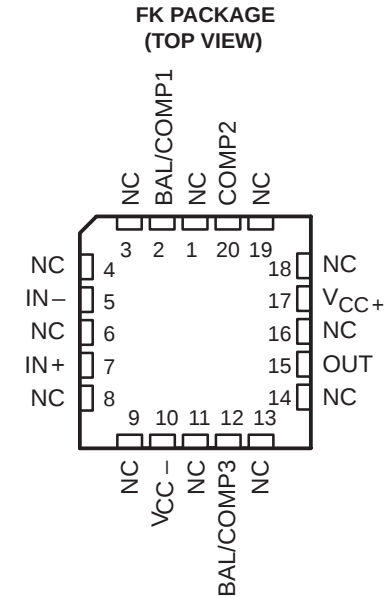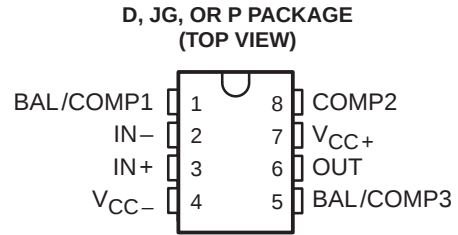

NC – No internal connection

symbol

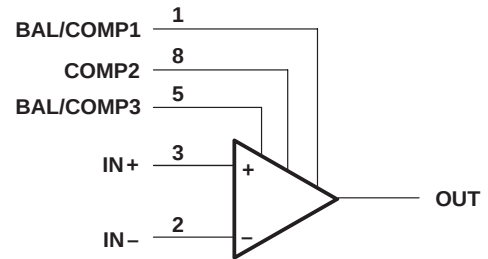

Pin numbers shown are for the D, JG, and P packages.

LM118, LM218, LM318
FAST GENERAL-PURPOSE OPERATIONAL AMPLIFIERS


SLOS063A – JUNE 1976 – REVISED APRIL 1994

AVAILABLE OPTIONS

T _A	V _{IO} max AT 25°C	PACKAGE			
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (JG)	PLASTIC DIP (P)
0°C to 70°C	10 mV	LM318D	—	—	LM318P
–25°C to 85°C	4 mV	LM218D	—	—	LM218P
–55°C to 125°C	4 mV	LM118D	LM118FK	LM118JG	LM118P

The D package is available taped and reeled. Add the suffix R to the device type (e.g., LM318DR).

schematic

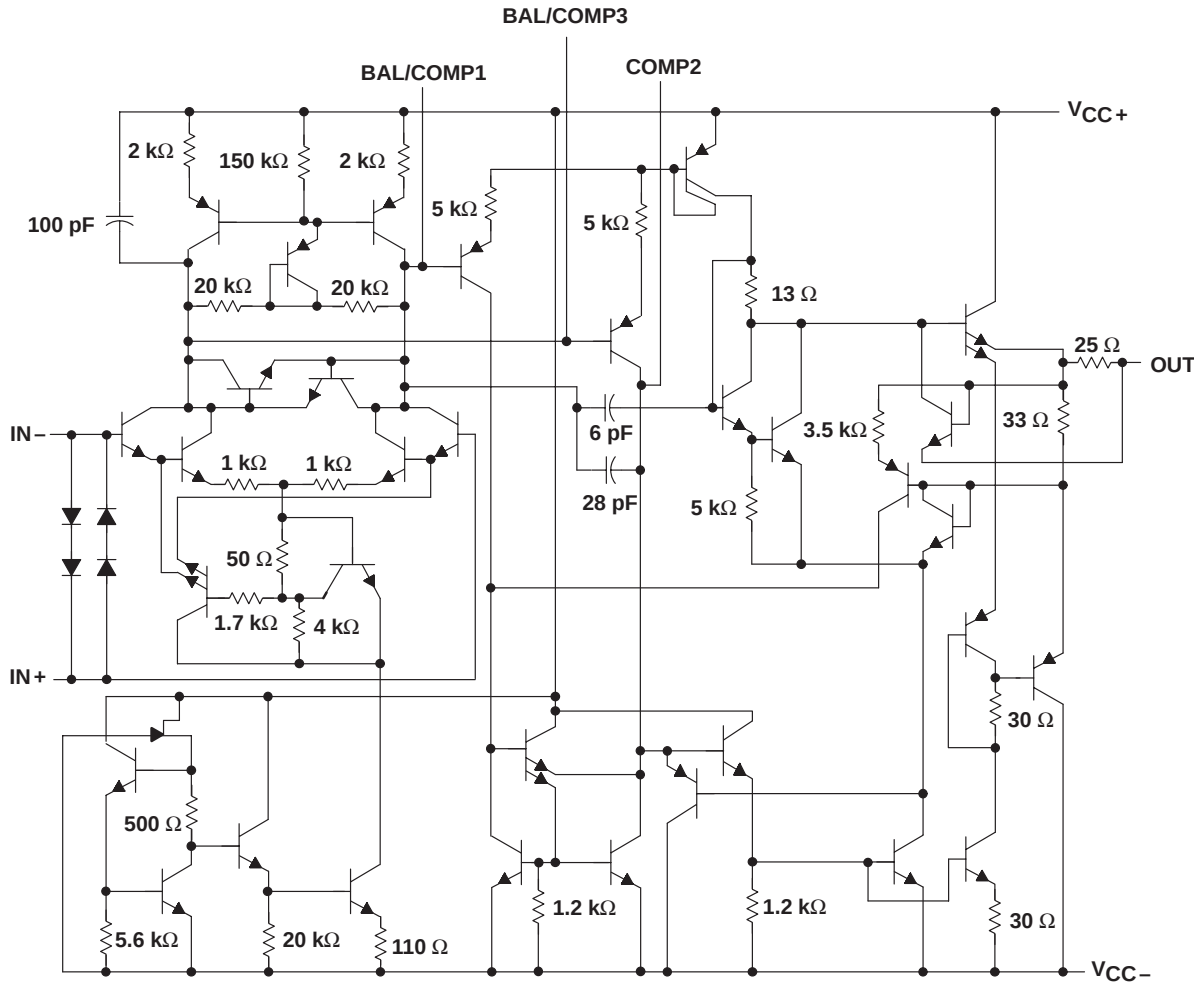

Component values shown are nominal.

LM118, LM218, LM318

FAST GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS063A – JUNE 1976 – REVISED APRIL 1994

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	LM118	LM218	LM318	UNIT
Supply voltage, V_{CC+} (see Note 1)	20	20	20	V
Supply voltage, V_{CC-} (see Note 1)	-20	-20	-20	V
Input voltage, V_I (either input, see Notes 1 and 2)	± 15	± 15	± 15	V
Differential input current, I_{ID} (see Note 3)	± 10	± 10	± 10	mA
Duration of output short circuit (see Note 4)	unlimited	unlimited	unlimited	
Continuous total power dissipation	See Dissipation Rating Table			
Operating free-air temperature range, T_A	-55 to 125	-25 to 85	0 to 70	°C
Storage temperature range	-65 to 150	-65 to 150	-65 to 50	°C
Case temperature for 60 seconds	FK package	260		°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	D or P package	260	260	°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds	JG package	300		°C

- NOTES: 1. All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-} .
2. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
3. The inputs are shunted with two opposite-facing base-emitter diodes for overvoltage protection. Therefore, excessive current flows if a different input voltage in excess of approximately 1 V is applied between the inputs unless some limiting resistance is used.
4. The output can be shorted to ground or either power supply. For the LM118 and LM218 only, the unlimited duration of the short circuit applies at (or below) 85°C case temperature or 75°C free-air temperature.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR	DERATE ABOVE T_A	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 85^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D	500 mW	5.8 mW/°C	64°C	464 mW	377 mW	145 mW
FK	500 mW	11.0 mW/°C	105°C	500 mW	500 mW	275 mW
JG	500 mW	8.4 mW/°C	90°C	500 mW	500 mW	210 mW
P	500 mW	8.0 mW/°C	88°C	500 mW	500 mW	200 mW



LM118, LM218, LM318
FAST GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS063A – JUNE 1976 – REVISED APRIL 1994

electrical characteristics at specified free-air temperature (see Note 5)


PARAMETER	TEST CONDITIONS†	TA‡	LM118, LM218			LM318			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
VIO Input offset voltage	VO = 0	25°C	2	4		4	10		mV
		Full range			6			15	
IIO Input offset current	VO = 0	25°C	6	50		30	200		nA
		Full range			100			300	
IIB Input bias current	VO = 0	25°C	120	250		150	500		nA
		Full range			500			750	
VICR Common-mode input voltage range	VCC± = ±15 V	Full range	±11.5			±11.5			V
VOM Maximum peak output voltage swing	VCC± = ±15 V, RL = 2 kΩ	Full range	±12	±13		±12	±13		V
AVD Large-signal differential voltage amplification	VCC± = ±15 V, VO = ±10 V, RL ≥ 2 kΩ	25°C	50	200		25	200		V/mV
		Full range	25			20			
B1 Unity-gain bandwidth	VCC± = ±15 V	25°C	15			15			MHz
ri Input resistance		25°C	1*	3		0.5	3		MΩ
CMRR Common-mode rejection ratio	VIC = VICRmin	Full range	80	100		70	100		dB
kSVR Supply-voltage rejection ratio (ΔVCC/ΔVIO)		Full range	70	80		65	80		dB
ICC Supply current	VO = 0, No load	25°C	5	8		5	10		mA

* On products compliant to MIL-STD-883, Class B, this parameter is not production tested.
† All characteristics are measured under open-loop conditions with common-mode input voltage unless otherwise specified.
‡ Full range for LM118 is –55°C to 125°C, full range for LM218 is –25°C to 85°C, and full range for LM318 is 0°C to 70°C.
NOTE 5: Unless otherwise noted, VCC = ±5 V to ±20 V. All typical values are at VCC± = ±15 V and TA = 25°C.

operating characteristics, VCC± = ±15 V, TA = 25°C

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR Slew rate at unity gain	ΔVI = 10 V, CL = 100 pF, See Figure 1	50*	70		V/μs

* On products compliant to MIL-STD-883, Class B, this parameter is not production tested.

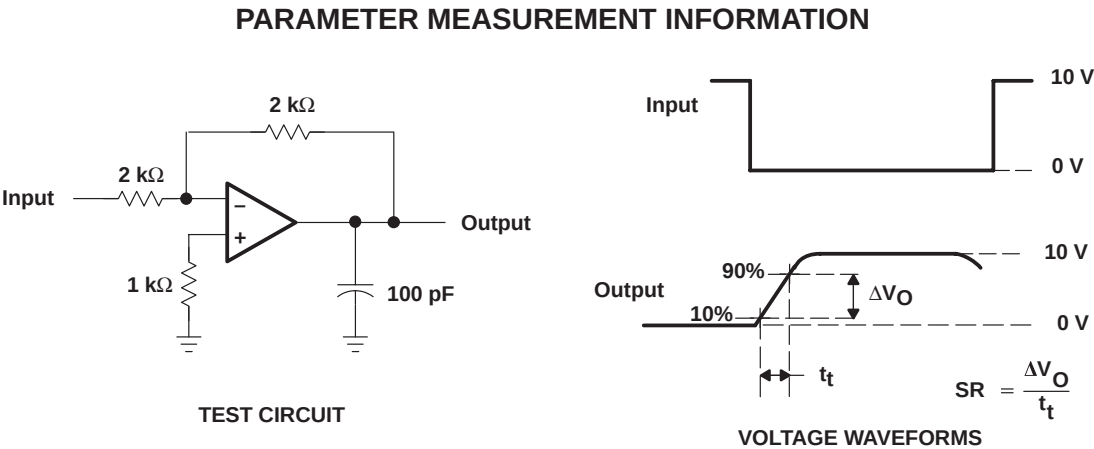

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.



>> [Semiconductor Home](#) > [Products](#) > [Analog & Mixed-Signal](#) > [Amplifiers](#) > [Operational Amplifiers](#) >

LM318, SINGLE HIGH-SPEED OPERATIONAL AMPLIFIER

Device Status: Active

- > [Description](#)
- > [Features](#)
- > [Datasheets](#)
- > [Pricing/Samples/Availability](#)
- > [Application Notes](#)
- > [User Manuals](#)
- > [Development Tools](#)
- > [Applications](#)

Parameter Name	LM318
delta VCC (max) (V)	40
delta VCC (min) (V)	10
IDD / ICC per channel (max) (mA)	10
IDD / ICC per channel (typ) (mA)	5
GBW (typ) (MHz)	15
Slew Rate (typ) (V/us)	70
VIO (Full Range) (max) (mV)	15
VIO (25 deg C) (max) (mV)	10
IIB (typ) (pA)	150000
CMRR (typ) (dB)	100
Vn (typ) (nV/rtHz)	23
Number of Channels	1
Spec'd at VCC (V)	+/-15

Description

The LM118, LM218, and LM318 are precision, high-speed operational amplifiers designed for applications requiring wide bandwidth and high slew rate. They feature a factor-of-ten increase in speed over general-purpose devices without sacrificing dc performance.

These operational amplifiers have internal unity-gain frequency compensation. This considerably simplifies their application, since no external components are necessary for operation. However, unlike most internally compensated amplifiers, external frequency compensation may be added for optimum performance. For inverting applications, feed-forward compensation boosts the slew rate to over 150 V/us and almost double the bandwidth. Overcompensation can be used with the amplifier for greater stability when maximum bandwidth is not needed. Further, a single capacitor may be added to reduce the settling time for 0.1% error band to under 1 us.

The high speed and fast settling time of these operational amplifiers make them useful in A/D converters, oscillators, active filters, sample-and-hold circuits, and general-purpose amplifiers.

The LM118 is characterized for operation from -55°C to 125°C. The LM218 is characterized for operation from -25°C to 85°C, and the LM318 is characterized for operation from 0°C to 70°C.

Features

- Small-Signal Bandwidth . . . 15 MHz Typ
- Slew Rate . . . 50 V/us Min
- Bias Current . . . 250 nA Max (LM118, LM218)
- Supply Voltage Range . . . ± 5 V to ± 20 V
- Internal Frequency Compensation
- Input and Output Overload Protection
- Same Pin Assignments as General-Purpose Operational Amplifiers

To view the following documents, [Acrobat Reader 3.x](#) is required.

To download a document to your hard drive, right-click on the link and choose 'Save'.

Datasheets

Full datasheet in Acrobat PDF: [slos063a.pdf](#) (87 KB)

Full datasheet in Zipped PostScript: [slos063a.psz](#) (81 KB)

Pricing/Samples/Availability

Orderable Device	Package	Pins	Temp (°C)	Status	Price/unit USD (100-999)	Pack Qty	Availability / Samples
LM318D	D	8		ACTIVE	1.00	75	Check stock or order
LM318DR	D	8		ACTIVE	0.87	2500	Check stock or order
LM318P	P	8		ACTIVE	1.00	50	Check stock or order
LM318PS	PS	8		ACTIVE			Check stock or order

Application Reports

View Application Reports for [Operational Amplifiers](#)

- [ANALOG APPLICATIONS JOURNAL, FEBRUARY 2000](#) (SLYT012A - Updated: 03/23/2000)
- [ANALOG APPLICATIONS JOURNAL, NOVEMBER 1999](#) (SLYT010A - Updated: 03/23/2000)
- [ANALYSIS OF THE SALLÉN-KEY ARCHITECTURE](#) (SLOA024A - Updated: 08/04/1999)
- [ELECTROSTATIC DISCHARGE APPLICATION NOTE](#) (SSYA008 - Updated: 05/05/1999)
- [SIGNAL CONDITIONING PIEZOELECTRIC SENSORS](#) (SLOA033 - Updated: 10/03/1999)
- [SIGNAL CONDITIONING WHEATSTONE RESISTIVE BRIDGE SENSORS](#) (SLOA034 - Updated: 10/03/1999)
- [THERMAL CHARACTERISTICS OF LINEAR AND LOGIC PACKAGES USING JEDEC PCB](#)

[DESIGNS](#) (SZZA017A - Updated: 09/15/1999)

User Manuals

- [UNIVERSAL OP AMP EVALUATION MODULE SELECTION GUIDE](#) (SLOU060, 10 KB - Updated: 02/15/2000)
- [UNIVERSAL OPERATIONAL AMPLIFIER EVM](#) (SLVU006A, 387 KB - Updated: 04/14/1999)
- [UNIVERSAL OPERATIONAL AMPLIFIER SINGLE, DUAL, QUAD \(MSOP/TSSOP\)](#) (SLOU055, 1196 KB - Updated: 11/11/1999)
- [UNIVERSAL OPERATIONAL AMPLIFIER SINGLE, DUAL, QUAD \(PDIP\)](#) (SLOU062, 1211 KB - Updated: 10/24/1999)
- [UNIVERSAL OPERATIONAL AMPLIFIER SINGLE, DUAL, QUAD \(SOIC\) EVALUATION MODULE WITH](#) (SLOU061, 1160 KB - Updated: 10/24/1999)

Table Data Updated on: 6/2/2000

• [Search](#) • [Tech Support](#) • [Comments](#) • [Site Map](#) • [TI&ME](#) • [Home](#)

(c) Copyright 2000 Texas Instruments Incorporated. All rights reserved.

[Trademarks](#), [Important Notice!](#), [Privacy Policy](#)