



FEATURES

- Automatically restarts microprocessor after power failure
- Monitors pushbutton for external override
- Internal circuitry debounces pushbutton switch
- Maintains reset for 350ms after V_{CC} returns to an in-tolerance condition or pushbutton released
- Accurate 5%, 10%, or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface-mount SOT-223 package
- Internal 5k Ω pull-up resistor
- Operating temperature of -40°C to +85°C

PIN ASSIGNMENT



BOTTOM VIEW
TO-92 PACKAGE
See Mech.
Drawings Section
on Website



TOP VIEW
SOT-223 PACKAGE
See Mech.
Drawings Section
on Website

PIN DESCRIPTION

PIN 1	GROUND
PIN 2	RESET
PIN 3	V_{CC}
PIN 4	GROUND (SOT-223 ONLY)

DESCRIPTION

The DS1233 EconoReset monitors two vital conditions for a microprocessor: power supply and external override. A precision temperature-compensated reference and comparator circuit are used to monitor the status of the power supply (V_{CC}). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When V_{CC} returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350ms to allow the power supply and processor to stabilize. The second function of the DS1233 is pushbutton reset control. The DS1233 debounces a pushbutton closure and will generate a 350ms reset pulse upon release.

OPERATION — POWER MONITOR

The DS1233 provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When V_{CC} is detected as out-of-tolerance, as defined by the tolerance of the part selected, the $\overline{RST}$ signal is asserted. On power-up, $\overline{RST}$ is kept active for approximately 350ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before $\overline{RST}$ is released.


OPERATION — PUSHBUTTON RESET

The DS1233 provides for a pushbutton switch to be connected to the $\overline{\text{RST}}$ output pin. When the DS1233 is not in a reset cycle, it continuously monitors the $\overline{\text{RST}}$ signal for a low going edge. If an edge is detected, the DS1233 will debounce the switch by pulling the $\overline{\text{RST}}$ line low. After the internal timer has expired, the DS1233 will continue to monitor the $\overline{\text{RST}}$ line. If the line is still low, the DS1233 will continue to monitor the line looking for a rising edge. Upon detecting a release, the DS1233 will force the $\overline{\text{RST}}$ line low and hold it low for 350ms.


NOTE:

For proper operation with an external pushbutton, a capacitor between 100pF and 0.01 μ F must be connected between $\overline{\text{RST}}$ and ground. In applications where additional reset current is required, a minimum capacitance of 500pF should be used, along with a parallel external pull-up resistor of 1k Ω minimum.


BLOCK DIAGRAM Figure 1

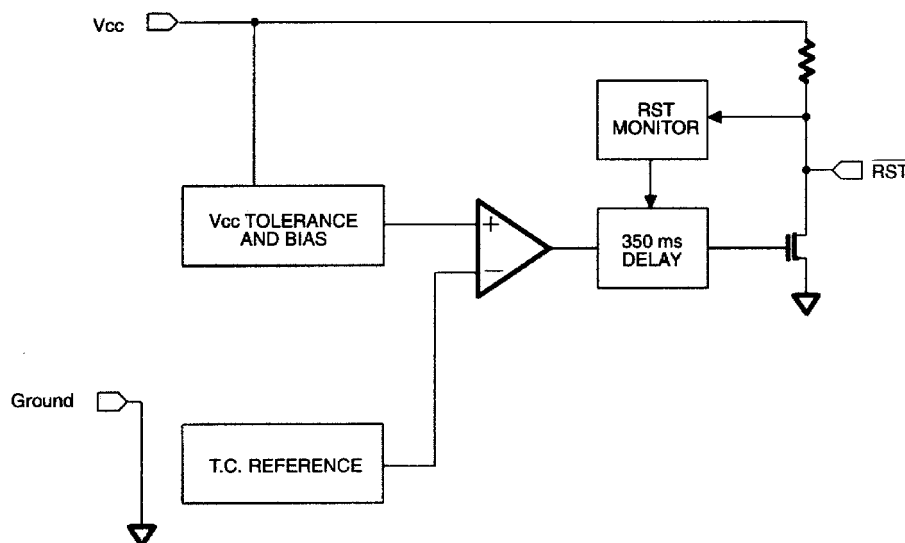


APPLICATION EXAMPLE Figure 2

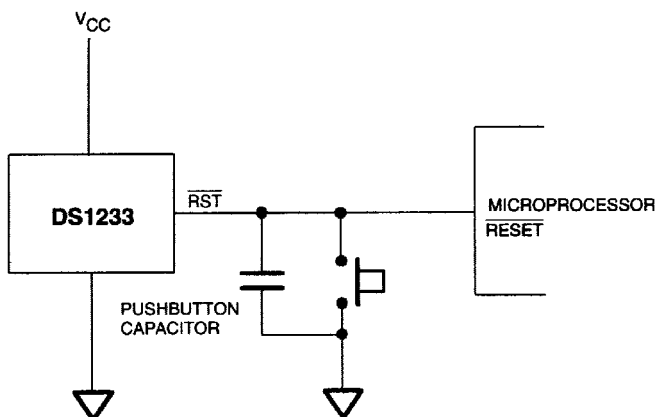


PUSHBUTTON RESET Figure 3

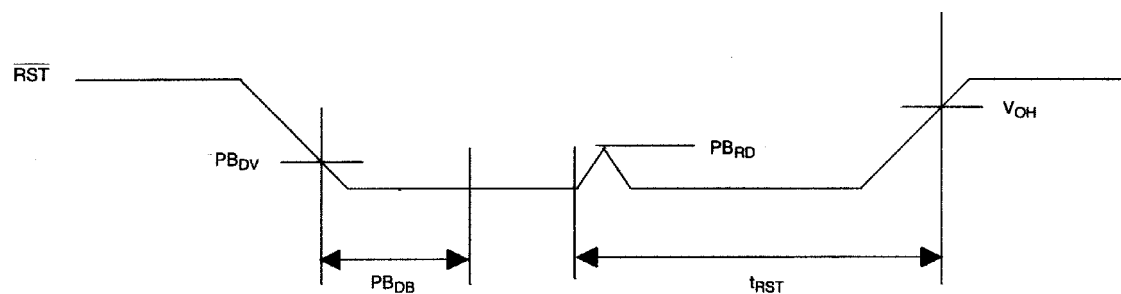

POWER UP Figure 4

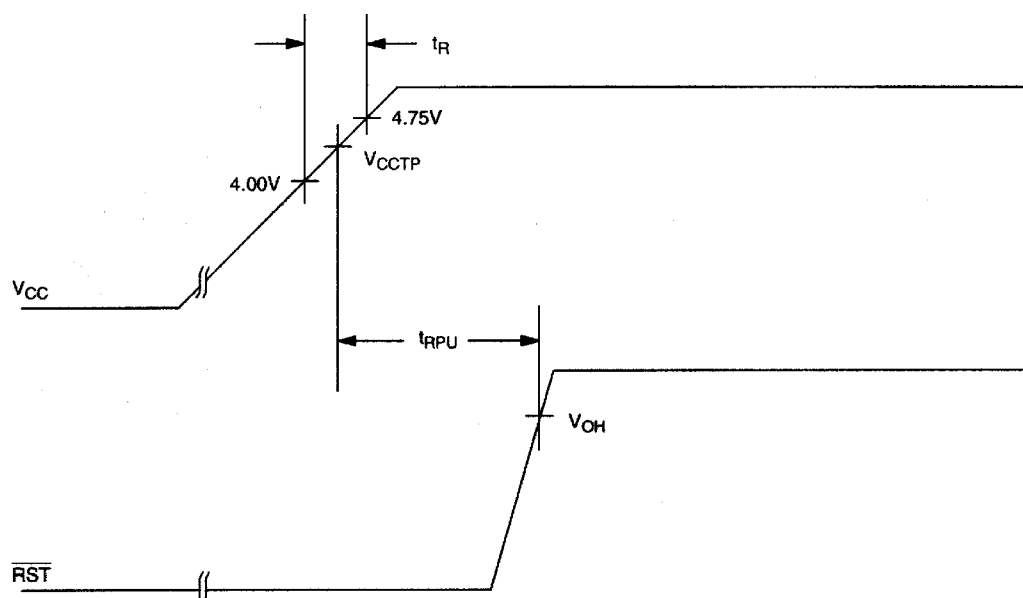

POWER DOWN Figure 5

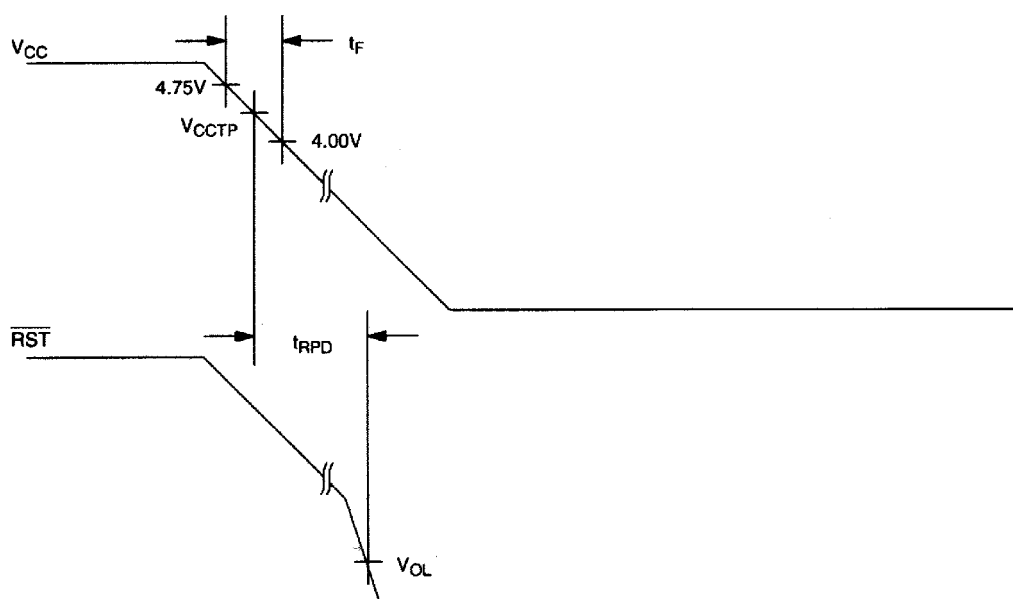

ABSOLUTE MAXIMUM RATINGS*

Voltage on V _{CC} Pin Relative to Ground	-0.5V to +7.0V
Voltage on I/O Relative to Ground	-0.5V to V _{CC} +0.5V
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-55°C to +125°C
Soldering Temperature	260°C for 10 seconds

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS (-40°C to +85°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage	V _{CC}	1.2	5.0	5.5	V	1

DC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; V_{DD} = 5V ± 10%)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Low Level @ $\overline{\text{RST}}$	V _{OL}			0.4	V	1
Output Current @ 0.4V	I _{OL}	+8			mA	
Operating Current	I _{CC}			50	μA	
V _{CC} Trip Point 5%	V _{CCTP0}	4.50	4.625	4.75	V	1
V _{CC} Trip Point 10%	V _{CCTP1}	4.25	4.375	4.49	V	1
V _{CC} Trip Point 15%	V _{CCTP2}	4.0	4.125	4.24	V	1
Output Capacitance	C _{OUT}			10	pF	
Pushbutton Detect	PB _{DV}	1.8		3.3	V	1
Pushbutton Release	PB _{RD}		0.3	0.8	V	1, 2
Internal Pull-Up Resistor	R _P	3.75	5	6.25	kΩ	

AC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; V_{CC} = 5V ± 10%)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
RESET Active Time	t _{RST}	250	350	450	ms	
V _{CC} Detect to $\overline{\text{RST}}$	t _{RPD}			100	ns	
V _{CC} Slew Rate (4.75V - 4.00V)	t _F	300			μs	
V _{CC} Slew Rate (4.00V - 4.75V)	t _R	0			ns	
Pushbutton Debounce	PB _{DB}	250	350	450	ms	
V _{CC} Detect to RST	t _{RPU}	250	350	450	ms	

NOTES:

- 1) All voltages are referenced to ground.
- 2) With a 100pF to 0.01μF capacitor connected from $\overline{\text{RST}}$ to ground.

ECONORESET SELECTION GUIDE

		V_{CC} TRIP POINT			PUSHBUTTON DETECT		
		MIN	TYP	MAX	MIN	TYP	MAX
5V	DS1233-15	4.0	4.125	4.24	1.8	-	3.3
	DS1233-10	4.25	4.375	4.49	1.8	-	3.3
	DS1233-5	4.5	4.625	4.75	1.8	-	3.3
	DS1233D-15	4.0	4.125	4.24	N/A		N/A
	DS1233D-10	4.25	4.375	4.49	N/A		N/A
	DS1233D-5	4.5	4.625	4.75	N/A		N/A
	DS1833-15	4.0	4.125	4.24	N/A		N/A
	DS1833-10	4.25	4.375	4.49	N/A		N/A
	DS1833-5	4.5	4.625	4.75	N/A		N/A
3.3V	DS1233A-15	2.64	2.72	2.80	0.8	-	2.0
	DS1233A-10	2.8	2.88	2.97	0.8	-	2.0



 SITE
SEARCH

 PART NO.
SEARCH

WHAT'S NEW

PRODUCTS

SOLUTIONS

DESIGN

APPNOTES

SUPPORT

BUY

COMPANY

MEMBERS

DS1233

Part Number Table

Notes:

1. See the [DS1233 QuickView Data Sheet](#) for further information on this product family or download the [DS1233 full data sheet](#) (PDF, 136kB).
2. Other options and links for purchasing parts are listed at: <http://www.maxim-ic.com/sales>.
3. [Didn't Find What You Need?](#) Ask our applications engineers. Expert assistance in finding parts, usually within one business day.
4. Part number suffixes: T or T&R = tape and reel; + = RoHS/lead-free; # = RoHS/lead-exempt. More: See [full data sheet](#) or [Part Naming Conventions](#).
5. * Some packages have variations, listed on the drawing. "PkgCode/Variation" tells which variation the product uses.

Part Number	Notes	Free Sample	Buy Direct	Package: TYPE PINS SIZE DRAWING CODE/VAR *	Temp	RoHS/Lead-Free? Materials Analysis
DS1233Z-10/T&R/C12			☐		-40C to +85C	RoHS/Lead-Free: No
DS1233Z-10/T&R/C11			☐		-40C to +85C	RoHS/Lead-Free: No
DS1233Z-15/T&R/C01			☐	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-15	5V-15% Monitor	☐	☐	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-10+T&R	5V-10% 2500/Reel		☐	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233Z-5+T&R	5V-5% 2500/Reel		☐	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233Z-15+T&R	5V-15% 2500/Reel		☐	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233Z-10+		☐	☐	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis

DS1233Z-5+				ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233Z-15+				ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233Z-10	5V-10% Monitor			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-5	5V-5% Monitor			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-15/T&R	5V-15% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-5/T&R	5V-5%, 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-10/T&R	5V-10% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-10 SUN MICRO CUSTOM					-40C to +85C	RoHS/Lead-Free: No
DS1233-10/T&R/C01				TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-10/T&R/C02				TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-15/T&R/				TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-15/T&R/STR				TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-10	5V-10%			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-5	5V-5% Monitor			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-15	5V-15% Monitor			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-5/T&R	5V-5% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis

DS1233-15+T&R	5V-15% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233-5+	5V-5%			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233-5+T&R	5V-5% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233-15/T&R	5V-15% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-10+T&R	5V-10% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233-10/T&R	5V-10%, 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233-10+				TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233-15+				TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233-WAFER					0C to +70C	RoHS/Lead-Free: No
DS1233 DICE					0C to +70C	RoHS/Lead-Free: No

[Didn't Find What You Need?](#)

[CONTACT US: SEND US AN EMAIL](#)

Copyright 2007 by Maxim Integrated Products, Dallas Semiconductor • [Legal Notices](#) • [Privacy Policy](#)