



# MP2665A

## 21V, 1A, Battery Charger for Single-Cell Li-Ion Batteries with I<sup>2</sup>C Control, Power Path Management, and Shipping Mode

### DESCRIPTION

The MP2665A is a highly integrated, single-cell Li-ion/Li-polymer battery charger with system power path management. It is targeted at space-constrained portable applications. This device takes input power from either an AC adapter or a USB port to supply the system load and charge the battery simultaneously. The charger features pre-charge, constant current (CC) fast charge, constant voltage (CV) regulation, charge termination, and automatic recharge.

Power path management ensures that the system is continuously powered by automatically selecting the input, the battery, or both to power the system. Power path management is accomplished using a low-dropout (LDO) regulator connected from the input to the system, as well as a 100mΩ switch connected from the battery to the system. This function separates the charging current from the system load, which allows for proper charge termination and keeps the battery in full charge mode.

The MP2665A provides system short-circuit protection (SCP) by limiting the current from the input to the system, as well as the current from the battery to the system. This feature is especially critical to prevent the Li-ion battery from being damaged due to excessively high currents. An on-chip battery under-voltage lockout (UVLO) threshold cuts off the path between the battery and the system if the battery voltage drops below the configurable battery UVLO threshold. This prevents the Li-ion battery from being overly discharged. An integrated I<sup>2</sup>C interface allows the MP2665A to configure the following charging parameters: input current limit, input voltage regulation limit, charging current, battery regulation voltage, safety timer, and battery UVLO threshold.

The MP2665A is available in a QFN-12 (2.5mmx3mm) package.

### FEATURES


- USB-Compliant, I<sup>2</sup>C-Configurable Charger for Single-Cell Li-Ion/Polymer Batteries
- 21V Maximum Input Voltage Rating with Over-Voltage Protection (OVP)
- Complete Power Path Management to Simultaneously Power the System and Charge the Battery
- **Fully Configurable Charging Parameters:**
  - 50mA to 1A Input Current Limit
  - 3.88V to 5.08V Input Voltage Loop to Support Weak Adapters
  - ±0.5% Charging Termination Voltage Accuracy
  - 16mA to 896mA Fast Charge Current
  - 2.5mA to 62mA Pre-Charge and Termination Current
- I<sup>2</sup>C Interface to Set Charging Parameters and Report INT/Statuses
- Ultra-Low Battery Leakage Current in Shipping Mode
- **Robust Safety Features:**
  - Built-in Charging Protections Including Battery Temperature Monitoring and Configurable Timer
  - Configurable Thermal Regulation
  - Configurable Watchdog Timer
  - PCB Over-Temperature Protection
  - Configurable Over Discharge Current Protection
- System Reset Function
- OTP Back Registers to Set Default Power-On Configuration
- Available in a QFN-12 (2.5mmx3mm) Package

### APPLICATIONS

- Wearable Devices
- Smart Handheld Devices
- Fitness Accessories
- Smartwatches

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

# TYPICAL APPLICATION

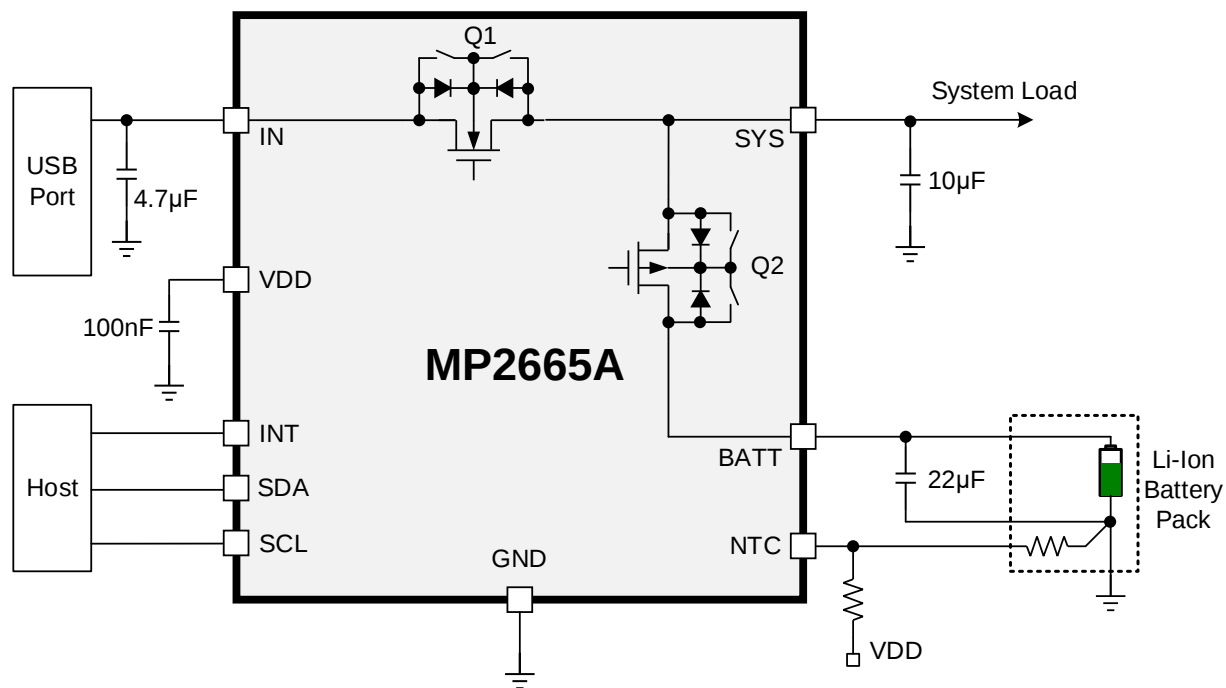

## ORDERING INFORMATION

| Part Number*      | Package            | Top Marking | MSL Rating |
|-------------------|--------------------|-------------|------------|
| MP2665AGQB-xxxx** | QFN-12 (2.5mmx3mm) | See Below   | 1          |
| EVKT-MP2665A      | Evaluation kit     | -           |            |

\* For Tape & Reel, add suffix -Z (e.g. MP2665AGQB-xxxx-Z).

\*\* “-xxxx” is the register setting option. The factory default is “-0000.” This content can be viewed in the I<sup>2</sup>C register map. Contact an MPS FAE to obtain an “-xxxx” value.

## TOP MARKING

**BXJ**

**YWW**

**LLL**

BXJ: Product code of MP2665AGQB

Y: Year code

WW: Week code

LLL: Lot number

## EVALUATION KIT EVKT-MP2665A

EVKT-MP2665A kit contents (items below can be ordered separately):

| # | Part Number       | Item                                                                                              | Quantity |
|---|-------------------|---------------------------------------------------------------------------------------------------|----------|
| 1 | EV2665A-QB-00A    | MP2665A evaluation board                                                                          | 1        |
| 2 | EVKT-USB2C-02-BAG | Includes one USB to I <sup>2</sup> C communication interface, one USB cable, and one ribbon cable | 1        |
| 3 | Online resources  | Include datasheet, user guide, product brief, and GUI                                             | 1        |

Order directly from [MonolithicPower.com](http://MonolithicPower.com) or our distributors.


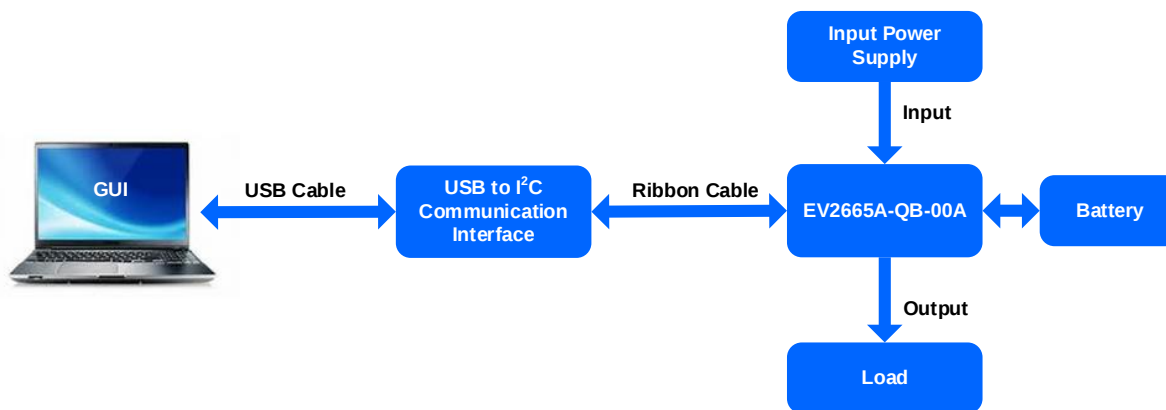


Figure 1: EVKT-MP2665A Evaluation Kit Set-Up

## PACKAGE REFERENCE

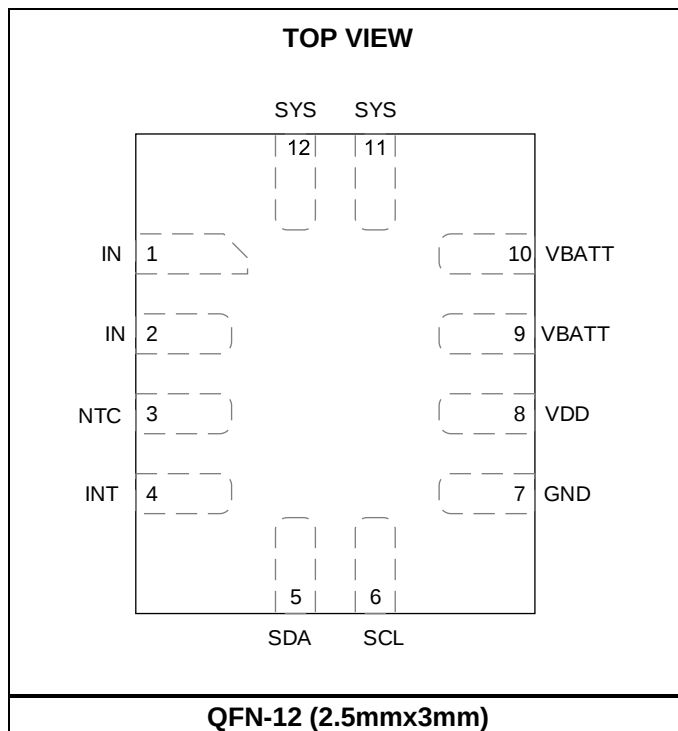

## PIN FUNCTIONS

| Pin #  | Name | I/O <sup>(1)</sup> | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 2   | IN   | P                  | <b>Input power pin.</b> Place a ceramic capacitor from IN to GND, as close as possible to the IC.                                                                                                                                                                                                                                                                                                                                                                          |
| 3      | NTC  | AI                 | <b>Temperature-sense input.</b> Connect a negative temperature coefficient thermistor to the NTC pin. Configure the hot and cold temperature thresholds with a resistor divider connected from VDD to NTC to GND. Charging is suspended when the NTC pin is out of range.                                                                                                                                                                                                  |
| 4      | INT  | AIO                | <b>Interrupt signal.</b> INT can send a charging status and fault interrupt signal to the host. INT is also used to disconnect the system from the battery. If INT is pulled low for longer than t <sub>RST_DGL</sub> (about 16s), the battery FET turns off and turns on again automatically after t <sub>RST_DUR</sub> (about 4s), regardless of the INT state. Both t <sub>RST_DGL</sub> and t <sub>RST_DUR</sub> can be configured via the I <sup>2</sup> C interface. |
| 5      | SDA  | DIO                | <b>I<sup>2</sup>C interface data.</b> Connect SDA to the logic rail through a 10kΩ resistor.                                                                                                                                                                                                                                                                                                                                                                               |
| 6      | SCL  | DI                 | <b>I<sup>2</sup>C interface clock.</b> Connect SCL to the logic rail through a 10kΩ resistor.                                                                                                                                                                                                                                                                                                                                                                              |
| 7      | GND  | P                  | <b>Ground.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 8      | VDD  | P                  | <b>Internal control power supply pin.</b> Connect a 100nF ceramic capacitor from the VDD pin to GND. No external load is allowed.                                                                                                                                                                                                                                                                                                                                          |
| 9, 10  | BATT | P                  | <b>Battery pin.</b> Place a ceramic capacitor from BATT to GND, as close as possible to the IC.                                                                                                                                                                                                                                                                                                                                                                            |
| 11, 12 | SYS  | P                  | <b>System power supply.</b> Place a ceramic capacitor from SYS to GND, as close as possible to the IC.                                                                                                                                                                                                                                                                                                                                                                     |

### Note:

1) AI = analog input, AIO = analog input/output, DI = digital input, DIO = digital input/output, P = power.

## ABSOLUTE MAXIMUM RATINGS <sup>(2)</sup>

|                                                                     |                                  |
|---------------------------------------------------------------------|----------------------------------|
| IN .....                                                            | -0.3V to +21V                    |
| BATT to GND .....                                                   | -0.3V to +6.0V                   |
| SYS to GND .....                                                    | -0.3V to +5.3V (+5.5V for 500μs) |
| All other pins to GND .....                                         | -0.3V to +5.2V                   |
| Continuous power dissipation (T <sub>A</sub> = 25°C) <sup>(3)</sup> | 1.67W                            |
| Junction temperature .....                                          | 150°C                            |
| Lead temperature (solder) .....                                     | 260°C                            |
| Storage temperature .....                                           | -65°C to +150°C                  |

## ESD Ratings

|                                  |       |
|----------------------------------|-------|
| Human body model (HBM) .....     | 2000V |
| Charged device model (CDM) ..... | 750V  |

## Recommended Operating Conditions <sup>(4)</sup>

|                                                |                           |
|------------------------------------------------|---------------------------|
| Supply voltage (V <sub>IN</sub> ) ...          | 4.35V to 5.5V (USB Input) |
| I <sub>IN</sub> .....                          | Up to 1A                  |
| I <sub>DSCHG</sub> .....                       | Up to 3.2A <sup>(5)</sup> |
| I <sub>CC</sub> .....                          | Up to 896mA               |
| V <sub>BATT_REG</sub> .....                    | Up to 4.545V              |
| Operating junction temp (T <sub>J</sub> ) .... | -40°C to +125°C           |

| Thermal Resistance <sup>(6)</sup> | θ <sub>JA</sub> | θ <sub>JC</sub> |
|-----------------------------------|-----------------|-----------------|
| QFN-12 (2.5mmx3mm) .....          | 60              | 13.... °C/W     |

### Notes:

- 2) Exceeding these ratings may damage the device.
- 3) The maximum allowable power dissipation is a function of the maximum junction temperature, T<sub>J</sub> (MAX), the junction-to-ambient thermal resistance, θ<sub>JA</sub>, and the ambient temperature, T<sub>A</sub>. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P<sub>D</sub> (MAX) = (T<sub>J</sub> (MAX) - T<sub>A</sub>) / θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation can cause excessive die temperature, and the device may go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- 4) The device is not guaranteed to function outside of its operating conditions.
- 5) Guaranteed by design.
- 6) Measured on JESD51-7, 4-layer PCB.

## ELECTRICAL CHARACTERISTICS

V<sub>IN</sub> = 5.0V, V<sub>BATT</sub> = 3.5V, T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                               | Symbol                   | Condition                                                                                                                       | Min | Typ  | Max  | Units |
|---------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----|------|------|-------|
| Input Source and Battery Protection                     |                          |                                                                                                                                 |     |      |      |       |
| Input under-voltage lock-out threshold                  | V <sub>IN_UVLO</sub>     | Input falling                                                                                                                   | 3.6 | 3.7  | 3.8  | V     |
| Input under-voltage lock-out threshold hysteresis       |                          | Input rising                                                                                                                    |     | 170  |      | mV    |
| Input over-voltage protection threshold                 | V <sub>IN_OVP</sub>      | Input rising threshold                                                                                                          | 6.1 | 6.4  | 6.7  | V     |
| Input over-voltage protection threshold hysteresis      |                          |                                                                                                                                 |     | 350  |      | mV    |
| Input vs. battery voltage headroom threshold            | V <sub>HDRM</sub>        | Input rising vs. battery                                                                                                        | 80  | 120  | 160  | mV    |
| Input vs. battery voltage headroom threshold hysteresis |                          |                                                                                                                                 |     | 85   |      | mV    |
| Battery under-voltage lockout threshold                 | V <sub>BATT_UVLO</sub>   | BATT voltage falling, REG01h, bits[2:0] = 000                                                                                   | 2.2 | 2.4  | 2.6  | V     |
|                                                         |                          | BATT voltage falling, REG01h, bits[2:0] = 100                                                                                   | 2.6 | 2.76 | 2.92 |       |
|                                                         |                          | BATT voltage falling, REG01h, bits[2:0] = 111                                                                                   | 2.9 | 3.03 | 3.2  |       |
| BATT under voltage threshold hysteresis                 |                          | V <sub>BATT_UVLO</sub> = 2.76V                                                                                                  |     | 210  |      | mV    |
| Battery over-voltage protection threshold               | V <sub>BATT_OVP</sub>    | Rising, higher than V <sub>BATT_REG</sub>                                                                                       |     | 110  |      | mV    |
| Battery over-voltage protection hysteresis              |                          |                                                                                                                                 |     | 50   |      |       |
| Power Path Management                                   |                          |                                                                                                                                 |     |      |      |       |
| Regulated system output voltage accuracy                | V <sub>SYS_REG_ACC</sub> | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>BATT</sub> = 0A, REG07h, bits[3:0] = 0000, V <sub>SYS_REG</sub> = 4.2V  | -2  |      | +2   | %     |
|                                                         |                          | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>BATT</sub> = 0A, REG07h, bits[3:0] = 0010, V <sub>SYS_REG</sub> = 4.3V  | -2  |      | +2   | %     |
|                                                         |                          | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>BATT</sub> = 0A, REG07h, bits[3:0] = 1001, V <sub>SYS_REG</sub> = 4.65V | -2  |      | +2   | %     |
|                                                         |                          | V <sub>IN</sub> = 5.5V, R <sub>SYS</sub> = 100Ω, I <sub>BATT</sub> = 0A, REG07h, bits[3:0] = 1111, V <sub>SYS_REG</sub> = 4.95V | -2  |      | +2   | %     |
| Input current limit                                     | I <sub>IN_LIM</sub>      | REG00h, bits[3:0] = 0000, I <sub>IN_LIM</sub> = 50mA                                                                            | 30  | 40   | 50   | mA    |
|                                                         |                          | REG00h, bits[3:0] = 0011, I <sub>IN_LIM</sub> = 140mA                                                                           | 112 | 126  | 140  |       |
|                                                         |                          | REG00h, bits[3:0] = 0110, I <sub>IN_LIM</sub> = 460mA                                                                           | 420 | 440  | 460  |       |
|                                                         |                          | REG00h, bits[3:0] = 1110 ,I <sub>IN_LIM</sub> = 940mA                                                                           | 840 | 890  | 940  |       |
|                                                         |                          | REG00h, bits[3:0] = 1111, I <sub>IN_LIM</sub> = 1000mA                                                                          | 900 | 950  | 1000 |       |

## ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 5.0V, V<sub>BATT</sub> = 3.5V, T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                            | Symbol                | Condition                                                                                                                                                                      | Min | Typ                 | Max | Units |
|------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------|-----|-------|
| Input minimum voltage regulation                     | V <sub>IN_MIN</sub>   | REG00h, bits[7:4] = 0000, V <sub>IN_MIN</sub> = 3.88V                                                                                                                          | 3.6 | 3.88                | 4.2 | V     |
|                                                      |                       | REG00h, bits[7:4] = 0110, V <sub>IN_MIN</sub> = 4.36V                                                                                                                          | 4.1 | 4.36                | 4.7 |       |
|                                                      |                       | REG00h, bits[7:4] = 1001, V <sub>IN_MIN</sub> = 4.60V                                                                                                                          | 4.3 | 4.6                 | 4.9 |       |
|                                                      |                       | REG00h, bits[7:4] = 1111, V <sub>IN_MIN</sub> = 5.08V                                                                                                                          | 4.8 | 5.08                | 5.4 |       |
| IN to SYS switch on resistance                       | R <sub>ON_Q1</sub>    | V <sub>IN</sub> = 4.5V, I <sub>SYS</sub> = 100mA                                                                                                                               |     | 290                 |     | mΩ    |
| Input quiescent current                              | I <sub>IN_Q</sub>     | V <sub>IN</sub> = 5.1V, EN_HIZ = 0, CEB = 0, charging enabled, I <sub>BATT</sub> = 0A, I <sub>SYS</sub> = 0A                                                                   |     | 1.8                 |     | mA    |
|                                                      |                       | V <sub>IN</sub> = 5.1V, EN_HIZ = 0, CEB = 1, charging disabled, I <sub>BATT</sub> = 0A, I <sub>SYS</sub> = 0A                                                                  |     | 1.6                 |     |       |
| Input suspend current                                | I <sub>IN_SUSP</sub>  | V <sub>IN</sub> = 5.5V, EN_HIZ = 1, CEB = 0, charging enabled                                                                                                                  |     | 0.7                 | 1.5 | mA    |
| Battery quiescent current                            | I <sub>BATT_Q</sub>   | V <sub>IN</sub> = 5V, CEB = 0, I <sub>SYS</sub> = 0A, charging done, V <sub>BATT</sub> = 4.35V                                                                                 |     | 43                  |     | μA    |
|                                                      |                       | V <sub>IN</sub> = GND, CEB = 1, I <sub>SYS</sub> = 0A, V <sub>BATT</sub> = 4.35V, disable the PCB OTP function, not including the current from the external NTC resistor       |     | 6.5                 | 8   |       |
|                                                      |                       | V <sub>IN</sub> = GND, CEB = 1, I <sub>SYS</sub> = 0A, V <sub>BATT</sub> = 4.35V, enable PCB OTP function, not include the current from external NTC resistor                  |     | 14                  | 21  |       |
|                                                      |                       | V <sub>IN</sub> = GND, CEB = 1, I <sub>SYS</sub> = 0A, V <sub>BATT</sub> = 4.35V, enable PCB OTP function, not include the current from external NTC resistor, enable watchdog |     | 22.5                |     |       |
|                                                      |                       | V <sub>BATT</sub> = 4.5V, V <sub>IN</sub> = V <sub>SYS</sub> = GND, FET_DIS = 1, shipping mode                                                                                 |     |                     | 350 | nA    |
| Battery FET on resistance                            | R <sub>ON_Q2</sub>    | V <sub>IN</sub> = GND, V <sub>BATT</sub> = 3.5V, I <sub>SYS</sub> = 100mA                                                                                                      |     | 100                 |     | mΩ    |
| Battery FET discharge current limit                  | I <sub>DSCHG</sub>    | REG03h, bits[7:4] = 0001, I <sub>DSCHG</sub> = 400mA                                                                                                                           |     | 480                 |     | mA    |
|                                                      |                       | REG03h, bits[7:4] = 1001, I <sub>DSCHG</sub> = 2000mA                                                                                                                          |     | 2000 <sup>(7)</sup> |     |       |
|                                                      |                       | REG03h, bits[7:4] = 1111, I <sub>DSCHG</sub> = 3200mA                                                                                                                          |     | 3200 <sup>(7)</sup> |     |       |
| SYS reverse to BATT switch leakage                   |                       | V <sub>SYS</sub> = 4.65V, V <sub>IN</sub> = 5V, V <sub>BATT</sub> = GND, EN_HIZ = 1, CEB = 1, charging disabled                                                                |     |                     | 1   | μA    |
| Ideal diode forward voltage in supplement mode       | V <sub>FWD</sub>      | 50mA discharge current                                                                                                                                                         |     | 28.5                |     | mV    |
| <b>Shipping mode</b>                                 |                       |                                                                                                                                                                                |     |                     |     |       |
| Enter shipping mode deglitch time                    | t <sub>SMEN_DGL</sub> | REG06h, bit[5] is set from 0 to 1, REG09h, bits[7:6] = 00                                                                                                                      |     | 1                   |     | s     |
| Exit shipping mode by INT or V <sub>IN</sub> plug in | t <sub>SMEX_DGL</sub> | INT is pulled low                                                                                                                                                              |     | 2                   |     | s     |

## ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 5.0V, V<sub>BATT</sub> = 3.5V, T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                      | Symbol                | Condition                                                                  | Min   | Typ  | Max   | Units |
|------------------------------------------------|-----------------------|----------------------------------------------------------------------------|-------|------|-------|-------|
| Auto-Reset Mode                                |                       |                                                                            |       |      |       |       |
| Reset by INT                                   | t <sub>RST_DGL</sub>  | REG01h, bits[7:6] = 00                                                     |       | 8    |       | s     |
|                                                |                       | REG01h, bits[7:6] = 10                                                     |       | 16   |       |       |
| Battery FET off lasting time                   | t <sub>RST_DUR</sub>  | REG01h, bit[5] = 0                                                         |       | 2    |       | s     |
|                                                |                       | REG01h, bit[5] = 1                                                         |       | 4    |       |       |
| Battery Charger                                |                       |                                                                            |       |      |       |       |
| Battery charge voltage regulation              | V <sub>BATT_REG</sub> | REG04h, bits[7:2] = 000000, V <sub>BATT_REG</sub> = 3.6V                   | 3.582 | 3.6  | 3.618 | V     |
|                                                |                       | REG04h, bits[7:2] = 101000, V <sub>BATT_REG</sub> = 4.2V                   | 4.179 | 4.2  | 4.221 |       |
|                                                |                       | REG04h, bits[7:2] = 110010, V <sub>BATT_REG</sub> = 4.38V                  | 4.358 | 4.38 | 4.4   |       |
|                                                |                       | REG04h, bits[7:2] = 111110, V <sub>BATT_REG</sub> = 4.53V                  | 4.522 | 4.53 | 4.568 |       |
| Fast charge current                            | I <sub>CC</sub>       | REG02h, bits[5:0] = 000000, I <sub>CC</sub> = 16mA                         | 12.5  | 15.5 | 18.5  | mA    |
|                                                |                       | REG02h, bits[5:0] = 001011, I <sub>CC</sub> = 168mA                        | 139   | 160  | 181   |       |
|                                                |                       | REG02h, bits[5:0] =001111, I <sub>CC</sub> = 224mA                         | 193   | 216  | 239   |       |
|                                                |                       | REG02h, bits[5:0] =100011, I <sub>CC</sub> = 504mA                         | 467   | 504  | 536   |       |
|                                                |                       | REG02h, bits[5:0] =110001, I <sub>CC</sub> = 700mA                         | 654   | 704  | 754   |       |
|                                                |                       | REG02h, bits[5:0] = 111111, I <sub>CC</sub> = 896mA                        | 790   | 900  | 1000  |       |
| Pre-charge current                             | I <sub>PRE</sub>      | I <sub>PRE</sub> = I <sub>TERM</sub>                                       | 2.5   |      | 62    | mA    |
| Charge termination current threshold           | I <sub>TERM</sub>     | REG03h, bits[3:0] = 0000, I <sub>TERM</sub> = 2.5mA                        | 1.5   | 2.5  | 3.5   | mA    |
|                                                |                       | REG03h, bits[3:0] = 0001, I <sub>TERM</sub> = 7.5mA                        | 6     | 7.5  | 9     |       |
|                                                |                       | REG03h, bits[3:0] = 0101, I <sub>TERM</sub> = 22mA                         | 20    | 22   | 24    |       |
|                                                |                       | REG03h, bits[3:0] = 1111, I <sub>TERM</sub> = 62mA                         | 56    | 62   | 70    |       |
| Termination deglitch time                      | t <sub>TERM_DGL</sub> |                                                                            |       | 3.2  |       | s     |
| Pre-charge to fast charge threshold            | V <sub>BATT_PRE</sub> | V <sub>BATT</sub> rising, REG04h, bit[1] = 1, V <sub>BATT_PRE</sub> = 3.0V | 2.9   | 3.0  | 3.1   | V     |
| Pre-charge to fast charge threshold hysteresis |                       |                                                                            |       | 90   |       | mV    |
| Battery automatic recharge voltage threshold   | V <sub>RECH</sub>     | Below V <sub>BATT_REG</sub> , REG04h, bit[0] = 0                           | 60    | 100  | 140   | mV    |
|                                                |                       | Below V <sub>BATT_REG</sub> , REG04h, bit[0] = 1                           | 145   | 200  | 245   |       |
| Battery automatic recharge deglitch time       | t <sub>RECH_DGL</sub> |                                                                            |       | 200  |       | ms    |

## ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 5V, T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                             | Symbol               | Condition                                                      | Min | Typ | Max | Units |
|-------------------------------------------------------|----------------------|----------------------------------------------------------------|-----|-----|-----|-------|
| <b>Thermal</b>                                        |                      |                                                                |     |     |     |       |
| Junction temperature regulation <sup>(7)</sup>        | T <sub>J_REG</sub>   | Thermal regulation threshold<br>REG07h, bits[5:4] = 11 (120°C) |     | 120 |     | °C    |
| Thermal shutdown threshold <sup>(7)</sup>             | T <sub>J_SHDN</sub>  |                                                                |     | 150 |     | °C    |
| Thermal shutdown hysteresis <sup>(7)</sup>            |                      |                                                                |     | 20  |     | °C    |
| NTC pin output current                                | I <sub>NTC</sub>     | CEB = 0, NTC = 3V                                              | -1  | 0   | +1  | µA    |
| NTC cold temp rising threshold                        | V <sub>COLD</sub>    | As a percentage of V <sub>DD</sub>                             | 63  | 65  | 68  | %     |
| NTC cold temp rising threshold hysteresis             |                      |                                                                |     | 55  |     | mV    |
| NTC hot temp falling threshold                        | V <sub>HOT</sub>     | As a percentage of V <sub>DD</sub>                             | 31  | 33  | 35  | %     |
| NTC hot temp falling threshold hysteresis             |                      |                                                                |     | 70  |     | mV    |
| NTC hot temp falling threshold for PCB OTP            | V <sub>HOT_PCB</sub> | As a percentage of V <sub>DD</sub>                             | 30  | 33  | 35  | %     |
| NTC hot temp falling threshold hysteresis for PCB OTP |                      |                                                                |     | 85  |     | mV    |
| <b>Logic I/O Pin Characteristics</b>                  |                      |                                                                |     |     |     |       |
| Low logic voltage threshold                           | V <sub>L</sub>       |                                                                |     |     | 0.4 | V     |
| High logic voltage threshold                          | V <sub>H</sub>       |                                                                | 1.3 |     |     | V     |
| <b>I<sup>2</sup>C Interface (SDA, SCL)</b>            |                      |                                                                |     |     |     |       |
| Input high threshold level                            | V <sub>IL</sub>      | V <sub>PULL_UP</sub> = 1.8V, SDA and SCL                       | 1.3 |     |     | V     |
| Input low threshold level                             | V <sub>IH</sub>      | V <sub>PULL_UP</sub> = 1.8V, SDA and SCL                       |     |     | 0.4 | V     |
| Output low threshold level                            | V <sub>OL</sub>      | I <sub>SINK</sub> = 5mA                                        |     |     | 0.4 | V     |
| I <sup>2</sup> C clock frequency                      | f <sub>SCL</sub>     |                                                                |     |     | 400 | kHz   |
| <b>Clock Frequency and Watchdog Timer</b>             |                      |                                                                |     |     |     |       |
| Clock frequency                                       | f <sub>CLK</sub>     |                                                                |     | 131 |     | kHz   |
| Watchdog timer                                        | t <sub>WDT</sub>     | REG05h, bits[6:5] = 11                                         |     | 160 |     | s     |

**Note:**


7) Guaranteed by design

# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 940mA$ ,  $I_{CC} = 224mA$ ,  $V_{IN\_MIN} = 4.36V$ ,  $V_{SYS\_REG} = 4.65V$ , unless otherwise noted.


**Battery Regulation Voltage vs. Temperature**

$V_{BATT\_REG} = 4.2V$

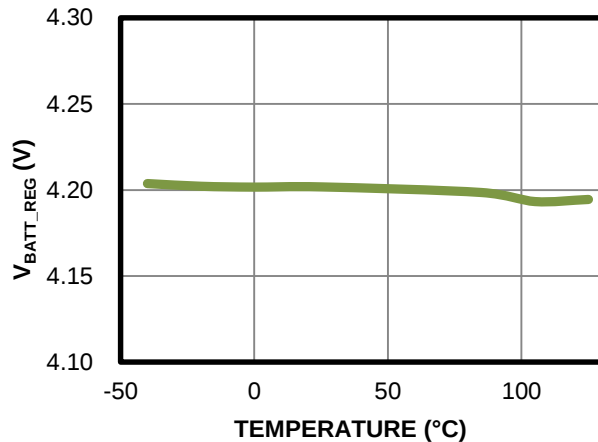


**System Regulation Voltage vs. Temperature**

$V_{SYS\_REG} = 4.65V$

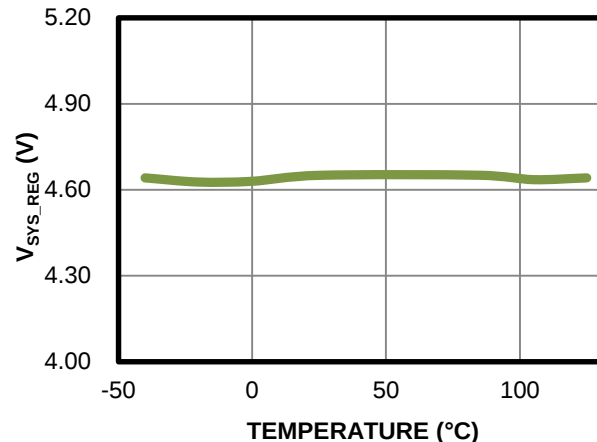


**Battery Current under Shipping Mode vs. Temperature**

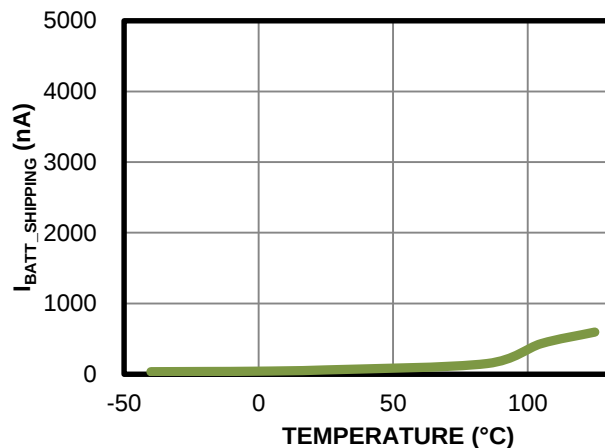


**Pre-Charge Current vs. Temperature**

$I_{PRE} = 7.5mA$

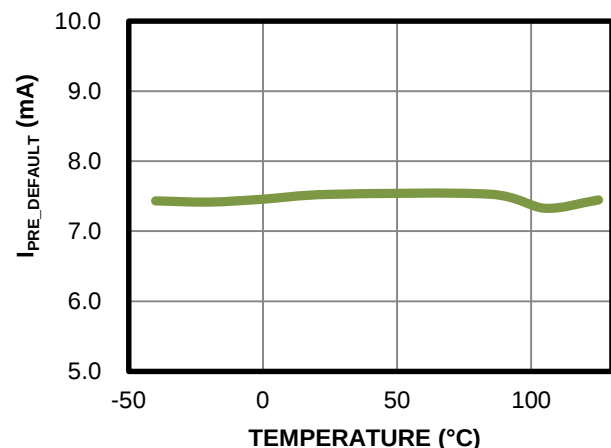


**Fast Charge Current vs. Temperature**

$I_{CC} = 224mA$

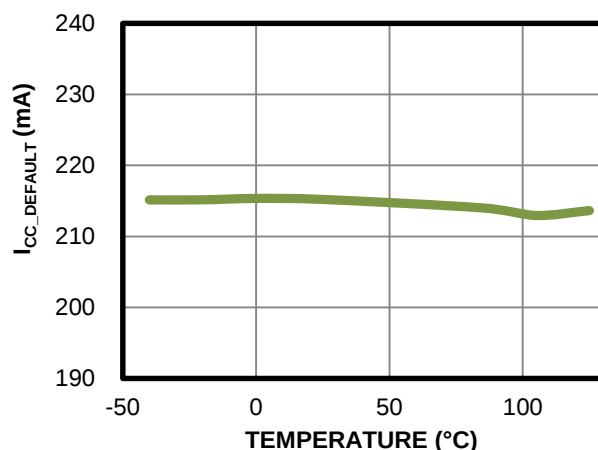

**Battery Termination Current vs. Temperature**


$I_{TERM} = 7.5mA$

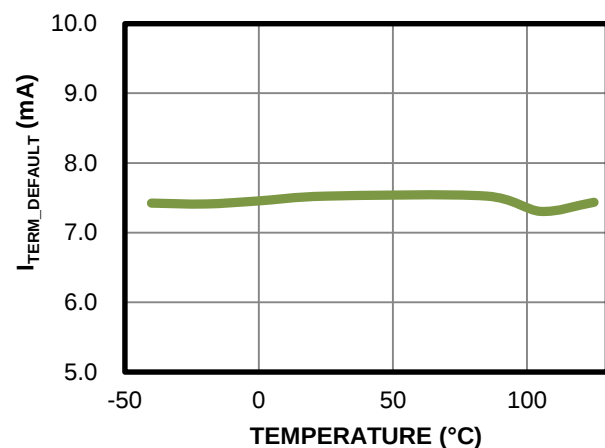

## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*


$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 940mA$ ,  $I_{CC} = 224mA$ ,  $V_{IN\_MIN} = 4.36V$ ,  $V_{SYS\_REG} = 4.65V$ , unless otherwise noted.

### Battery OVP Voltage vs. Temperature

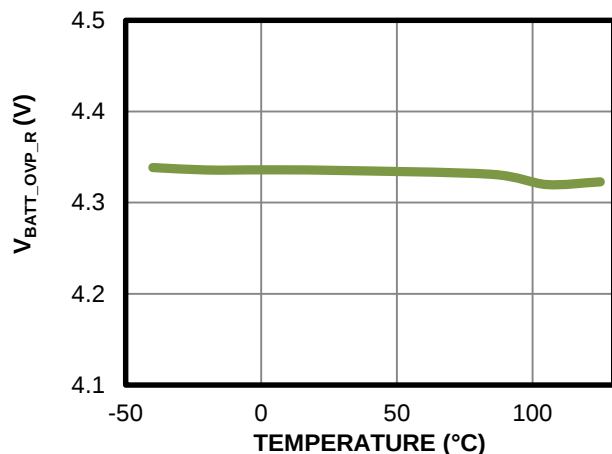


### Input Current Limit vs. Temperature

$I_{IN\_LIM} = 940mA$

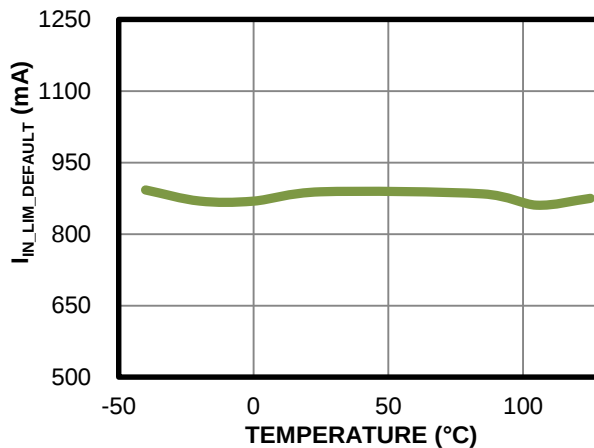

### Input Minimum Voltage vs. Temperature

$V_{IN\_MIN} = 4.36V$

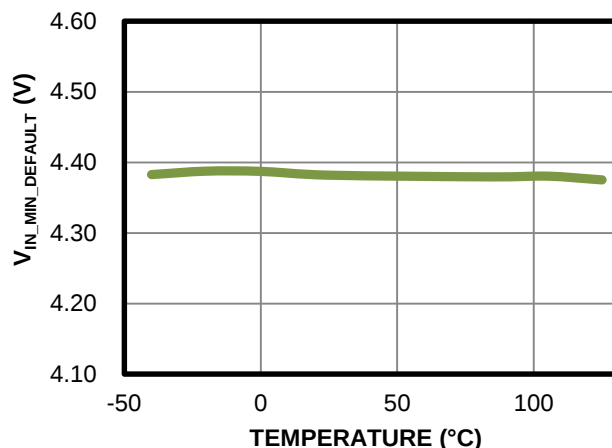


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 460mA$ ,  $I_{CC} = 224mA$ ,  $V_{IN\_MIN} = 4.36V$ ,  $V_{SYS\_REG} = 4.65V$ , unless otherwise noted.


## Battery Charge Curve

$V_{SYS\_REG} = 4.5V$ ,  $I_{SYS} = 0A$

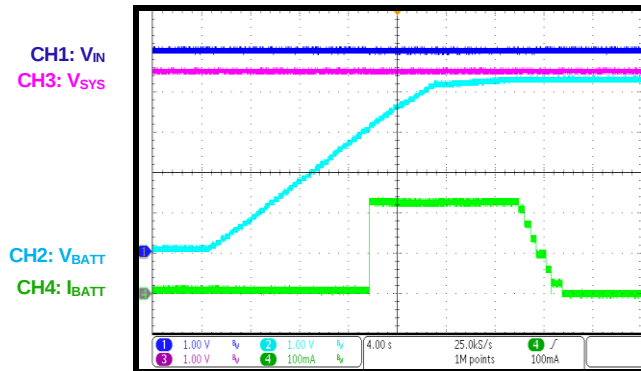


## Automatic Recharge

$V_{SYS\_REG} = 4.5V$ ,  $I_{SYS} = 0A$

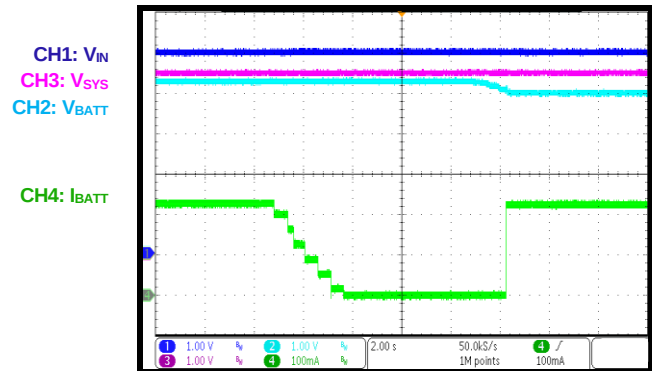


## CC Charge Steady State

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

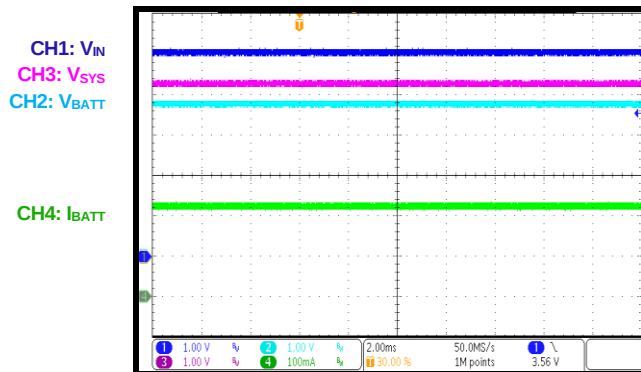


## Input Current-Limit based PPM

$V_{BATT} = 3.7V$

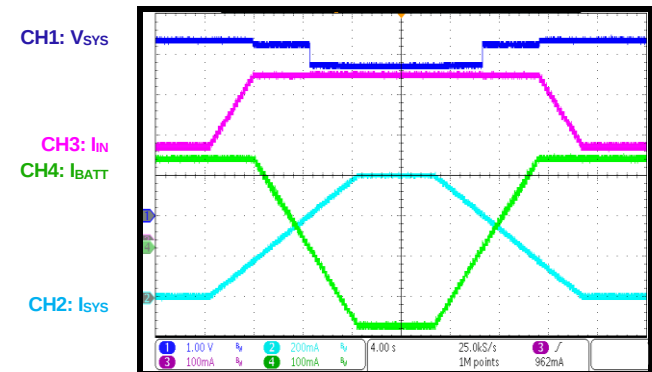


## Input Voltage Regulation based PPM

$V_{IN\_MIN} = 4.6V$ ,  $V_{IN} = 5V/300mA$ ,  $V_{BATT} = 3.7V$

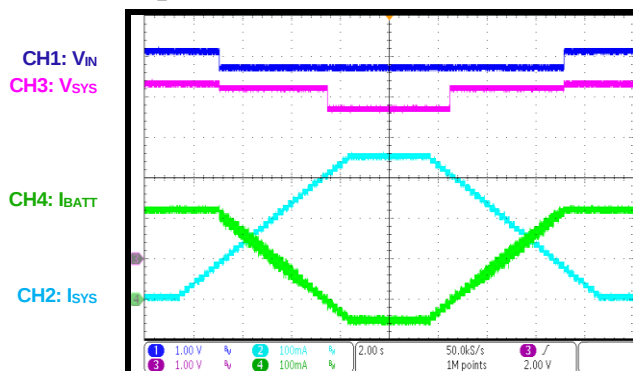

## SYS Load Transient Response

$I_{IN\_LIM} = 1A$ ,  $I_{CC} = 896mA$ ,  $V_{IN} = 5V$ ,  
 $V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$  to  $2A$

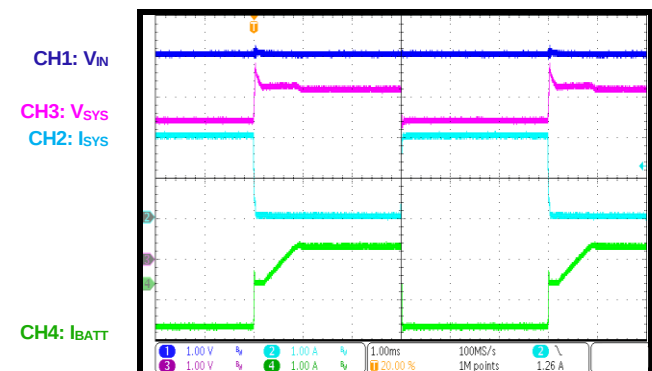


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 460mA$ ,  $I_{CC} = 224mA$ ,  $V_{IN\_MIN} = 4.36V$ ,  $V_{SYS\_REG} = 4.65V$ , unless otherwise noted.


## Start-Up

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

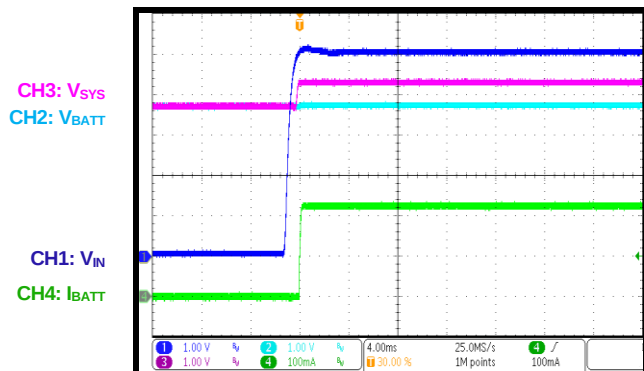


## Shutdown

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

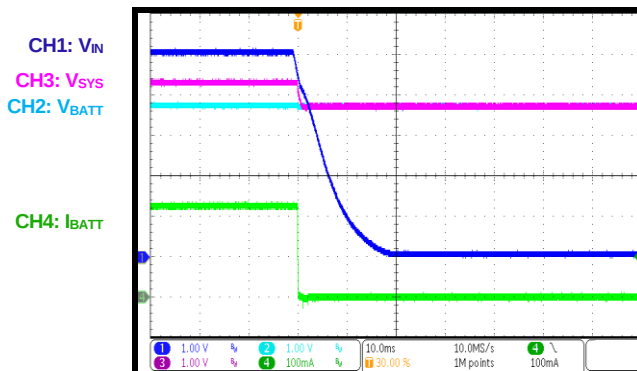


## Charging Enabled

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

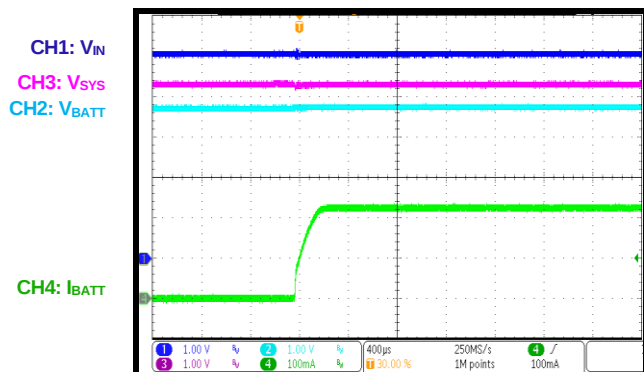


## Charging Disabled

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

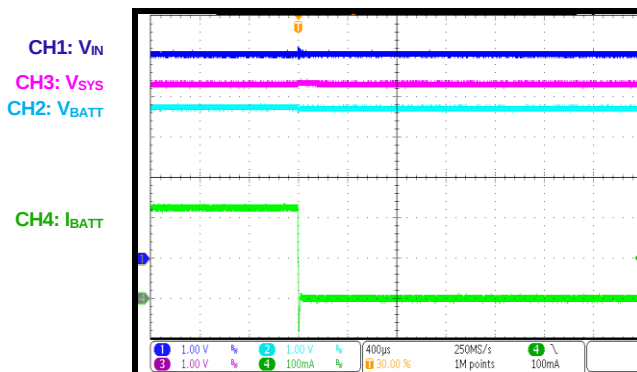


## BATT Insertion

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

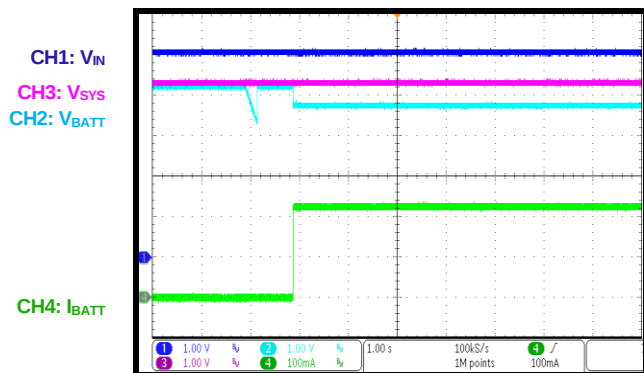

## BATT Removal

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

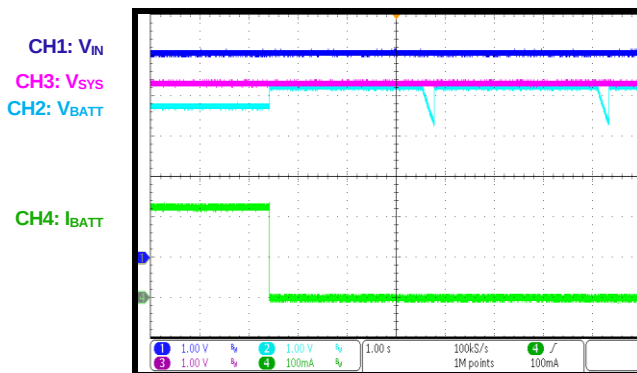


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $I_{IN\_LIM} = 460mA$ ,  $I_{CC} = 224mA$ ,  $V_{IN\_MIN} = 4.36V$ ,  $V_{SYS\_REG} = 4.65V$ , unless otherwise noted.


## NTC Rising

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$ , PCB OTP disabled

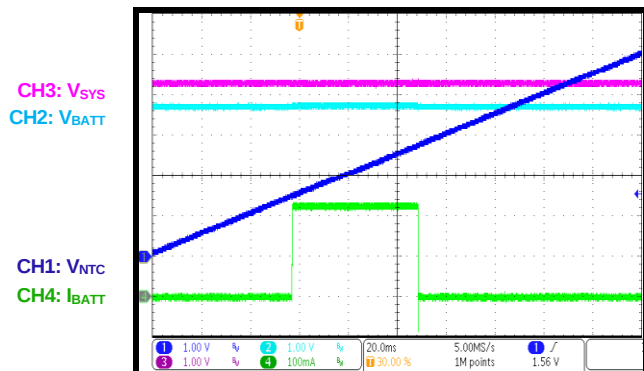


## NTC Falling

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$ , PCB OTP disabled

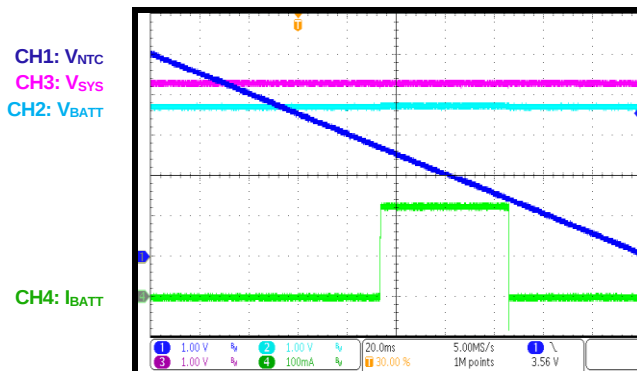


## PCB OTP ing Charging Mode

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$ , PCB OTP enabled

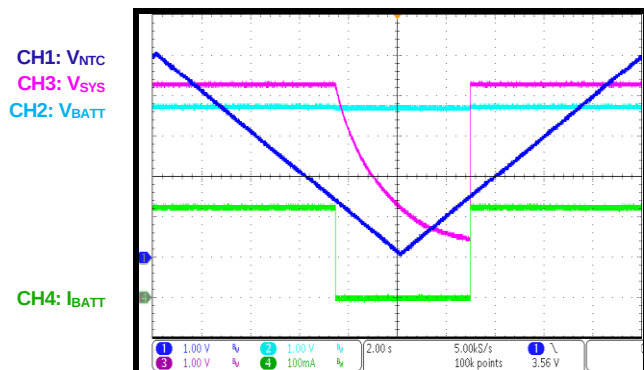


## PCB OTP in Discharging Mode

$V_{IN} = 0V$ ,  $V_{BATT} = 3.7V$ ,  $I_{SYS} = 1A$ , PCB OTP enabled

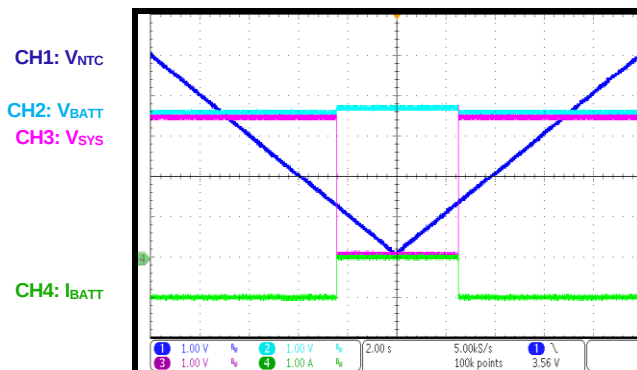

## V<sub>IN</sub> OVP Operation

$V_{BATT} = 3.7V$ ,  $I_{SYS} = 0A$

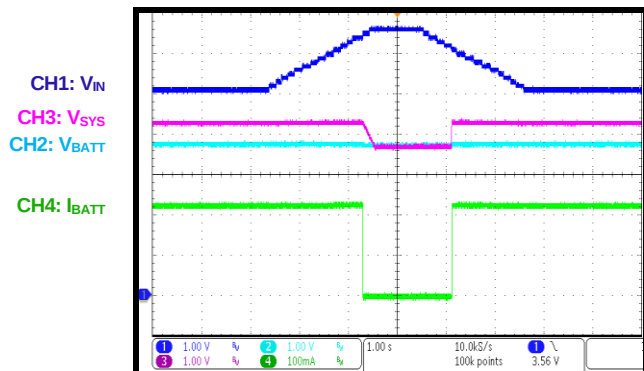

## FUNCTIONAL BLOCK DIAGRAM

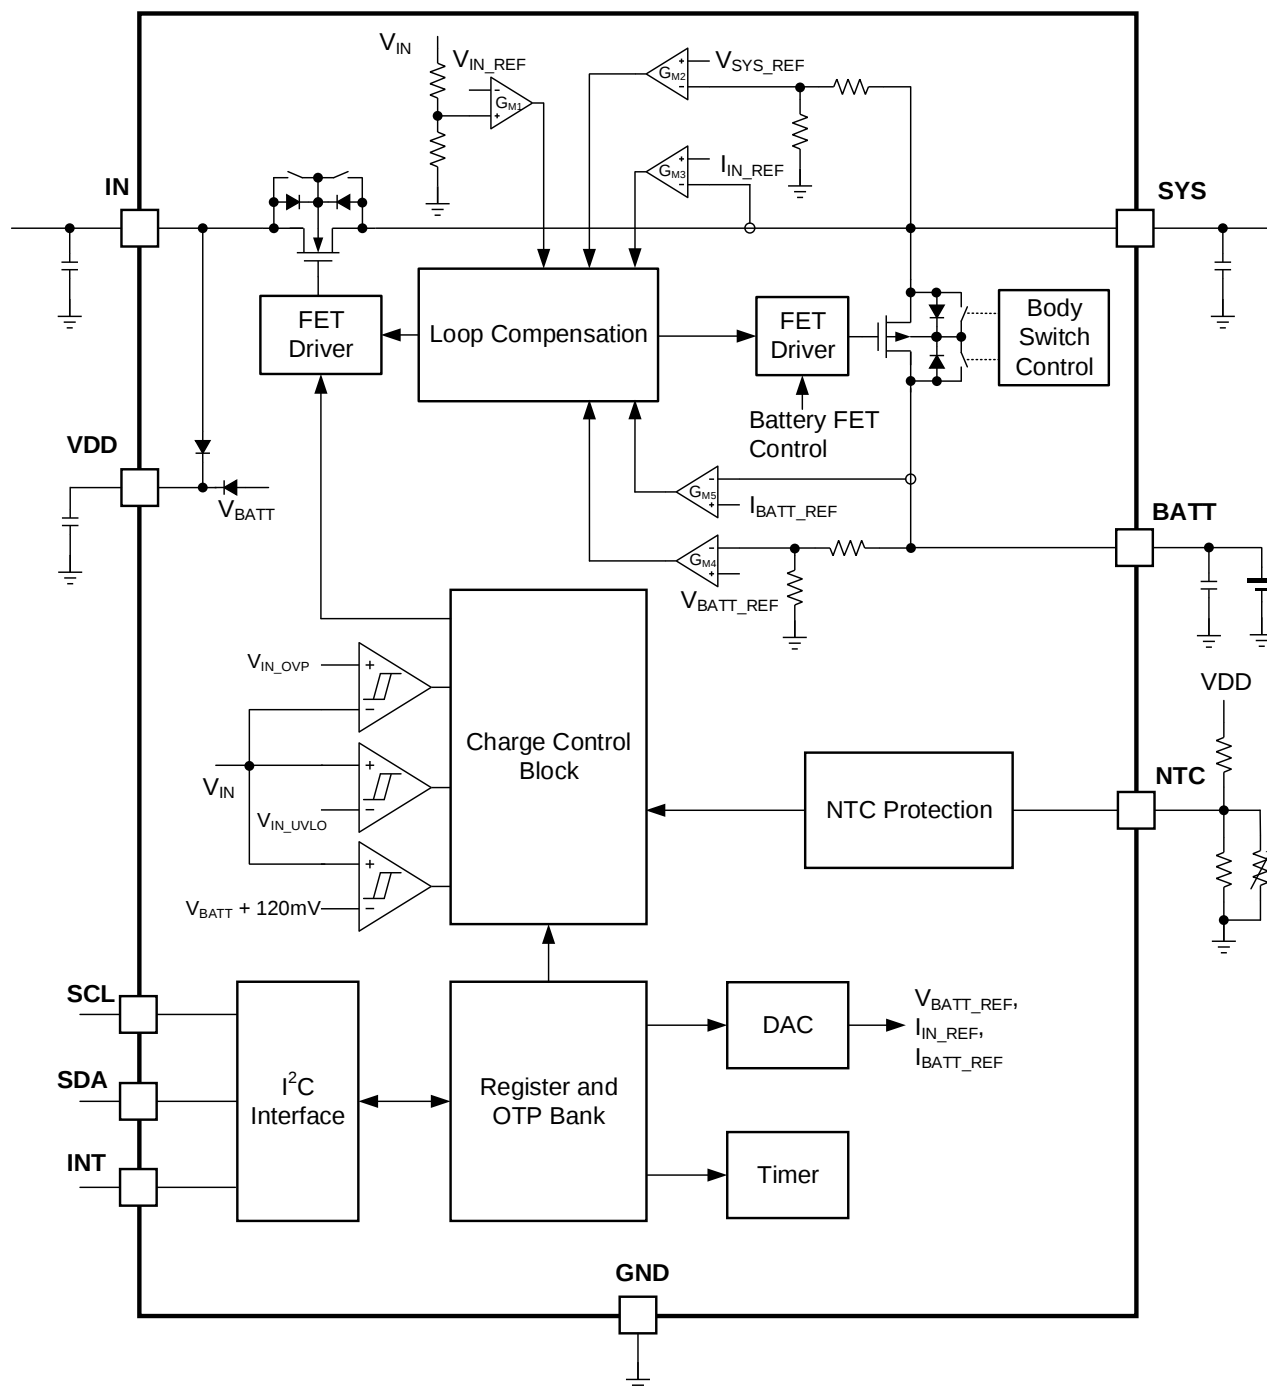


Figure 2: Functional Block Diagram

## OPERATION

### Introduction

The MP2665A is an I<sup>2</sup>C-controlled single-cell Li-ion or Li-polymer battery charger with complete power path management. The full charge function features constant current pre-charge (PRE.C), constant current (CC) fast charge, and constant voltage (CV) regulation, charge termination, automatic recharge, and a built-in timer. The power path function allows the input source to power the system and charge the battery simultaneously. The system load requirement always has priority over the charge current. When the input power is limited due to an input current limit or input voltage limit, the MP2665A automatically reduces the charge current until the battery supplements the system load.


The MP2665A integrates a 290mΩ LDO FET between the IN and SYS pins, and a 100mΩ battery FET between the SYS and BATT pins.

In charging mode, the on-chip, 100mΩ battery FET works as a full-featured linear charger with pre-charge, fast charge, CV charge, charge termination, automatic recharge, NTC monitoring, built-in timer control, and thermal protection. The charge current can be configured via the I<sup>2</sup>C interface. The MP2665A adjusts the charge current when the die temperature exceeds the thermal regulation threshold (about 120°C).

When the input power cannot power the system load in supplement mode, the 100mΩ battery FET turns on to connect the battery to the system load. When the input is removed, the 100mΩ battery FET fully turns on, so the battery can power up the system.

Once the system load is sufficient, the remaining current charges the smart power path management battery. When the demand exceeds the input power capacity, the MP2665A reduces the charging current or uses power from the battery to satisfy the system load.

Figure 3 shows the power path management structure.

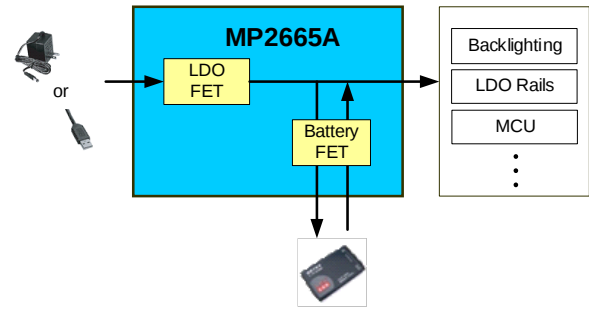

**Figure 3: Power Path Management Structure**

### Power Supply


The internal bias circuit is powered from the higher voltage between the IN and BATT pins. When IN or BATT rise above their respective under-voltage lockout (UVLO) threshold, the sleep comparator, battery depletion comparator and the battery FET driver are active. Then the I<sup>2</sup>C interface is ready for communication, and all the registers are reset to the default value. The host can access all the registers at this point.

### Input Over-Voltage Protection (OVP) and Under-Voltage Lockout (UVLO)

The MP2665A has an input over-voltage protection (OVP) threshold and input under-voltage lockout (UVLO) threshold. Once the input voltage ( $V_{IN}$ ) rises above or drops below its normal range, the LDO FET (Q1) turns off immediately.

When  $V_{IN}$  is identified as a good source, a 200μs immunity timer activates. If the input power is good after 200μs, the system starts up. Otherwise, Q1 remains off.

Figure 4 shows the operation profile.

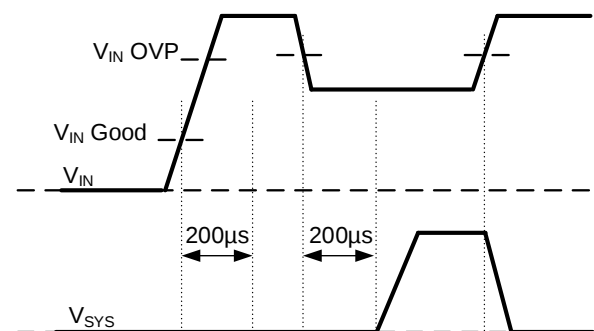

**Figure 4: Input Power Detection Operation Profile**

Figure 5 shows the battery charge profile.

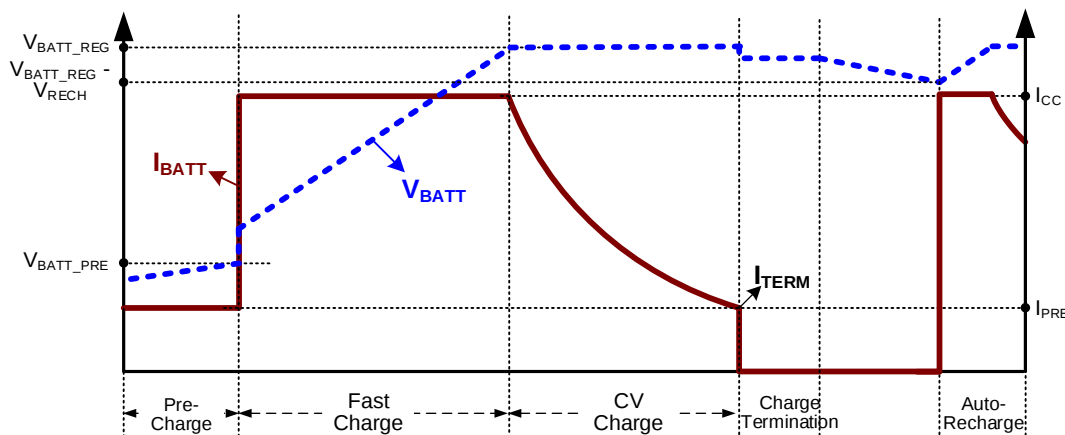


Figure 5: Battery Charge Profile

### Power Path Management

The MP2665A employs a pass-through power path structure with the battery FET (Q2) by decoupling the system from the battery, which allows for separate control between the system and the battery. The system is given the priority to start up even with a deeply discharged or missing battery. This means that input power is available with a deeply depleted battery, and the system voltage is always regulated to  $V_{SYS\_REG}$  by the integrated LDO FET.

Figure 2 on page 14 shows the direct power structure, which is comprised of a frond-end LDO FET between the IN and SYS pins, and a battery FET between the SYS and BATT pins. The LDO FET and battery FET can be controlled by I<sup>2</sup>C.

Table 1: FET Control via the I<sup>2</sup>C

| FET On/Off<br>Changed By<br>Control | Hi-Z Mode and Charge Control |                 |
|-------------------------------------|------------------------------|-----------------|
|                                     | Set EN_HIZ<br>to 1           | Set CEB<br>to 1 |
| LDO FET                             | Off                          | x               |
| Battery FET<br>(charging)           | x <sup>(8)</sup>             | Off             |
| Battery FET<br>(discharging)        | x                            | x               |

**Note:**

8) x means not applicable.

System voltage control is described in greater detail below:

- If the input voltage exceeds  $V_{SYS\_REG}$ , the system voltage is regulated to  $V_{SYS\_REG}$ .

- When the input voltage is below  $V_{SYS\_REG}$ , the LDO FET is fully on with input current limiting.

$V_{SYS\_REG}$  can be configured through REG07h, bits[3:0].

### Battery Charge Profile

The MP2665A provides three main charging phases: pre-charge, fast current charge, and constant voltage charge (see Figure 5).

**Phase 1 (pre-charge):** The MP2665A safely pre-charges the deeply depleted battery until the battery voltage reaches the pre-charge to fast charge threshold ( $V_{BATT\_PRE}$ ).

The pre-charge current can be configured through REG03h, bits[3:0]. If  $V_{BATT\_PRE}$  is not reached before the pre-charge timer (2hrs) expires, the charge cycle ends, and a corresponding timeout fault signal asserts.

**Phase 2 (fast charge):** When the battery voltage exceeds  $V_{BATT\_PRE}$ , the device enters a fast charge phase. The fast charge current can be configured via REG02h, bits[5:0].

**Phase 3 (constant voltage charge):** When the battery voltage rises to the battery full voltage ( $V_{BATT\_REG}$ ) set via REG04h, bits[7:2], the charge mode changes from constant current (CC) mode to constant voltage (CV) mode, and the charge current begins to decrease.

Assuming the termination function (EN\_TERM) set via REG05h, bit[4] = 1, the charge cycle is considered to be complete when the following conditions are met:

- The charge current ( $I_{BATT}$ ) reaches the termination current threshold ( $I_{TERM}$ ), and a 3.2s delay timer is initiated.
- $I_{BATT}$  is always below ( $I_{TERM} + I_{TERM\_HYS}$ ) during this 3.2s period.

The charge status is updated to charging done once the 3.2s delay timer expires.

The termination charge current ( $I_{TERM}$ ) threshold can be configured by REG03h, bits[3:0].

The charge current is terminated if TERM\_TMR set via REG05h, bit[0] = 0. Otherwise the charge current continues tapering off even after the charging status is changed to charging done.

If EN\_TERM = 0, the termination function is disabled and all the above actions are invalid (see Table 2).

**Table 2: Termination Function Selection**

| EN_TERM | TERM_TMR         | 3.2s After $I_{BATT}$ Reaches $I_{TERM}$ in CV Mode |               |
|---------|------------------|-----------------------------------------------------|---------------|
|         |                  | Operation                                           | Charge Status |
| 0       | x <sup>(9)</sup> | Charge in CV mode                                   | Charge        |
| 1       | 0                | Charging done                                       | Charging done |
| 1       | 1                | Charge in CV mode                                   | Charge Done   |

**Note:**

9) “x” means not applicable.

During the charging process, the actual charge current may be less than what is set by the register due to other loop regulations, such as dynamic power management (DPM) regulation (e.g. input voltage, input current), or thermal regulation. Termination does not occur if any of the above conditions are active (or if the device is operating in supplement mode).

A new charge cycle starts when the following conditions are valid:

- The input power is recycled
- Battery charging is enabled by the I<sup>2</sup>C
- Automatic recharge initiates
- No thermistor fault at NTC has occurred
- No safety timer fault has occurred
- No battery over-voltage event has occurred

- The battery FET is not forced to turn off

### Automatic Recharge

When the battery is fully charged and charging is terminated, the battery may be discharged due to system consumption or self-discharge. When the battery voltage is discharged below the recharge threshold, and  $V_{IN}$  is still in the operation range, the MP2665A automatically starts a new charging cycle without manually restarting a charging cycle.

The automatic recharge function is enabled when EN\_TERM = 1 and TERM\_TMR = 0.

### Battery Over-Voltage Protection (OVP)

The built-in battery over-voltage (OV) limit is about 110mV above  $V_{BATT\_REG}$ . If a battery OV event occurs, the MP2665A immediately suspends charging and asserts a fault.

### Input Current and Input Voltage Based Power Management

To meet the input source (typically a USB) maximum current limit specification, the MP2665A features input current based power management that continuously monitors the input current. The total input current limit can be configured via the I<sup>2</sup>C to prevent the input source from being overloaded.


If the preset input current limit exceeds the input source rating, the backup input voltage based power management also prevents the input source from being overloaded. If either the input current limit or the input voltage limit is reached, the FET (Q1) between IN and SYS is regulated such that the total input power is limited. As a result, the system voltage drops. Once the system voltage from to ( $V_{SYS\_REG} - 135mV$ ) and ( $V_{IN} - 295mV$ ), the charge current is reduced to prevent the system voltage from dropping further.

The voltage based dynamic power management (DPM) regulates the input voltage to  $V_{IN\_MIN}$  when the load exceeds the input power capacity.

### Battery Supplement Mode

If DPM regulates the input voltage, the charge current drops to keep the input current or input voltage under regulation. If the charge current

drops to zero and the input source is still overloaded due to a heavy system load, the system voltage starts to decrease. Once the system voltage falls 30mV below the battery voltage, the MP2665A enters battery supplement mode, and ideal diode mode is enabled. The battery FET is regulated to maintain ( $V_{BATT} - V_{SYS}$ ) at 28.5mV when the supplement current ( $I_{DSCHG} \times R_{ON\_BATT}$ ) is lower than 28.5mV. If  $I_{DSCHG} \times R_{ON\_BATT}$  exceeds 28.5mV, the battery FET fully turns on. While the system load decreases, and  $V_{SYS}$  exceeds  $V_{BATT} + 20mV$ , ideal diode mode is disabled. Figure 6 shows the dynamic power management and battery supplement mode operation profile.

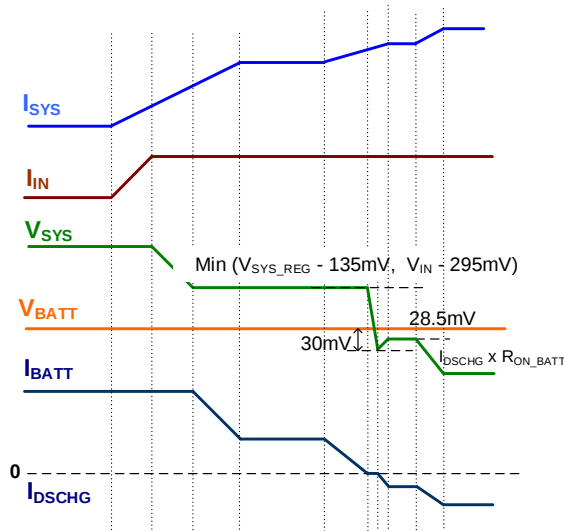

**Figure 6: Dynamic Power Management and Battery Supplement Operation Profile**

When the input voltage is not available, the MP2665A operates in discharge mode. In discharge mode, the battery FET is always fully on to reduce power loss.

### Battery Regulation Voltage

The battery voltage for the constant voltage regulation phase is  $V_{BATT\_REG}$ . When battery is floating, the BATT pin voltage varies between ( $V_{BATT\_REG} - V_{RECH}$ ) and  $V_{BATT\_REG}$ .

### Thermal Regulation and Thermal Shutdown

The MP2665A continuously monitors the internal junction temperature to maximize power delivery and avoid overheating the chip. When the internal junction temperature reaches the preset limit of  $T_{J\_REG}$  (about 120°C), the IC starts to reduce the charge current to prevent

higher power dissipation. The multiple thermal regulation thresholds (from 60°C to 120°C) help the system design meet the thermal requirements for different applications. The junction temperature regulation threshold can be set via REG07h, bits[5:4].

If the junction temperature reaches 150°C, both Q1 and Q2 turn off.

### NTC (Negative Temperature Coefficient) Temperature Sensor

The NTC pin allows the MP2665A to sense the battery temperature using the thermistor (typically available in the battery pack) to ensure that the chip operates in a safe operating environment. An appropriate resistor should be connected from VDD to NTC, while the thermistor should be connected from NTC to ground. The voltage on the NTC pin is determined by the resistor divider, and the divide ratio depends on the temperature. The IC internally sets a pre-determined upper and lower bound on the divide ratio for the NTC cold and NTC hot thresholds.

The MP2665A is set to use the NTC function by default. This function can be changed via the I<sup>2</sup>C (see Table 3).

**Table 3: NTC Function Selection**

| I <sup>2</sup> C Control |                   | Function |
|--------------------------|-------------------|----------|
| EN_NTC                   | EN_PCB OTP        |          |
| 0                        | x <sup>(10)</sup> | Disabled |
| 1                        | 1                 | NTC      |
| 1                        | 0                 | PCB OTP  |

**Note:**

10) "x" means not applicable.

If PCB over-temperature protection (OTP) is selected, and the NTC pin voltage is below the NTC hot threshold, both the LDO FET and battery FET are off. A PCB OTP fault also sets the NTC\_FAULT bit (REG09h, bit[1]) to 1 to indicate if a fault has occurred. Operation resumes once the NTC pin voltage exceeds the NTC hot threshold.

The NTC function only works in charge mode. Once the NTC pin voltage falls out of this divide ratio (meaning the temperature is outside the safe operating range), the MP2665A stops charging and reports the change on the status

bits. Charging automatically resumes after the temperature falls back into the safe range.

### Safety Timer

The pre-charge and fast charge safety timer prevent extended charging cycles due to abnormal battery conditions. The safety timer is 2hrs when the battery voltage is below  $V_{BATT\_PRE}$ . The fast charge safety timer starts when the battery enters fast charge. The fast charge safety timer can be configured and enabled through the I<sup>2</sup>C.

The following actions restart the safety timer:

- A new charge cycle is initiated
- Charge toggling is enabled
- Hi-Z toggling is disabled

### Host Mode and Default Mode

The MP2665A is a host-controlled device. After power-on reset (POR), the device starts in the watchdog timer expiration state or default mode. All the registers are in their default settings.

The watchdog timer works in both charge and discharge mode. The register returns to its default value when the watchdog timer runs out. When the watchdog timer runs out in both charge and discharge mode, the system is reset.

To save the quiescent current in discharge mode, the watchdog timer can be turned off during discharge mode by setting REG05h, bit[7] to 0.

Any write to the MP2665A transits the device to host mode. All the charge parameters are configurable. If the watchdog timer (REG05h, bits[6:5]) is not disabled, the host has to reset the watchdog timer regularly by writing 1 to REG02h, bit[6] before the watchdog timer expires to keep the device in host mode. Once the watchdog timer expires, the IC goes back to default mode. The watchdog timer limit can also be configured or disabled via host control.

When REG05h, bits[6:5] is set to 00, the watchdog timer is disabled under both charge mode and discharge mode, regardless of what REG05h, bit[7] is set to.

The MP2665A can enter default mode if any of the following conditions are valid:

- The input is refreshed without a battery
- A battery is reinserted if there is no input voltage
- REG02h, bit[7] is reset

### Battery Discharge Function

If a battery is connected and the input source is missing, the battery FET turns fully on when  $V_{BATT}$  exceeds the  $V_{BATT\_UVLO}$  threshold. The 100mΩ battery FET minimizes conduction loss during discharge. The quiescent current is as low as 6.5μA in this mode. The low on resistance and quiescent current extend the battery's run time.

### Over Discharge Current Protection

The MP655A provides over discharge current protection in discharge mode and supplement mode. If  $I_{DSCHG}$  exceeds the configurable discharge current limit (default at 3.2A), after a 60μs delay, the battery FET turns off and the part goes into hiccup mode due to over-current protection (OCP). The discharge current limit can be set high to 3.2A through the I<sup>2</sup>C. If the discharge current reaches the internal fixed current limit (about 3.7A), the battery FET turns off and starts hiccup mode immediately.

Similarly, when the battery voltage falls below the configurable  $V_{BATT\_UVLO}$  threshold (about 2.76V by default), the battery FET turns off to prevent over discharge.

### System Short-Circuit Protection (SCP)

The MP2665A features SYS node short-circuit protection for both the IN to SYS path and the BATT to SYS path.

The system voltage is continuously monitored. If  $V_{SYS}$  is below 1.5V, the system SCP for both the IN to SYS path and the BATT to SYS path are active. Meanwhile,  $I_{DSCHG}$  drops to 1/2 of the original value. The two paths are described in greater detail below:

1. IN to SYS path: Once  $I_{IN}$  exceeds the protection threshold, both the LDO FET and the battery FET turn off immediately, and the MP2665A enters hiccup mode. If the maximum current limit is not reached, but the set input current limit is reached,  $I_{IN}$  is regulated to  $I_{IN\_LIM}$ , and hiccup mode starts

after a 60 $\mu$ s delay. The interval for hiccup mode is 800 $\mu$ s.

2. **BATT to SYS path:** Once I<sub>BATT</sub> exceeds the 3.7A protection threshold, both the LDO FET and the battery FET turn off immediately, and the MP2665A enters hiccup mode. If the battery discharge current limit threshold is reached, hiccup mode also starts after a 60 $\mu$ s delay. The interval for hiccup mode is 800 $\mu$ s.

For more details, see Figure 20 on page 37.

If a system short circuit occurs when both the input and battery are present, the protection mechanism for both paths work simultaneously, though the protection that is triggered first initiates hiccup mode.

### Interrupt to Host (INT)

The MP2665A has an alert mechanism that can output an interrupt signal via the INT pin to notify the system of the operation by outputting a 256 $\mu$ s, low-state INT pulse. The below events trigger the INT output:

- Good input source detected (PG\_STAT)
- Charging completed
- Charging status change
- Any fault in REG09h (e.g. watchdog timer fault, input fault, thermal fault, safety timer

fault, battery over-voltage protection fault, NTC fault) has occurred

If a fault occurs, the device sends out an INT pulse and latches the fault state in REG09h. After the fault is removed, the fault bit can be released to 0 after the host reads REG09h. The NTC fault does not latch, and it always reports the current thermistor conditions.

The INT signal can be masked when the corresponding control bit is set. This means that INT can stay high even if a fault occurs. To mask the INT signal, set the INT control bit in REG06h, bits[4:0].

### Battery Disconnection Function

In the application has a battery that cannot be removed, disconnect the battery from the system for shipping mode to allow the system power to be reset during the application. The MP2665A provides both shipping mode and system reset mode for different applications (see Table 4).

The MP2665A has a register bit (FET\_DIS) for battery disconnection control. If this bit is set to 1, the MP2665A enters shipping mode after a delay time that can be configured by REG09h, bits[7:6]. The battery FET turns off and the FET\_DIS bit is refreshed to 0 after the battery FET turns off. By pulling down the INT pin or plugging in the input adapter for 2s, the part can wake up from shipping mode.

**Table 4: Shipping Mode Control**

| Items                     | Enter Shipping Mode               | Exit Shipping Mode     |               |
|---------------------------|-----------------------------------|------------------------|---------------|
|                           | Set FET_DIS to 1                  | INT High to Low for 2s | VIN Plug In   |
| LDO FET                   | x <sup>(11)</sup>                 | x                      | On            |
| Battery FET (charging)    | Off (t <sub>SMEN_DGL</sub> later) | On                     | On (2s later) |
| Battery FET (discharging) | Off (t <sub>SMEN_DGL</sub> later) | On                     | On (2s later) |


#### Note:

11) “x” means not applicable.

The IC can reuse the INT pin to cut off the path from the battery to manually reset the system. Once the logic on the INT pin is set low for more than t<sub>RST\_DGL</sub> (which can be configured by REG01h, bits[7:6]), the battery is disconnected from the system by turning off the battery FET. This off state lasts for t<sub>RST\_DUR</sub>, which can be configured by REG01h, bit[5]. Then the battery FET automatically turns on, and the system is

powered by the battery again. During the off period, the INT pin is not limited to being either high or low.

The MP2665A can reset the system by controlling the INT pin. Figure 7 shows the system reset function.

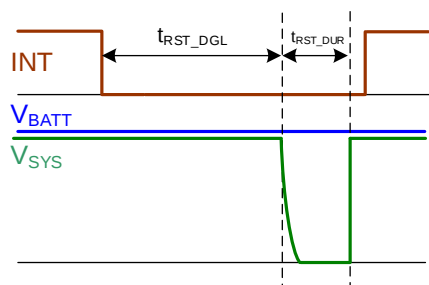


**Figure 7: System Reset Function Operation Profile**

## SERIES INTERFACE

The IC uses an I<sup>2</sup>C-compatible interface for set the charging parameters and instantaneously report the device status. The I<sup>2</sup>C is a two-wire serial interface with two required bus lines: a serial data line (SDA) and a serial clock line (SCL). Both the SDA and SCL lines are open drains that must be connected to the positive supply voltage via a pull-up resistor.

The MP2665A operates as a slave device, receiving control inputs from the master device, such as a microcontroller (MCU). The SCL line is always driven by the master device. The I<sup>2</sup>C interface supports both standard mode (up to 100 kbit/s), and fast mode (up to 400 kbit/s).


All transactions begin with a start (S) condition and are terminated by a stop (P) condition. The start and stop conditions are always generated by the master. A high to low transition on the SDA line while SCL is high defines a start condition. A low to high transition on the SDA line when SCL is high defines a stop condition (see Figure 8).

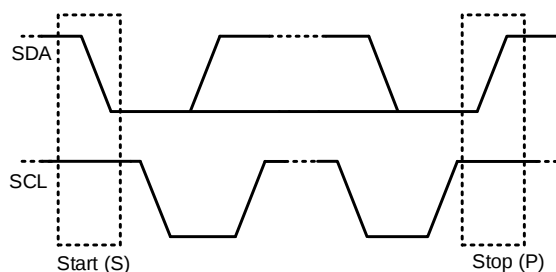

**Figure 8: Start and Stop Conditions**

For data validity, the data on the SDA line must be stable during the high period of the clock. The high or low state of the SDA line can only change when the clock signal on the SCL line is low. Every byte on the SDA line must be 8 bits long. The number of bytes that can be transmitted per transfer is unrestricted. Data is

first transferred with the most significant bit (MSB) (see Figure 9).

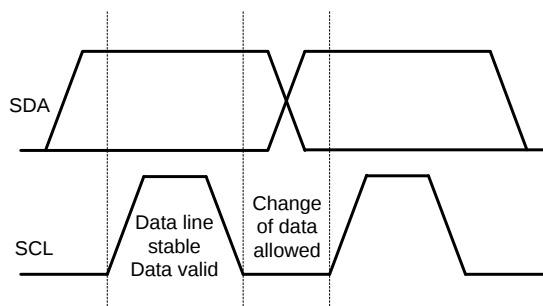


**Figure 9: Bit Transfer on the I<sup>2</sup>C Bus**

Each byte has to be followed by an acknowledge (ACK) bit that is generated by the receiver. The ACK bit signals to the transmitter that the byte was successfully received.

The ACK signal is defined as when the transmitter releases the SDA line during the acknowledge clock pulse. Then the receiver can pull the SDA line low, and the SDA line remains low during the high period of the ninth clock.

If the SDA line is high during the ninth clock, this is defined as a not acknowledge (NACK) signal. The master can then generate either a stop condition to abort the transfer, or a repeated start (Sr) condition to start a new transfer.

After the start signal is received, a slave address is sent. This address is 7 bits long, followed by the eighth data direction bit (R/W). A zero indicates a transmission (write), and a one indicates a request for data (read). Figure 10 shows the address bit arrangement.

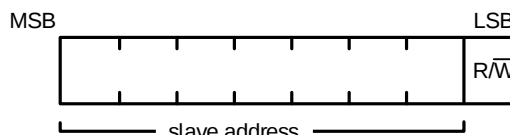

**Figure 10: 7-Bit Address**

Figure 11, Figure 12, Figure 13, Figure 14, and Figure 15 on page 22 show the detailed sequences.

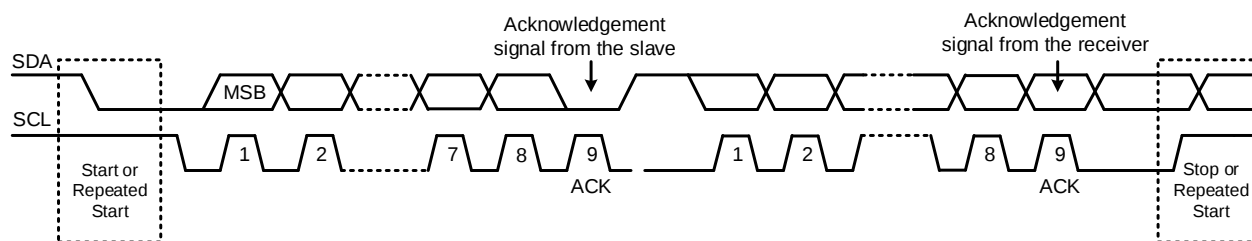
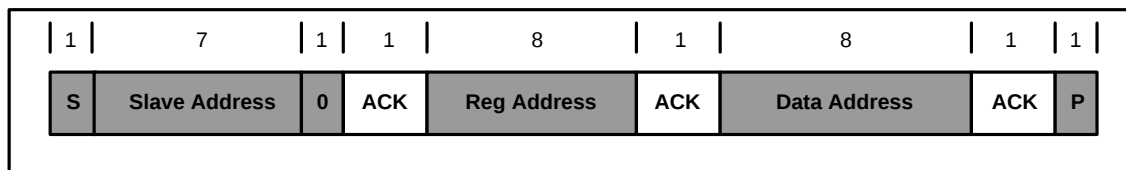

Figure 11: Data Transfer on the I<sup>2</sup>C Bus


Figure 12: Single Write

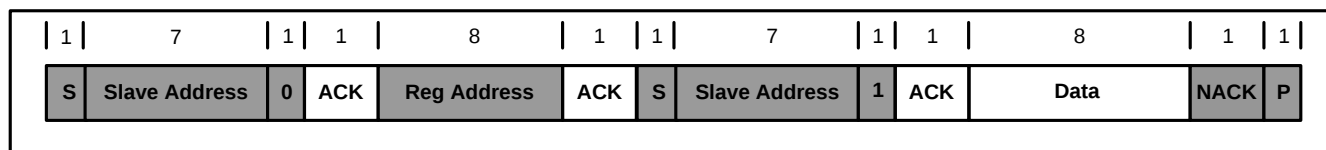


Figure 13: Single Read

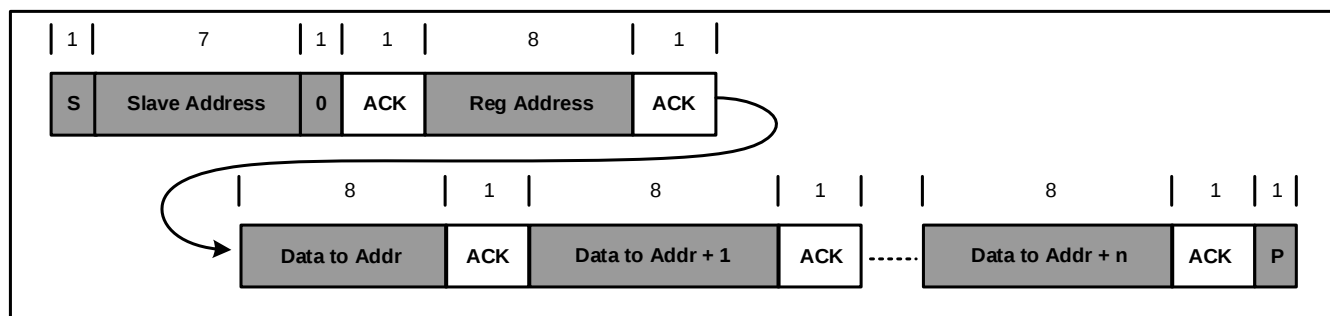


Figure 14: Multi-Write

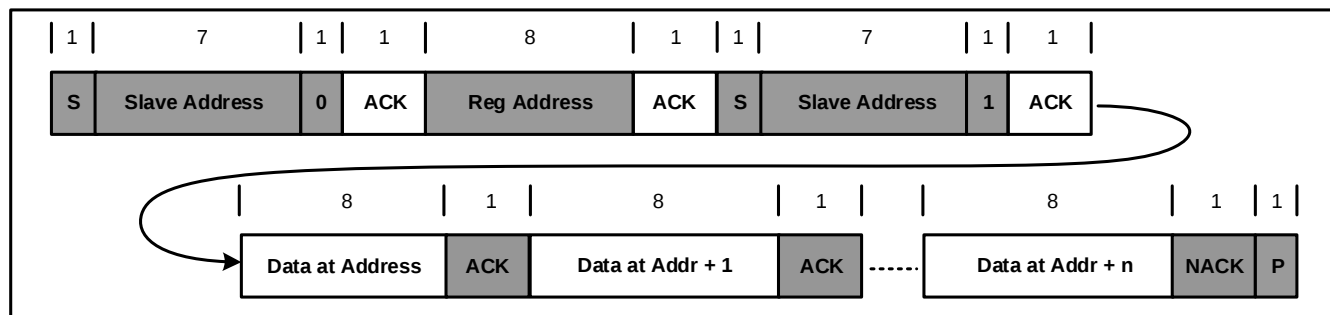


Figure 15: Multi-Read

## I<sup>2</sup>C REGISTER MAP

IC Address: REG08h (reserved certain trim options)

| Register Name | Address | R/W | Description                                          | Default   |
|---------------|---------|-----|------------------------------------------------------|-----------|
| REG00h        | 0x00    | R/W | Input source control register                        | 0110 0110 |
| REG01h        | 0x01    | R/W | Power connection control register                    | 1010 1100 |
| REG02h        | 0x02    | R/W | Charge current setting register                      | 0000 1111 |
| REG03h        | 0x03    | R/W | Discharge/termination current limit setting register | 1111 0001 |
| REG04h        | 0x04    | R/W | Charge termination voltage setting register          | 1010 0011 |
| REG05h        | 0x05    | R/W | Charge termination/timer control register            | 0011 1000 |
| REG06h        | 0x06    | R/W | Miscellaneous operation control register             | 1100 0000 |
| REG07h        | 0x07    | R/W | Thermal/system voltage regulation setting register   | 1011 1001 |
| REG08h        | 0x08    | R   | Charge status register                               | 0100 0000 |
| REG09h        | 0x09    | R/W | Fault register                                       | 0000 0000 |
| REG0Ah        | 0x0A    | N/A | Address for the one-time programmable (OTP) register | 0000 0000 |

## REG00h

| Bits | Bit Name                | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                                              | Comments                                                                                                                                                                                                                                 |
|------|-------------------------|-----|------------------|--------------|-----|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | V <sub>IN_MIN</sub> [3] | 0   | Y                | N            | R/W | 640mV                                                                    | Offset: 3.88V<br>Range: 3.88V to 5.08V<br>Default: 0110 (4.36V)                                                                                                                                                                          |
| 6    | V <sub>IN_MIN</sub> [2] | 1   | Y                | N            | R/W | 320mV                                                                    |                                                                                                                                                                                                                                          |
| 5    | V <sub>IN_MIN</sub> [1] | 1   | Y                | N            | R/W | 160mV                                                                    |                                                                                                                                                                                                                                          |
| 4    | V <sub>IN_MIN</sub> [0] | 0   | Y                | N            | R/W | 80mV                                                                     |                                                                                                                                                                                                                                          |
| 3    | I <sub>IN_LIM</sub> [3] | 1   | Y                | N            | R/W | 480mA                                                                    | Sets the input current limit.                                                                                                                                                                                                            |
| 2    | I <sub>IN_LIM</sub> [2] | 1   | Y                | N            | R/W | 120mA: I <sub>IN_LIM</sub> ≤ 170mA<br>240mA: I <sub>IN_LIM</sub> > 170mA | If I <sub>IN_LIM</sub> ≤ 170mA:<br>Offset: 50mA<br>Step: 30mA<br>Range: 0000 to 0100 (50mA to 170mA)<br>If I <sub>IN_LIM</sub> > 170mA:<br>Offset: 100mA<br>Step: 60mA<br>Range: 0101 to 1111 (400mA to 1000mA)<br>Default: 1110 (940mA) |
| 1    | I <sub>IN_LIM</sub> [1] | 1   | Y                | N            | R/W | 60mA: I <sub>IN_LIM</sub> ≤ 170mA<br>120mA: I <sub>IN_LIM</sub> > 170mA  |                                                                                                                                                                                                                                          |
| 0    | I <sub>IN_LIM</sub> [0] | 0   | Y                | N            | R/W | 30mA: I <sub>IN_LIM</sub> ≤ 170mA<br>60mA: I <sub>IN_LIM</sub> > 170mA   |                                                                                                                                                                                                                                          |

## REG01h

| Bits | Bit Name                   | POR | Reset by REG_RST | Reset by WTD | R/W | Description                             | Comments                                                                                                                 |
|------|----------------------------|-----|------------------|--------------|-----|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| 7    | t <sub>RST_DGL</sub> [1]   | 1   | Y                | Y            | R/W | 00: 8s<br>01: 12s<br>10: 16s<br>11: 20s | Sets how long the INT signal should be pulled low to disconnect the battery.<br>Default: 10 (16s)                        |
| 6    | t <sub>RST_DGL</sub> [0]   | 0   | Y                | Y            | R/W |                                         |                                                                                                                          |
| 5    | t <sub>RST_DUR</sub>       | 1   | Y                | Y            | R/W | 0: 2s<br>1: 4s                          | Battery FET lasts off time before auto-on<br>Default: 1 (4s)                                                             |
| 4    | EN_HIZ <sup>(12)</sup>     | 0   | Y                | Y            | R/W | 0: Disabled<br>1: Enabled               | Default: 0 (disabled)                                                                                                    |
| 3    | CEB                        | 1   | Y                | Y            | R/W | 0: Charge enabled<br>1: Charge disabled | Configures the charge.<br>Default: 1 (charge disabled)                                                                   |
| 2    | V <sub>BATT_UVLO</sub> [2] | 1   | Y                | Y            | R/W | 360mV                                   | Sets the battery under-voltage lockout (UVLO) threshold.<br>Offset: 2.4V<br>Range: 2.4V to 3.03V<br>Default: 100 (2.76V) |
| 1    | V <sub>BATT_UVLO</sub> [1] | 0   | Y                | Y            | R/W | 180mV                                   |                                                                                                                          |
| 0    | V <sub>BATT_UVLO</sub> [0] | 0   | Y                | Y            | R/W | 90mV                                    |                                                                                                                          |

### Note:

12) This bit only controls when the LDO FET turns on and off.

## REG02h

| Bits | Bit Name                              | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                                  | Comments                                                                                                                                                                                                                                                              |
|------|---------------------------------------|-----|------------------|--------------|-----|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | REGISTER_RESET                        | 0   | Y                | N            | R/W | 0: Keep the current setting<br>1: Reset                      | Default: 0 (keep the current setting)                                                                                                                                                                                                                                 |
| 6    | I <sup>2</sup> C_WATCHDOG_TIMER_RESET | 0   | Y                | Y            | R/W | 0: Normal<br>1: Reset                                        | Default: 0 (normal)                                                                                                                                                                                                                                                   |
| 5    | I <sub>CC</sub> [5]                   | 0   | Y                | Y            | R/W | 448mA                                                        | Sets the fast charge current.<br>If I <sub>CC</sub> ≤ 80mA:<br>Offset: 16mA<br>Step: 16mA<br>Range: 000000 to 000100 (16mA to 80mA)<br>If I <sub>CC</sub> > 80mA:<br>Offset: 14mA<br>Step: 14mA<br>Range: 000101 to 111111 (84mA to 896mA)<br>Default: 001111 (224mA) |
| 4    | I <sub>CC</sub> [4]                   | 0   | Y                | Y            | R/W | 224mA                                                        |                                                                                                                                                                                                                                                                       |
| 3    | I <sub>CC</sub> [3]                   | 1   | Y                | Y            | R/W | 112mA                                                        |                                                                                                                                                                                                                                                                       |
| 2    | I <sub>CC</sub> [2]                   | 1   | Y                | Y            | R/W | 64mA: I <sub>CC</sub> ≤ 80mA<br>56mA: I <sub>CC</sub> > 80mA |                                                                                                                                                                                                                                                                       |
| 1    | I <sub>CC</sub> [1]                   | 1   | Y                | Y            | R/W | 32mA: I <sub>CC</sub> ≤ 80mA<br>28mA: I <sub>CC</sub> > 80mA |                                                                                                                                                                                                                                                                       |
| 0    | I <sub>CC</sub> [0]                   | 1   | Y                | Y            | R/W | 16mA: I <sub>CC</sub> ≤ 80mA<br>14mA: I <sub>CC</sub> > 80mA |                                                                                                                                                                                                                                                                       |

## REG 03h

| Bits | Bit Name               | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                                         | Comments                                                                                                                                                                                                                                                            |
|------|------------------------|-----|------------------|--------------|-----|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | I <sub>DSCHG</sub> [3] | 1   | Y                | Y            | R/W | 1600mA                                                              | Sets the BATT to SYS discharge current limit.<br>Offset: 200mA<br>Range: 400mA to 3.2A<br>Valid range: 0001 to 1111<br>Default: 1111 (3200mA)                                                                                                                       |
| 6    | I <sub>DSCHG</sub> [2] | 1   | Y                | Y            | R/W | 800mA                                                               |                                                                                                                                                                                                                                                                     |
| 5    | I <sub>DSCHG</sub> [1] | 1   | Y                | Y            | R/W | 400mA                                                               |                                                                                                                                                                                                                                                                     |
| 4    | I <sub>DSCHG</sub> [0] | 1   | Y                | Y            | R/W | 200mA                                                               |                                                                                                                                                                                                                                                                     |
| 3    | I <sub>TERM</sub> [3]  | 0   | Y                | Y            | R/W | 32mA                                                                | Sets the termination current.<br>If I <sub>TERM</sub> ≤ 17.5mA:<br>Offset: 2.5mA<br>Step: 5mA<br>Range: 0000 to 0011 (2.5mA to 17.5mA)<br>If I <sub>TERM</sub> > 17.5mA:<br>Offset: 2mA<br>Step: 4mA<br>Range: 0100 to 1111 (18mA to 62mA)<br>Default: 0001 (7.5mA) |
| 2    | I <sub>TERM</sub> [2]  | 0   | Y                | Y            | R/W | 16mA                                                                |                                                                                                                                                                                                                                                                     |
| 1    | I <sub>TERM</sub> [1]  | 0   | Y                | Y            | R/W | 10mA: I <sub>TERM</sub> ≤ 17.5mA<br>8mA: I <sub>TERM</sub> > 17.5mA |                                                                                                                                                                                                                                                                     |
| 0    | I <sub>TERM</sub> [0]  | 1   | Y                | Y            | R/W | 5mA: I <sub>TERM</sub> ≤ 17.5mA<br>4mA: I <sub>TERM</sub> > 17.5mA  |                                                                                                                                                                                                                                                                     |

## REG04h

| Bits | Bit Name                  | POR | Reset by REG_RST | Reset by WTD | R/W | Description          | Comments                                                                                                      |
|------|---------------------------|-----|------------------|--------------|-----|----------------------|---------------------------------------------------------------------------------------------------------------|
| 7    | V <sub>BATT_REG</sub> [5] | 1   | Y                | Y            | R/W | 480mV                | Sets the battery regulation voltage.<br><br>Offset: 3.60V<br>Range: 3.60V to 4.545V<br>Default: 4.2V (101000) |
| 6    | V <sub>BATT_REG</sub> [4] | 0   | Y                | Y            | R/W | 240mV                |                                                                                                               |
| 5    | V <sub>BATT_REG</sub> [3] | 1   | Y                | Y            | R/W | 120mV                |                                                                                                               |
| 4    | V <sub>BATT_REG</sub> [2] | 0   | Y                | Y            | R/W | 60mV                 |                                                                                                               |
| 3    | V <sub>BATT_REG</sub> [1] | 0   | Y                | Y            | R/W | 30mV                 |                                                                                                               |
| 2    | V <sub>BATT_REG</sub> [0] | 0   | Y                | Y            | R/W | 15mV                 |                                                                                                               |
| 1    | V <sub>BATT_PRE</sub>     | 1   | Y                | Y            | R/W | 0: 2.8V<br>1: 3.0V   | Pre-charge to fast charge threshold<br><br>Default: 1 (3V)                                                    |
| 0    | V <sub>RECH</sub>         | 1   | Y                | Y            | R/W | 0: 100mV<br>1: 200mV | Battery recharge threshold (below V <sub>BATT_REG</sub> )<br><br>Default: 1 (200mV)                           |

## REG05h

| Bits | Bit Name     | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                          | Comments                                                                                                                                                                                                                                                                                               |
|------|--------------|-----|------------------|--------------|-----|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | EN_WD_DISCHG | 0   | Y                | N            | R/W | 0: Disabled<br>1: Enabled                            | Enables watchdog control in discharge mode.<br><br>Default: 0 (disabled)                                                                                                                                                                                                                               |
| 6    | WATCHDOG[1]  | 0   | Y                | Y            | R/W | 00: Timer disabled<br>01: 40s<br>10: 80s<br>11: 160s | Sets the I <sup>2</sup> C watchdog timer limit. If bits[6:5] = 00, then the watchdog timer is disabled, regardless of bit[7]. If bits[6:5] are set to 00 via the OTP, then the watchdog flag is not triggered and the system does not reset after the watchdog timer expires.<br><br>Default: 01 (40s) |
| 5    | WATCHDOG[0]  | 1   | Y                | Y            | R/W |                                                      |                                                                                                                                                                                                                                                                                                        |
| 4    | EN_TERM      | 1   | Y                | Y            | R/W | 0: Disabled<br>1: Enabled                            | Enables termination control.<br><br>Default: 1 (enabled)                                                                                                                                                                                                                                               |
| 3    | EN_TIMER     | 1   | Y                | Y            | R/W | 0: Disabled<br>1: Enabled                            | Enables the safety timer.<br><br>Default: 1 (enabled)                                                                                                                                                                                                                                                  |
| 2    | CHG_TMR[1]   | 0   | Y                | Y            | R/W | 00: 20hrs<br>01: 5hrs<br>10: 8hrs<br>11: 12hrs       | Sets the fast charge timer.<br><br>Default: 00 (20hrs)                                                                                                                                                                                                                                                 |
| 1    | CHG_TMR[0]   | 0   | Y                | Y            | R/W |                                                      |                                                                                                                                                                                                                                                                                                        |
| 0    | TERM_TMR     | 0   | Y                | Y            | R/W | 0: Disabled<br>1: Enabled                            | Controls the termination timer (when TERM_TMR is enabled, the IC does not suspend the charge current after charge termination).<br><br>Default: 0 (disabled)                                                                                                                                           |

## REG06h

| Bits | Bit Name                | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                                                                              | Comments                                                                                                                  |
|------|-------------------------|-----|------------------|--------------|-----|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| 7    | EN_NTC                  | 1   | Y                | Y            | R/W | 0: Disabled<br>1: Enabled                                                                                | Default: 1 (enabled)                                                                                                      |
| 6    | TMR2X_EN                | 1   | Y                | Y            | R/W | 0: Disable the 2x extended safety timer during PPM;<br>1: Enable the 2x extended safety timer during PPM | Default: 1 (enabled)                                                                                                      |
| 5    | FET_DIS <sup>(13)</sup> | 0   | Y                | N            | R/W | 0: Enabled<br>1: Turned off                                                                              | Default: 0 (enabled)                                                                                                      |
| 4    | PG_INT_CONTROL          | 0   | Y                | Y            | R/W | 0: On<br>1: Off                                                                                          | Default: 0 (on)                                                                                                           |
| 3    | EOC_INT_CONTROL         | 0   | Y                | Y            | R/W | 0: On<br>1: Off                                                                                          | Charge completed INT mask control<br>Default: 0 (on)                                                                      |
| 2    | CHG STATUS_INT_CONTROL  | 0   | Y                | Y            | R/W | 0: On<br>1: Off                                                                                          | Charging status change INT mask control (Charging status contain: not charging, pre-charge and charge)<br>Default: 0 (on) |
| 1    | NTC_INT_CONTROL         | 0   | Y                | Y            | R/W | 0: On<br>1: Off                                                                                          | Default: 0 (on)                                                                                                           |
| 0    | BATTOVP_INT_CONTROL     | 0   | Y                | Y            | R/W | 0: On<br>1: Off                                                                                          | Default: 0 (on)                                                                                                           |

### Note:

13) This bit only controls the turn on/off function of the battery FET, including charge and discharge.

## REG07h

| Bits | Bit Name    | POR | Reset by REG_RST | Reset by WTD | R/W | Description               | Comments                                                                                             |
|------|-------------|-----|------------------|--------------|-----|---------------------------|------------------------------------------------------------------------------------------------------|
| 7    | EN_PCB_OTP  | 1   | Y                | Y            | R/W | 0: Enabled<br>1: Disabled | Enables PCB over-temperature protection (OTP).<br>Default: 1 (disabled)                              |
| 6    | EN_VINLOOP  | 0   | Y                | Y            | R/W | 0: Enabled<br>1: Disabled | Default: 0 (enabled)                                                                                 |
| 5    | TJ_REG[1]   | 1   | Y                | Y            | R/W | 00: 60°C<br>01: 80°C      | Sets the thermal regulation threshold<br>Default: 11 (120°C)                                         |
| 4    | TJ_REG[0]   | 1   | Y                | Y            | R/W | 10: 100°C<br>11: 120°C    |                                                                                                      |
| 3    | VSYS_REG[3] | 1   | Y                | N            | R/W | 400mV                     | Sets the system regulation voltage.<br>Offset: 4.2V<br>Range: 4.2V to 4.95V<br>Default: 1001 (4.65V) |
| 2    | VSYS_REG[2] | 0   | Y                | N            | R/W | 200mV                     |                                                                                                      |
| 1    | VSYS_REG[1] | 0   | Y                | N            | R/W | 100mV                     |                                                                                                      |
| 0    | VSYS_REG[0] | 1   | Y                | N            | R/W | 50mV                      |                                                                                                      |

## REG08h

| Bits | Bit Name       | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                                         | Comments                                                                                                                                                       |
|------|----------------|-----|------------------|--------------|-----|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | WATCHDOG_FAULT | 0   | NA               | NA           | R   | 0: Normal<br>1: Watchdog timer expiration                           | Default: 0 (normal)                                                                                                                                            |
| 6    | REV[1]         | 1   | NA               | NA           | R   | 00: Reserved<br>01: Reserved<br>10: MP2665A<br>11: Reserved         | Indicates the revision number.<br>Default: 10 (MP2665A)                                                                                                        |
| 5    | REV[0]         | 0   | NA               | NA           | R   |                                                                     |                                                                                                                                                                |
| 4    | CHG_STAT[1]    | 0   | NA               | NA           | R   | 00: Not charging<br>01: Pre-charge<br>10: Charge<br>11: Charge done | Default: 00 (not charging)                                                                                                                                     |
| 3    | CHG_STAT[0]    | 0   | NA               | NA           | R   |                                                                     |                                                                                                                                                                |
| 2    | PPM_STAT       | 0   | NA               | NA           | R   | 0: No PPM<br>1: In PPM                                              | Default: 0 (no PPM)                                                                                                                                            |
| 1    | PG_STAT        | 0   | NA               | NA           | R   | 0: Power fail<br>1: Power good                                      | PG is set to 1 when V <sub>IN</sub> is beyond its thresholds. V <sub>IN</sub> should exceed V <sub>BATT</sub> + V <sub>HDRM</sub> .<br>Default: 0 (power fail) |
| 0    | THERM_STAT     | 0   | NA               | NA           | R   | 0: No thermal regulation<br>1: In thermal regulation                | Default: 0 (no thermal regulation)                                                                                                                             |

## REG09h

| Bits | Bit Name           | POR | Reset by REG_RST | Reset by WTD | R/W | Description                                                        | Comments                                                                                                     |
|------|--------------------|-----|------------------|--------------|-----|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 7    | EN_SHIPPING_DGL[1] | 0   | Y                | N            | R/W | 00: 1s<br>01: 2s<br>10: 4s<br>11: 8s                               | Sets the shipping mode deglitch time.<br>Default: 00 (1s)                                                    |
| 6    | EN_SHIPPING_DGL[0] | 0   | Y                | N            | R/W |                                                                    |                                                                                                              |
| 5    | VIN_FAULT          | 0   | NA               | NA           | R   | 0: Normal<br>1: Input fault (OVP or bad source)                    | When V <sub>IN</sub> rises above or drops below its thresholds, this bit is set to 1.<br>Default: 0 (normal) |
| 4    | THERM_SD           | 0   | NA               | NA           | R   | 0: Normal<br>1: Thermal shutdown                                   | Default: 0 (normal)                                                                                          |
| 3    | BAT_FAULT          | 0   | NA               | NA           | R   | 0: Normal<br>1: Battery over-voltage protection (OVP) has occurred | Default: 0 (normal)                                                                                          |
| 2    | STMR_FAULT         | 0   | NA               | NA           | R   | 0: Normal<br>1: Safety timer expiration                            | Default: 0 (normal)                                                                                          |
| 1    | NTC_FAULT[1]       | 0   | NA               | NA           | R   | 0: Normal<br>1: NTC hot                                            | Default: 0 (normal)                                                                                          |
| 0    | NTC_FAULT[0]       | 0   | NA               | NA           | R   | 0: Normal<br>1: NTC cold                                           | Default: 0 (normal)                                                                                          |

# REG0Ah<sup>(14)</sup>

| Bits | Bit Name | POR | Reset by<br>REG_RST | Reset<br>by WTD | R/W | Description                              | Comments                                                                               |
|------|----------|-----|---------------------|-----------------|-----|------------------------------------------|----------------------------------------------------------------------------------------|
| 7    | ADDR[1]  | 0   | NA                  | NA              | NA  | 00: 08h<br>01: 0Ah<br>10: 0Ch<br>11: 0Eh | Indicates the IC address.<br>Default: 00 (08h)                                         |
| 6    | ADDR[0]  | 0   | NA                  | NA              | NA  |                                          |                                                                                        |
| 5    | VINOVP   | 0   | NA                  | NA              | NA  | 0: 6.4V<br>1: 13.6V                      | Sets the V <sub>IN</sub> over-voltage protection (OVP) threshold.<br>Default: 0 (6.4V) |
| 4    | RESERVED | 0   | NA                  | NA              | NA  |                                          |                                                                                        |
| 3    | RESERVED | 0   | NA                  | NA              | NA  |                                          |                                                                                        |
| 2    | RESERVED | 0   | NA                  | NA              | NA  |                                          |                                                                                        |
| 1    | RESERVED | 0   | NA                  | NA              | NA  |                                          |                                                                                        |
| 0    | RESERVED | 0   | NA                  | NA              | NA  |                                          |                                                                                        |

## Note:

14) This register is for the one-time programmable (OTP) memory, and it is not accessible.


## OTP MAP

| #    | Bit[7]                                             | Bit[6]     | Bit[5]                          | Bit[4] | Bit[3]                            | Bit[2] | Bit[1] | Bit[0] |
|------|----------------------------------------------------|------------|---------------------------------|--------|-----------------------------------|--------|--------|--------|
| 0x00 | N/A                                                |            |                                 |        | I <sub>IN LIM</sub> [3]           | N/A    |        |        |
| 0x01 | N/A                                                |            |                                 |        | CEB                               | N/A    |        |        |
| 0x02 | N/A                                                |            | I <sub>CC</sub> : 16mA to 896mA |        |                                   |        |        |        |
| 0x03 | N/A                                                |            |                                 |        | I <sub>TERM</sub> : 2.5mA to 62mA |        |        |        |
| 0x04 | V <sub>BATT_REG</sub> : 3.6V to 4.545V (15mV/step) |            |                                 |        |                                   |        | N/A    |        |
| 0x05 | N/A                                                | WATCHDOG   |                                 |        | N/A                               |        |        |        |
| 0x07 | EN_PCB_OTP                                         | EN_VINLOOP | N/A                             |        |                                   |        |        |        |
| 0x0A | ADDRESS                                            |            | VINOVP                          | N/A    |                                   |        |        |        |

## OTP DEFAULT


| OTP Items             | Default |
|-----------------------|---------|
| I <sub>IN LIM</sub>   | 940mA   |
| CEB                   | Disable |
| I <sub>CC</sub>       | 224mA   |
| I <sub>TERM</sub>     | 7.5mA   |
| V <sub>BATT_REG</sub> | 4.2V    |
| WATCHDOG              | 40s     |
| EN_PCB_OTP            | Disable |
| EN_VINLOOP            | Enable  |
| ADDRESS               | 08h     |
| VINOVP                | 6.4V    |

## STATE CONVERSION CHART

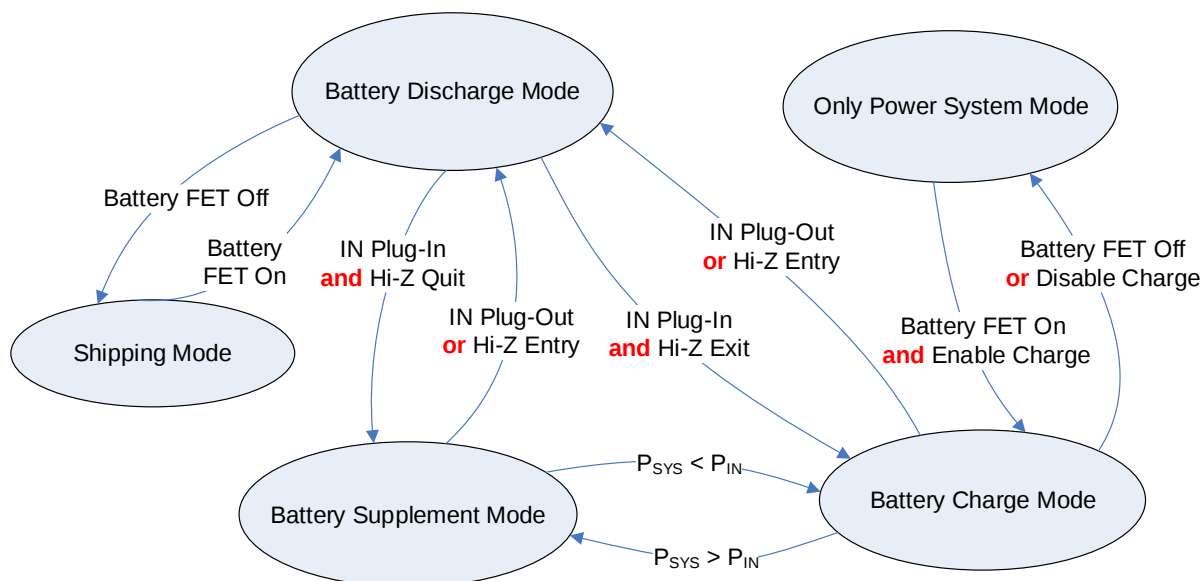

**Figure 16: State Machine Conversion**

## CONTROL FLOWCHARTS

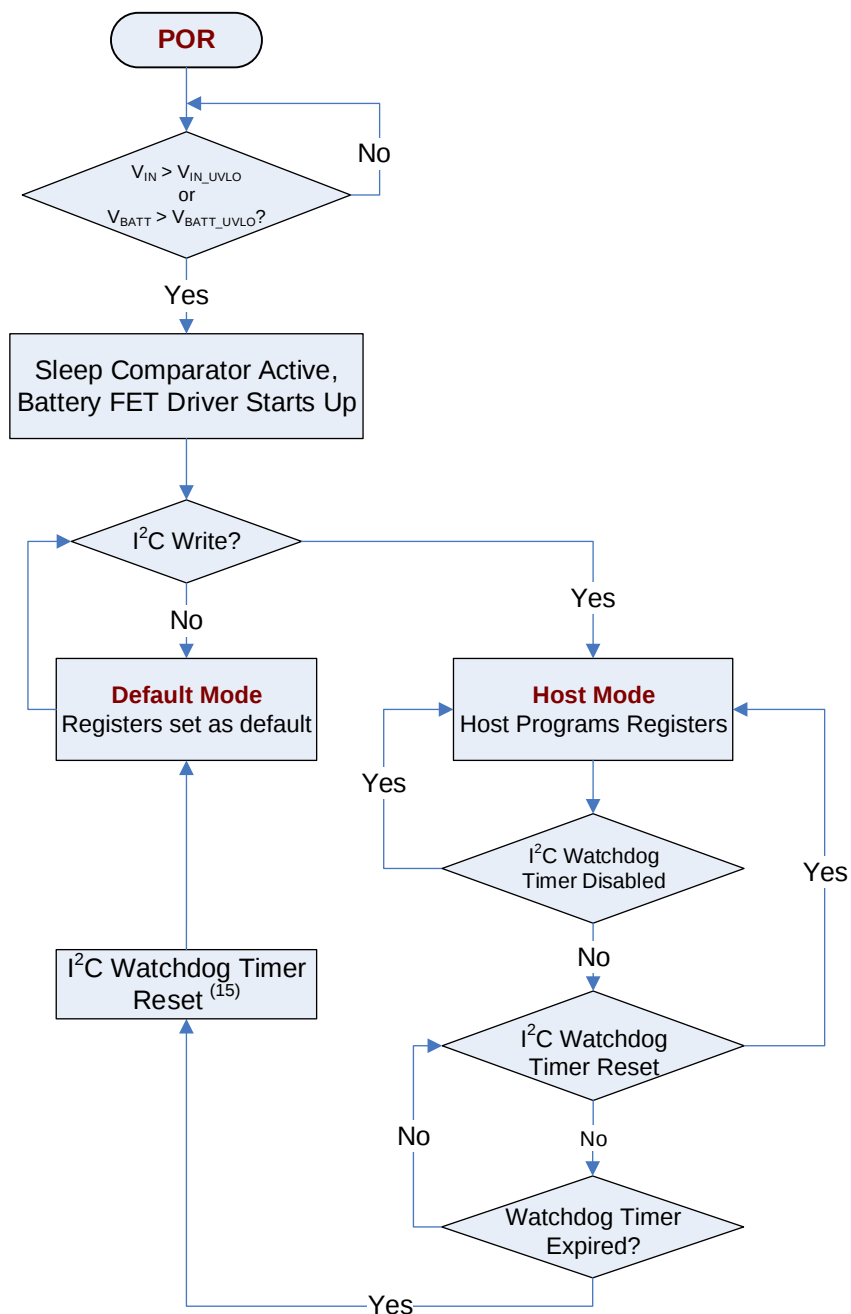

**Figure 17: Default Mode and Host Mode Selection**

**Note:**

15) Once the watchdog timer has expired, the I<sup>2</sup>C watchdog timer must be reset, or the watchdog timer is not valid in the next cycle.

## CONTROL FLOWCHARTS (continued)

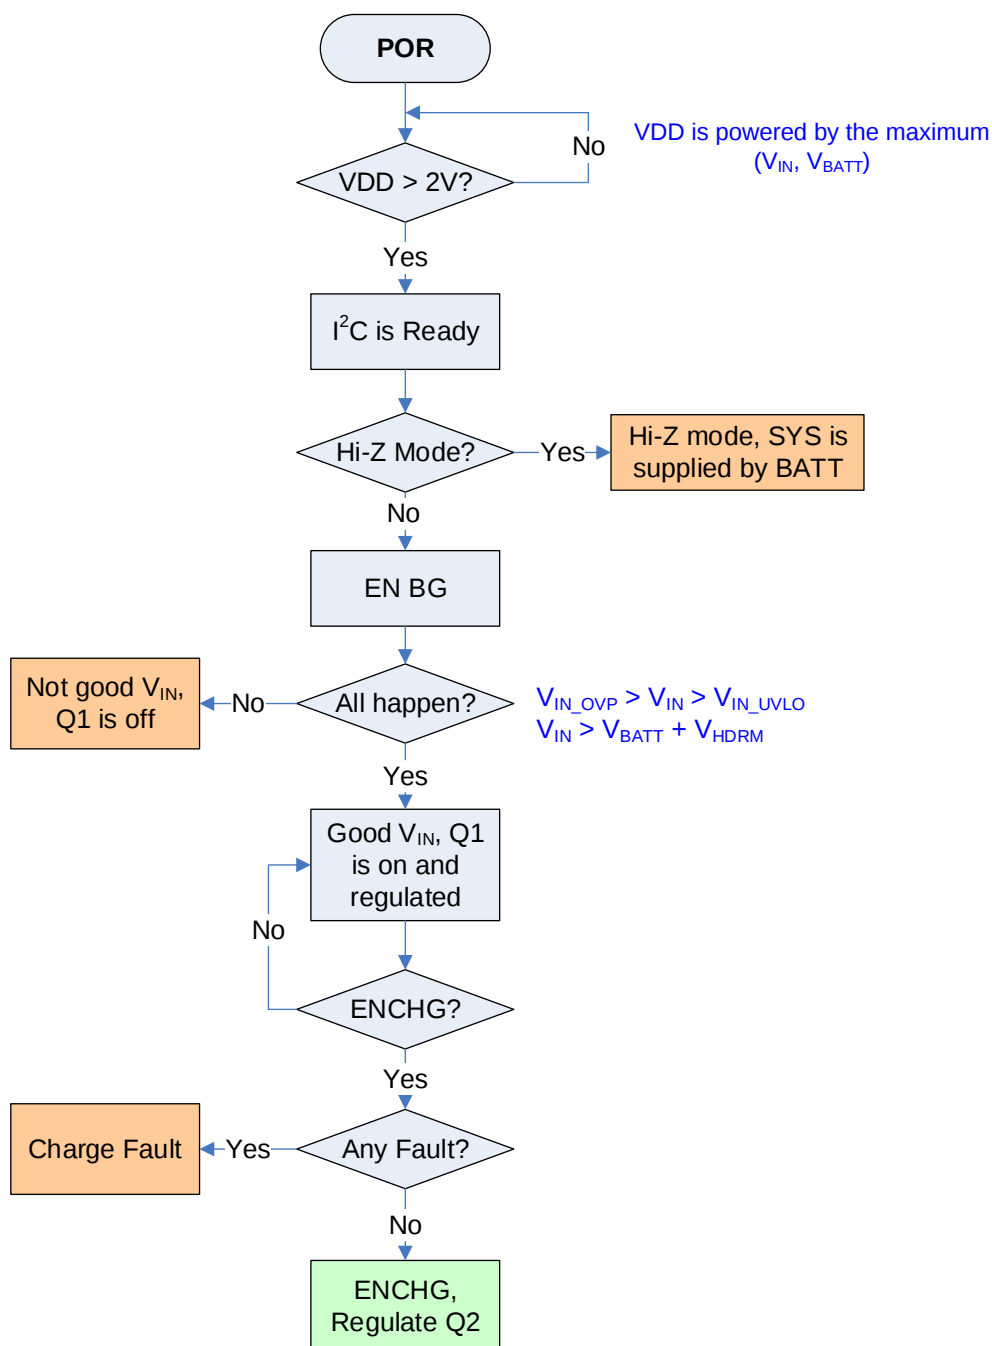


Figure 18: Input Power Start-Up Flowchart

## CONTROL FLOWCHARTS (continued)

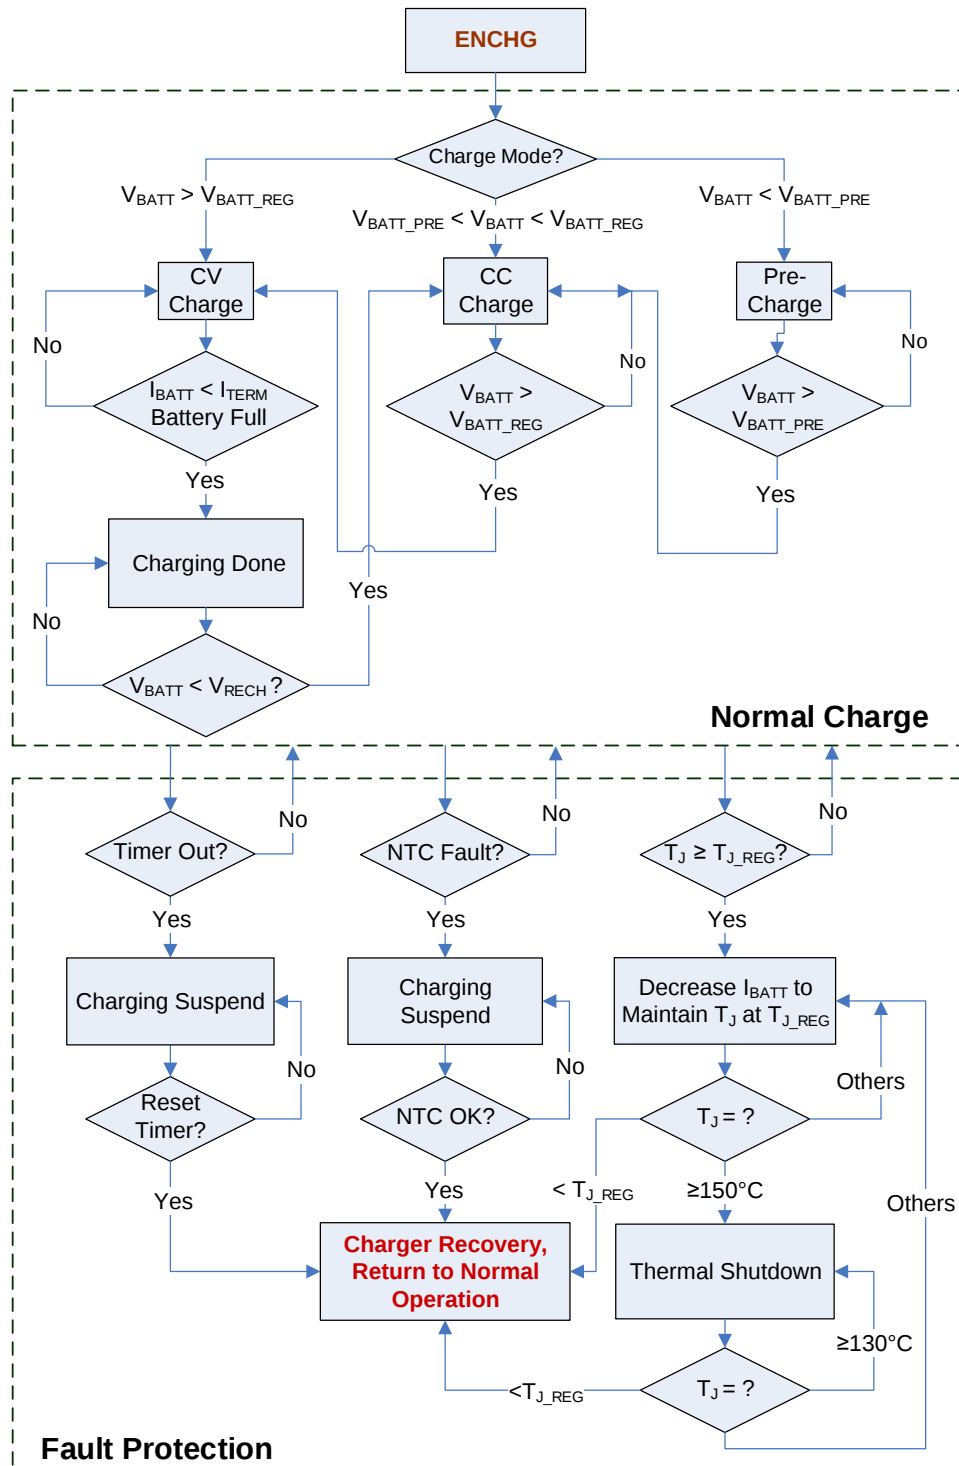


Figure 19: Charging Process

## CONTROL FLOWCHARTS (continued)

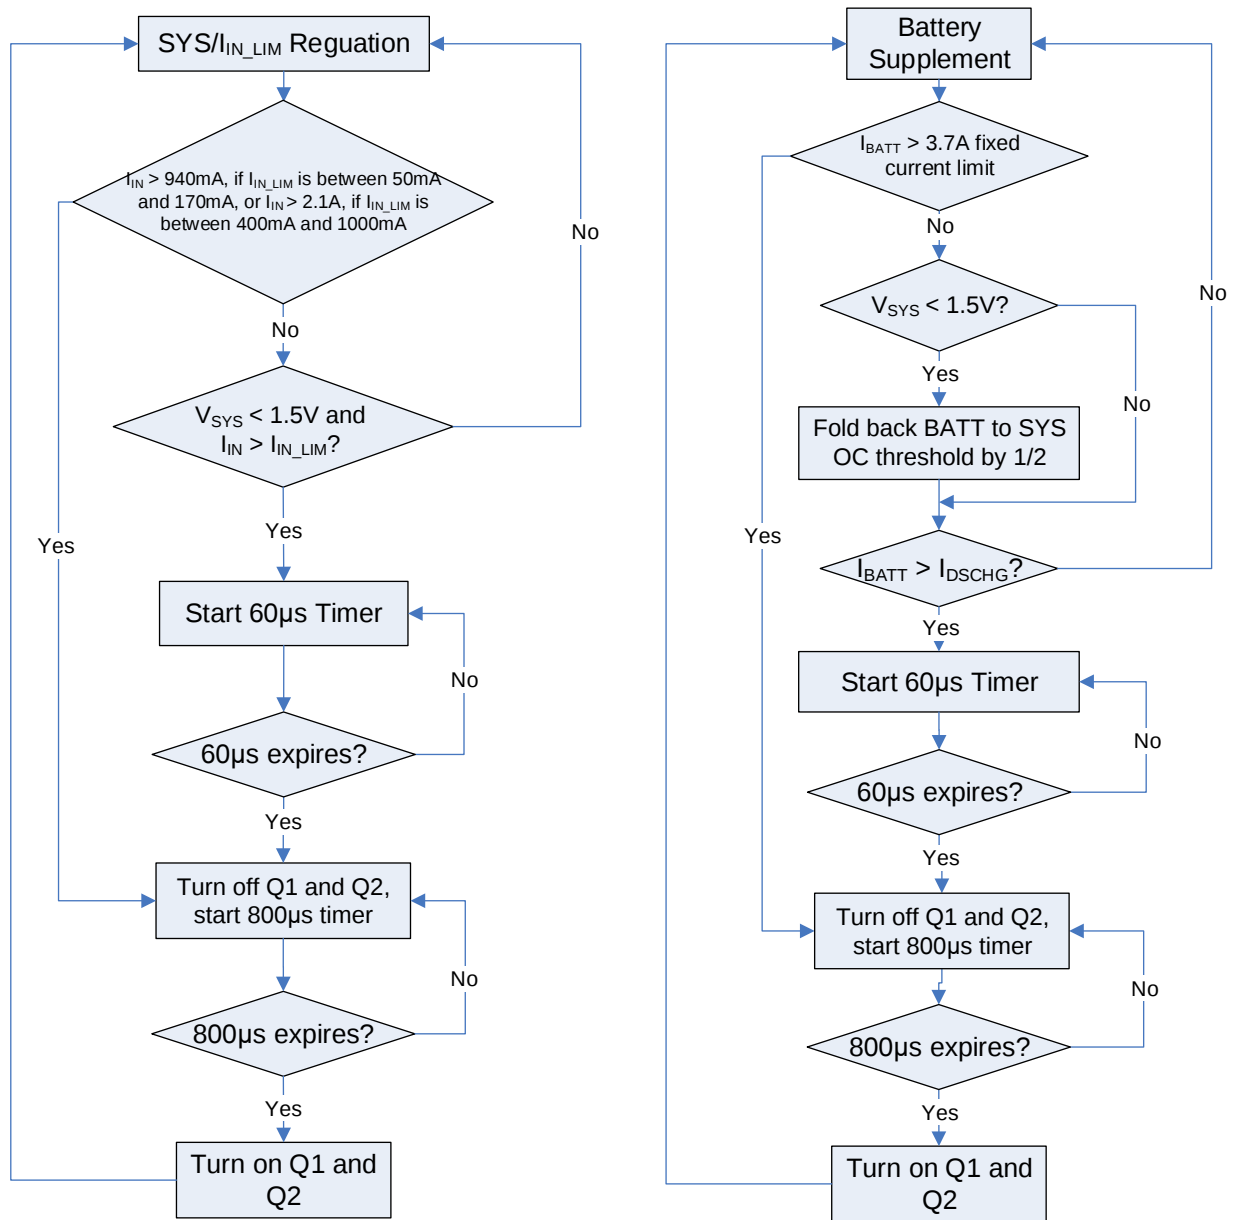


Figure 20: System Short-Circuit Protection (SCP)

## APPLICATION INFORMATION

### Selecting the NTC Resistor

The NTC pin uses a resistor divider connected to the input source (VDD) to sense the battery temperature. The two resistors ( $R_{T1}$  and  $R_{T2}$ ) allow the high temperature limit and low temperature limit to be configured independently (see Figure 21). This means the MP2665A can meet most NTC resistor and temperature operation range requirements with the addition of two resistors.

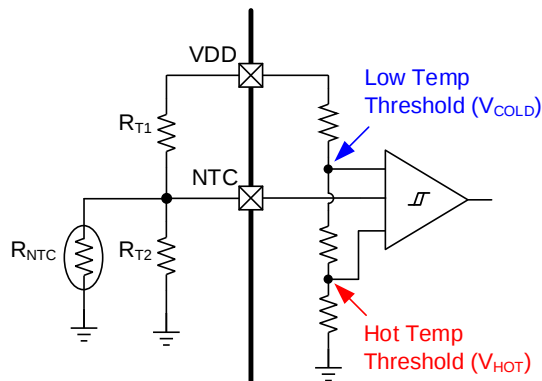


Figure 21: NTC Functional Block

For a given NTC thermistor, the  $R_{T1}$  and  $R_{T2}$  values depend on the type of the NTC resistor.  $R_{T2}$  and  $R_{T1}$  can be calculated with Equation (1) and Equation (2), respectively:

$$R_{T2} = \frac{(V_{COLD} - V_{HOT}) \times R_{NTCH} \times R_{NTCL}}{(V_{HOT} - V_{COLD} V_{HOT}) \times R_{NTCL} - (V_{COLD} - V_{COLD} V_{HOT}) \times R_{NTCH}} \quad (1)$$

$$R_{T1} = \frac{1 - V_{COLD}}{V_{COLD}} \times (R_{T2} // R_{NTCL}) \quad (2)$$

Where  $R_{NTCH}$  is the value of the NTC resistor at the high temperature, and  $R_{NTCL}$  is the value of the NTC resistor at the low temperature.

For example, for the thermistor NCP18XH103,  $R_{NTCL}$  is 27.219k $\Omega$  at 0°C, and  $R_{NTCH}$  is 4.161k $\Omega$  at 50°C. Use Equation (1) and Equation (2) to calculate  $R_{T1} = 7.33k\Omega$  and  $R_{T2} = 27.22k\Omega$ . Assume that the NTC window is between 0°C and 50°C, then use the  $V_{COLD}$  and  $V_{HOT}$  values from the Electrical Characteristics section on page 10.

### Selecting the External Capacitor

Like most low-dropout regulators, the MP2665A requires external capacitors for regulator stability and voltage spike immunity. The device is specifically designed for portable applications

requiring minimum board space and smallest components, these capacitors must be selected for optimal performance.

### Selecting the Input Capacitor

A minimum 4.7 $\mu$ F input capacitor must be connected between IN to GND for stable operation across the full load current range. The output capacitance can have a higher capacitance than the input, as long as the input is at least 4.7 $\mu$ F.

### Selecting the Output Capacitor

The MP2665A is designed specifically to work with a very small ceramic output capacitor. A >10 $\mu$ F ceramic capacitor with X5R or X7R dielectrics is recommended for the application circuit. The output capacitor should be connected between the SYS and GND pins with a thick trace and small loop area.

### Selecting the BATT to GND Capacitor

Place a >22 $\mu$ F ceramic capacitor with X5R or X7R dielectrics from the BATT pin to GND.

### Selecting the VDD to GND Capacitor

The capacitor between VDD and GND stabilizes the VDD voltage so that VDD can power the internal control and logic circuit. The typical value of this capacitor is about 100nF.

### PCB Layout Guidelines

1. Place the external capacitors as close to the IC as possible for the smallest input inductance and the ground impedance.
2. The PCB trace to connect the capacitor between VDD and GND should be put very close to the IC.
3. The GND-to-I<sup>2</sup>C wire should be clean, and it should not be placed close to GND.
4. The I<sup>2</sup>C wires should be placed in parallel.

# TYPICAL APPLICATION CIRCUIT

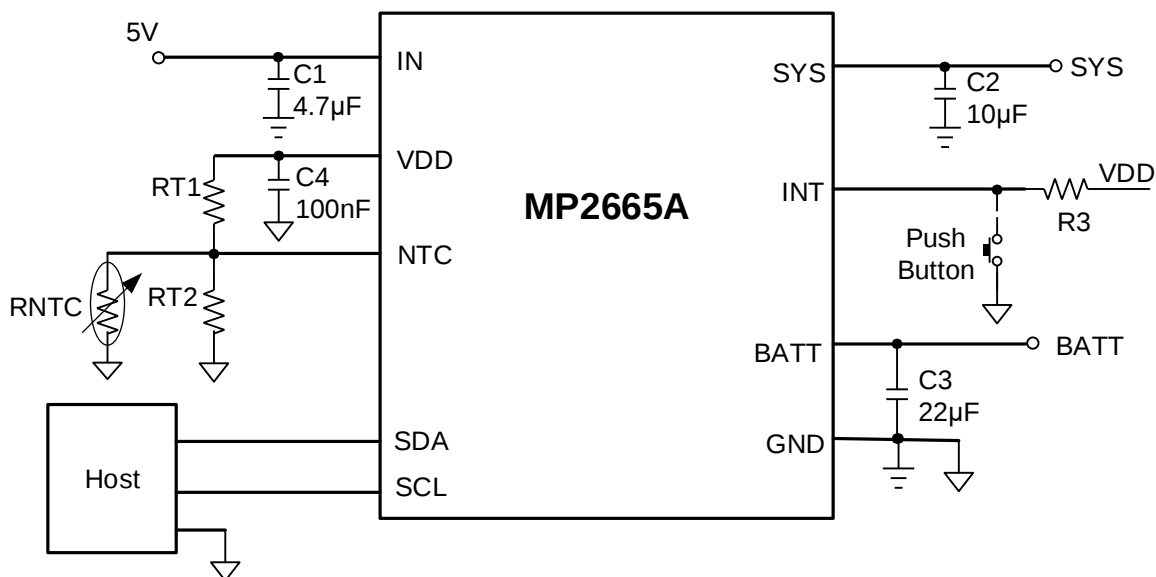



Figure 22: MP2665A Typical Application Circuit with 5V Input

Table 5: The Key BOM from Figure 22


| Qty | Ref | Value | Description                        | Package | Manufacturer |
|-----|-----|-------|------------------------------------|---------|--------------|
| 1   | C1  | 4.7µF | Ceramic capacitor, 16V, X5R OR X7R | 0603    | Any          |
| 1   | C2  | 10µF  | Ceramic capacitor, 16V, X5R OR X7R | 0805    | Any          |
| 1   | C3  | 22µF  | Ceramic capacitor, 16V, X5R OR X7R | 0805    | Any          |
| 1   | C4  | 100nF | Ceramic capacitor, 16V, X5R OR X7R | 0603    | Any          |

# PACKAGE INFORMATION


## QFN-12 (2.5mmx3mm)

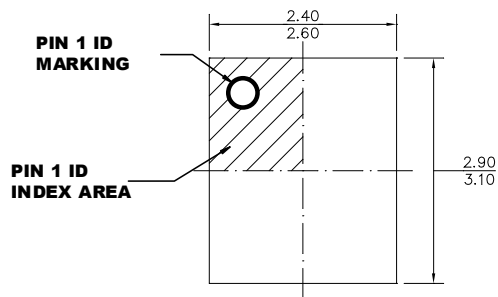


**TOP VIEW**

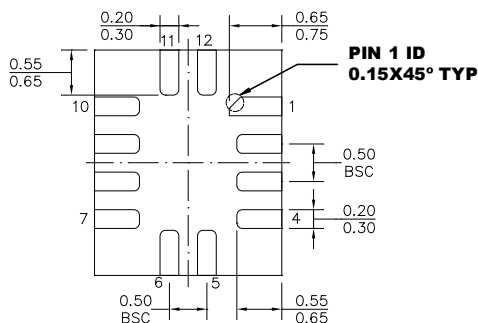

**BOTTOM VIEW**



**SIDE VIEW**

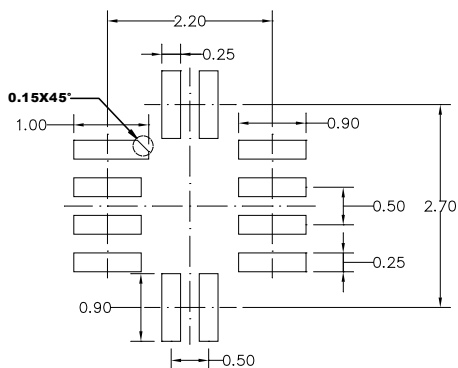


**RECOMMENDED LAND PATTERN**

### NOTE:

- 1) ALL DIMENSIONS ARE IN MILLIMETERS.
- 2) LEAD COPLANARITY SHALL BE 0.08 MILLIMETERS MAX.
- 3) JEDEC REFERENCE IS MO-220.
- 4) DRAWING IS NOT TO SCALE.

## CARRIER INFORMATION

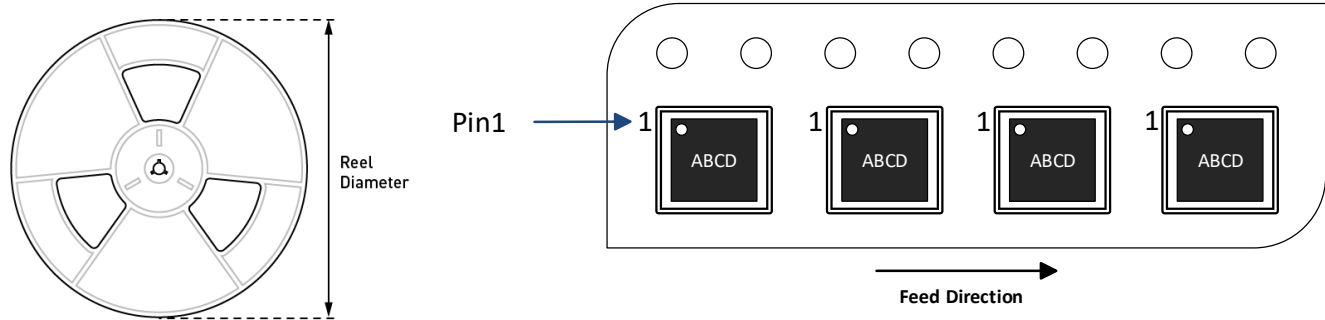

| Part Number       | Package Description | Quantity/ Reel | Quantity/ Tube | Quantity/ Tray | Reel Diameter | Carrier Tape Width | Carrier Tape Pitch |
|-------------------|---------------------|----------------|----------------|----------------|---------------|--------------------|--------------------|
| MP2665AGQB-xxxx-Z | QFN-12 (2.5mmx3mm)  | 5000           | N/A            | N/A            | 13in          | 12mm               | 8mm                |

## REVISION HISTORY

| Revision # | Revision Date | Description                                   | Pages Updated |
|------------|---------------|-----------------------------------------------|---------------|
| 1.0        | 8/16/2021     | Initial Release                               | -             |
| 1.1        | 4/28/2022     | Minor grammar edits                           | 1             |
|            |               | Updated WATCHDOG[1] and WATCHDOG[0] in REG05h | 28            |

**Notice:** The information in this document is subject to change without notice. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.