

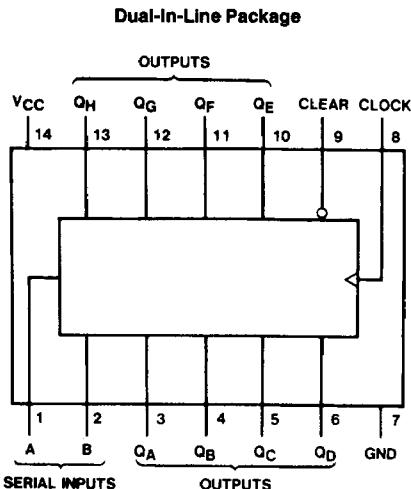


# 54164/DM74164 8-Bit Serial In/Parallel Out Shift Registers

## General Description

These 8-bit shift registers feature gated serial inputs and an asynchronous clear. A low logic level at either serial input inhibits entry of the new data, and resets the first flip-flop to the low level at the next clock pulse, thus providing complete control over incoming data. A high logic level on either input enables the other input, which will then determine the state of the first flip-flop. Data at the serial inputs may be changed while the clock is high or low, but only information meeting the setup and hold time requirements will be entered. Clocking occurs on the low-to-high level transition of the clock input. All inputs are diode-clamped to minimize transmission-line effects.

## Connection Diagram



TL/F/6552-1

**Order Number 54164DMQB, 54164FMQB or DM74164N**  
See NS Package Number J14A, N14A or W14B

## Features

- Gated (enable/disable) serial inputs
- Fully buffered clock and serial inputs
- Asynchronous clear
- Typical clock frequency 36 MHz
- Typical power dissipation 185 mW

## Function Table

Inputs			Outputs				
Clear	Clock	A B	QA	QB	...	QH	
L	X	X X	L	L	...	L	
H	L	X X	QA0	QB0	...	QH0	
H	↑	H H	H	QA <sub>n</sub>	...	QG <sub>n</sub>	
H	↑	L X	L	QA <sub>n</sub>	...	QG <sub>n</sub>	
H	↑	X L	L	QA <sub>n</sub>	...	QG <sub>n</sub>	

H = High Level (steady state), L = Low Level (steady state)

X = Don't Care (any input, including transitions)

↑ = Transition from low to high level

QA<sub>0</sub>, QB<sub>0</sub>, QH<sub>0</sub> = The level of QA, QB, or QH, respectively, before the indicated steady-state input conditions were established.

QA<sub>n</sub>, QG<sub>n</sub> = The level of QA or QG before the most recent ↑ transition of the clock; indicates a one-bit shift.

## Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	5.5V
Operating Free Air Temperature Range 54 DM74	–55°C to +125°C 0°C to +70°C
Storage Temperature Range	–65°C to +150°C

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

## Recommended Operating Conditions

Symbol	Parameter	54164			DM74164			Units
		Min	Nom	Max	Min	Nom	Max	
V <sub>CC</sub>	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V <sub>IH</sub>	High Level Input Voltage	2			2			V
V <sub>IL</sub>	Low Level Input Voltage			0.8			0.8	V
I <sub>OH</sub>	High Level Output Current			–0.4			–0.4	mA
I <sub>OL</sub>	Low Level Output Current			8			8	mA
f <sub>CLK</sub>	Clock Frequency (Note 4)			25	0		25	MHz
t <sub>w</sub>	Pulse Width (Note 4)	Clock	20		20			ns
		Clear	20		20			
t <sub>SU</sub>	Data Setup Time (Note 4)	15			15			ns
t <sub>H</sub>	Data Hold Time (Note 4)	0			5			ns
T <sub>A</sub>	Free Air Operating Temperature	–55		125	0		70	°C

## Electrical Characteristics

 over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ (Note 1)	Max	Units
V <sub>I</sub>	Input Clamp Voltage	V <sub>CC</sub> = Min, I <sub>I</sub> = –14 mA				–1.5	V
V <sub>OH</sub>	High Level Output Voltage	V <sub>CC</sub> = Min, I <sub>OH</sub> = Max V <sub>IL</sub> = Max, V <sub>IH</sub> = Min		2.4	3.2		V
V <sub>OL</sub>	Low Level Output Voltage	V <sub>CC</sub> = Min, I <sub>OL</sub> = Max V <sub>IH</sub> = Min, V <sub>IL</sub> = Max			0.2	0.4	V
I <sub>I</sub>	Input Current @ Max Input Voltage	V <sub>CC</sub> = Max, V <sub>I</sub> = 5.5V				1	mA
I <sub>IH</sub>	High Level Input Current	V <sub>CC</sub> = Max, V <sub>I</sub> = 2.4V				40	µA
I <sub>IL</sub>	Low Level Input Current	V <sub>CC</sub> = Max, V <sub>I</sub> = 0.4V				–1.6	mA
I <sub>OS</sub>	Short Circuit Output Current	V <sub>CC</sub> = Max (Note 2)	54 DM74	–10 –9		–27.5 –27.5	mA
I <sub>CC</sub>	Supply Current	V <sub>CC</sub> = Max (Note 3)			37	54	mA

Note 1: All typicals are at V<sub>CC</sub> = 5V, T<sub>A</sub> = 25°C.

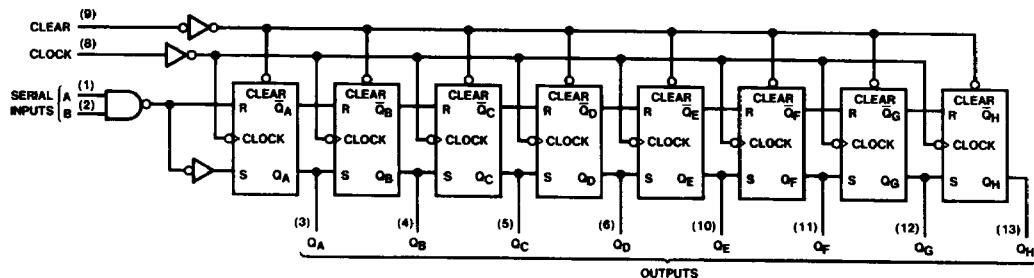
Note 2: Not more than one output should be shorted at a time.

Note 3: I<sub>CC</sub> is measured with all outputs open, SERIAL inputs grounded, the CLOCK input at 2.4V, and a momentary ground, then 4.5V, applied to the CLEAR input.

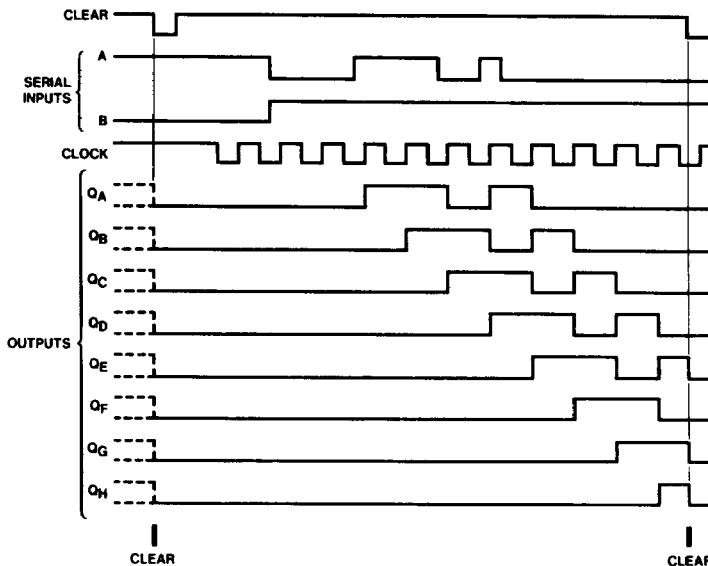
Note 4: T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5V.

**Switching Characteristics** at  $V_{CC} = 5V$  and  $T_A = 25^\circ C$  (See Section 1 for Test Waveforms and Output Load)

Symbol	Parameter	From (Input) To (Output)	$R_L = 800\Omega$				Units	
			$C_L = 15 \text{ pF}$		$C_L = 50 \text{ pF}$			
			Min	Max	Min	Max		
$f_{MAX}$	Maximum Clock Frequency		25				MHz	
$t_{PLH}$	Propagation Delay Time Low to High Level Output	Clock to Output		27		30	ns	
$t_{PHL}$	Propagation Delay Time High to Low Level Output	Clock to Output		32		37	ns	
$t_{PHL}$	Propagation Delay Time High to Low Level Output	Clear to Output		36		42	ns	

**Logic Diagram**


TL/F6552-2

**Timing Diagram**


TL/F6552-3