

### 1. General description

---

The PTN3332 is a differential line receiver that implements the electrical characteristics of Low-Voltage Differential Signaling (LVDS). This device meets or exceeds the requirements of the *ANSI TIA/EIA-644 Standard*. LVDS is used to achieve higher data rates on commonly used media. LVDS overcomes the limitations of achievable slew rates and EMI restrictions of previous differential signaling techniques. The PTN3332 operates at a 3.3 V supply level. Any of the four differential receivers provides a valid logical output state with a  $\pm 100$  mV differential input voltage within the input common-mode voltage range. The input common-mode voltage range allows 1 V of ground potential difference between two LVDS nodes.

The intended application of this device is for point-to-point baseband transmission rates over a controlled impedance media of approximately 100  $\Omega$ . The maximum rates and distance of data transfer are dependent upon the attenuation characteristics of the media selected and the noise coupling to the environment.

The PTN3332 is designed to function over the full industrial temperature range of  $-40$  °C to  $+85$  °C.

### 2. Features

---

- Meets or exceeds the requirements of *ANSI TIA/EIA-644 Standard*
- Designed for signaling rates of up to 400 Mbit/s
- Differential input thresholds of  $\pm 100$  mV
- Power dissipation of 60 mW typical at 200 MHz
- Typical propagation delay of 2.6 ns
- Low Voltage TTL (LVTTTL) logic output levels
- Pin compatible with AM26LS32 and SN65LVDS32
- Open-circuit fail safe

### 3. Applications

---

- Low voltage, low EMI, high speed differential signal receiver
- Point-to-point high speed data transmission
- High performance switches and routers

4. Ordering information

Table 1. Ordering information

| Type number | Package |                                                                           | Version  |
|-------------|---------|---------------------------------------------------------------------------|----------|
|             | Name    | Description                                                               |          |
| PTN3332DH   | TSSOP16 | plastic thin shrink small outline package; 16 leads;<br>body width 4.4 mm | SOT403-1 |
| PTN3332D    | SO16    | plastic small outline package; 16 leads;<br>body width 3.9 mm             | SOT109-1 |

5. Functional diagram


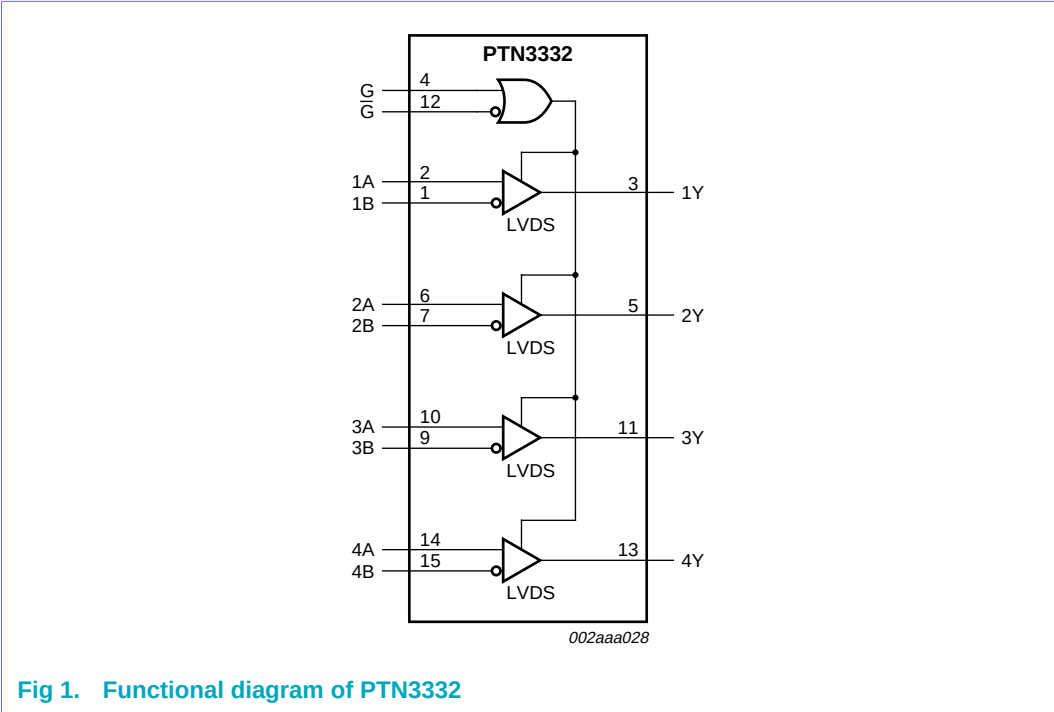


Fig 1. Functional diagram of PTN3332

6. Pinning information

6.1 Pinning

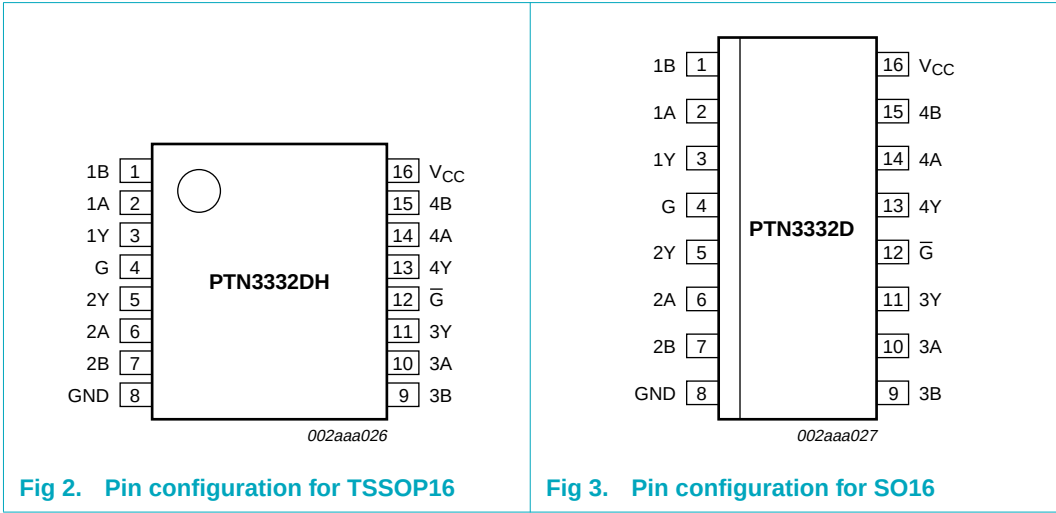

6.2 Pin description

Table 2. Pin description

| Symbol          | Pin | Description              |
|-----------------|-----|--------------------------|
| 1B              | 1   | LVDS inverting input     |
| 1A              | 2   | LVDS non-inverting input |
| 1Y              | 3   | LVTTL output             |
| G               | 4   | enable (active HIGH)     |
| 2Y              | 5   | LVTTL output             |
| 2A              | 6   | LVDS non-inverting input |
| 2B              | 7   | LVDS inverting input     |
| GND             | 8   | ground                   |
| 3B              | 9   | LVDS inverting input     |
| 3A              | 10  | LVDS non-inverting input |
| 3Y              | 11  | LVTTL output             |
| G̅              | 12  | enable (active LOW)      |
| 4Y              | 13  | LVTTL output             |
| 4A              | 14  | LVDS non-inverting input |
| 4B              | 15  | LVDS inverting input     |
| V <sub>CC</sub> | 16  | supply voltage           |

## 7. Functional description

Refer to [Figure 1 “Functional diagram of PTN3332”](#).

### 7.1 Function table

**Table 3. Function table**

*H = HIGH level; L = LOW level; X = irrelevant; high-Z = high-impedance; ? = indeterminate state*

| Differential input                          | Enables |           | Output |
|---------------------------------------------|---------|-----------|--------|
| nA, nB                                      | G       | $\bar{G}$ | nY     |
| $V_{ID} \geq 100 \text{ mV}$                | H       | X         | H      |
|                                             | X       | L         | H      |
| $-100 \text{ mV} < V_{ID} < 100 \text{ mV}$ | H       | X         | ?      |
|                                             | X       | L         | ?      |
| $V_{ID} \leq -100 \text{ mV}$               | H       | X         | L      |
|                                             | X       | L         | L      |
| X                                           | L       | H         | high-Z |
| Open                                        | H       | X         | L      |
|                                             | X       | L         | L      |

## 8. Limiting values

**Table 4. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134).*

| Symbol    | Parameter                       | Conditions          | Min  | Max            | Unit |
|-----------|---------------------------------|---------------------|------|----------------|------|
| $V_{CC}$  | supply voltage                  |                     | -0.5 | +4.0           | V    |
| $V_I$     | input voltage                   | enables and outputs | -0.5 | $V_{CC} + 0.5$ | V    |
|           |                                 | A or B inputs       | -0.5 | +4.0           | V    |
| $T_{amb}$ | ambient temperature             | operating           | -40  | +85            | °C   |
| $T_j$     | junction temperature            | operating           | -40  | +150           | °C   |
| $T_{stg}$ | storage temperature             |                     | -65  | +150           | °C   |
| $V_{esd}$ | electrostatic discharge voltage |                     | > 2  | -              | kV   |

## 9. Recommended operating conditions

**Table 5. Recommended operating conditions**

| Symbol    | Parameter                  | Conditions | Min         | Typ | Max               | Unit |
|-----------|----------------------------|------------|-------------|-----|-------------------|------|
| $V_{CC}$  | supply voltage             |            | 3           | 3.3 | 3.6               | V    |
| $V_{IH}$  | HIGH-level input voltage   |            | 2           | -   | -                 | V    |
| $V_{IL}$  | LOW-level input voltage    |            | -           | -   | 0.8               | V    |
| $V_{ID}$  | differential input voltage |            | 0.1         | -   | 0.6               | V    |
| $V_{IC}$  | common-mode input voltage  |            | $0.5V_{ID}$ | -   | $2.4 - 0.5V_{ID}$ | V    |
| $T_{amb}$ | ambient temperature        | operating  | -40         | -   | +85               | °C   |

## 10. Static characteristics

**Table 6. Static characteristics**

Over recommended operating conditions, unless otherwise specified.

| Symbol       | Parameter                                     | Conditions                                               | Min  | Typ <sup>[1]</sup> | Max | Unit    |
|--------------|-----------------------------------------------|----------------------------------------------------------|------|--------------------|-----|---------|
| $V_{TR+}$    | positive differential input voltage threshold | see <a href="#">Figure 4</a> and <a href="#">Table 8</a> | -    | -                  | 100 | mV      |
| $V_{TR-}$    | negative differential input voltage threshold | see <a href="#">Figure 4</a> and <a href="#">Table 8</a> | -100 | -                  | -   | mV      |
| $V_{OH}$     | HIGH-level output voltage                     | $I_{OH} = -8$ mA                                         | 2.4  | -                  | -   | V       |
|              |                                               | $I_{OH} = -4$ mA                                         | 2.8  | -                  | -   | V       |
| $V_{OL}$     | LOW-level output voltage                      | $I_{OL} = 8$ mA                                          | -    | -                  | 0.4 | V       |
| $I_{CC}$     | supply current                                | enabled; no load                                         | -    | 10                 | 18  | mA      |
|              |                                               | disabled                                                 | -    | 0.25               | 0.5 | mA      |
| $I_I$        | input current                                 | A or B inputs                                            |      |                    |     |         |
|              |                                               | $V_I = 0$ V                                              | -2   | -10                | -20 | $\mu$ A |
|              |                                               | $V_I = 2.4$ V                                            | 0    | 10                 | 20  | $\mu$ A |
| $I_{I(OFF)}$ | power-off input current                       | A or B inputs; $V_{CC} = 0$ V; $V_I = 3.6$ V             | -    | 6                  | 20  | $\mu$ A |
| $I_{IH}$     | HIGH-level input current                      | G or $\overline{G}$ inputs; $V_{IH} = 2$ V               | -    | -                  | 10  | $\mu$ A |
| $I_{IL}$     | LOW-level input current                       | G or $\overline{G}$ inputs; $V_{IL} = 0.8$ V             | -    | -                  | 10  | $\mu$ A |
| $I_{OZ}$     | high-impedance output current                 | $V_O = 0$ V or $V_{CC}$                                  | -10  | -                  | +10 | $\mu$ A |

[1] All typical values are at  $T_{amb} = 25$  °C and  $V_{CC} = 3.3$  V.

## 11. Dynamic characteristics

**Table 7. Dynamic characteristics**

Over recommended operating condition, unless otherwise specified.

| Symbol        | Parameter                                              | Conditions                                          | Min              | Typ | Max <sup>[1]</sup> | Unit |
|---------------|--------------------------------------------------------|-----------------------------------------------------|------------------|-----|--------------------|------|
| $t_{PLH}$     | LOW-to-HIGH propagation delay                          | output; $C_L = 10$ pF; see <a href="#">Figure 5</a> | 1.3              | 2.6 | 6                  | ns   |
| $t_{PHL}$     | HIGH-to-LOW propagation delay                          | output; $C_L = 10$ pF; see <a href="#">Figure 5</a> | 1.3              | 2.5 | 6                  | ns   |
| $t_r$         | rise time                                              | output; 20 % to 80 %                                | -                | 0.6 | -                  | ns   |
| $t_f$         | fall time                                              | output; 80 % to 20 %                                | -                | 0.7 | -                  | ns   |
| $t_{sk(p)}$   | pulse skew time                                        | $t_{PHL} - t_{PLH}$                                 | -                | -   | 0.4                | ns   |
| $t_{sk(o)}$   | output skew time                                       | channel-to-channel                                  | <sup>[2]</sup> - | 0.1 | 0.3                | ns   |
| $t_{sk(p-p)}$ | part-to-part skew time                                 |                                                     | <sup>[3]</sup> - | -   | 1                  | ns   |
| $t_{PZH}$     | propagation delay, high-impedance to HIGH-level output | see <a href="#">Figure 6</a>                        | -                | 8   | 12                 | ns   |
| $t_{PZL}$     | propagation delay, high-impedance to LOW-level output  | see <a href="#">Figure 6</a>                        | -                | 3   | 12                 | ns   |
| $t_{PHZ}$     | propagation delay, HIGH-level to high-impedance output | see <a href="#">Figure 6</a>                        | -                | 6.5 | 12                 | ns   |
| $t_{PLZ}$     | propagation delay, LOW-level to high-impedance output  | see <a href="#">Figure 6</a>                        | -                | 5.5 | 12                 | ns   |

[1] All typical values are at  $T_{amb} = 25$  °C and  $V_{CC} = 3.3$  V.

[2]  $t_{sk(o)}$  is the skew between specified outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical specified loads.

[3]  $t_{sk(p-p)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, same temperature, and have identical packages and test circuits.

12. Test information

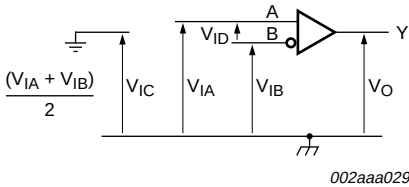


Fig 4. Voltage definitions

Table 8. Receiver minimum and maximum input threshold test voltages

| Applied voltages |          | Resulting differential input voltage | Resulting common-mode input voltage |
|------------------|----------|--------------------------------------|-------------------------------------|
| $V_{IA}$         | $V_{IB}$ | $V_{ID}$                             | $V_{IC}$                            |
| 1.25 V           | 1.15 V   | 100 mV                               | 1.2 V                               |
| 1.15 V           | 1.25 V   | −100 mV                              | 1.2 V                               |
| 2.4 V            | 2.3 V    | 100 mV                               | 2.35 V                              |
| 2.3 V            | 2.4 V    | −100 mV                              | 2.35 V                              |
| 0.1 V            | 0 V      | 100 mV                               | 0.05 V                              |
| 0 V              | 0.1 V    | −100 mV                              | 0.05 V                              |
| 1.5 V            | 0.9 V    | 600 mV                               | 1.2 V                               |
| 0.9 V            | 1.5 V    | −600 mV                              | 1.2 V                               |
| 2.4 V            | 1.8 V    | 600 mV                               | 2.1 V                               |
| 1.8 V            | 2.4 V    | −600 mV                              | 2.1 V                               |
| 0.6 V            | 0 V      | 600 mV                               | 0.3 V                               |
| 0 V              | 0.6 V    | −600 mV                              | 0.3 V                               |

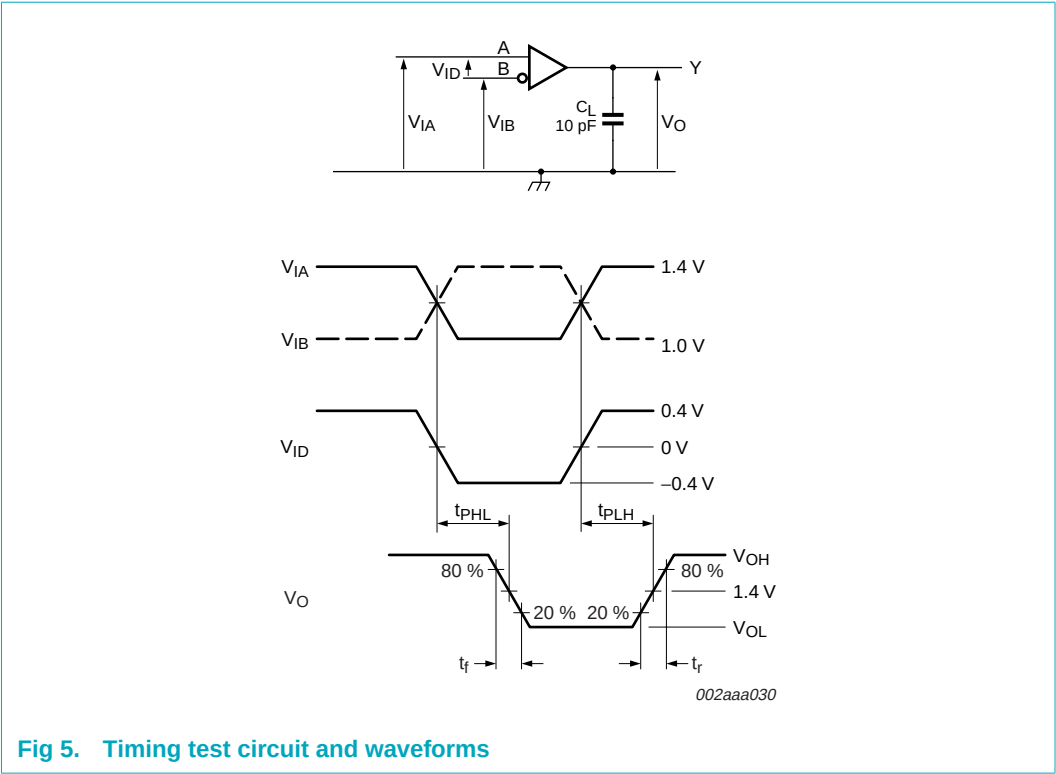


Fig 5. Timing test circuit and waveforms



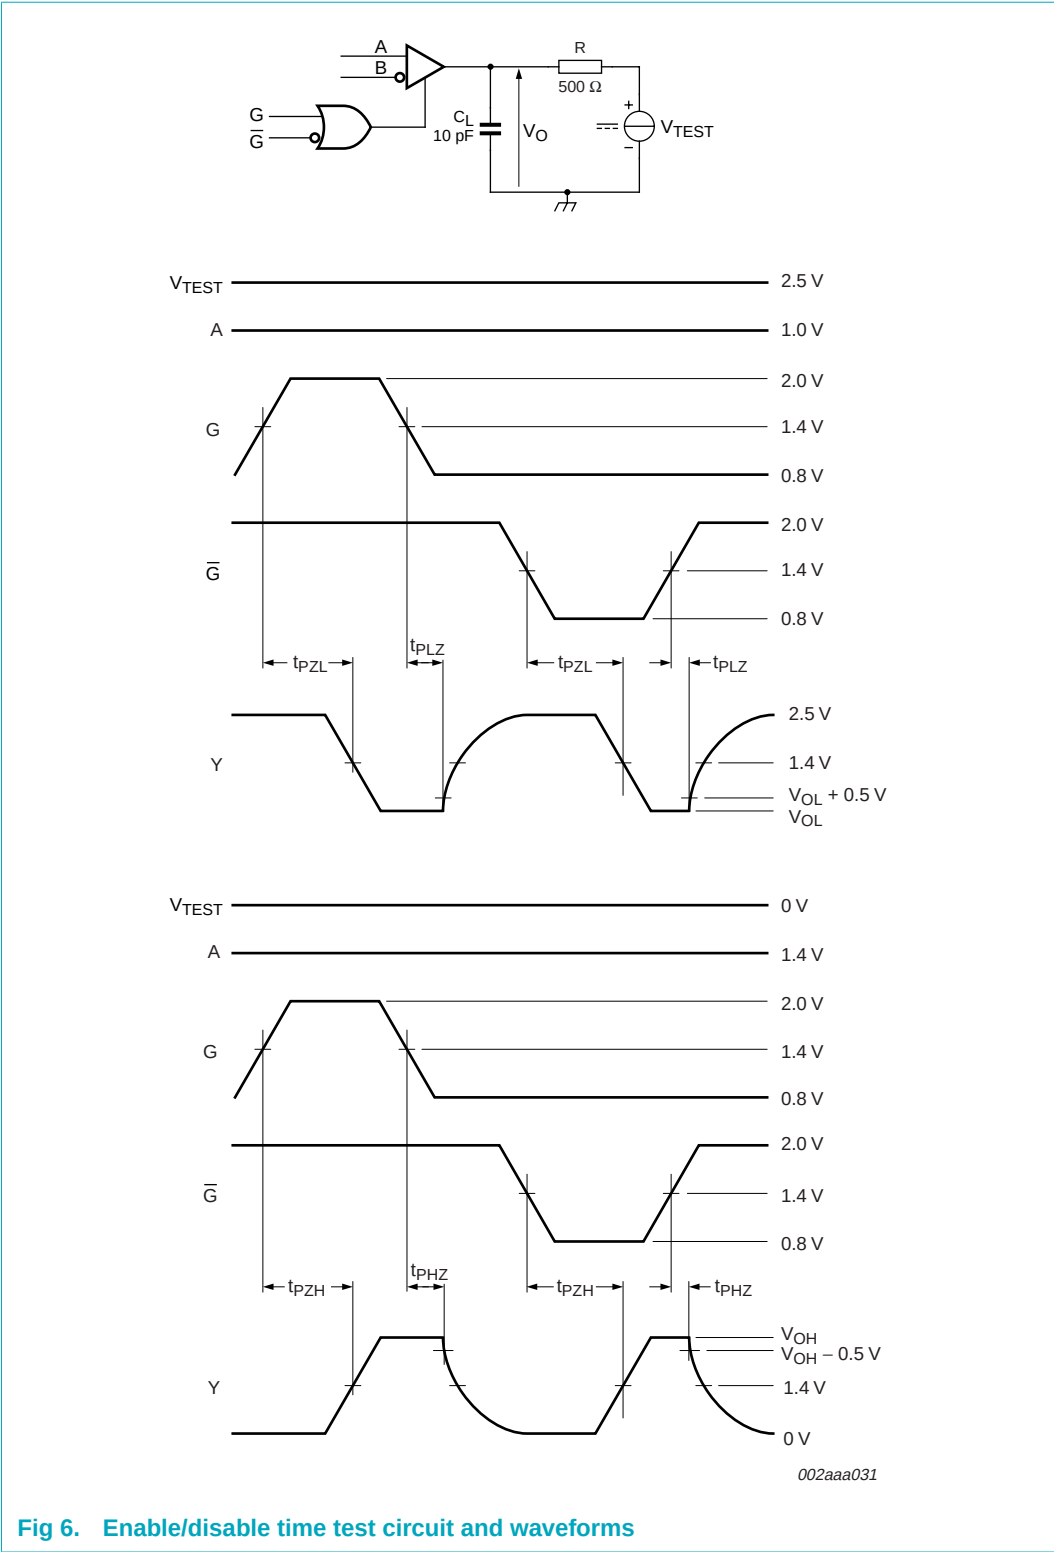


Fig 6. Enable/disable time test circuit and waveforms

13. Package outline

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm SOT403-1

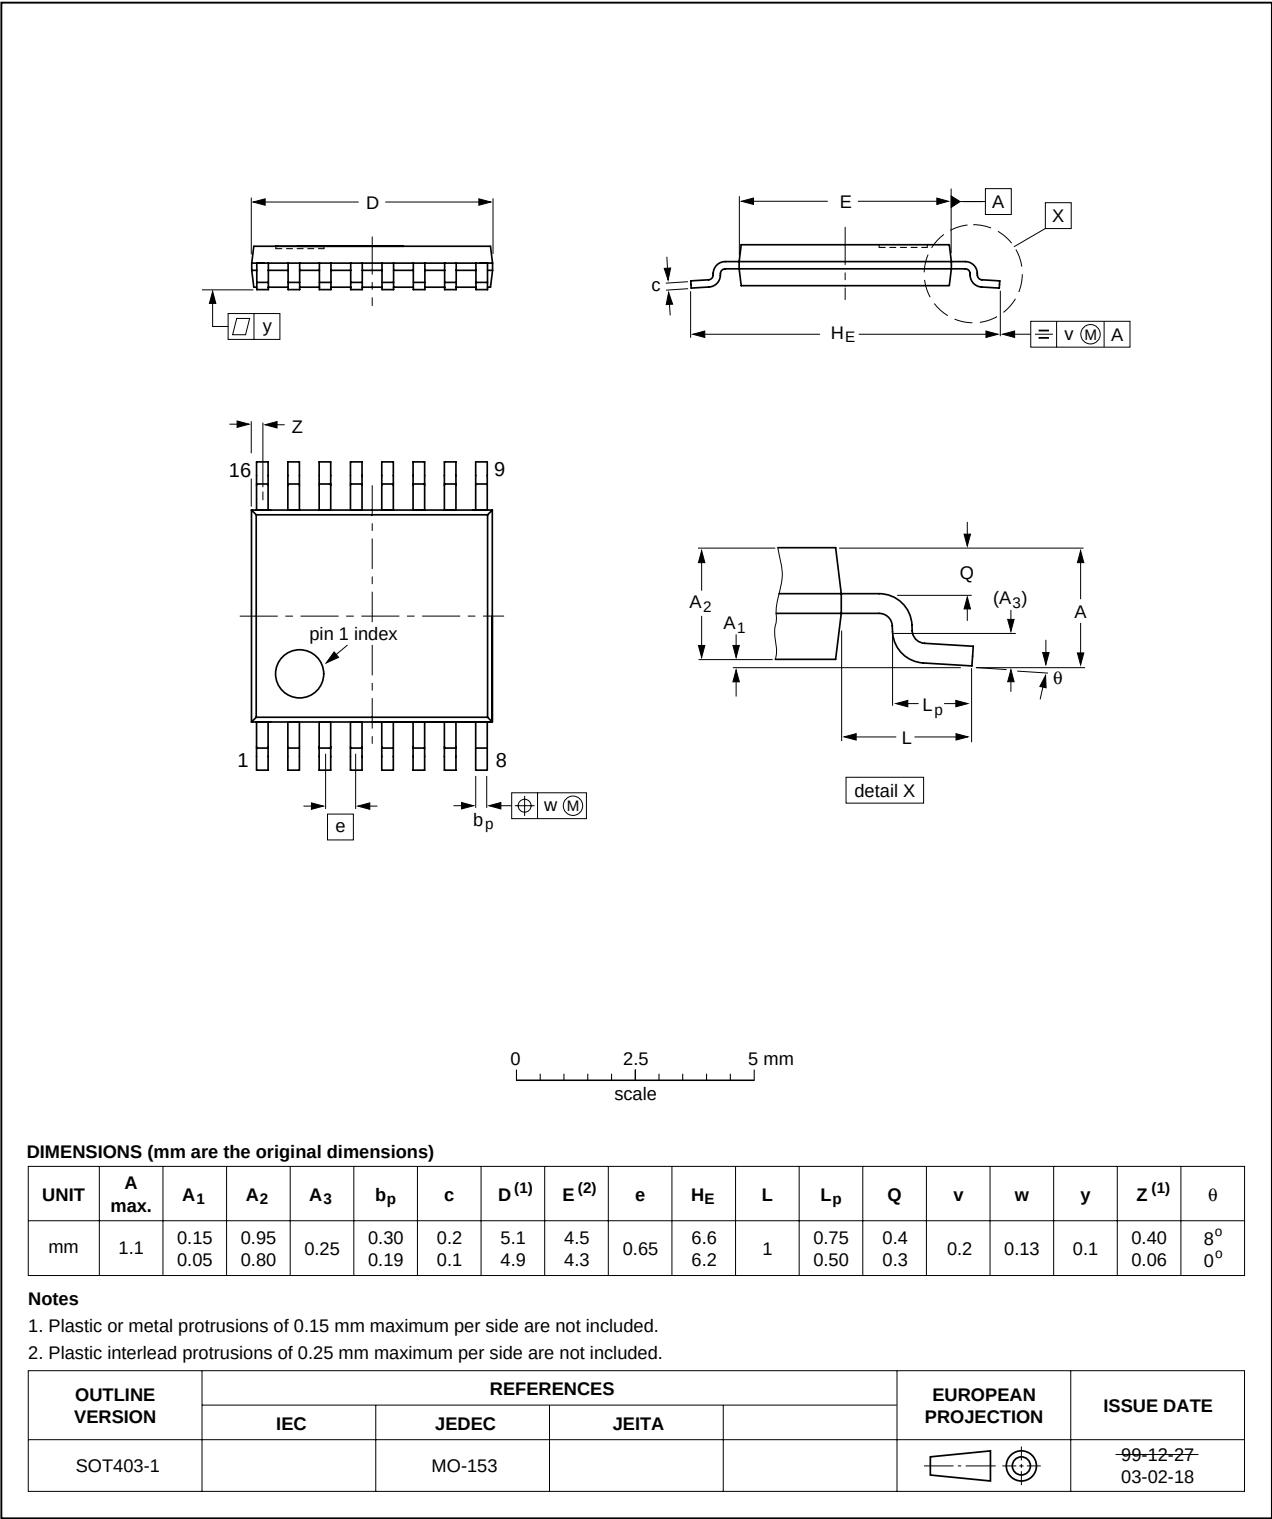


Fig 7. Package outline SOT403-1 (TSSOP16)

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

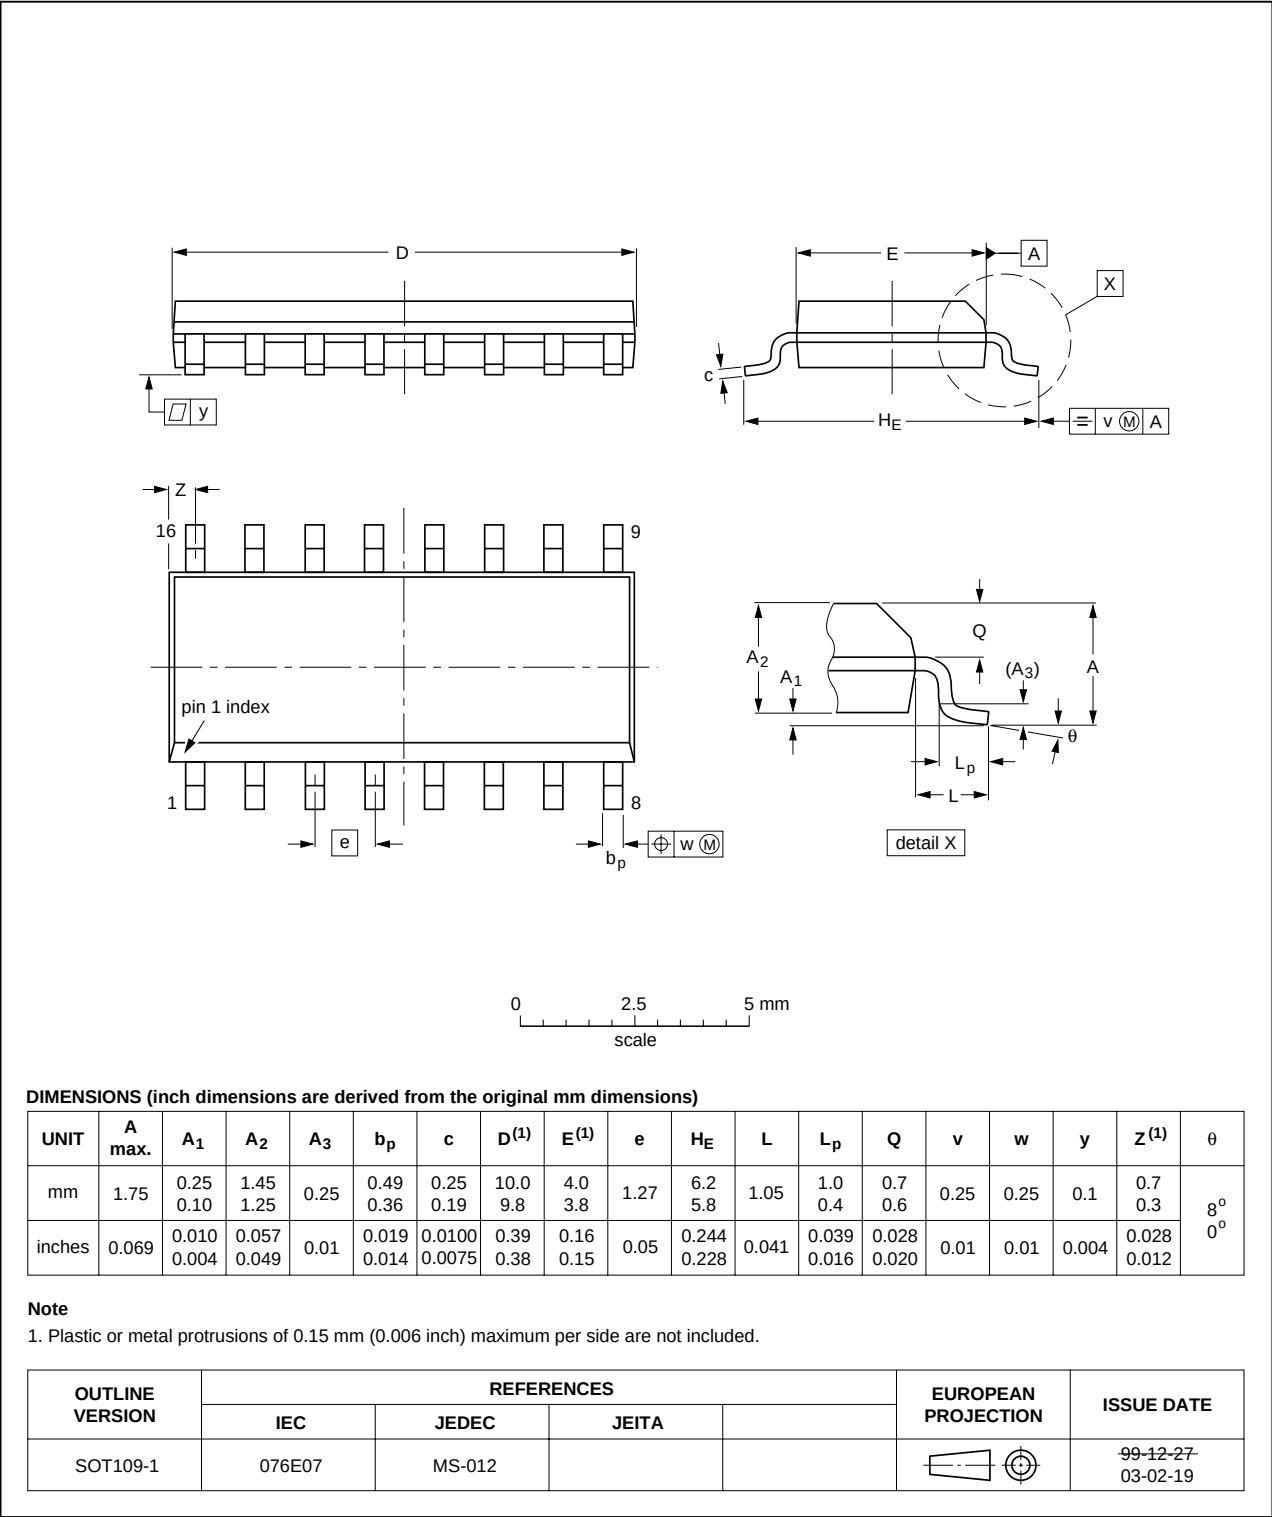


Fig 8. Package outline SOT109-1 (SO16)

## 14. Soldering

### 14.1 Introduction to soldering surface mount packages

There is no soldering method that is ideal for all surface mount IC packages. Wave soldering can still be used for certain surface mount ICs, but it is not suitable for fine pitch SMDs. In these situations reflow soldering is recommended.

### 14.2 Reflow soldering

Reflow soldering requires solder paste (a suspension of fine solder particles, flux and binding agent) to be applied to the printed-circuit board by screen printing, stencilling or pressure-syringe dispensing before package placement. Driven by legislation and environmental forces the worldwide use of lead-free solder pastes is increasing.

Several methods exist for reflowing; for example, convection or convection/infrared heating in a conveyor type oven. Throughput times (preheating, soldering and cooling) vary between 100 seconds and 200 seconds depending on heating method.

Typical reflow temperatures range from 215 °C to 260 °C depending on solder paste material. The peak top-surface temperature of the packages should be kept below:

**Table 9. SnPb eutectic process - package peak reflow temperatures (from J-STD-020C July 2004)**

| Package thickness | Volume mm <sup>3</sup> < 350 | Volume mm <sup>3</sup> ≥ 350 |
|-------------------|------------------------------|------------------------------|
| < 2.5 mm          | 240 °C + 0/-5 °C             | 225 °C + 0/-5 °C             |
| ≥ 2.5 mm          | 225 °C + 0/-5 °C             | 225 °C + 0/-5 °C             |

**Table 10. Pb-free process - package peak reflow temperatures (from J-STD-020C July 2004)**

| Package thickness | Volume mm <sup>3</sup> < 350 | Volume mm <sup>3</sup> 350 to 2000 | Volume mm <sup>3</sup> > 2000 |
|-------------------|------------------------------|------------------------------------|-------------------------------|
| < 1.6 mm          | 260 °C + 0 °C                | 260 °C + 0 °C                      | 260 °C + 0 °C                 |
| 1.6 mm to 2.5 mm  | 260 °C + 0 °C                | 250 °C + 0 °C                      | 245 °C + 0 °C                 |
| ≥ 2.5 mm          | 250 °C + 0 °C                | 245 °C + 0 °C                      | 245 °C + 0 °C                 |

Moisture sensitivity precautions, as indicated on packing, must be respected at all times.

### 14.3 Wave soldering

Conventional single wave soldering is not recommended for surface mount devices (SMDs) or printed-circuit boards with a high component density, as solder bridging and non-wetting can present major problems.

To overcome these problems the double-wave soldering method was specifically developed.

If wave soldering is used the following conditions must be observed for optimal results:

- Use a double-wave soldering method comprising a turbulent wave with high upward pressure followed by a smooth laminar wave.
- For packages with leads on two sides and a pitch (e):

- larger than or equal to 1.27 mm, the footprint longitudinal axis is **preferred** to be parallel to the transport direction of the printed-circuit board;
- smaller than 1.27 mm, the footprint longitudinal axis **must** be parallel to the transport direction of the printed-circuit board.

The footprint must incorporate solder thieves at the downstream end.

- For packages with leads on four sides, the footprint must be placed at a 45° angle to the transport direction of the printed-circuit board. The footprint must incorporate solder thieves downstream and at the side corners.

During placement and before soldering, the package must be fixed with a droplet of adhesive. The adhesive can be applied by screen printing, pin transfer or syringe dispensing. The package can be soldered after the adhesive is cured.

Typical dwell time of the leads in the wave ranges from 3 seconds to 4 seconds at 250 °C or 265 °C, depending on solder material applied, SnPb or Pb-free respectively.

A mildly-activated flux will eliminate the need for removal of corrosive residues in most applications.

#### 14.4 Manual soldering

Fix the component by first soldering two diagonally-opposite end leads. Use a low voltage (24 V or less) soldering iron applied to the flat part of the lead. Contact time must be limited to 10 seconds at up to 300 °C.

When using a dedicated tool, all other leads can be soldered in one operation within 2 seconds to 5 seconds between 270 °C and 320 °C.

#### 14.5 Package related soldering information

**Table 11. Suitability of surface mount IC packages for wave and reflow soldering methods**

| Package <sup>[1]</sup>                                                                         | Soldering method                  |                       |
|------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------|
|                                                                                                | Wave                              | Reflow <sup>[2]</sup> |
| BGA, HTSSON..T <sup>[3]</sup> , LBGA, LFBGA, SQFP, SSOP..T <sup>[3]</sup> , TFBGA, VFBGA, XSON | not suitable                      | suitable              |
| DHVQFN, HBCC, HBGA, HLQFP, HSO, HSOP, HSQFP, HSSON, HTQFP, HTSSOP, HVQFN, HVSON, SMS           | not suitable <sup>[4]</sup>       | suitable              |
| PLCC <sup>[5]</sup> , SO, SOJ                                                                  | suitable                          | suitable              |
| LQFP, QFP, TQFP                                                                                | not recommended <sup>[5][6]</sup> | suitable              |
| SSOP, TSSOP, VSO, VSSOP                                                                        | not recommended <sup>[7]</sup>    | suitable              |
| CWQCCN..L <sup>[8]</sup> , PMFP <sup>[9]</sup> , WQCCN..L <sup>[8]</sup>                       | not suitable                      | not suitable          |

[1] For more detailed information on the BGA packages refer to the *(LF)BGA Application Note* (AN01026); order a copy from your Philips Semiconductors sales office.

[2] All surface mount (SMD) packages are moisture sensitive. Depending upon the moisture content, the maximum temperature (with respect to time) and body size of the package, there is a risk that internal or external package cracks may occur due to vaporization of the moisture in them (the so called popcorn effect). For details, refer to the Drypack information in the *Data Handbook IC26; Integrated Circuit Packages; Section: Packing Methods*.

- [3] These transparent plastic packages are extremely sensitive to reflow soldering conditions and must on no account be processed through more than one soldering cycle or subjected to infrared reflow soldering with peak temperature exceeding  $217\text{ }^{\circ}\text{C} \pm 10\text{ }^{\circ}\text{C}$  measured in the atmosphere of the reflow oven. The package body peak temperature must be kept as low as possible.
- [4] These packages are not suitable for wave soldering. On versions with the heatsink on the bottom side, the solder cannot penetrate between the printed-circuit board and the heatsink. On versions with the heatsink on the top side, the solder might be deposited on the heatsink surface.
- [5] If wave soldering is considered, then the package must be placed at a  $45^{\circ}$  angle to the solder wave direction. The package footprint must incorporate solder thieves downstream and at the side corners.
- [6] Wave soldering is suitable for LQFP, QFP and TQFP packages with a pitch (e) larger than 0.8 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.65 mm.
- [7] Wave soldering is suitable for SSOP, TSSOP, VSO and VSSOP packages with a pitch (e) equal to or larger than 0.65 mm; it is definitely not suitable for packages with a pitch (e) equal to or smaller than 0.5 mm.
- [8] Image sensor packages in principle should not be soldered. They are mounted in sockets or delivered pre-mounted on flex foil. However, the image sensor package can be mounted by the client on a flex foil by using a hot bar soldering process. The appropriate soldering profile can be provided on request.
- [9] Hot bar soldering or manual soldering is suitable for PMFP packages.

## 15. Abbreviations

**Table 12. Abbreviations**

| Acronym | Description                             |
|---------|-----------------------------------------|
| ANSI    | American National Standards Institute   |
| EMI     | ElectroMagnetic Interference            |
| LVDS    | Low Voltage Differential Signaling      |
| LVTTTL  | Low Voltage Transistor-Transistor Logic |
| TTL     | Transistor-Transistor Logic             |

## 16. Revision history

**Table 13. Revision history**

| Document ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Release date | Data sheet status  | Change notice                 | Supersedes |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------|-------------------------------|------------|
| PTN3332_2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 20060814     | Product data sheet | -                             | PTN3332-01 |
| Modifications:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |              |                    |                               |            |
| <ul style="list-style-type: none"> <li>• The format of this data sheet has been redesigned to comply with the new presentation and information standard of Philips Semiconductors.</li> <li>• <a href="#">Section 2 "Features"</a>, second bullet item: changed "400 Mbps" to "400 Mbit/s"</li> <li>• <a href="#">Table 4 "Limiting values"</a>: added symbol "<math>V_{\text{esd}}</math>" and changed parameter from "ESD" to "electrostatic discharge voltage"</li> <li>• <a href="#">Table 6 "Static characteristics"</a>: <ul style="list-style-type: none"> <li>– updated values for <math>I_{\text{I}}</math> (condition <math>V_{\text{I}} = 2.4\text{ V}</math>) from "<math>-1.2\text{ }\mu\text{A min}</math>; <math>-3\text{ }\mu\text{A typ}</math>" to "<math>0\text{ }\mu\text{A min}</math>; <math>10\text{ }\mu\text{A typ}</math>; <math>20\text{ }\mu\text{A max}</math>"</li> </ul> </li> <li>• added <a href="#">Section 15 "Abbreviations"</a></li> </ul> |              |                    |                               |            |
| PTN3332-01<br>(9397 750 08341)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 20040107     | Product data       | 853-2443 A14996<br>(20031215) | -          |

## 17. Legal information

### 17.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.semiconductors.philips.com>.

### 17.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Philips Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Philips Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 17.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, Philips Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — Philips Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Philips Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a Philips Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Philips Semiconductors accepts no liability for inclusion and/or use of Philips Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — Philips Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.semiconductors.philips.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Philips Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 17.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 18. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

## 19. Contents

|           |                                                        |           |
|-----------|--------------------------------------------------------|-----------|
| <b>1</b>  | <b>General description</b> .....                       | <b>1</b>  |
| <b>2</b>  | <b>Features</b> .....                                  | <b>1</b>  |
| <b>3</b>  | <b>Applications</b> .....                              | <b>1</b>  |
| <b>4</b>  | <b>Ordering information</b> .....                      | <b>2</b>  |
| <b>5</b>  | <b>Functional diagram</b> .....                        | <b>2</b>  |
| <b>6</b>  | <b>Pinning information</b> .....                       | <b>3</b>  |
| 6.1       | Pinning .....                                          | 3         |
| 6.2       | Pin description .....                                  | 3         |
| <b>7</b>  | <b>Functional description</b> .....                    | <b>4</b>  |
| 7.1       | Function table .....                                   | 4         |
| <b>8</b>  | <b>Limiting values</b> .....                           | <b>4</b>  |
| <b>9</b>  | <b>Recommended operating conditions</b> .....          | <b>4</b>  |
| <b>10</b> | <b>Static characteristics</b> .....                    | <b>5</b>  |
| <b>11</b> | <b>Dynamic characteristics</b> .....                   | <b>6</b>  |
| <b>12</b> | <b>Test information</b> .....                          | <b>7</b>  |
| <b>13</b> | <b>Package outline</b> .....                           | <b>10</b> |
| <b>14</b> | <b>Soldering</b> .....                                 | <b>12</b> |
| 14.1      | Introduction to soldering surface mount packages ..... | 12        |
| 14.2      | Reflow soldering .....                                 | 12        |
| 14.3      | Wave soldering .....                                   | 12        |
| 14.4      | Manual soldering .....                                 | 13        |
| 14.5      | Package related soldering information .....            | 13        |
| <b>15</b> | <b>Abbreviations</b> .....                             | <b>14</b> |
| <b>16</b> | <b>Revision history</b> .....                          | <b>14</b> |
| <b>17</b> | <b>Legal information</b> .....                         | <b>15</b> |
| 17.1      | Data sheet status .....                                | 15        |
| 17.2      | Definitions .....                                      | 15        |
| 17.3      | Disclaimers .....                                      | 15        |
| 17.4      | Trademarks .....                                       | 15        |
| <b>18</b> | <b>Contact information</b> .....                       | <b>15</b> |
| <b>19</b> | <b>Contents</b> .....                                  | <b>16</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© Koninklijke Philips Electronics N.V. 2006. All rights reserved.

For more information, please visit: <http://www.semiconductors.philips.com>.

For sales office addresses, email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com).

Date of release: 14 August 2006

Document identifier: PTN3332\_2