ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

Analog Multiplexer/ Demultiplexer

TTL Compatible, Single-Pole, 8-Position Plus Common Off

The NLAS4051 is an improved version of the MC14051 and MC74HC4051 fabricated in sub–micron Silicon Gate CMOS technology for lower $R_{DS(on)}$ resistance and improved linearity with low current. This device may be operated either with a single supply or dual supply up to $\pm 3.0~V$ to pass a 6.0 V_{PP} signal without coupling capacitors.

When operating in single supply mode, it is only necessary to tie V_{EE} , pin 7 to ground. For dual supply operation, V_{EE} is tied to a negative voltage, not to exceed maximum ratings.

Features

- Improved R_{DS(on)} Specifications
- Pin for Pin Replacement for MAX4051 and MAX4051A
 - One Half the Resistance Operating at 5.0 V
- Single or Dual Supply Operation
 - Single 2.5–5.0 V Operation, or Dual ±3.0 V Operation
 - With V_{CC} of 3.0 to 3.3 V, Device Can Interface with 1.8 V Logic, No Translators Needed
 - ◆ Address and Inhibit Logic are Over-Voltage Tolerant and May Be Driven Up +6.0 V Regardless of V_{CC}
- Improved Linearity Over Standard HC4051 Devices
- Popular SOIC, and Space Saving TSSOP, and QSOP 16 Pin Packages
- Pb-Free Packages are Available*

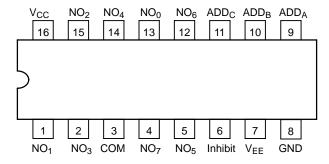


Figure 1. Pin Connection (Top View)



ON Semiconductor®

http://onsemi.com

MARKING DIAGRAMS



SOIC-16 D SUFFIX CASE 751B






TSSOP-16 DT SUFFIX CASE 948F





QSOP-16 QS SUFFIX CASE 492



A = Assembly Location

WL, L = Wafer Lot
Y = Year
WW, W = Work Week
G or = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping [†]
NLAS4051DR2	SOIC-16	2500/Tape & Reel
NLAS4051DR2G	SOIC-16 (Pb-Free)	2500/Tape & Reel
NLAS4051DTR2	TSSOP-16	2500/Tape & Reel
NLAS4051DTR2G	TSSOP-16 (Pb-Free)	2500/Tape & Reel
NLAS4051QSR	QSOP-16	2500/Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{*}For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

TRUTH TABLE

		Address		
Inhibit	С	В	Α	ON SWITCHES*
1	X don't care	X don't care	X don't care	All switches open
0	0	0	0	COM-NO ₀
0	0	0	1	COM-NO ₁
0	0	1	0	COM-NO ₂
0	0	1	1	COM-NO ₃
0	1	0	0	COM-NO ₄
0	1	0	1	COM-NO ₅
0	1	1	0	COM-NO ₆
0	1	1	1	COM-NO ₇

^{*}NO and COM pins are identical and interchangeable. Either may be considered an input or output; signals pass equally well in either direction.

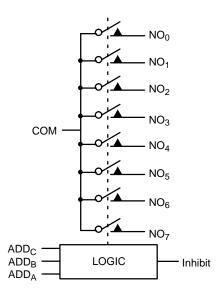


Figure 2. Logic Diagram

MAXIMUM RATINGS

F	Parameter	Symbol	Value	Unit
Negative DC Supply Voltage	(Referenced to GND)	V _{EE}	-7.0 to +0.5	V
Positive DC Supply Voltage (Note 1)	(Referenced to GND) (Referenced to V _{EE})	V _{CC}	-0.5 to +7.0 -0.5 to +7.0	V
Analog Input Voltage		V _{IS}	V_{EE} –0.5 to V_{CC} +0.5	V
Digital Input Voltage	(Referenced to GND)	V_{IN}	-0.5 to 7.0	V
DC Current, Into or Out of Any Pin		I	±50	mA
Storage Temperature Range		T _{STG}	-65 to +150	°C
Lead Temperature, 1 mm from Case f	or 10 Seconds	TL	260	°C
Junction Temperature under Bias		TJ	+ 150	°C
Thermal Resistance	SOIC TSSOP QSOP	$\theta_{\sf JA}$	143 164 164	°C/W
Power Dissipation in Still Air,	SOIC TSSOP QSOP	P _D	500 450 450	mW
Moisture Sensitivity		MSL	Level 1	
Flammability Rating	Oxygen Index: 30% – 35%	F _R	UL 94 V-0 @ 0.125 in	
ESD Withstand Voltage	Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4)	V _{ESD}	> 2000 > 200 > 1000	V
Latchup Performance	Above V _{CC} and Below GND at 125°C (Note 5)	I _{LATCHUP}	±300	mA

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- The absolute value of V_{CC} ±|V_{EE}| ≤ 7.0.
 Tested to EIA/JESD22–A114–A.
- 3. Tested to EIA/JESD22-A115-A.
- Tested to JESD22-C101-A.
- 5. Tested to EIA/JESD78.

RECOMMENDED OPERATING CONDITIONS

Parameter		Symbol	Min	Max	Unit
Negative DC Supply Voltage	(Referenced to GND)	V _{EE}	-5.5	GND	V
Positive DC Supply Voltage	(Referenced to GND) (Referenced to V _{EE})	V _{CC}	2.5 2.5	5.5 6.6	V
Analog Input Voltage		V _{IS}	V _{EE}	V _{CC}	V
Digital Input Voltage	(Note 6) (Referenced to GND)	V _{IN}	0	5.5	V
Operating Temperature Range, All Package Types		T _A	-55	125	°C
Input Rise/Fall Time (Channel Select or Enable Inputs)	$V_{CC} = 3.0 \text{ V} \pm 0.3 \text{ V}$ $V_{CC} = 5.0 \text{ V} \pm 0.5 \text{ V}$	t _r , t _f	0	100 20	ns/V

^{6.} Unused digital inputs may not be left open. All digital inputs must be tied to a high-logic voltage level or a low-logic input voltage level.

DC CHARACTERISTICS - Digital Section (Voltages Referenced to GND)

			V _{CC}	Guara	nteed Lin	nit	
Parameter	Condition	Symbol	V	–55 to 25°C	≤85°C	≤125°C	Unit
Minimum High-Level Input Voltage, Address and Inhibit Inputs		V _{IH}	2.5 3.0 4.5 5.5	1.75 2.1 3.15 3.85	1.75 2.1 3.15 3.85	1.75 2.1 3.15 3.85	V
Maximum Low–Level Input Voltage, Address and Inhibit Inputs		V _{IL}	2.5 3.0 4.5 5.5	.45 0.9 1.35 1.65	.45 0.9 1.35 1.65	.45 0.9 1.35 1.65	>
Maximum Input Leakage Current, Address or Inhibit Inputs	V _{IN} = 6.0 or GND	I _{IN}	0 V to 6.0 V	±0.1	± 1.0	±1.0	μΑ
Maximum Quiescent Supply Current (per Package)	Address, Inhibit and V _{IS} = V _{CC} or GND	I _{CC}	6.0	4.0	40	80	μΑ

DC ELECTRICAL CHARACTERISTICS - Analog Section

		Symbol	V _{CC}	VEE	Guara	nteed Lim	nit	
Parameter	Test Conditions		V	VEE	–55 to 25°C	≤85°C	≤125°C	Unit
Maximum "ON" Resistance (Note 7)	$V_{IN} = V_{IL}$ or V_{IH} $V_{IS} = (V_{EE} \text{ to } V_{CC})$ $ I_S = 10 \text{ mA}$ (Figures 4 thru 9)	R _{ON}	3.0 4.5 3.0	0 0 -3.0	86 37 26	108 46 33	120 55 37	Ω
Maximum Difference in "ON" Resistance Between Any Two Channels in the Same Package	$\begin{aligned} &V_{IN} = V_{IL} \text{ or } V_{IH,} V_{IS} = 2.0 \text{ V} \\ &V_{IS} = \frac{1}{2} (V_{CC} - V_{EE}), V_{IS} = 3.0 \text{ V} \\ &I_{IS} I_{IS} = 10 \text{ mA}, V_{IS} = 2.0 \text{ V} \end{aligned}$	ΔR _{ON}	3.0 4.5 3.0	0 0 -3.0	15 13 10	20 18 15	20 18 15	Ω
ON Resistance Flatness	$ I_S $ = 10 mA V_{COM} = 1, 2, 3.5 V V_{COM} = 2, 0, 2 V	Rflat(ON)	4.5 3.0	3.0	4 2	4 2	5 3	Ω
Maximum Off–Channel Leakage Current	Switch Off $V_{IN} = V_{IL}$ or V_{IH} $V_{IO} = V_{CC} -1.0 \text{ V or } V_{EE} +1.0 \text{ V}$ (Figure 17)	I _{NC(OFF)}	6.0 3.0	0 -3.0	0.1 0.1	5.0 5.0	100 100	nA
Maximum On-Channel Leakage Current, Channel- to-Channel	Switch On $V_{IO} = V_{CC} -1.0 \text{ V or } V_{EE} +1.0 \text{ V}$ (Figure 17)	I _{COM(ON)}	6.0 3.0	0 -3.0	0.1 0.1	5.0 5.0	100 100	nA

^{7.} At supply voltage (V_{CC}) approaching 2.5 V the analog switch on–resistance becomes extremely non–linear. Therefore, for low voltage operation it is recommended that these devices only be used to control digital signals.

AC CHARACTERISTICS (Input $t_r = t_f = 3 \text{ ns}$)

						Guarar	nteed Limi	t	
			Vcc	VEE	-55 to	25°C			
Parameter	Test Conditions	Symbol	V	V	Min	Тур*	≤85°C	≤125°C	Unit
Minimum Break-Before- Make Time	$ \begin{array}{c} V_{IN} = V_{IL} \text{ or } V_{IH} \\ V_{IS} = V_{CC} \\ R_L = 300 \ \Omega, \ C_L = 35 \text{ pF} \\ \text{(Figure 19)} \end{array} $	t _{BBM}	3.0 4.5 3.0	0.0 0.0 -3.0	1.0 1.0 1.0	6.5 5.0 3.5	- - -	- - -	ns


^{*}Typical Characteristics are at 25°C.

$\textbf{AC CHARACTERISTICS} \; (C_L = 35 \; \text{pF, Input} \; t_r = t_f = 3 \; \text{ns)}$

						Guar	anteed	Limit			
		Vcc	VEE	-	55 to 25	°C	≤8≥	35°C	≤1	25°C	
Parameter	Symbol	V	V	Min	Тур	Max	Min	Max	Min	Max	Unit
Transition Time (Address Selection Time) (Figure 18)	t _{TRANS}	2.5 3.0 4.5 3.0	0 0 0 -3.0		22 20 16 16	40 28 23 23		45 30 25 25		50 35 30 28	ns
Turn–on Time (Figures 14, 15, 20, and 21) Inhibit to N _O or N _C	t _{ON}	2.5 3.0 4.5 3.0	0 0 0 -3.0		22 18 16 16	40 28 23 23		45 30 25 25		50 35 30 28	ns
Turn–off Time (Figures 14, 15, 20, and 21) Inhibit to N _O or N _C	^t OFF	2.5 3.0 4.5 3.0	0 0 0 -3.0		22 18 16 16	40 28 23 23		45 30 25 25		50 35 30 28	ns
					Ту	pical @	25°C, \	/ _{CC} = 5.0	V		
Maximum Input Capacitance, Select Inputs	C _{IN}						8				pF
Analog I/O	C _{NO} or C _{NC}						10				
Common I/O	C _{COM}						10				
Feedthrough	C _(ON)						1.0				

ADDITIONAL APPLICATION CHARACTERISTICS (GND = 0 V)


			v _{cc}	V _{EE}	Тур	
Parameter	Condition	Symbol	v	V	25°C	Unit
Maximum On–Channel Bandwidth or Minimum Frequency Response	V _{IS} = ½ (V _{CC} – V _{EE}) Source Amplitude = 0 dBm (Figures 10 and 22)	BW	3.0 4.5 6.0 3.0	0.0 0.0 0.0 -3.0	80 90 95 95	MHz
Off-Channel Feedthrough Isolation	f =100 kHz; $V_{IS} = \frac{1}{2} (V_{CC} - V_{EE})$ Source = 0 dBm (Figures 12 and 22)	V _{ISO}	3.0 4.5 6.0 3.0	0.0 0.0 0.0 -3.0	-93 -93 -93 -93	dB
Maximum Feedthrough On Loss	$V_{IS} = \frac{1}{2} (V_{CC} - V_{EE})$ Source = 0 dBm (Figures 10 and 22)	V _{ONL}	3.0 4.5 6.0 3.0	0.0 0.0 0.0 -3.0	-2 -2 -2 -2	dB
Charge Injection	$\begin{array}{c} V_{IN} = V_{CC} \text{ to } V_{EE,} f_{IS} = 1 \text{ kHz, } t_r = t_f = 3 \text{ ns} \\ R_{IS} = 0 \Omega, C_L = 1000 \text{ pF, } Q = C_L ^\star \Delta V_{OUT} \\ \text{(Figures 16 and 23)} \end{array}$	Q	5.0 3.0	0.0 -3.0	9.0 12	pC
Total Harmonic Distortion THD + Noise	$\begin{array}{l} \rm f_{IS}=1~MHz,~R_L=10~K\Omega,~C_L=50~pF,\\ \rm V_{IS}=5.0~V_{PP}~sine~wave\\ \rm V_{IS}=6.0~V_{PP}~sine~wave\\ \rm (Figure~13) \end{array}$	THD	6.0 3.0	0.0 -3.0	0.10 0.05	%

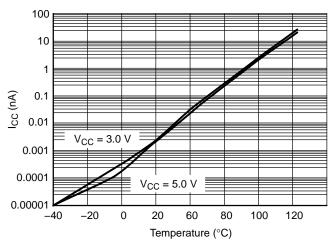

100 80 2.0 V 60 R_{ON} (Ω) 40 3.0 V 4.5 V 5.5 V 20 0 -4.0 -2.0 0 2.0 4.0 6.0 V_{IS} (VDC)

Figure 3. I_{CC} versus Temp, V_{CC} = 3 V and 5 V

Figure 4. R_{ON} versus V_{CC}, Temp = 25°C

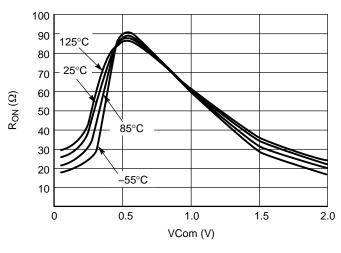

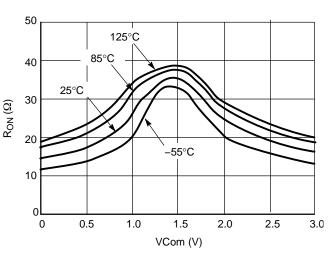
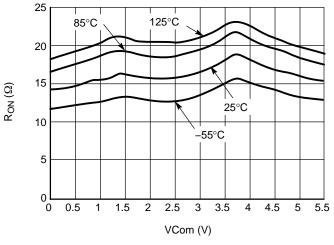


Figure 5. Typical On Resistance $V_{CC} = 2.0 \text{ V}, V_{EE} = 0 \text{ V}$

Figure 6. Typical On Resistance V_{CC} = 3.0 V, V_{EE} = 0 V



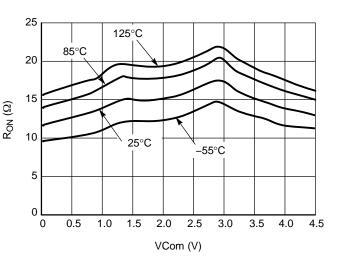


Figure 7. Typical On Resistance V_{CC} = 4.5 V, V_{EE} = 0 V

Figure 8. Typical On Resistance V_{CC} = 5.5 V, V_{EE} = 0 V

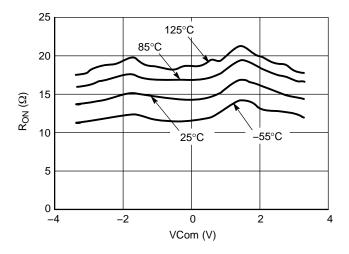


Figure 9. Typical On Resistance V_{CC} = 3.3 V, V_{EE} = -3.3 V

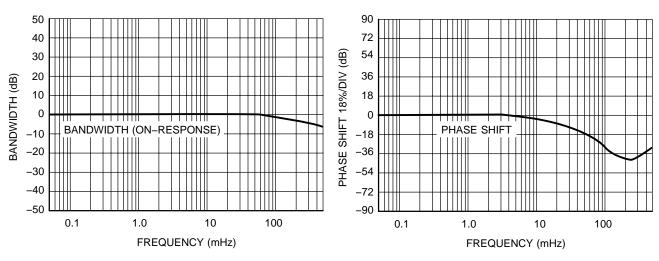


Figure 10. Bandwidth, $V_{CC} = 5.0 \text{ V}$

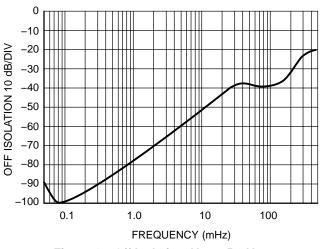


Figure 12. Off Isolation, $V_{CC} = 5.0 \text{ V}$

Figure 11. Phase Shift, V_{CC} = 5.0 V

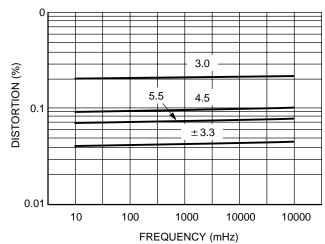


Figure 13. Total Harmonic Distortion

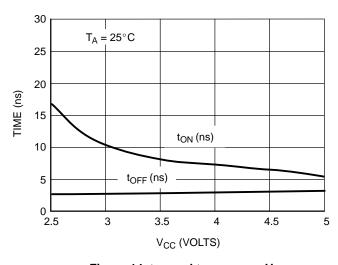


Figure 14. t_{ON} and t_{OFF} versus V_{CC}

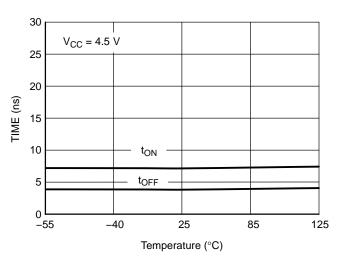


Figure 15. $t_{\mbox{\scriptsize ON}}$ and $t_{\mbox{\scriptsize OFF}}$ versus Temp

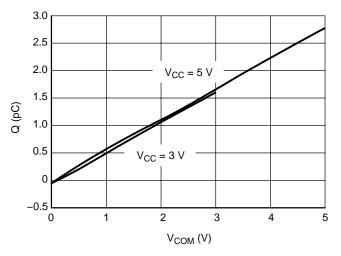


Figure 16. Charge Injection versus COM Voltage

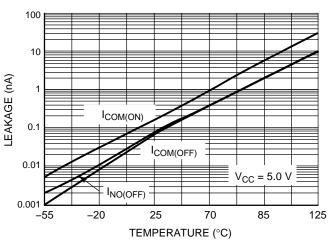
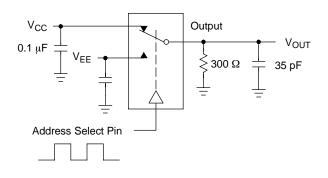


Figure 17. Switch Leakage versus Temperature



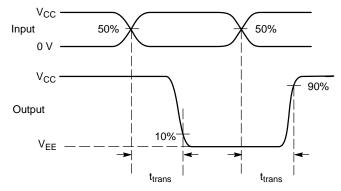


Figure 18. Channel Selection Propagation Delay

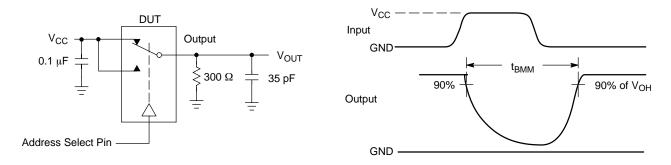


Figure 19. t_{BBM} (Time Break-Before-Make)

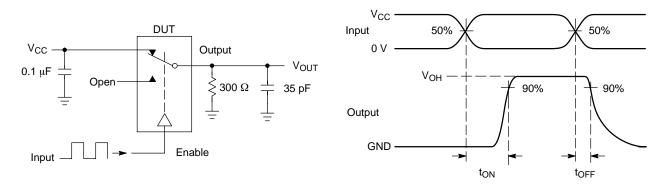


Figure 20. t_{ON}/t_{OFF}


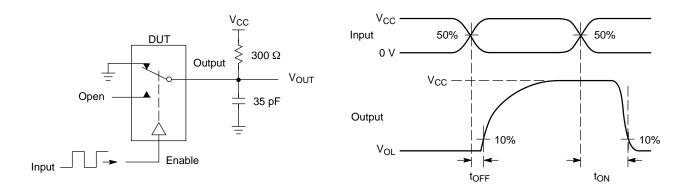


Figure 21. t_{ON}/t_{OFF}

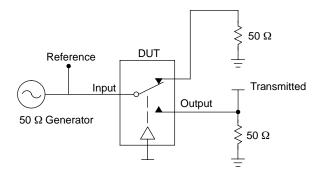

Channel switch Address and Inhibit/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch. V_{ISO} , Bandwidth and V_{ONL} are independent of the input signal direction.

$$\begin{split} &V_{ISO} = \text{Off Channel Isolation} = 20 \text{ Log} \left(\frac{V_{OUT}}{V_{IN}} \right) \text{ for } V_{IN} \text{ at } 100 \text{ kHz} \\ &V_{ONL} = \text{On Channel Loss} = 20 \text{ Log} \left(\frac{V_{OUT}}{V_{IN}} \right) \text{ for } V_{IN} \text{ at } 100 \text{ kHz to } 50 \text{ MHz} \end{split}$$

Bandwidth (BW) = the frequency 3 dB below V_{ONL}

Figure 22. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/V_{ONL}

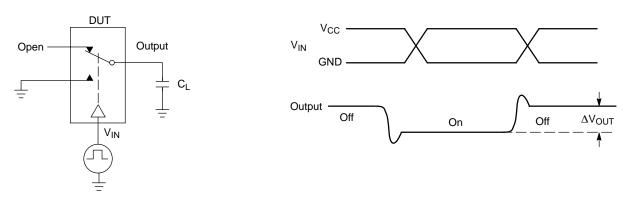


Figure 23. Charge Injection: (Q)

TYPICAL OPERATION




Figure 24. 5.0 Volts Single Supply $V_{CC} = 5.0 \text{ V}, V_{EE} = 0$





Figure 25. Dual Supply $V_{CC} = 3.0 \text{ V}$, $V_{EE} = -3.0 \text{ V}$

PACKAGE DIMENSIONS


SOIC-16 **D SUFFIX** CASE 751B-05 **ISSUE J**

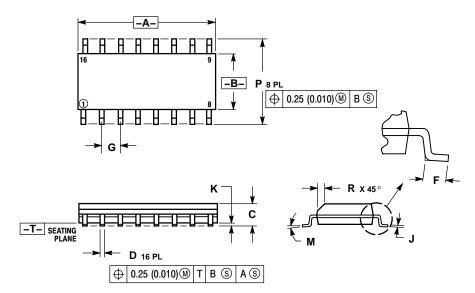

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982. CONTROLLING DIMENSION: MILLIMETER.
- DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
- MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
- DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIN	IETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α	9.80	10.00	0.386	0.393
В	3.80	4.00	0.150	0.157
С	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27	BSC	0.050	BSC
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

TSSOP-16 CASE 948F-01 ISSUE A

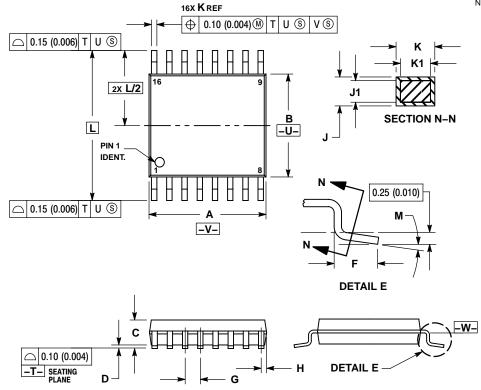

- NOTES:


 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.06) PER SIDE.
 - EXCEED 0.15 (0.006) PER SIDE.
 4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION.
 INTERLEAD FLASH OR PROTRUSION SHALL
 - NOT EXCEED 0.25 (0.010) PER SIDE.


 5. DIMENSION K DOES NOT INCLUDE
 DAMBAR PROTRUSION. ALLOWABLE
 DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K
 DIMENSION AT MAXIMUM MATERIAL
 - 6. TERMINAL NUMBERS ARE SHOWN REFERENCE ONLY. 7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–. TERMINAL NUMBERS ARE SHOWN FOR

	MILLIN	IETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α	4.90	5.10	0.193	0.200
В	4.30	4.50	0.169	0.177
С		1.20		0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65	BSC	0.026	BSC
Н	0.18	0.28	0.007	0.011
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40	BSC	0.252	BSC
M	0°	8°	0°	8 °

PACKAGE DIMENSIONS

QSOP-16 QS SUFFIX CASE 492-01 ISSUE O

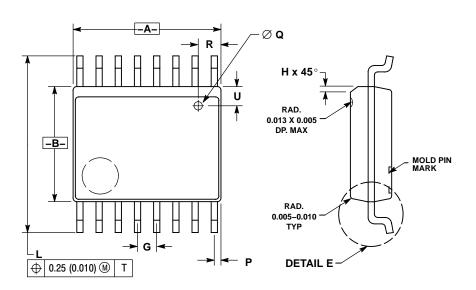

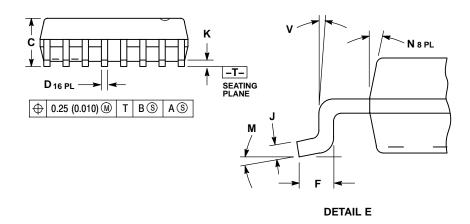

NOTES

- DIMENSIONING AND TOLERANCING PER ANSI
 VIA EM 1092
- Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
- 3. THE BOTTOM PACKAGE SHALL BE BIGGER THAN THE TOP PACKAGE BY 4 MILS (NOTE: LEAD SIDE ONLY). BOTTOM PACKAGE DIMENSION SHALL FOLLOW THE DIMENSION STATED IN THIS DRAWING.
- 4. PLASTIC DIMENSIONS DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 6 MILS PER SIDE.
- 5. BOTTOM EJECTOR PIN WILL INCLUDE THE COUNTRY OF ORIGIN (COO) AND MOLD CAVITY I.D.

DIM MIN MAX MIN A 0.189 0.196 4.80 B 0.150 0.157 3.81 C 0.061 0.068 1.55 D 0.008 0.012 0.20 F 0.016 0.035 0.41	3.99 1.73 0.31
B 0.150 0.157 3.81 C 0.061 0.068 1.55 D 0.008 0.012 0.20	3.99 1.73 0.31
C 0.061 0.068 1.55 D 0.008 0.012 0.20	1.73
D 0.008 0.012 0.20	0.31
F 0.016 0.035 0.41	0.89
G 0.025 BSC 0.	64 BSC
H 0.008 0.018 0.20	0.46
J 0.0098 0.0075 0.249	0.191
K 0.004 0.010 0.10	0.25
L 0.230 0.244 5.84	
M 0° 8° 0°	
N 0° 7° 0°	° 7 °
P 0.007 0.011 0.18	0.28
Q 0.020 DIA 0.	51 DIA
R 0.025 0.035 0.64	0.89
U 0.025 0.035 0.64	
V 0° 8° 0°	8 °

ON Semiconductor and the registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Japan Customer Focus Center Phone: 81–3–5773–3850 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative