
# Hex D Master/Slave Flip-Flop

The MC10176 contains six high-speed, master slave type "D" flip-flops. Clocking is common to all six flip-flops. Data is entered into the master when the clock is low. Master to slave data transfer takes place on the positive-going Clock transition. Thus, outputs may change only on a positive-going Clock transition. A change in the information present at the data (D) input will not affect the output information any other time due to the master-slave construction of this device.

- $P_D = 460 \text{ mW typ/pkg (No Load)}$
- $f_{toggle} = 150 \text{ MHz (typ)}$
- $t_r$ ,  $t_f = 2.0$  ns typ (20%–80%)

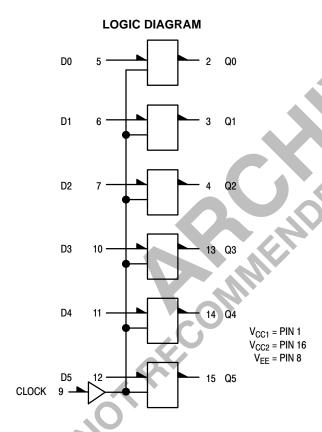

#### **CLOCKED TRUTH TABLE**

С	D	Q <sub>n+1</sub>
L	Х	Q <sub>n</sub>
H*	L	L
H*	Н	Н

\*A clock H is a clock transition from a low to a high state.




### ON Semiconductor

http://onsemi.com



CDIP-16 L SUFFIX CASE 620



**MARKING** 



PDIP-16 P SUFFIX CASE 648





PLCC-20 FN SUFFIX CASE 775




A = Assembly Location

WL = Wafer Lot

YY = Year

WW = Work Week

#### **DIP PIN ASSIGNMENT**



Pin assignment is for Dual-in-Line Package.
For PLCC pin assignment, see the Pin Conversion Tables on page 18 of the ON Semiconductor MECL Data Book (DL122/D).

#### ORDERING INFORMATION

Device	Package	Shipping
MC10176L	CDIP-16	25 Units / Rail
MC10176P	PDIP-16	25 Units / Rail
MC10176FN	PLCC-20	46 Units / Rail

#### **ELECTRICAL CHARACTERISTICS**

Characteristic  Power Supply Drain Current  Input Current	Symbol	Pin	Test Limits  −30°C +25°C		+85°C		1			
Power Supply Drain Current	Symbol	Under Test	Min	Max	Min	Typ	Max	Min	Max	u
	IE	8	IVIIII	121	IVIIII	88	110	IVIIII	121	m
mput Guirent	I <sub>inH</sub>	5		350		88	220		220	μ
	InH	9		495			310		310	μ
	I <sub>inL</sub>	5	0.5		0.5			0.3		μ
		9	0.5		0.5			0.3		
Output Voltage Logic 1	V <sub>OH</sub>	2† 15†	-1.060 -1.060	-0.890 -0.890	-0.960 -0.960		-0.810 -0.810	-0.890 -0.890	-0.700 -0.700	٧
Output Voltage Logic (	V <sub>OL</sub>	2† 15†	-1.890 -1.890	-1.675 -1.675	-1.850 -1.850		-1.650 -1.650	-1.825 -1.825	-1.615 -1.615	ν
Threshold Voltage Logic 1	V <sub>OHA</sub>	2† 15†	-1.080 -1.080		-0.980 -0.980			-0.910 -0.910		V
Threshold Voltage Logic (	) V <sub>OLA</sub>	2† 15†		-1.655 -1.655			-1.630 -1.630		-1.595 -1.595	٧
Switching Times (50Ω Load Clock Input	,									ı
Propagation Delay	, t <sub>9+2+</sub>	2	1.6	4.6	1,6		4.5	1.6	5.0	
	t <sub>9+2-</sub>	2	1.6	4.6	1.6		4.5	1.6	5.0	
Rise Time (20 to 80%)		2	1.0	4.1	1.1		4.0	1.1	4.4	
Fall Time (20 to 80%)	) t <sub>2-</sub>	2	1.0	4.1	1.1	20	4.0	1.1	4.4	
Setup Time	t <sub>setup</sub>	2	2.5		2.5	0		2.5		ı
Hold Time	t <sub>hold</sub>	2	1.5		1.5			1.5		ı
Toggle Frequency (Max)	$f_{tog}$	2	125		125	150		125		Ν
OFNICE		CO	een applied							

 $<sup>\</sup>rm V_{IHmax}$ † Output level to be measured after a clock pulse has been applied to the C Input (Pin 9)  $V_{\text{ILmin}}$ 

#### **ELECTRICAL CHARACTERISTICS** (continued)

				TEST VOI	TAGE VALU	JES (Volts)		
	@ Test Te	mperature	V <sub>IHmax</sub>	V <sub>ILmin</sub>	V <sub>IHAmin</sub>	V <sub>ILAmax</sub>	V <sub>EE</sub>	
		–30°C	-0.890	-1.890	-1.205	-1.500	-5.2	
+25°0			-0.810	-1.850	-1.105	-1.475	-5.2	
	+85°C	-0.700	-1.825	-1.035	-1.440	<b>−</b> 5.2		
Pin			TEST VOLTAGE APPLIED TO PINS LISTED BELOW					04 \
Characteristic	Symbol	Under Test	V <sub>IHmax</sub>	V <sub>ILmin</sub>	V <sub>IHAmin</sub>	V <sub>ILAmax</sub>	V <sub>EE</sub>	(V <sub>CC</sub> ) Gnd
Power Supply Drain Current	Ι <sub>Ε</sub>	8					8	1, 16
Input Current	l <sub>inH</sub>	5 9	5 9				8 8	1, 16 1, 16
	I <sub>inL</sub>	5 9		5 9			8 8	1, 16 1, 16
Output Voltage Logic 1	V <sub>OH</sub>	2† 15†	5 12				8 8	1, 16 1, 16
Output Voltage Logic 0	V <sub>OL</sub>	2† 15†		5 12			8 8	1, 16 1, 16
Threshold Voltage Logic 1	V <sub>OHA</sub>	2† 15†			5 12	ln.	8 8	1, 16 1, 16
Threshold Voltage Logic 0	V <sub>OLA</sub>	2† 15†				5 12	8 8	1, 16 1, 16
Switching Times (50Ω Load)			+1.11Vdc	+0.31V	Pulse In	Pulse Out	-3.2 V	+2.0 V
Clock Input Propagation Delay	t <sub>9+2+</sub> t <sub>9+2-</sub>	2 2			5, 9 5, 9	2 2	8 8	1, 16 1, 16
Rise Time (20 to 80%)	t <sub>2+</sub>	2		X	5, 9	2	8	1, 16
Fall Time (20 to 80%)	t <sub>2-</sub>	2			5, 9	2	8	1, 16
Setup Time	t <sub>setup</sub>	2			5, 9	2	8	1, 16
Hold Time	t <sub>hold</sub>	2			5, 9	2	8	1, 16
Toggle Frequency (Max)	f <sub>tog</sub>	2					8	1, 16


<sup>†</sup> Output level to be measured after a clock pulse has been applied to the C Input (Pin 9) VILmin VILmin

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibitum has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

#### PACKAGE DIMENSIONS

#### PLCC-20 **FN SUFFIX**

PLASTIC PLCC PACKAGE CASE 775-02 ISSUE C

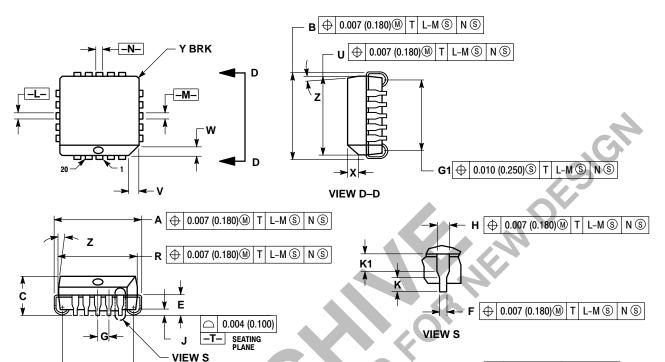

#### NOTES:

G1 ⊕ 0.010 (0.250)③ T L-M ⑤ N ⑤

OF MICE. NOT PERSON

- OTES:

  1. DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.


  2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.

  3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.

  4. DIMENSIONING AND TOLERANCING PER ANSI V14 5M 1982
- Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INCHES		MILLIM	ETERS
DIM	MIN	MAX	MIN	MAX
Α	0.385	0.395	9.78	10.03
В	0.385	0.395	9.78	10.03
С	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050	BSC	1.27	BSC
Н	0.026	0.032	0.66	0.81
J	0.020		0.51	
K	0.025		0.64	
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
٧	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y		0.020		0.50
Z	2°	10°	2°	10 °
G1	0.310	0.330	7.88	8.38
K1	0.040		1.02	

#### PACKAGE DIMENSIONS

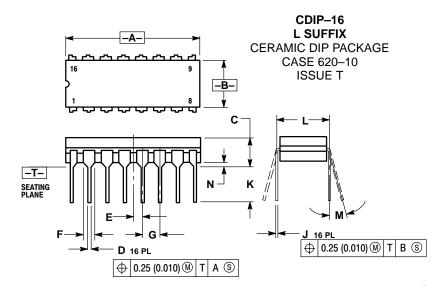

#### NOTES:


- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: INCH.
   DIMENSION LTO CENTER OF LEAD WHEN CONTROLLING DIMENSION LTO CENTER OF LEAD WHEN

- FORMED PARALLEL

  DIMENSION F MAY NARROW TO 0.76 (0.030)
  WHERE THE LEAD ENTERS THE CERAMIC
  BODY.

	INC	HES	MILLIN	IETERS		
DIM	MIN	MAX	MIN	MAX		
Α	0.750	0.785	19.05	19.93		
В	0.240	0.295	6.10	7.49		
С		0.200		5.08		
D	0.015	0.020	0.39	0.50		
Е	0.050	BSC	1.27 BSC			
F	0.055	0.065	1.40	1.65		
G	0.100	BSC	2.54	BSC		
Н	0.008	0.015	0.21	0.38		
K	0.125	0.170	3.18	4.31		
L	0.300	BSC	7.62	BSC		
M	0 °	15°	0 °	15°		
N	0.020	0.040	0.51	1.01		

#### PDIP-16 **P SUFFIX** PLASTIC DIP PACKAGE CASE 648-08 ISSUE R

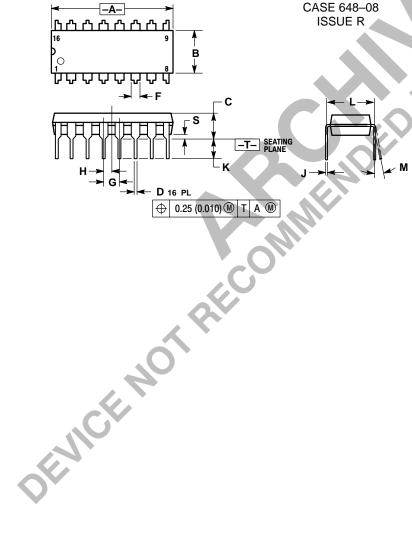

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
  5. ROUNDED CORNERS OPTIONAL

	INC	HES	MILLIN	IETERS	
DIM	MIN MAX		MIN	MAX	
Α	0.740	0.770	18.80	19.55	
В	0.250	0.270	6.35	6.85	
С	0.145	0.175	3.69	4.44	
D	0.015	0.021	0.39	0.53	
F	0.040	0.70	1.02	1.77	
G	0.100	BSC	2.54 BSC		
Н	0.050	BSC	1.27	BSC	
J	0.008	0.015	0.21	0.38	
K	0.110	0.130	2.80	3.30	
L	0.295	0.305	7.50	7.74	
M	0°	10°	0°	10 °	
S	0.020	0.040	0.51	1.01	

## **Notes**



## **Notes**





ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

#### PUBLICATION ORDERING INFORMATION

#### Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada

Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

**JAPAN**: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031

Phone: 81–3–5740–2700 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local

Sales Representative.