

Low voltage 0.5 Ω max dual SPDT switch
with break-before-make

Features

- Ultra low power dissipation:
 $I_{CC} = 0.2 \mu\text{A}$ (max.) at $T_A = 85^\circ\text{C}$
- Low ON resistance $V_{IN} = 0 \text{ V}$:
 - $R_{ON} = 0.50 \Omega$ (max. $T_A = 25^\circ\text{C}$)
at $V_{CC} = 4.3 \text{ V}$
 - $R_{ON} = 0.50 \Omega$ (max. $T_A = 25^\circ\text{C}$)
at $V_{CC} = 3.6 \text{ V}$
- Wide operating voltage range:
 V_{CC} (OPR) = 1.65 to 4.3 V single supply
- 4.3 V tolerant and 1.8 V compatible threshold on digital control input at $V_{CC} = 2.3$ to 4.3 V
- Latch-up performance exceeds 300 mA (JESD 17)
- ESD performance:
HBM > 2 kV (MIL STD 883 method 3015)

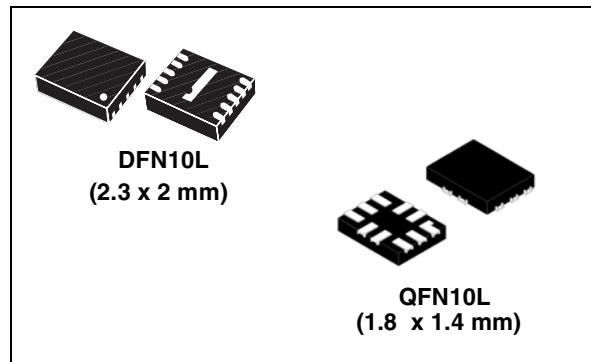


Table 1. Device summary

| Order code | Package | Packing |
|-------------|--------------------------|---------------|
| STG3684AUTR | QFN10L (1.8 x 1.4 mm) | Tape and reel |
| STG3684ADTR | DFN10L (2.3 x 2 mm) | Tape and reel |

Contents

| | | |
|----------|---|-----------|
| 1 | Description | 5 |
| 2 | Pin settings | 6 |
| 2.1 | Pin connection | 6 |
| 2.2 | Pin description | 7 |
| 3 | Input equivalent circuit and truth table | 8 |
| 4 | Maximum rating | 9 |
| | Recommended operating conditions | 9 |
| 5 | Electrical characteristics | 10 |
| 6 | Test circuit | 13 |
| 7 | Package mechanical data | 19 |
| 8 | Revision history | 28 |

List of tables

| | | |
|-----------|---|----|
| Table 1. | Device summary | 1 |
| Table 2. | Pin description | 7 |
| Table 3. | Truth table | 8 |
| Table 4. | Absolute maximum ratings | 9 |
| Table 5. | Recommended operating conditions | 9 |
| Table 6. | DC specifications | 10 |
| Table 7. | AC electrical characteristics ($C_L = 35 \text{ pF}$, $R_L = 50 \Omega$, $t_r = t_f \leq 6 \text{ ns}$) | 11 |
| Table 8. | Analog switch characteristics ($C_L = 5 \text{ pF}$, $R_L = 50 \Omega$, $T_A = 25^\circ\text{C}$) | 12 |
| Table 9. | QFN10L (1.8 x 1.4 mm) mechanical data | 20 |
| Table 10. | DFN10L (2 x 2.3 mm) mechanical data | 24 |
| Table 11. | Document revision history | 28 |

List of figures

| | | |
|------------|---|----|
| Figure 1. | Pin connection (top through view) | 6 |
| Figure 2. | Input equivalent circuit | 8 |
| Figure 3. | ON resistance | 13 |
| Figure 4. | OFF leakage | 14 |
| Figure 5. | OFF isolation | 14 |
| Figure 6. | Bandwidth | 15 |
| Figure 7. | Channel-to-channel crosstalk | 15 |
| Figure 8. | Test circuit | 16 |
| Figure 9. | Break-before-make time delay | 16 |
| Figure 10. | Charge injection ($V_{GEN} = 0$ V, $R_{GEN} = 0$ Ω , $R_L = 1$ M Ω , $C_L = 100$ pF) | 17 |
| Figure 11. | Turn-on, turn-off delay time | 18 |
| Figure 12. | QFN10L (1.8 x 1.4 mm) package outline | 19 |
| Figure 13. | QFN10L (1.8 x 1.4 mm) footprint recommendations | 20 |
| Figure 14. | QFN10L (1.8 x 1.4 mm) carrier type | 21 |
| Figure 15. | QFN10L (1.8 x 1.4 mm) reel information - back view | 22 |
| Figure 16. | QFN10L (1.8 x 1.4 mm) reel information - front side | 23 |
| Figure 17. | DFN10L (2 x 2.3 mm) package outline | 24 |
| Figure 18. | DFN10L (2 x 2.3 mm) carrier type | 25 |
| Figure 19. | DFN10L (2 x 2.3 mm) reel information - back view | 26 |
| Figure 20. | DFN10L (2 x 2.3 mm) reel information - front side | 27 |

1 Description


The STG3684A is a high-speed CMOS dual analog SPDT (single-pole dual-throw) switch or dual 2:1 multiplexer/demultiplexer bus switch fabricated using silicon gate C²MOS technology. Designed to operate from 1.65 to 4.3 V, this device is ideal for portable applications.

It offers very low ON resistance ($R_{ON} < 0.5 \Omega$) at $V_{CC} = 3.6$ V. The nIN inputs are provided to control the independent channel switches nS1 and nS2. The switches nS1 are ON (connected to common ports Dn) when the nIN input is held high and OFF (state of high impedance exists between the two ports) when nIN is held low. The switches nS2 are ON (connected to common ports Dn) when the nIN input is held low and OFF (state of high impedance exists between the two ports) when IN is held high. Additional key features are fast switching speed, break-before-make delay time and ultra low power consumption. All inputs and outputs are equipped with protection circuits against static discharge, giving them ESD and excess transient voltage immunity.

2 Pin settings

2.1 Pin connection

Figure 1. Pin connection (top through view)

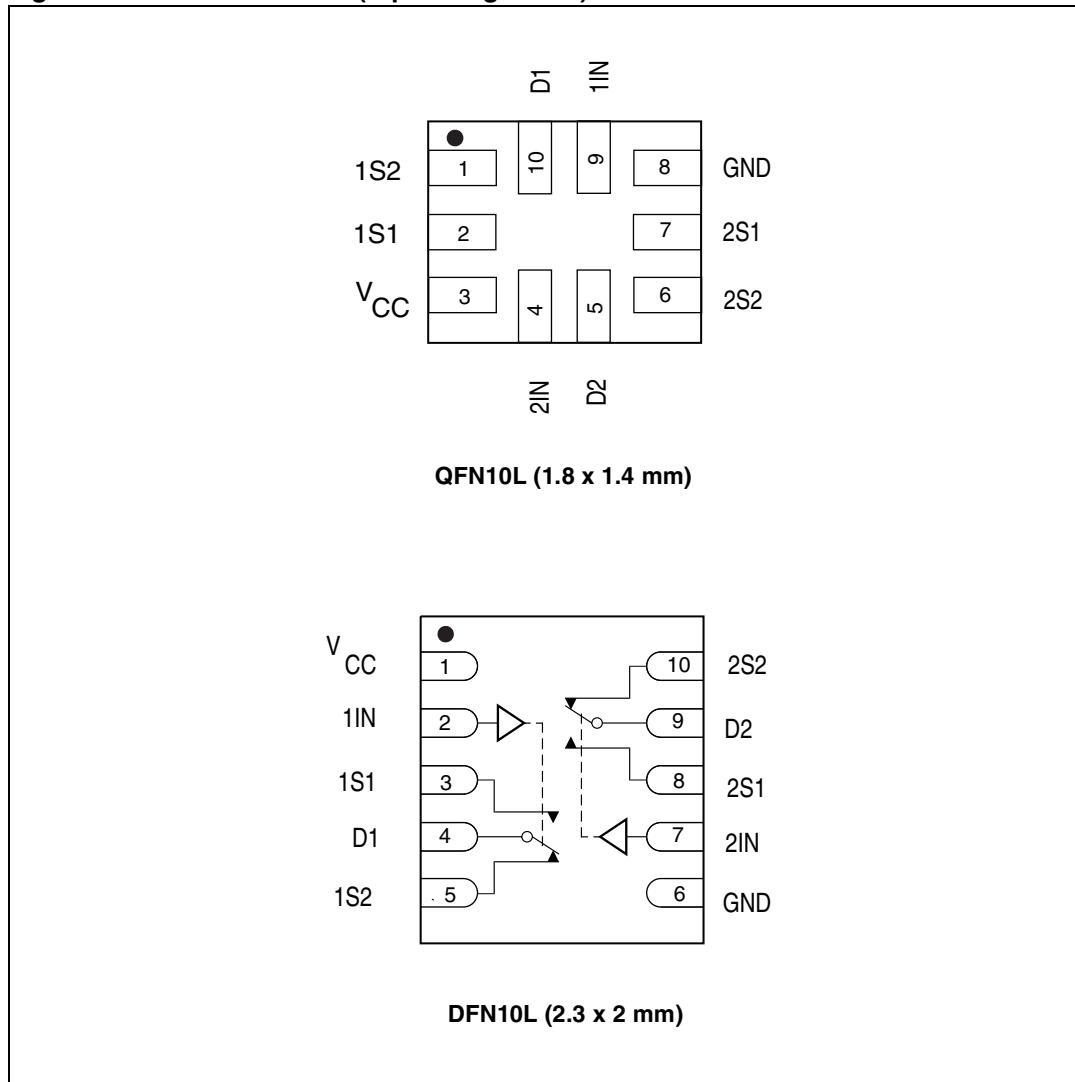

2.2 Pin description

Table 2. Pin description

| Pin number | | Symbol | Name and function |
|------------|--------|-----------------|-------------------------|
| QFN10L | DFN10L | | |
| 1 | 5 | 1S2 | Independent channel |
| 2 | 3 | 1S1 | Independent channel |
| 3 | 1 | V _{CC} | Positive voltage supply |
| 4 | 7 | 2IN | Control |
| 5 | 9 | D2 | Common channel |
| 6 | 10 | 2S2 | Independent channel |
| 7 | 8 | 2S1 | Independent channel |
| 8 | 6 | GND | Ground (0 V) |
| 9 | 2 | 1IN | Control |
| 10 | 4 | D1 | Common channel |

Note: *Exposed pad must be soldered to a floating plane. Do NOT connect to power or ground.*

3 Input equivalent circuit and truth table

Figure 2. Input equivalent circuit

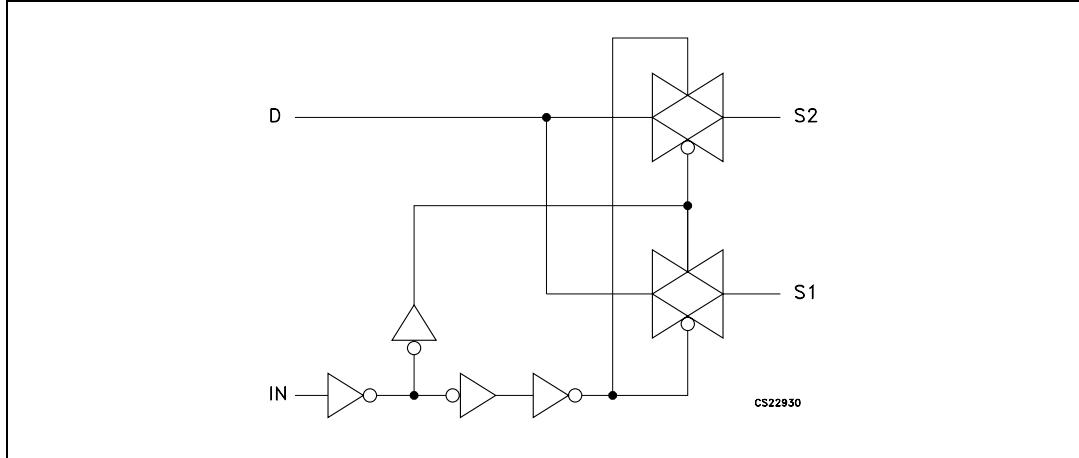


Table 3. Truth table

| IN | Switch S1 | Switch S2 |
|----|--------------------|--------------------|
| H | ON | OFF ⁽¹⁾ |
| L | OFF ⁽¹⁾ | ON |

1. High impedance.

4 Maximum rating

Stressing the device above the rating listed in the “Absolute maximum ratings” table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality documents.

Table 4. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|--------------------------|---|------------------------|------|
| V_{CC} | Supply voltage | -0.5 to 5.5 | V |
| V_I | DC input voltage | -0.5 to $V_{CC} + 0.5$ | V |
| V_{IC} | DC control input voltage | -0.5 to 5.5 | V |
| V_O | DC output voltage | -0.5 to $V_{CC} + 0.5$ | V |
| I_{IKC} | DC input diode current on control pin ($V_{IN} < 0$ V) | -50 | mA |
| I_{IK} | DC Input diode current ($V_{IN} < 0$ V) | ± 50 | mA |
| I_{OK} | DC output diode current | ± 20 | mA |
| I_O | DC output current | ± 300 | mA |
| I_{OP} | DC output current peak (pulse at 1 ms, 10% duty cycle) | ± 500 | mA |
| I_{CC} or I_{GND} | DC V_{CC} or ground current | ± 100 | mA |
| P_D | Power dissipation at $T_A = 70$ °C | 1120 | mW |
| T_{STG} | Storage temperature | -65 to 150 | °C |
| T_L | Lead temperature (10 sec) | 300 | °C |

Recommended operating conditions

Table 5. Recommended operating conditions

| Symbol | Parameter | Value | Unit |
|----------|--|--------------------------|---------|
| V_{CC} | Supply voltage | 1.65 to 4.3 | V |
| V_I | Input voltage | 0 to V_{CC} | V |
| V_{IC} | Control input voltage | 0 to 4.3 | V |
| V_O | Output voltage | 0 to V_{CC} | V |
| T_{op} | Operating temperature | -40 to 85 | °C |
| dt/dv | Input rise and fall time control input | $V_{CC} = 1.65$ to 2.7 V | 0 to 20 |
| | | $V_{CC} = 3.0$ to 4.3 V | 0 to 10 |
| | | | ns/V |

5 Electrical characteristics

Table 6. DC specifications

| Symbol | Parameter | V _{CC} (V) | Test condition | Value | | | | | Unit | |
|-------------------|---|---------------------|--|------------------------|------|-------|----------------------|------|------|--|
| | | | | T _A = 25 °C | | | -40 to 85 °C | | | |
| | | | | Min | Typ | Max | Min | Max | | |
| V _{IH} | High level input voltage | 1.65 – 1.95 | | 0.65 V _{CC} | | | 0.65 V _{CC} | | V | |
| | | 2.3 – 2.5 | | 1.2 | | | 1.2 | | | |
| | | 2.7 – 3.0 | | 1.3 | | | 1.3 | | | |
| | | 3.0 – 3.6 | | 1.4 | | | 1.4 | | | |
| | | 4.3 | | 1.5 | | | 1.5 | | | |
| V _{IL} | Low level input voltage | 1.65 – 1.95 | | | | 0.25 | | 0.25 | V | |
| | | 2.3 – 2.5 | | | | 0.25 | | 0.25 | | |
| | | 2.7 – 3.0 | | | | 0.25 | | 0.25 | | |
| | | 3.0 – 3.6 | | | | 0.30 | | 0.30 | | |
| | | 4.3 | | | | 0.40 | | 0.40 | | |
| R _{ON} | Switch ON resistance | 4.3 | V _S = 0 V to V _{CC} I _S = 100 mA | | 0.45 | 0.50 | | 0.60 | Ω | |
| | | 3.6 | | | 0.45 | 0.50 | | 0.60 | | |
| | | 3.0 | | | 0.50 | 0.55 | | 0.60 | | |
| | | 2.3 | | | 0.60 | 0.70 | | 0.80 | | |
| | | 1.8 | | | 0.80 | 0.9 | | 1.0 | | |
| ΔR _{ON} | ON resistance match between channels ^{(1), (2)} | 2.7 | V _S = 1.5 V I _S = 100 mA | | 0.1 | | | | Ω | |
| R _{FLAT} | ON resistance flatness ⁽³⁾ | 4.3 | V _S = 1.5 V I _S = 100 mA | | 0.15 | 0.20 | | 0.20 | Ω | |
| | | 3.6 | | | 0.15 | 0.20 | | 0.20 | | |
| | | 3.0 | | | 0.15 | 0.20 | | 0.20 | | |
| | | 2.7 | | | 0.15 | 0.20 | | 0.20 | | |
| | | 2.3 | | | 0.20 | 0.25 | | 0.25 | | |
| | | 1.65 | | | 0.35 | 0.45 | | 0.45 | | |
| I _{OFF} | OFF state leakage current (nSn), (Dn) | 4.3 | V _S = 0.3 or 4 V | | | ±20 | | ±100 | nA | |
| I _{IN} | Input leakage current | 0 – 4.3 | V _{IN} = 0 to 4.3 V | | | ±0.05 | | ±1 | μA | |
| I _{CC} | Quiescent supply current ⁽¹⁾ | 1.65 – 4.3 | V _{IN} = V _{CC} or GND | | | ±0.05 | | ±0.2 | μA | |

Table 6. DC specifications (continued)

| Symbol | Parameter | V _{CC} (V) | Test condition | Value | | | | | Unit | |
|-------------------|--|---------------------|--|------------------------|-----|-----|--------------|------|------|--|
| | | | | T _A = 25 °C | | | -40 to 85 °C | | | |
| | | | | Min | Typ | Max | Min | Max | | |
| I _{CCLV} | Quiescent supply current low voltage driving | 4.3 | V _{1IN} , V _{2IN} = 1.65 V | | ±37 | ±50 | | ±100 | µA | |
| | | | V _{1IN} , V _{2IN} = 1.80 V | | ±33 | ±40 | | ±50 | | |
| | | | V _{1IN} , V _{2IN} = 2.60 V | | ±12 | ±20 | | ±30 | | |

1. Guaranteed by design.
2. $\Delta R_{ON} = R_{ON(max)} - R_{ON(min)}$.
3. Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.

Table 7. AC electrical characteristics (C_L = 35 pF, R_L = 50 Ω, t_r = t_f ≤ 6 ns)

| Symbol | Parameter | V _{CC} (V) | Test condition | Value | | | | | Unit | |
|-------------------------------------|------------------------------|---------------------|---|------------------------|------|-----|--------------|-----|------|--|
| | | | | T _A = 25 °C | | | -40 to 85 °C | | | |
| | | | | Min | Typ | Max | Min | Max | | |
| t _{PLH} , t _{PHL} | Propagation delay | 1.65 – 1.95 | | | 0.45 | | | | ns | |
| | | 2.3 – 2.7 | | | 0.40 | | | | | |
| | | 3.0 – 3.3 | | | 0.30 | | | | | |
| | | 3.6 – 4.3 | | | 0.30 | | | | | |
| t _{ON} | Turn-ON time | 1.65 – 1.95 | V _S = 0.8 V | | 120 | | | | ns | |
| | | 2.3 – 2.7 | V _S = 1.5 V | | 65 | 85 | | 90 | | |
| | | 3.0 – 3.3 | | | 42 | 55 | | 65 | | |
| | | 3.6 – 4.3 | | | 40 | 55 | | 65 | | |
| t _{OFF} | Turn-OFF time | 1.65 – 1.95 | V _S = 0.8 V | | 45 | | | | ns | |
| | | 2.3 – 2.7 | V _S = 1.5 V | | 18 | 30 | | 40 | | |
| | | 3.0 – 3.3 | | | 16 | 30 | | 40 | | |
| | | 3.6 – 4.3 | | | 15 | 30 | | 40 | | |
| t _D | Break-before make time delay | 1.65 – 1.95 | C _L = 35 pF R _L = 50 Ω V _S = 1.5 V | 2 | 80 | | | | ns | |
| | | 2.3 – 2.7 | | 2 | 60 | | | | | |
| | | 3.0 – 3.3 | | 2 | 55 | | | | | |
| | | 3.6 – 4.3 | | 2 | 50 | | | | | |

Table 7. AC electrical characteristics ($C_L = 35 \text{ pF}$, $R_L = 50 \Omega$, $t_r = t_f \leq 6 \text{ ns}$) (continued)

| Symbol | Parameter | $V_{CC} (\text{V})$ | Test condition | Value | | | | | Unit | |
|--------|------------------|---------------------|--|--------------------------|-----|-----|------------------------------------|-----|------|--|
| | | | | $T_A = 25^\circ\text{C}$ | | | $-40 \text{ to } 85^\circ\text{C}$ | | | |
| | | | | Min | Typ | Max | Min | Max | | |
| Q | Charge injection | 1.65 – 1.95 | $C_L = 100 \text{ pF}$ $R_L = 1 \text{ M}\Omega$ $V_{GEN} = 0 \text{ V}$ $R_{GEN} = 0 \Omega$ | | 43 | | | | pC | |
| | | 2.3 – 2.7 | | | 51 | | | | | |
| | | 3.0 – 3.3 | | | 51 | | | | | |
| | | 3.6 – 4.3 | | | 49 | | | | | |


Table 8. Analog switch characteristics ($C_L = 5 \text{ pF}$, $R_L = 50 \Omega$, $T_A = 25^\circ\text{C}$)

| Symbol | Parameter | $V_{CC} (\text{V})$ | Test condition | Value | | | | | Unit | |
|----------|---|---------------------|--|--------------------------|------|-----|------------------------------------|-----|------|--|
| | | | | $T_A = 25^\circ\text{C}$ | | | $-40 \text{ to } 85^\circ\text{C}$ | | | |
| | | | | Min | Typ | Max | Min | Max | | |
| OIRR | Off isolation ⁽¹⁾ | 1.65 – 4.3 | $V_S = 1 \text{ V}_{\text{RMS}}$ $f = 100 \text{ kHz}$ | | -66 | | | | dB | |
| Xtalk | Crosstalk | 1.65 – 4.3 | $V_S = 1 \text{ V}_{\text{RMS}}$ $f = 100 \text{ kHz}$ | | -72 | | | | dB | |
| THD | Total harmonic distortion | 2.3 – 4.3 | $R_L = 600 \Omega$ $V_{IN} = 2V_{PP}$ $f = 20 \text{ Hz to } 20 \text{ kHz}$ | | 0.02 | | | | % | |
| BW | -3 dB bandwidth | 1.65 – 4.3 | $R_L = 50 \Omega$ | | 55 | | | | MHz | |
| C_{IN} | Control pin input capacitance | | | | 5 | | | | pF | |
| C_{Sn} | Sn port capacitance | 3.3 | $f = 1 \text{ MHz}$ | | 40 | | | | | |
| C_D | D port capacitance when switch is enabled | 3.3 | $f = 1 \text{ MHz}$ | | 114 | | | | | |


1. Off Isolation = $20 \log_{10} (V_D/V_S)$, V_D = output. V_S = input at off switch.

6 Test circuit


Figure 3. ON resistance

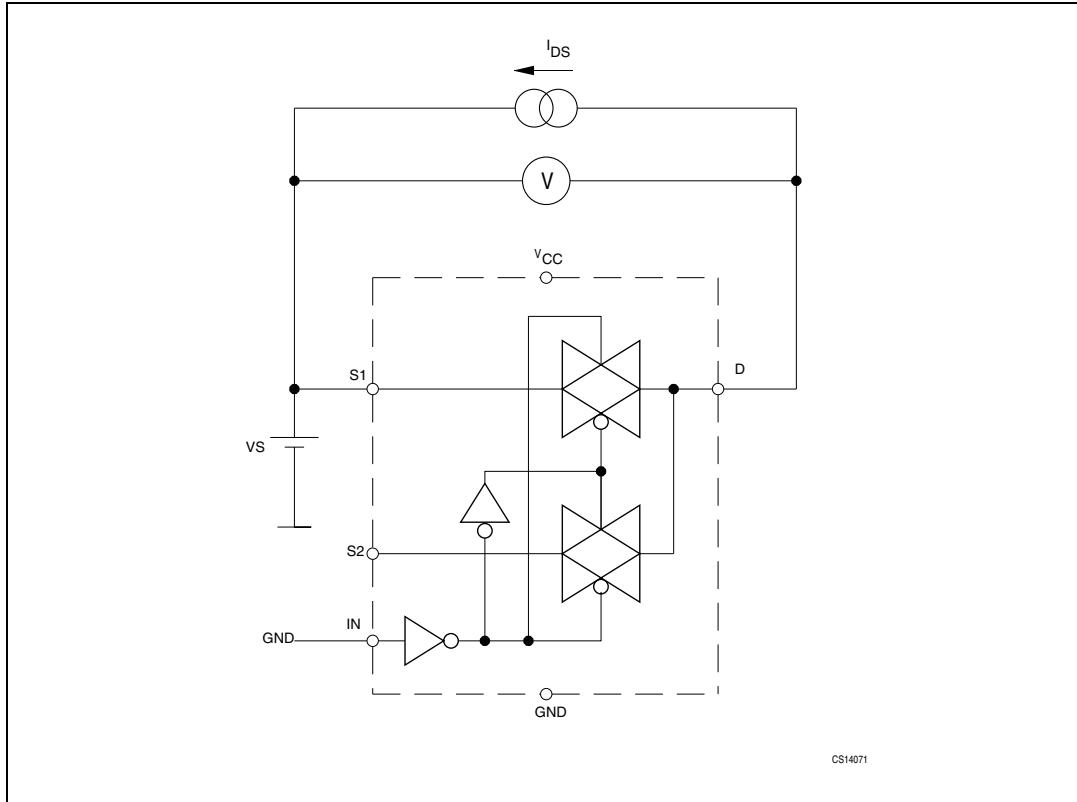

CS14071

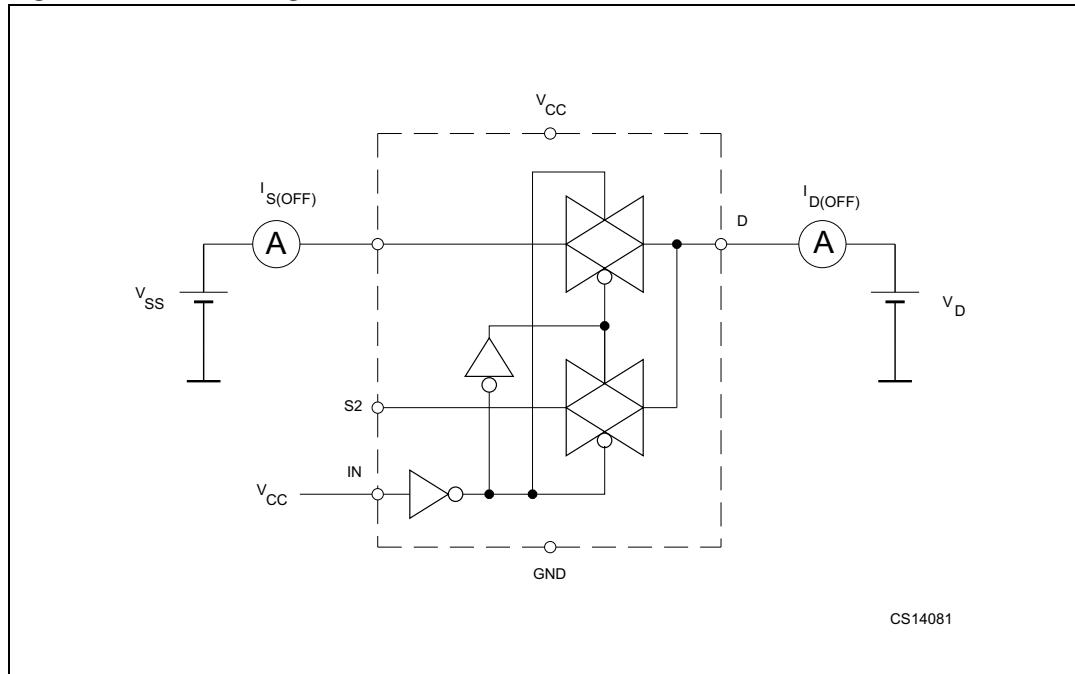Figure 4. OFF leakage

CS14081

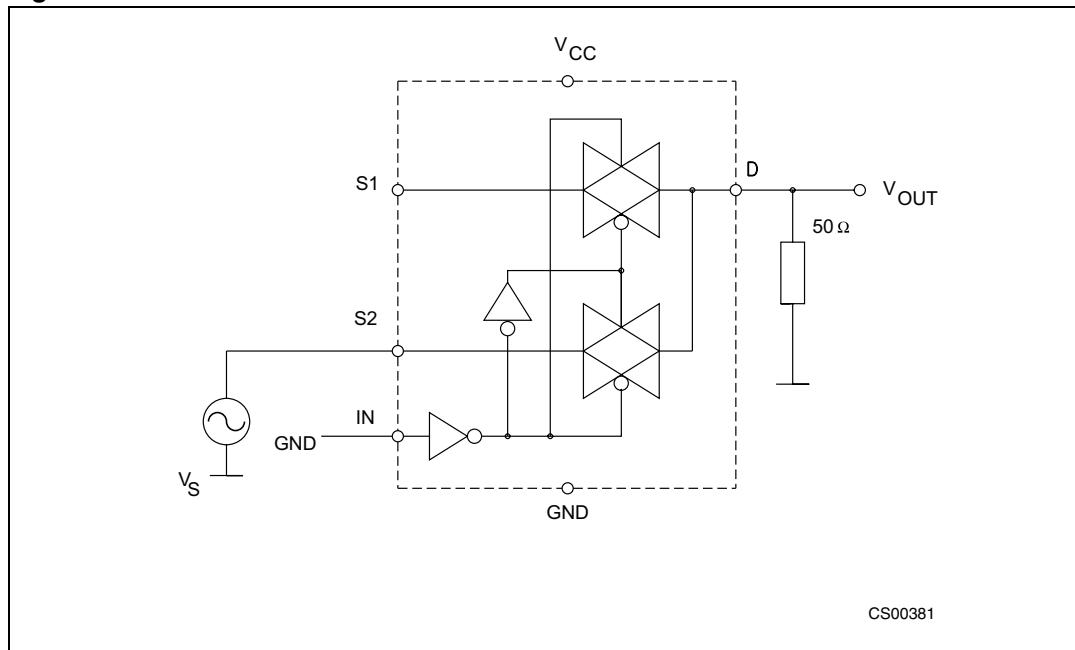Figure 5. OFF isolation

CS00381

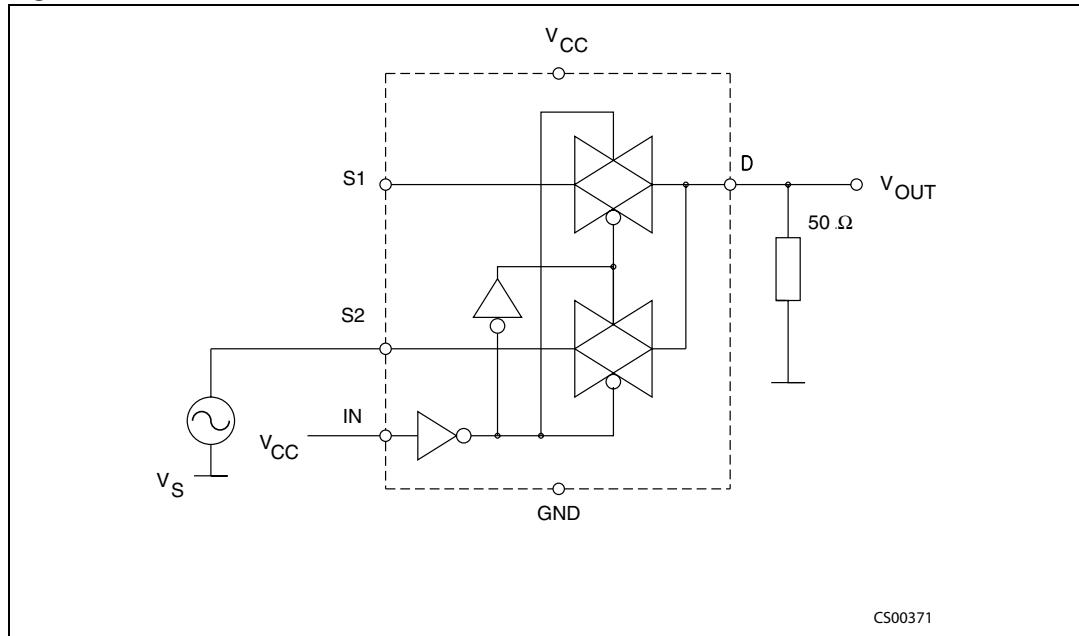
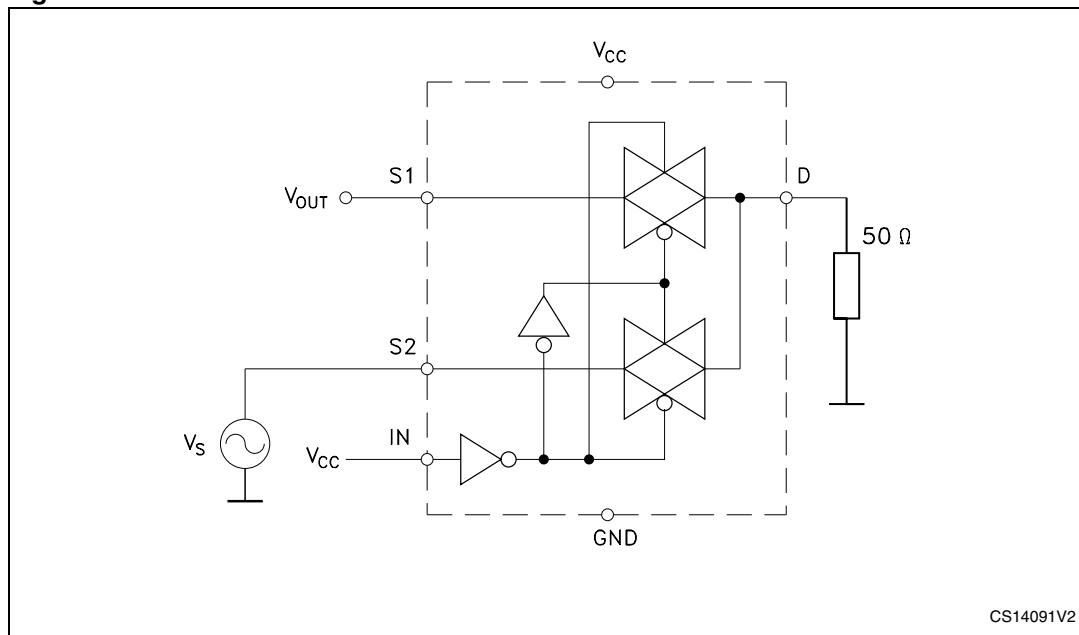
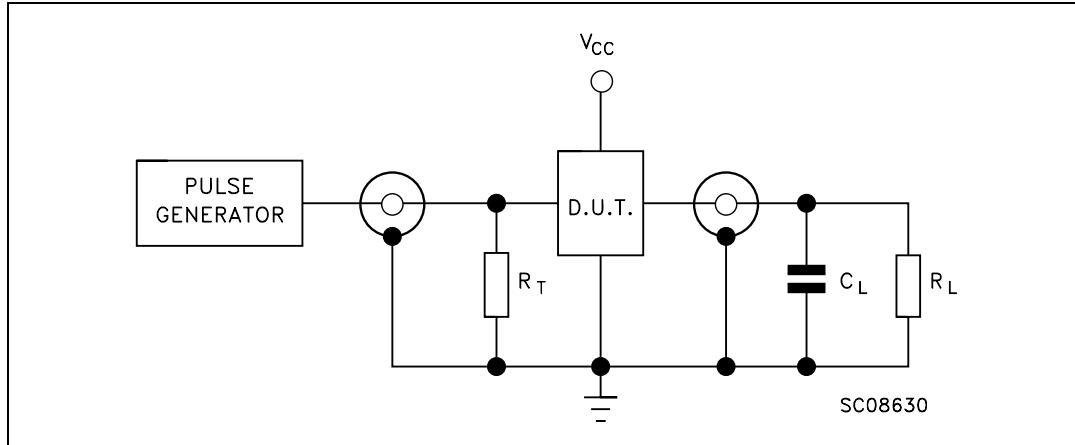
Figure 6. Bandwidth**Figure 7. Channel-to-channel crosstalk**

Figure 8. Test circuit

- $C_L = 5/35 \text{ pF}$ or equivalent (includes jig and probe capacitance).
- $R_L = 50 \Omega$ or equivalent.
- $R_T = Z_{OUT}$ of pulse generator (typically 50Ω).

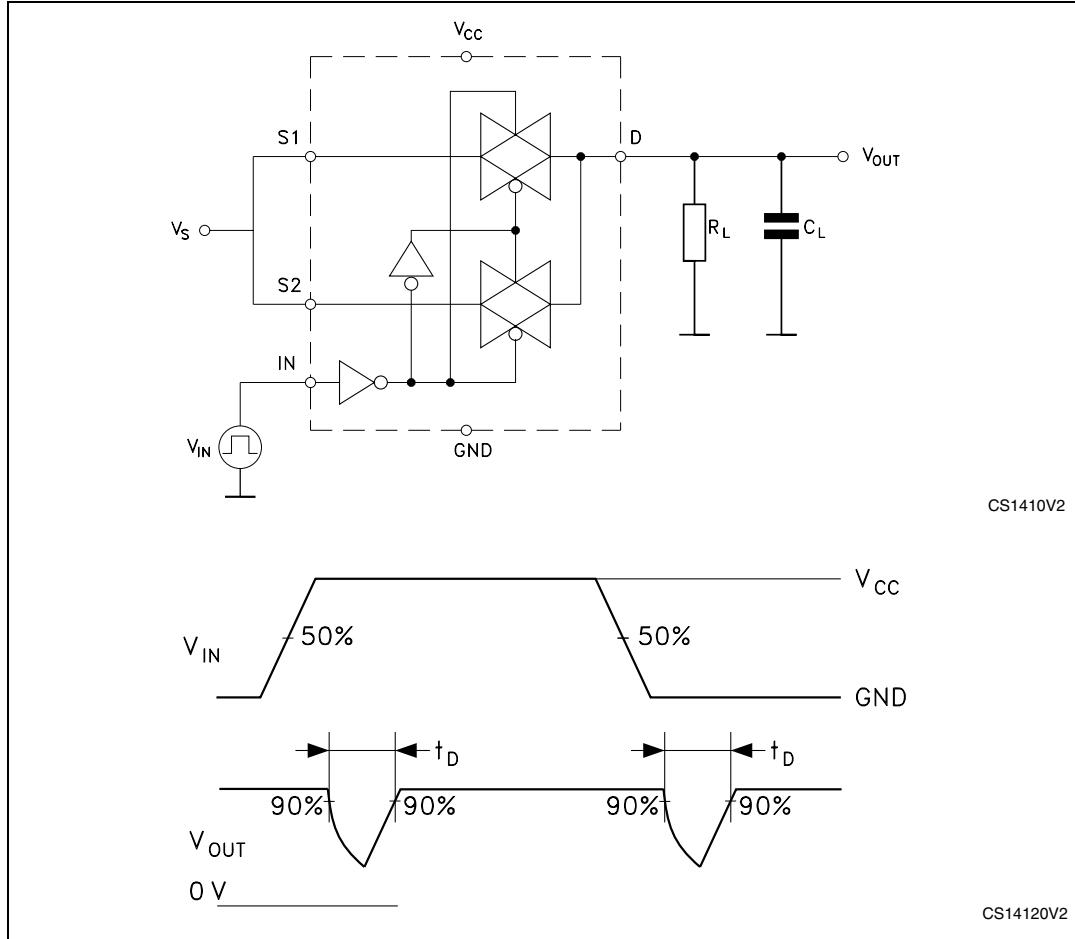
Figure 9. Break-before-make time delay




Figure 10. Charge injection ($V_{GEN} = 0 \text{ V}$, $R_{GEN} = 0 \Omega$, $R_L = 1 \text{ M}\Omega$, $C_L = 100 \text{ pF}$)

Figure 11. Turn-on, turn-off delay time

7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.
ECOPACK® is an ST trademark.


Figure 12. QFN10L (1.8 x 1.4 mm) package outline

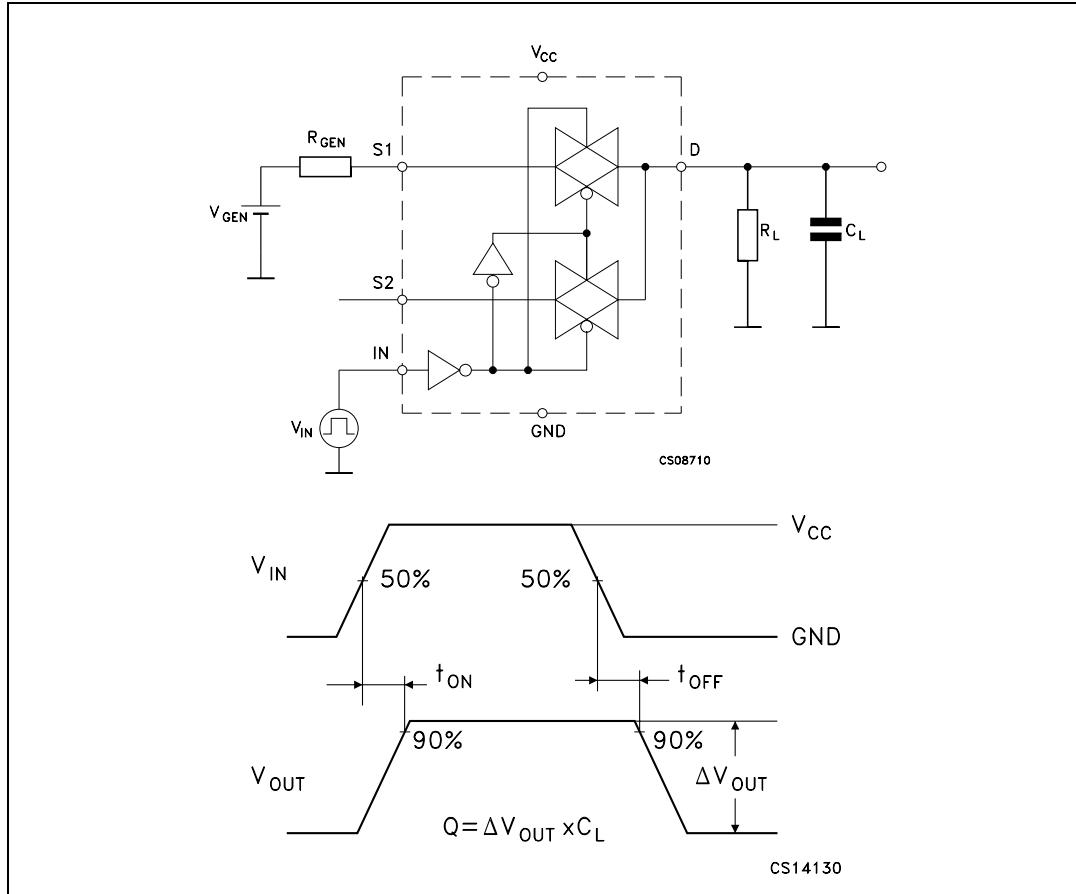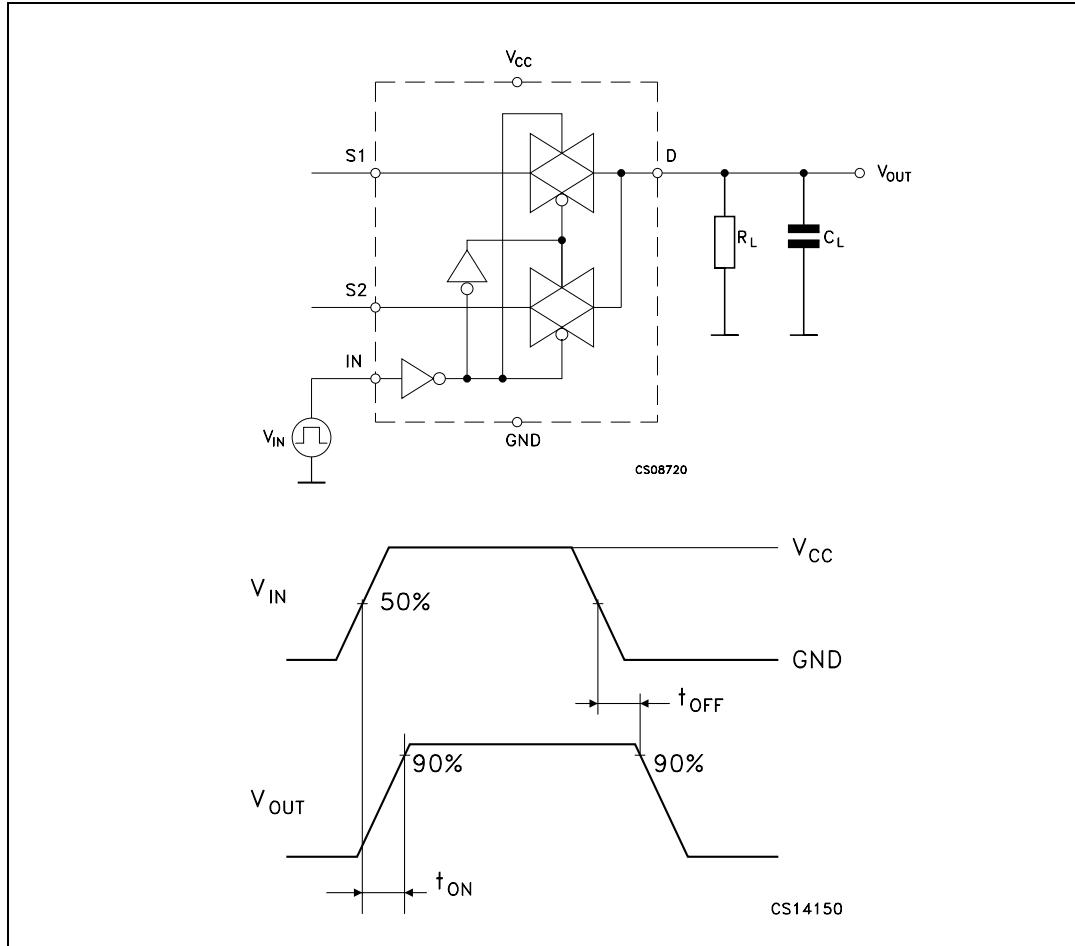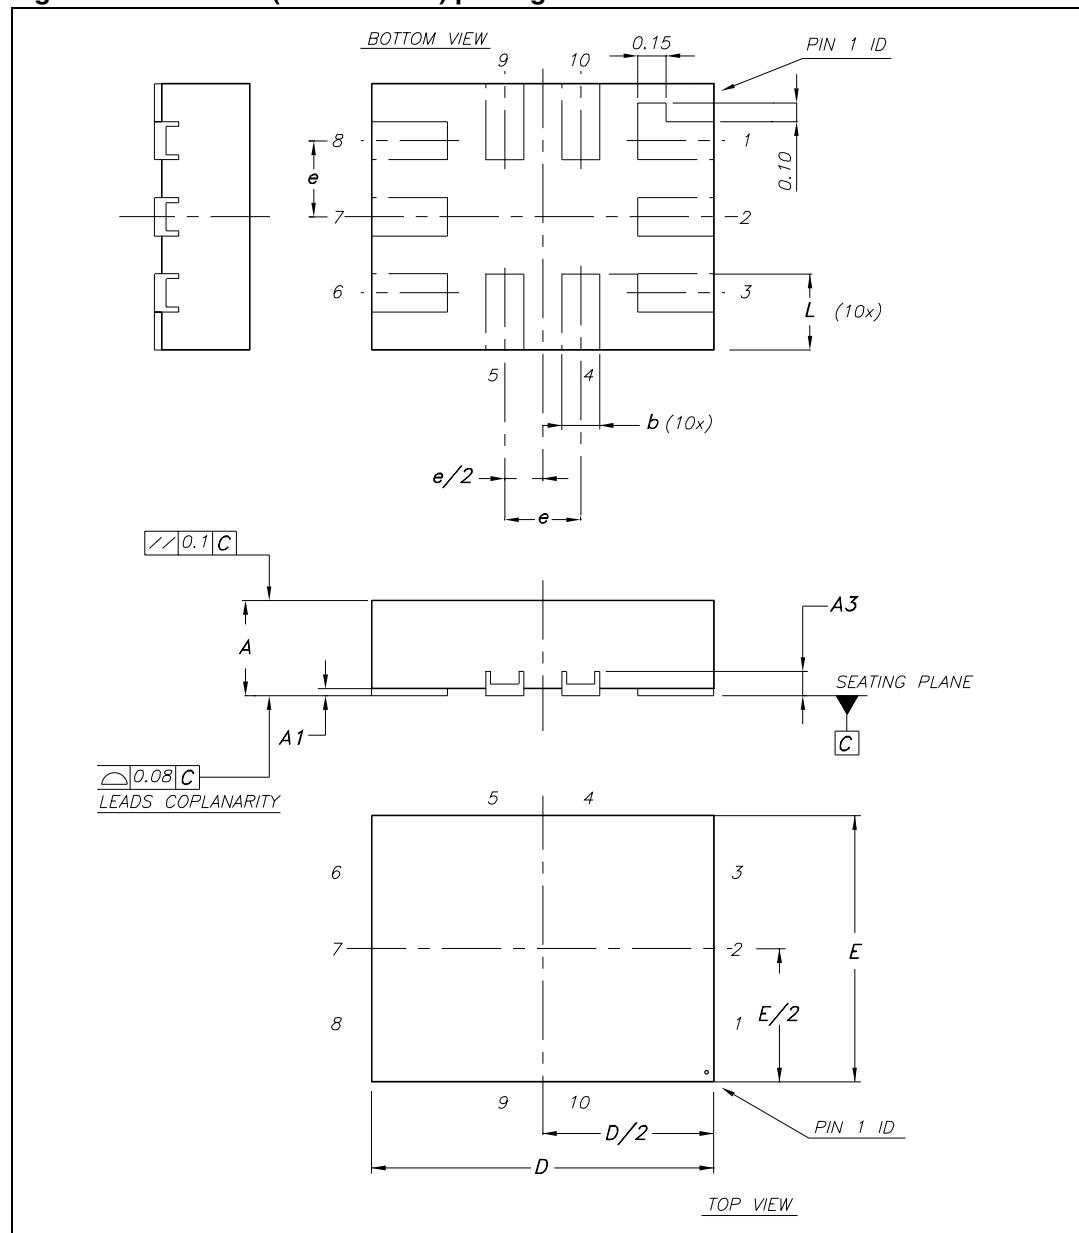


1. Drawing not to scale.

Table 9. QFN10L (1.8 x 1.4 mm) mechanical data


| Symbol | millimeters | | | inches | | |
|--------|-------------|------|------|--------|-------|-------|
| | Nom | Min | Max | Nom | Min | Max |
| A | 0.50 | 0.45 | 0.55 | 0.020 | 0.017 | 0.021 |
| A1 | 0.02 | 0 | 0.05 | 0.001 | 0 | 0.002 |
| A3 | 0.127 | | | 0.005 | 0 | 0 |
| b | 0.20 | 0.15 | 0.25 | 0.007 | 0.006 | 0.010 |
| D | 1.80 | 1.70 | 1.90 | 0.070 | 0.066 | 0.074 |
| E | 1.40 | 1.30 | 1.50 | 0.055 | 0.051 | 0.059 |
| e | 0.40 | | | 0.015 | | |
| L | 0.40 | 0.30 | 0.50 | 0.015 | 0.011 | 0.020 |

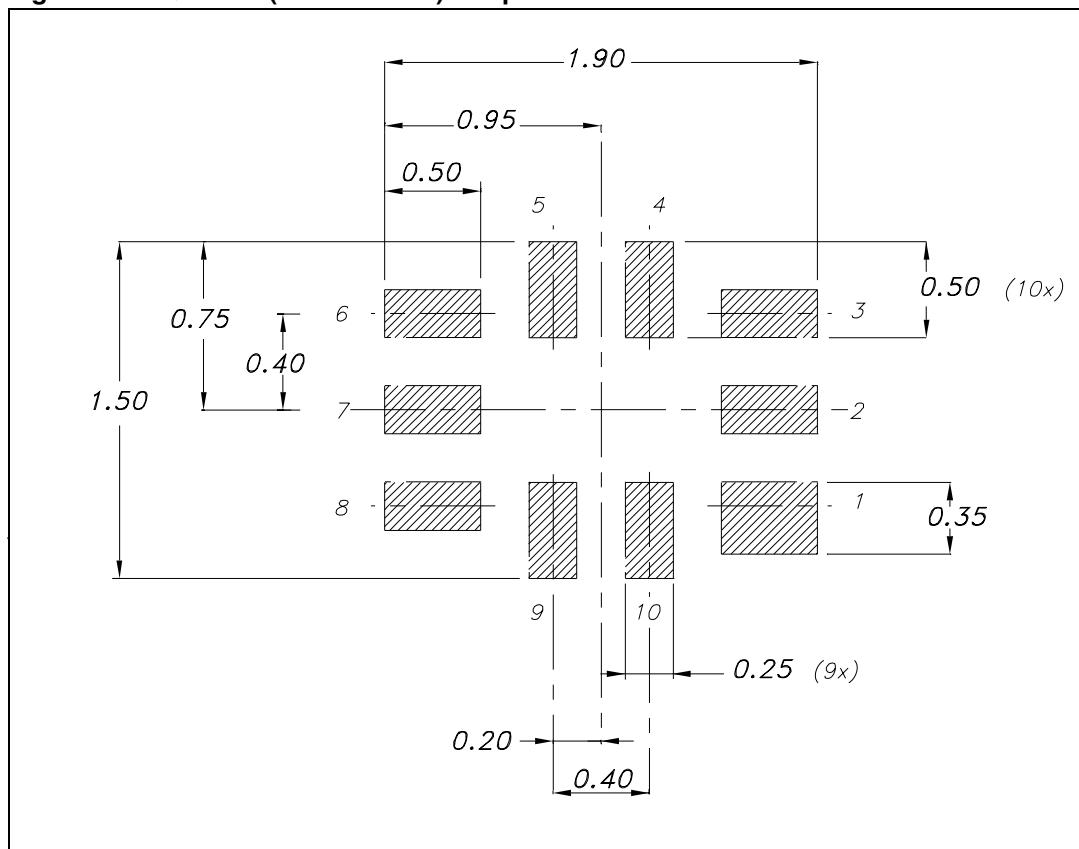Figure 13. QFN10L (1.8 x 1.4 mm) footprint recommendations


1. Drawing not to scale.

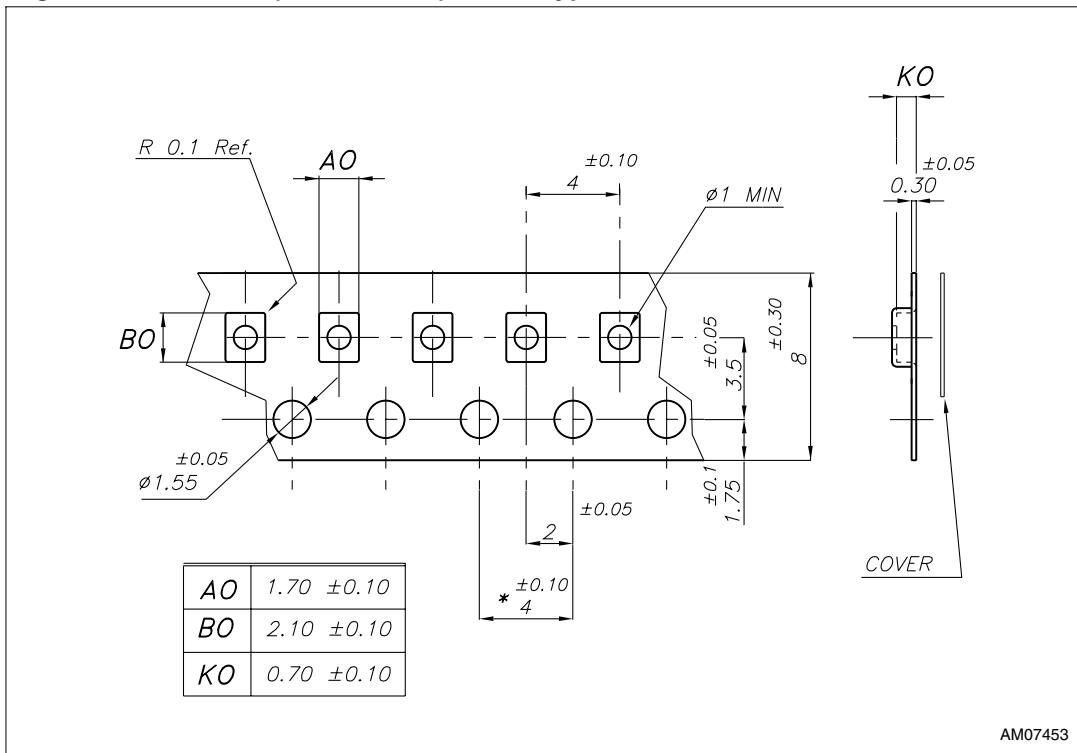Figure 14. QFN10L (1.8 x 1.4 mm) carrier type


1. Drawing not to scale.

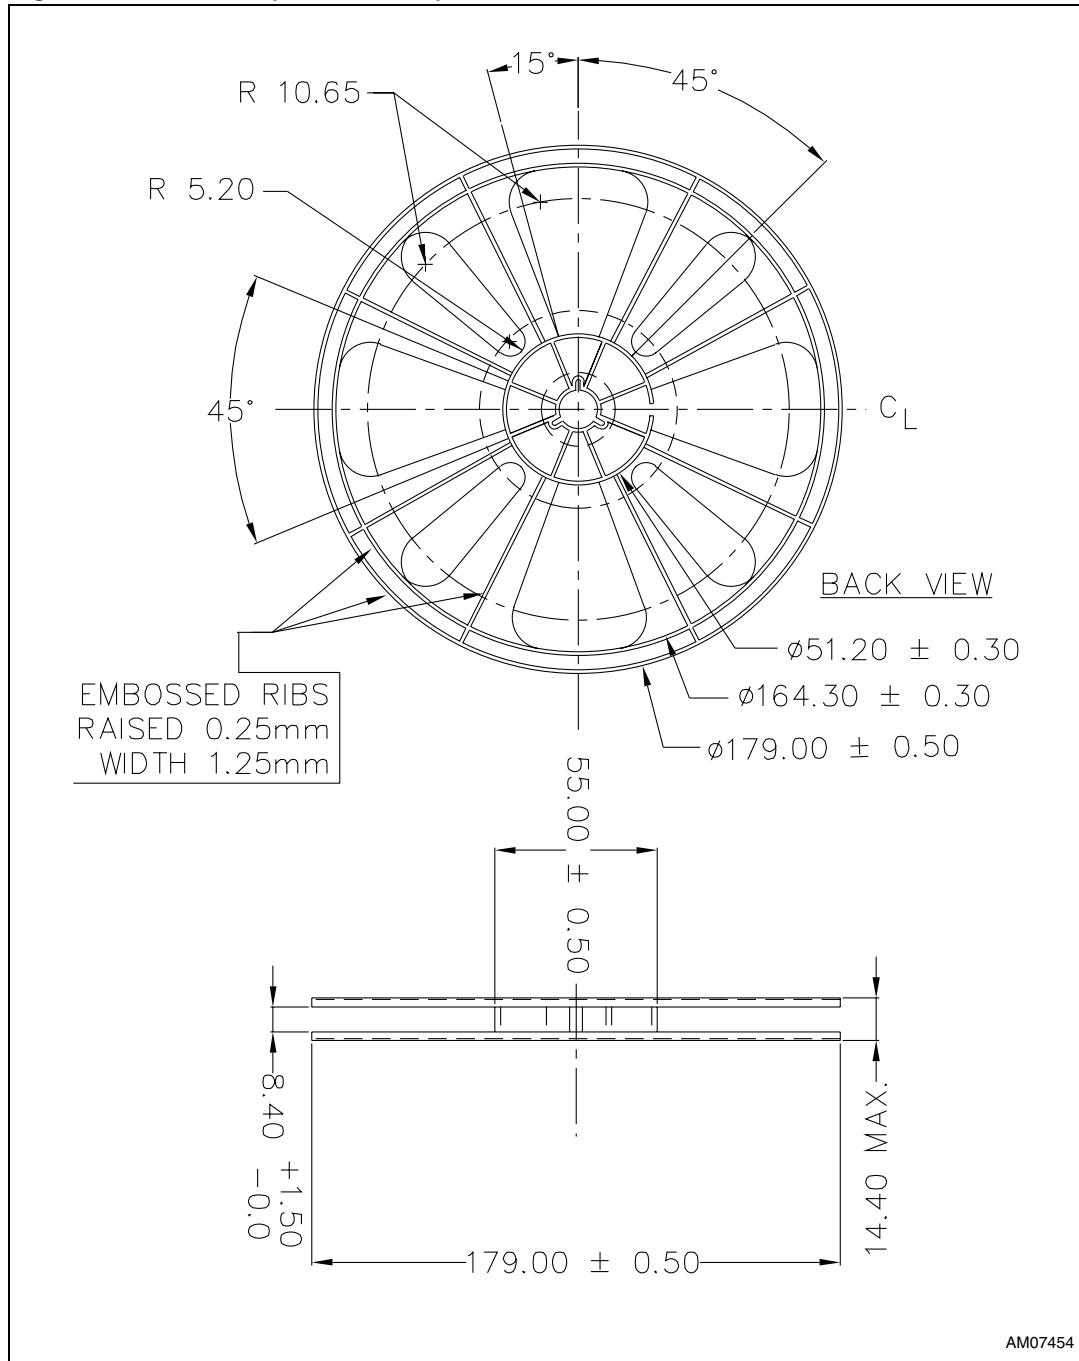Figure 15. QFN10L (1.8 x 1.4 mm) reel information - back view

1. Drawing not to scale.

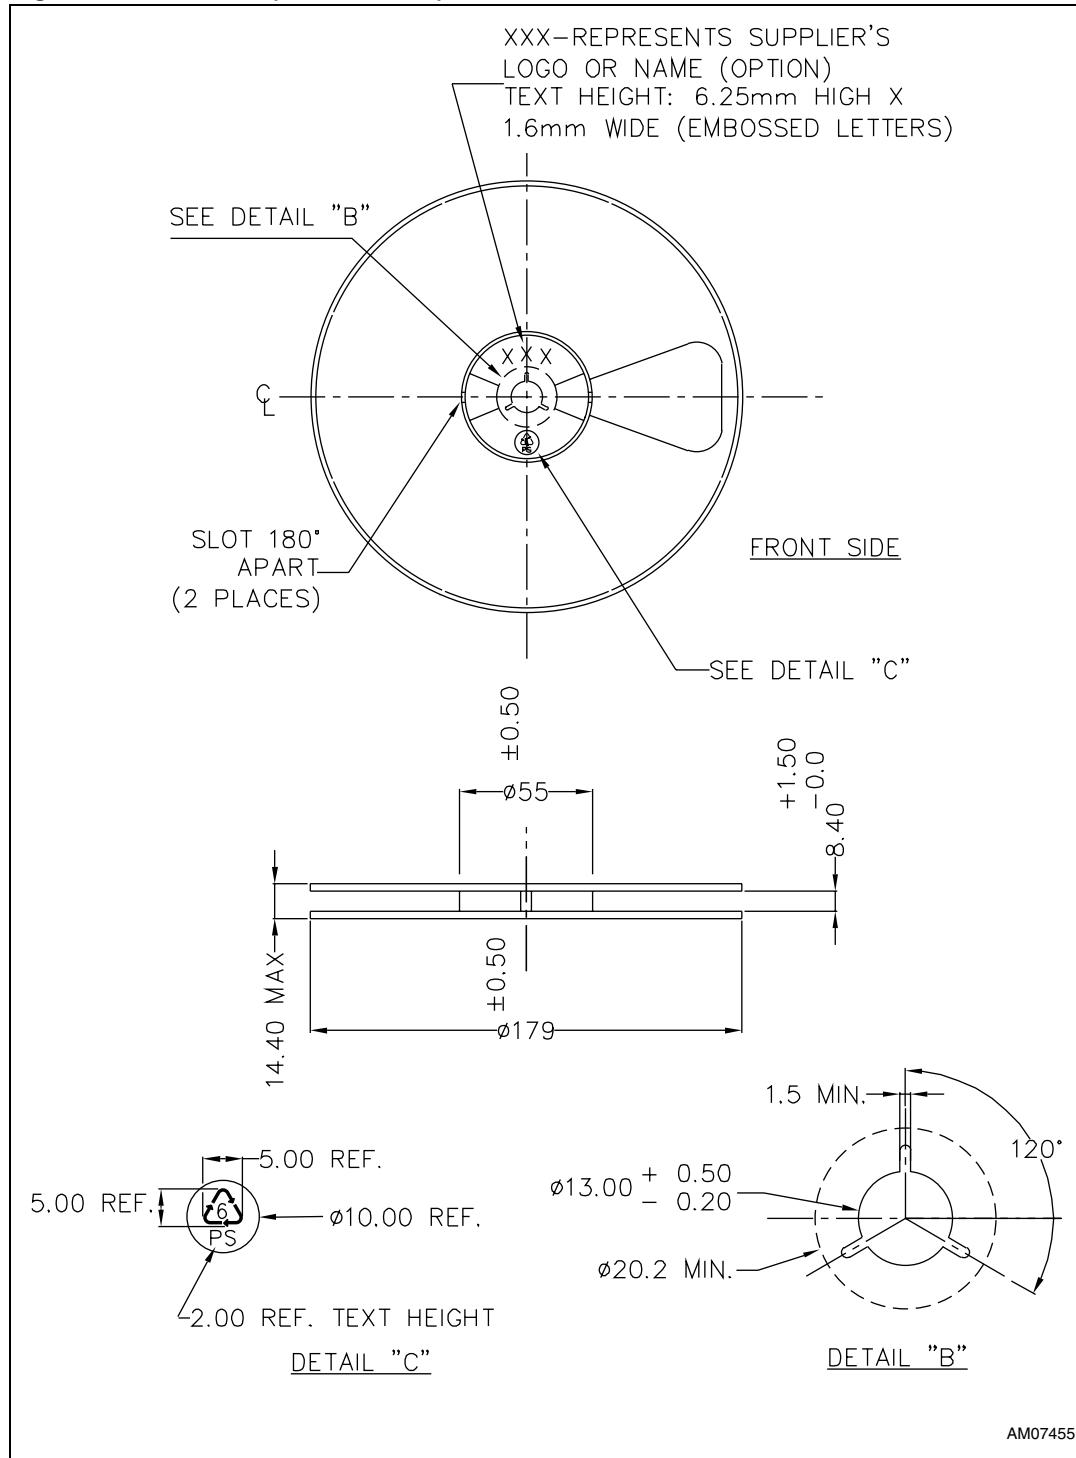Figure 16. QFN10L (1.8 x 1.4 mm) reel information - front side


1. Drawing not to scale.

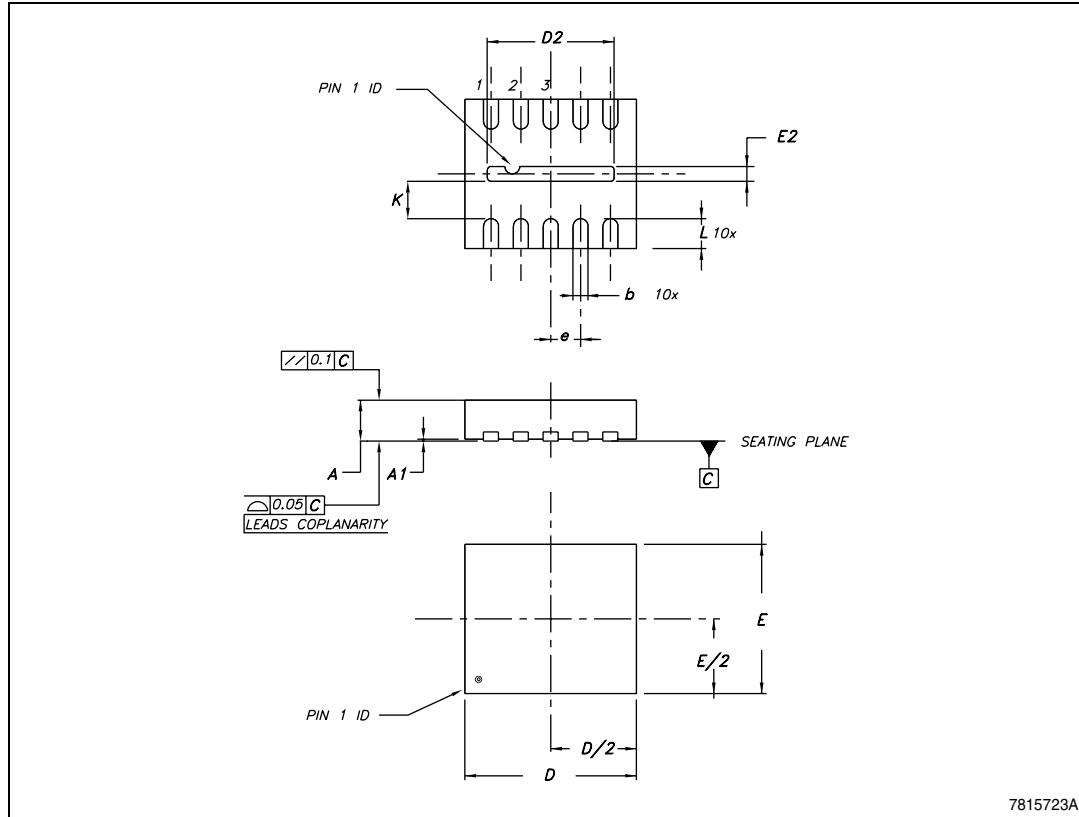Figure 17. DFN10L (2 x 2.3 mm) package outline


1. Drawing not to scale.

Table 10. DFN10L (2 x 2.3 mm) mechanical data


| Symbol | millimeters | | | mils | | |
|--------|-------------|------|------|------|------|------|
| | Min | Typ | Max | Min | Typ | Max |
| A | 0.50 | 0.55 | 0.60 | 19.7 | 21.7 | 23.6 |
| A1 | | 0.02 | 0.05 | | 0.8 | 2.0 |
| b | 0.15 | 0.20 | 0.25 | 5.9 | 7.9 | 9.8 |
| D | 2.20 | 2.30 | 2.40 | 86.6 | 90.6 | 94.5 |
| D2 | 1.65 | 1.70 | 1.75 | 65.0 | 66.9 | 68.9 |
| E | 1.90 | 2 | 2.10 | 74.8 | 78.7 | 82.7 |
| E2 | 0.15 | 0.20 | 0.25 | 5.9 | 7.9 | 9.8 |
| e | | 0.40 | | | 15.7 | |
| L | 0.35 | 0.40 | 0.45 | 13.8 | 15.7 | 17.7 |
| K | 0.20 | | | 7.9 | | |

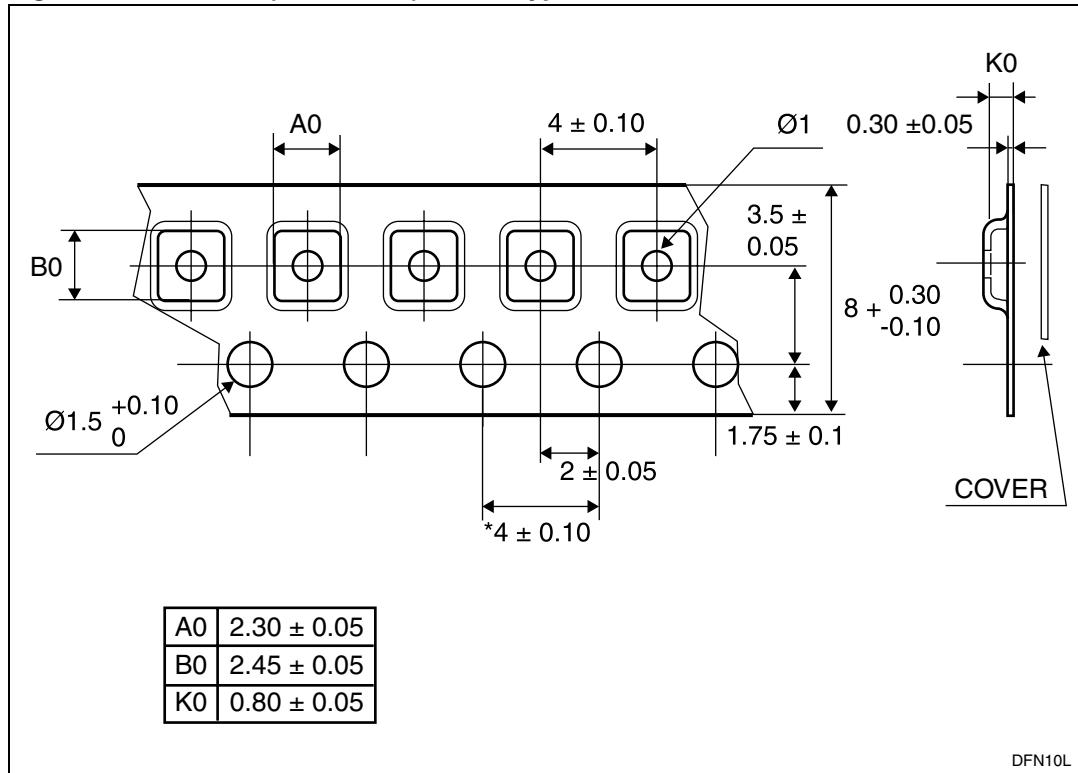Figure 18. DFN10L (2 x 2.3 mm) carrier type

1. Drawing not to scale.

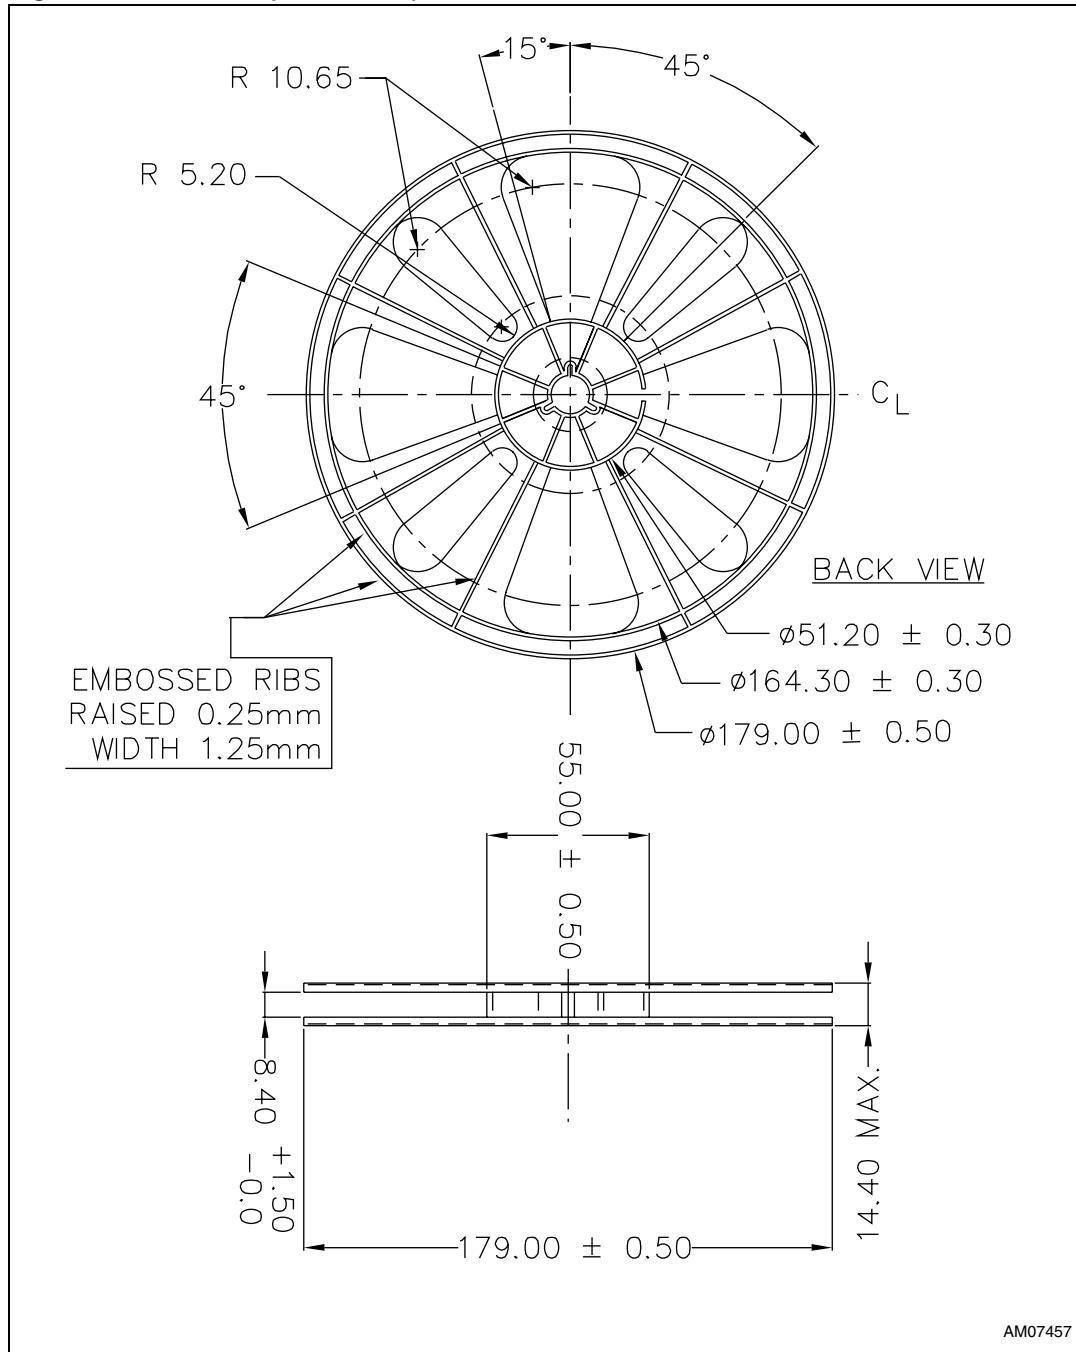Figure 19. DFN10L (2 x 2.3 mm) reel information - back view

1. Drawing not to scale.

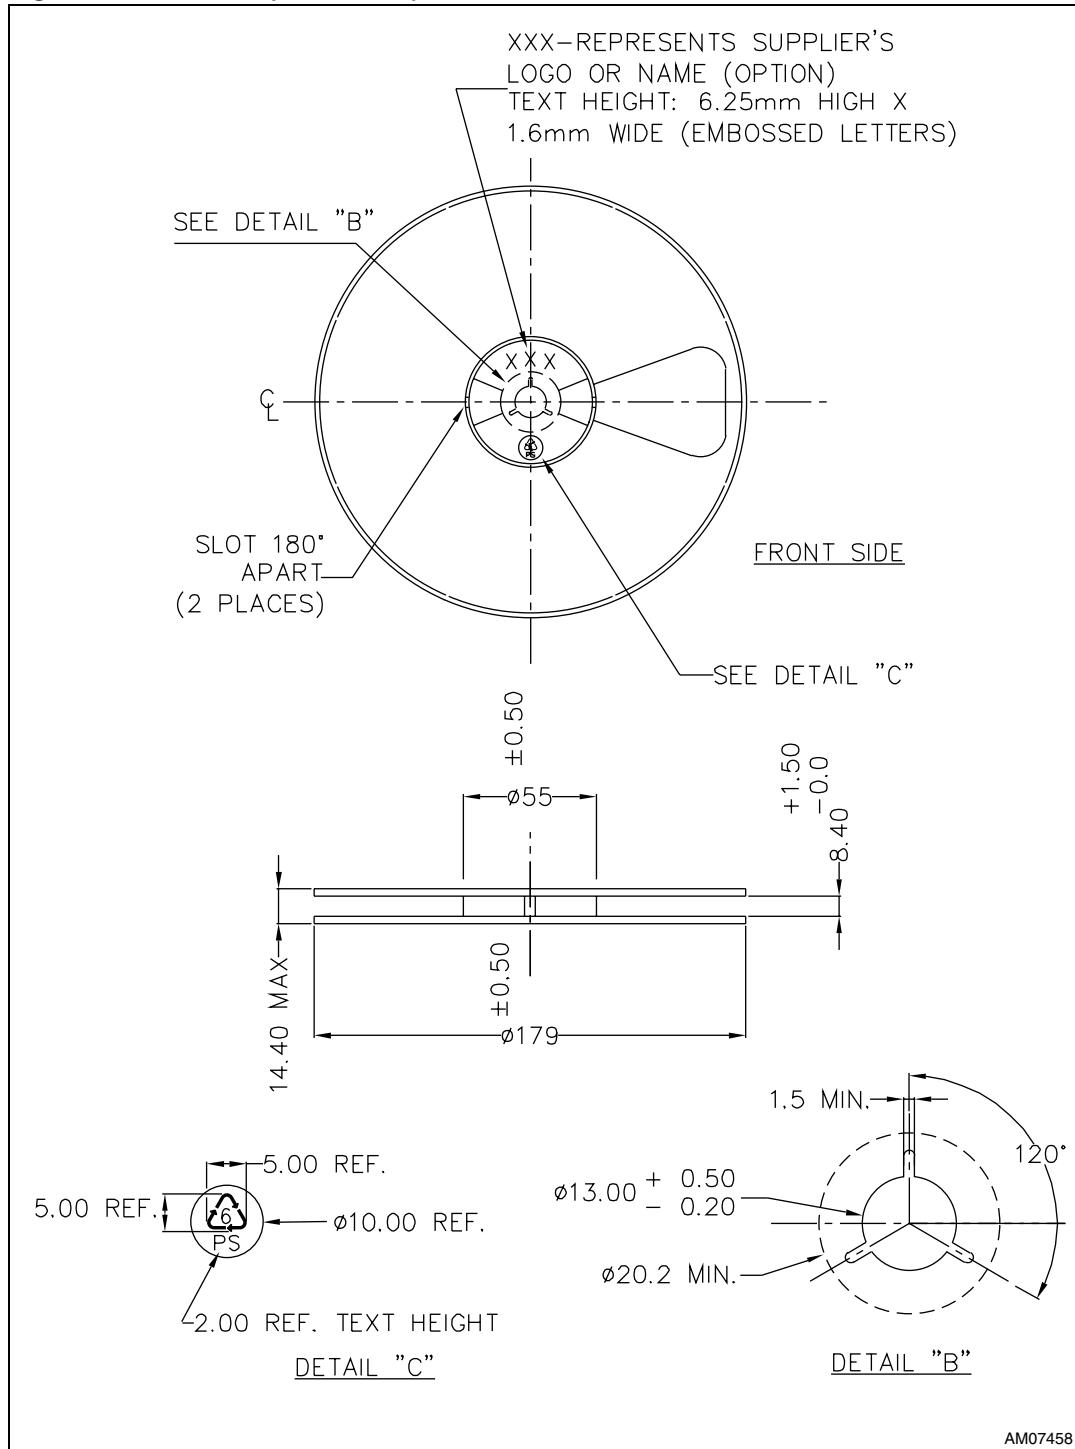Figure 20. DFN10L (2 x 2.3 mm) reel information - front side

1. Drawing not to scale.

8 Revision history

Table 11. Document revision history

| Date | Revision | Changes |
|--------------|----------|---|
| 04-Jul-2005 | 1 | First release. |
| 22-Aug-2005 | 2 | The V_{CC} and V_{IC} values has been changed on Table 4 on page 9 . |
| 15-May-2006 | 3 | New template, few updates. |
| 21-Jun-2006 | 4 | Mechanical data updated. |
| 10-Sept-2007 | 5 | Removed STG3684QTR order code, small text changes, updated Figure 3 on page 13 , Figure 4 on page 14 , Figure 5 on page 14 , Figure 6 on page 15 , layout restructured. |
| 15-Nov-2007 | 6 | Added list of tables and list of figures, updated Features Section on page 1 and T_{op} value in Table 5 on page 9 , removed the -55 to -125 °C values in Table 6 on page 10 and Table 7 on page 11 , minor changes to the text and layout. |
| 04-Feb-2011 | 7 | Document reformatted, updated Features, Section 1: Description , Table 6 , ECOPACK text, corrected typo in Table 2 to Table 8 , Figure 7 , Figure 9 . |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

